

Regal Rexnord

Energy Efficient Geared Motors

AC Variable Speed

Catalogue Edition 05/23 EN



 **BAUER GEAR MOTOR™**

A REGAL REXNORD BRAND

Type Designations

BK 50 Z - 11 U WA / S.. 09L A 4 - TF - S / ES 010 A 9 HN / C2

B	K	50	Z	X	-	1	1	U	W	A
										A = SSV Cover
									W	= Double Shaft Seals
								V H	=	Front and Rear
								V	=	Flange A or C or Torque Arm front
								H	=	Flange A or C or screw-on Torque Arm rear
								U	=	Foot on down or Torque Arm screwed on in upward direction
								O	=	Foot on top or Torque Arm screwed on in upward direction
								R	=	Foot right or Torque Arm screwed on in the direction to the right
								L	=	Foot left or Torque Arm screwed in direction to the left
								0	=	Splined Shaft acc. to DIN 5480
								1	=	Solid Shaft, front
								2	=	Solid Shaft, rear
								3	=	Solid Shaft, front and rear
								4	=	Hollow Shaft with Keyway
								5	=	Hollow Shaft for Shrink disk connection, rear (Standard)
								6	=	Hollow Shaft for Shrink disk connection, front (Special)
								7	=	Solid Shaft front, flush with Standard-Flange only BG10-BG90 and BS02+BS03
								8	=	Solid Shaft rear, flush with Standard-Flange only BS02+BS03
								9	=	Solid Shaft front and rear, flush with Standard-Flange only BS02+BS03
								0	=	Gear Housing, no surfaces except torque arm bore for BF
								1	=	Gear Housing, Foot
								2	=	Gear Housing, Standard flange diameter 1 small A-Flange
								3	=	Gear Housing, Standard flange diameter 2 Standard A-Flange
								4	=	Gear Housing, Standard flange diameter 3 large A-Flange
								5	=	Gear Housing, with Torque Arm for BK + BS as screw-on
								6	=	Gear Housing, Foot-threaded bores
								7	=	Gear Housing, C - Flange
								8	=	Gear Housing, completely machined
								9	=	Gear Housing, with Footplate only BG (Universal housing)
								-	=	seperates gear type from gear design
								X	=	reinforced bearings (radial)
								Z	=	Gearbox with pre-stage
								• •	=	Gear Size (03, 04, 05, 06, 10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100)
								B •	=	Gear type (BG, BF, BK, BS)

S ..	09	L A 4 - TF -	S
			S = rectifier (see chapter 3)
			TF = Motor monitoring (see chapter 3)
			4 = No. of pole for motor
		LA	= Motor core length and design
	09		= Motor size
..		A	= Aseptic motor
..			= NF Motor without Gearbox, Motor in flange design
..			= XE Expl.-Motor with increased safety – Zone 1 (Gas)
..			= XN Expl.-Motor with increased safety – Zone 2 (Gas)
..			= XC Expl.-Motor with increased safety – Zone 21 (Dust)
..			= XS Expl.-Motor with increased safety – Zone 22 (Dust)
..			= U Non-Ventilated
S			= Permanent Magnet Synchronous Motor

ES	010	A	9	HN
				HA = Hand Release (lockable)
				HN = Hand Release (none lockable)
			9	= Code for setting torque
		A		= Design
	010			= Brake size
ES				= Single disk brakes - HOLDING BRAKE
ZS				= Double disk brakes - HOLDING BRAKE
ESX				= Single disk brakes - WORKING BRAKE
ZSX				= Double disk brakes - WORKING BRAKE

Energy Efficient Geared Motors

AC Variable Speed

Table of contents

1 General	15
Advantages of Bauer-Geared Motors	17
Bauer Gearmotors	17
Bauer Gearboxes	17
Bauer Motors	17
Bauer Brakes	17
2 Product Description	19
Selection of geared motors	21
Installed positions of geared motors	21
Notes on safety	21
Guards for rotating parts	21
Touch protection	21
Operating noise	21
Painting and corrosion protection	21
Modular system overview	22
3 Type Designations	25
Significance of type designation	27
BG-series helical/geared motor	28
BF-series shaft-mounted geared motor	29
BK-series bevel/geared motor	30
BS-series worm/geared motor	31
Versions and options	32
BG and BF series	32
BK and BS series	32
Motor	33
Permanentmagnet synchronous motor (PMSM)	33
Motor protection	33
Brake rectifier in motor terminal box	33
Plug connector	33
Heavy-duty fan	33
Protective cover	33
CleanDrive	33
Supplement types	34
Brake	34
Digital and analogue encoder	34
Second shaft end	34
Forced ventilation	34
Overall design	34
4 Gear Motor Selection	35
Selection of geared motors	37
Drive configuration	38
Drive configuration - General	38
Required data for drive configuration	38
Determining the motor power	39
Determining the required torque	39
Determining the gear reduction ratio	39
Determining the factor of inertia	39
Determining the shock load	40
Determining the minimum service factor f_{Bmin}	40
Brake specification	40
Motor configuration	41
Torque-speed characteristic	41
Radial and axial forces on the output shaft	45
Maximum allowable radial force at force application point X	45
Bearing load limit	45
Shaft strength	46
Helical gear unit BG series	46
Shaft-mounted gear unit BF series	47
Bevel gear unit BK series	48
Worm gear unit BS series	48

Energy Efficient Geared Motors

Table of contents

Transmission components	49
Factor f_z for the type of transmission component	49
Axial force	49
Shock loads of machinery	50
5 Gearboxes & Lubrication	53
Standard mounting positions	55
Position of the terminal box	57
Position of the terminal box and the cable entry points (BG and BF)	57
Position of the terminal box and the cable entry points (BK and BS)	58
Gearboxes	59
Radial and axial forces at the output shaft	59
Dimensions and fits of output shafts and keyways	59
Installing transmission elements	59
Gear with solid shaft	59
Gear with hollow shaft	59
Shrink disc coupling	59
Torque restraint	60
Notes for installing shaft mount gears with hollow shaft and keyway	60
Gear ventilation	60
Output shaft seals	60
Lubricants	61
Lubricant quantities	62
Lubricant quantities, BG-series gears	63
Lubricant quantities, BG20-01R	64
Lubricant quantities, BF-series gears	65
Lubricant quantities, BK-series gears	66
Lubricant quantities, BS-series gears	67
Lubricant quantities, pre-stage gears (Z)	68
Lubrication quantity for intermediate gear	69
Threaded plugs	70
Position of threaded plugs	70
-BG-series gears	70
-BG-20-01R	71
-BF-series gears	72
-BK-series gears	73
-BS-series gears	75
-pre-stage gears (Z)	75
-in the System Cover Design with Standard Geared Motor	76
-in the System Cover Design with foreign motor or gear design with input shaft	77
6 BG-series helical/geared motors - Selection	79
Description of helical/geared units	81
Sizes	81
Bauer service factors (f_B) for helical-geared motors	81
Continuous operation without switching frequency $Z \leq 1/h$	81
Switching duty	81
Bauer service factor	81
Explanation of shock classification	82
Key to abbreviations	82
Selection tables, helical/geared motors	82
Selection helical/geared motors - $n_1 = 1500 \text{ } 1/\text{min}$	83
Selection helical/geared motors - $n_1 = 3000 \text{ } 1/\text{min}$	116
7 BF-series shaft-mounted geared motors - Selection	151
Description of shaft-mounted gear units	153
Sizes	153
Bauer service factors (f_B) for shaft-mounted geared motors	153
Continuous operation without switching frequency $Z \leq 1/h$	153
Switching duty	153
Bauer service factor	153
Explanation of shock classification	153
Key to abbreviations	154
Selection tables shaft-mounted geared motors	154
Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$	155
Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$	180

8 BK-series bevel-geared motors - Selection	207
Description of bevel-gear units	209
Sizes	209
Bauer service factors (f_B) for bevel-geared motors	209
Continuous operation without switching frequency $Z \leq 1/h$	209
Switching duty	209
Bauer Service factor	209
Explanation of shock classification	210
Key to abbreviations	210
Selection tables, bevel-geared motors	210
Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$	211
Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$	233
9 BS-series worm-geared motors - Selection	257
Description of worm-gear units	259
Sizes	259
Efficiency	259
Bauer service factors (f_B) for worm-geared motors	259
Continuous operation without switching frequency $Z \leq 1/h$	259
Switching duty	260
Ambient temperature	260
Bauer service factor	260
Explanation of shock classification	260
Key to abbreviations	261
Selection tables, worm-geared motors	261
Selection - worm-geared motors - $n_1 = 1500 \text{ } 1/\text{min}$	262
Selection - worm-geared motors - $n_1 = 3000 \text{ } 1/\text{min}$	276
10 BG-series helical-geared motors - Dimensions	291
Dimension - Standard	293
BG04	293
BG05	294
BG06	295
BG10-BG10Z	296
BG10X-BG10XZ	298
BG15	301
BG20-BG20Z	302
BG30-BG30Z	304
BG40-BG40Z	306
BG50-BG50Z	308
BG60-BG60Z	310
BG70 - BG70Z	312
BG80-BG80Z	314
BG90-BG90Z	316
BG100-BG100Z	318
Dimension - Tandem Gearbox	321
BG06G04	321
BG10G06	322
BG10XG06	324
BG20G06	326
BG30G06	328
BG40G10	330
BG50G10	332
BG60G20	334
BG70G20	336
BG80G40	338
BG90G50	340
BG100G50	342
11 BF-series shaft-mounted geared motors - Dimensions	345
Dimension - Standard	346
BF06	346
BF10-BF10Z	348
BF20-BF20Z	350
BF30-BF30Z	352
BF40-BF40Z	354

Energy Efficient Geared Motors

Table of contents

BF50-BF50Z	356
BF60-BF60Z	358
BF70-BF70Z	360
BF80-BF80Z	362
BF90-BF90Z	364
Dimension - Tandem Gearbox	366
BF10G06	366
BF20G06	368
BF30G06	370
BF40G10	372
BF50G10	374
BF60G20	376
BF70G20	378
BF80G40	380
BF90G50	382
Additional Dimension Sheet	385
Splined shaft	385
Shrink disc coupling (SSV)	386
Shrink disc coupling with (SSV) cover	387
Tapped Holes Side (H) → shaft cover	388
Rubber buffer for torque restraint	389
Assembly tools for hollow shaft and keyway	390
Assembly tools for shaft mounted gears with splined shaft	392
Shaft cap (VK)	394
Shaft cover (VD)	395
12 BK-series bevel-geared motors - Dimensions	397
Dimension - Standard	398
BK06	398
BK08	400
BK10-BK10Z	402
BK17	404
BK20-BK20Z	406
BK30-BK30Z	408
BK40-BK40Z	410
BK50-BK50Z	412
BK60-BK60Z	414
BK70-BK70Z	416
BK80-BK80Z	418
BK90-BK90Z	420
Dimension - Tandem Gearbox	422
BK10G06	422
BK20G06	424
BK30G06	426
BK40G10	428
BK50G10	430
BK60G20	432
BK70G20	434
BK80G40	436
BK90G50	438
Additional Dimension Sheet	441
Splined shaft	441
Shrink disc couplings (SSV)	442
Shrink disc connection with cover (SSV)	443
Rubber buffer for torque arm	444
Position of the torque arm	445
Foot with tapped holes	446
Foot plate with clearance holes	447
Assembly tools for hollow shaft and keyway	448
Assembly tools for splined shaft	450
Shaft cap (VK)	452
Shaft cover (VD)	453
13 BS-series worm-geared motors - Dimensions	455
Dimension - Standard	456
BS02	456

BS03	458
BS04	460
BS06	462
BS10-BS10Z	464
BS20-BS20Z	466
BS30-BS30Z	468
BS40-BS40Z	470
Dimension - Tandem Gearbox	472
BS06G04	472
BS10G06	474
BS20G06	476
BS30G06	478
BS40G10	480
Additional Dimension Sheet	482
Shrink disc couplings (SSV)	482
Shrink disc couplings with (SSV) cover	483
Rubber buffer for torque arm	484
Position of the torque arm	485
Threaded foot	486
Foot plate, left	487
Assembly tools for hollow shaft and keyway	488
Shaft cap (VK)	490
Shaft cover (VD)	491
14 Motors	493
General	495
ErP Directive 2009/125/EC	495
Regulation (EG) 640/2009 & (EU) 4/2014	495
Regulation (EU) 2019/1781	496
Torques	498
Line voltages	498
Line frequencies	499
Rating plate	499
Terminal box	499
Motor connections	500
Terminal connections for single speed motors	501
Terminal connections for single speed motors with thermal motor protection	502
Terminal connections for pole changing motors in Dahlander connection (Δ/YY or Y/YY)	503
Terminal connections for pole changing motors with two separate windings (Y/Y or Δ/Δ)	504
Plug-and-socket connection	505
Motor protection	506
Thermistors (PTC)	506
Thermostatic protection	507
KTY sensors	508
PT100 sensors	509
Insulation	510
IP – Protection classes	510
Degrees of protection provided by enclosures for electrical equipment	510
Speed of output shaft	511
Duty types as defined by EN 60034	512
General	512
Continuous running duty (S1)	512
Short-time duty (S2)	512
Intermittent periodic duty (S3)	513
Intermittent periodic duty with starting (S4)	514
Intermittent periodic duty with electric braking (S5)	515
Continuous-operation periodic duty (S6)	516
Continuous-operation periodic duty with electric braking (S7)	516
Continuous-operation periodic duty with relative load/speed changes (S8)	517
Duty with non-periodic load and speed variations (S9)	517
Duty with discreet constant loads and speeds (S10)	518
Operation with frequency converter	519
Notes on design	519
Increased torque with reduced duty factor	519
Increased torque with external fan	519
Energy-saving function	520

Energy Efficient Geared Motors

Table of contents

Regeneration	520
Notes on operation with other-make frequency inverters	520
Explosion protection	521
General	521
ATEX	521
Frequency converters	521
Protective device	521
Voltages	522
Gears with non-electrical explosion protection	522
Technical data	523
Standard Motors	523
Motors with rated speed 1500 1/min	523
Motor torques in the adjusting range 150 1/min - 1800 1/min. duty type S1	525
Motors with rated speed 2250 1/min	529
Motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1	531
Motors with rated speed 3000 1/min	533
Motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1	536
Aseptic-Motors	540
Aseptic motors with rated speed 1500 1/min	540
Aseptic motors torques in the adjusting range 150 1/min - 1800 1/min. duty type S1	540
Aseptic motors with rated speed 3000 1/min	542
Aseptic motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1	542
Stainless Steel Motors	544
Stainless steel motors with rated speed 1500 1/min	544
Stainless steel motors torques in the adjusting range 150 1/min - 1800 1/min. duty type S1	544
Stainless steel motors with rated speed 3000 1/min	546
Stainless steel motors torques in the adjusting range 150 1/min - 3000 1/min. duty type S1	546
Atex-Motors	548
Rated speed 1500 1/min	548
-Type S.XE.08MA4-	548
-Type S.XE.08LA4-	550
-Type S.XE.09SA4-	552
-Type S.XE.09XA4-	554
-Type S.XE.11SA6-	556
-Type S.XE.11MA6-	558
-Type S.XE.11LA6-	560
Rated speed 3000 1/min	562
-Type S.XE.08MA4-	562
-Type S.XE.08LA4-	564
-Type S.XE.09SA4-	566
-Type S.XE.09XA4-	568
-Type S.XE.11SA6-	570
-Type S.XE.11MA6-	572
-Type S.XE.11LA6-	574
15 Motor Mounted Components	577
Brake	579
Functional description	579
Product description of type ES(X) spring-actuated brakes	579
Product description of type ZS(X) spring-actuated brakes	580
Brake selection and sizing	581
Electrical connection	584
Specifications of holding brakes with emergency stop capability	587
Specifications of working brakes	588
Connection	590
DC connection via terminals (K)	590
Standard rectifier (S)	591
Rectifier for electronic rapid shutdown (E)	592
Rectifier for overexcitation and rapid shutdown (M)	593
Brake connection, operation with frequency converter	594
Manual release (HA, HN)	594
Second motor shaft extension (ZW, ZV)	595
Protective fan cowl (D)	595
Motor-independent fan (FV)	595
Technical Data Motor-independent fan	595
Encoder system	596

Shaft encoder (G)	596
Incremental rotary encoder	597
Functional description	597
Electrical specifications	597
Plug end view with male pin insert	597
Signal assignments	597
SinCos feedback	598
Functional description	598
Electrical specifications	598
Ansichten auf Steckseite, Stiftkontakteinsatz	598
Terminal assignment	598
Absolute rotary encoders	599
Functional description	599
Profibus DP interface	599
SSI interface	600
Modular motor system	601
Motor and encoder	601
Motor, brake and encoder	601
Motor and forced ventilation	601
16 Motor Mounted Components - Dimensions	603
Dimensions	605
Standard terminal box	605
Terminal box for plug-connector	606
Motor with standard brake	607
"Heavy-Duty" - brake	608
Motor with second shaft end	609
Motor with brake and second shaft end	610
Motor with "heavy duty" brake and second shaft end	611
Motor with protective hood	612
Motor with independent fan	613
Motor with brake and independent fan	614
Motor with encoder and built-on independent fan	615
Motor with brake and encoder with built-on independent fan	616
Motor with encoder	617
Motor with "heavy duty" encoder	618
Motor with brake and encoder	619
Motor with "heavy duty" brake and encoder	620
Motor in IEC design	621
17 BAUER global	623
North America	625
Latin America	626
Europe	627
Eastern Europe	630
Middle East & Africa	631

Energy Efficient Geared Motors

Bauer Gear Motor - profile

Innovation since 1927

During its 90-year history, Bauer Gear Motor has developed to become the preferred international provider of high-quality and extremely reliable geared motors. A great deal of knowledge has been accrued over the decades, and this has continually been built upon and shared. Bauer has pioneered many new geared motor solutions and will continue to do so in the future. Our engineers develop technically-advanced solutions that feature energy-efficient motors paired with optimal gearboxes so that we can offer our customers the lowest possible operating costs. It is not without reason that the Bauer brand has become world famous; this is because our geared motor solutions are the driving power in drive technology.



Competent and customer-focused


We see ourselves as the value adding partner for individual drive technology solutions along the entire customer value chain ... **Uncomplicated ... Competent ... Enduring**. With our global sales and expertise, we are there to support you side by side- right from the design of your drive. Our employees will ensure that you have the optimum geared motor solution for your application

Our quick response time to requests ensures that you receive the required offer within 24 hours. After your order has arrived, we check your order details and you will receive a confirmation of the order within 24 hours. This means that you will have the details for your own production planning process by the following day.

As we concentrate our production in regional factories, we are also able to deliver customised solutions from the factory reliably and directly, with an extremely short delivery period.

Energy Efficient Geared Motors

Bauer Gear Motor - profile

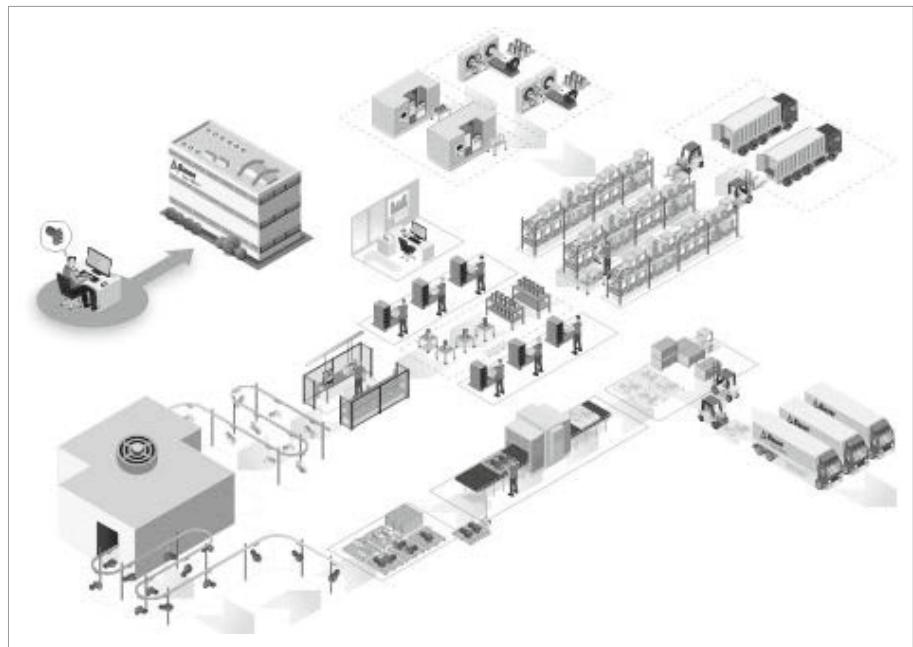

**Closer to the customer's needs
thanks to greater flexibility**

Orders are processed immediately and passed on to our production team. By reducing set-up times, we are able to start producing the order specific parts right away. This is synchronised with assembly, ensuring that the parts are available according to just-in-time principles.

The entire manufacturing processes starting from the production of the motor, the mechanical geared motor parts and the electrical components, are perfectly coordinated to ensure greater process reliability and availability. This means that a high delivery reliability of over 95% can be achieved, while maintaining Bauer's high quality.

The product range



Energy Efficient Geared Motors

Bauer Gear Motor - profile

Helical Geared Motors

- Power range from 0.03 kW to 75 kW
- 13 gear sizes for torques ranging from 20 Nm to 18500 Nm
- New attachment possibilities with low design height
- High efficiency through 2-stage base design
- High protection rating of IP65 as standard

Shaft Mounted Geared Motors

- Power range from 0.03 kW to 75 kW
- 10 gear sizes for torques ranging from 90 Nm to 18500 Nm
- Gearbox housing with integral torque arm
- High efficiency through 2-stage base design
- High protection rating of IP65 as standard

Bevel Geared Motors

- Power range from 0.03 kW to 75 kW
- 10 gearbox sizes for torques ranging from 80 Nm to 18500 Nm
- Right angle with universal, space-saving mounting options
- High efficiency through 2-stage base design
- High protection rating of IP65 as standard

Worm Geared Motors

- Power range from 0.03 kW to 5.5 kW
- 8 gearbox sizes for torques ranging from 25 Nm to 1000 Nm
- Hollow shaft version available from 25 Nm
- Heavy duty worm gearing for a long service life
- High protection rating of IP65 as standard

Monorail Geared Motor Drives

- Torque rating from 30 Nm to 680 Nm
- Radial force up to 25,000 N
- Gearboxes with a wide range of mounting options
- High protection rating of IP65 as standard
- Improved efficiency
- Low energy consumption - ideal for travel drives
- Reverse motion of gearbox possible with released brake

AsepticDRIVE

- Motor without cooling ribs and fan
- Available with helical, shaft-mounted, bevel and worm gearboxes
- Motor winding with thermistors and ISO class F as standard
- IP67 and IP69K protection ratings with alkali and acid-resistant coating as standard.
- Motor connection through standard, round stainless steel connector

CleanDRIVE

- Motor without cooling ribs and fan
- Available with helical, shaft-mounted, bevel and worm gearboxes
- Motor winding with thermistors and ISO class F as standard
- Motor connection through a standard terminal box or stainless steel cable gland

HiflexDRIVE

BK04 gearbox

- Torque 80 Nm
- Gear reductions 7.25 – 63.33

BK08 gearbox

- Torque 200 Nm
- Gear reductions 4.44 - 102.5

BK17 gearbox

- Torque 330 Nm
- Gear reductions 4.54 - 108.6

Motors

- Output power 0.12 kW ... 3.0 kW
- Efficiency classes no rating and IE1 to IE4
- Enclosure IP65 (standard)
- IP67 / IP69K (optional)

Energy-efficient motor solutions

Mains Supply

- IE1 asynchronous technology 0.12 kW – 45 kW
- IE2 asynchronous technology 0.12 kW – 45 kW
- IE3 asynchronous technology 0.12 kW – 45 kW
- IE4 asynchronous technology 0.55 kW – 4 kW

Inverter Duty

- IE3 PMSM-technology 1.5 kW – 15 kW
- IE4 PMSM-technology 0.55 kW – 11 kW

Energy-efficient motor solutions for explosion hazard areas

The S series in permanent magnet synchronous motors (PMSMs) offers variable-speed geared motors in efficiency class IE4 for use in explosion hazard areas⁽¹⁾.

- Design torque M_N : 5 Nm – 48 Nm
- Rated power P_N : 0.75 kW – 15 kW
- Increased safety for zone 1 II 2 G Ex e IIC T1 - T3 Gb
- Dust explosion protection – Zone 21 II 2 D Ex tb IIIC T 160°C ... 120° Db

⁽¹⁾ Individual motor designs can show lower efficiency classes than IE4 at rated torque.

EtaK2.0 Decentral Solutions

- PMSM enabled
- Integrated safety technology and field bus communication according to specific needs
- Modular structure minimises spare parts stock
- Energy savings of up to 30 % possible under partial load conditions
- Suited to extremely harsh environments thanks to IP65 enclosure rating
- 200 % overload current (3 s)
- Sensorless vector control
- CANopen, Profibus, Profinet, EtherCAT, EtherNet/IP and AS-Interface
- STO safety function

Energy Efficient Geared Motors

Bauer Gear Motor - profile

Submersible Solutions

- **Special sealing concepts** for maximum leakage protection
- **Reinforced bearings** for higher strength and longer service life
- **Shafts** available on request in V4A steel or coating
- **Motor Connection**
 - Standard with cast terminal box
 - Optional with special plug connection
- **Additional features:**
 - Special design for continuous submersible operation
 - Electronic leakage detection available on request
 - Brakes available in IP68 design
 - Water depths of 5m (deeper on request)
- **Corrosion category Im2** based on DIN ISO 12944-5

Customised geared motor solutions for all applications

- Special applications
- Special adaptations
- Special environments
- Series production

Based on our modular, geared motor programme, we offer specific solutions for applications in all key markets such as, for example, food & beverage, energy, wastewater, concrete, metals and material handling in applications such as washdown conveyor systems, rolling mills, monorail systems and overhead conveyors, sludge thickeners, cranes, fans and blowers and turbines. Our aim is to provide our customers with products tailored to their needs. At the same time, we take care to ensure that a geared motor solution will prove to be especially profitable throughout its entire life cycle.

We already equip our geared motors with highly efficient permanent magnet motors to achieve low life cycle costs because low energy consumption will be particularly important in the future. We are very confident that we are once again pioneers in this sector.

Learn more about Bauer Gear Motor, its products and philosophy at www.bauergears.com.



1

General

Advantages of Bauer-Geared Motors	17
Bauer Gearmotors	17
Bauer Gearboxes	17
Bauer Motors	17
Bauer Brakes	17

Energy Efficient Geared Motors

AC Variable Speed

1

Advantages of Bauer-Geared Motors

Bauer Gearmotors

- Low operating costs due to a high total efficiency
- 2-stage gearbox concept gives a longer lifetime due to a reduced number of moving parts
- Lower servicing costs due to a modular system
- No additional protective measures (e.g. dusty environment) through the IP65 enclosure as standard
- The electrical design of the motor is aligned to the gearbox
- Quick reaction time in emergency situations (Breakdowns etc.) through Fast Assembly Delivery (within 24 hours)

Bauer Gearboxes

- Easy access to the fixation points reduces assembly times and installation costs
- Low servicing costs as the lubrication change results in normal duty with a lubrication temperature of approx. 80 °C first after 15 000 operating hours when using CLP 220 or 25 000 operating hours when using PGLP 220 / PGLP 460.
- 2-stage gearbox concept reduces the spare part stocking
- A variety of attachment possibilities (Foot, Flange, Solid and Hollow shafts, Torque arms)
- Sealed housing design reduces the risk of oil leakage and increases the oil lifetime
- The large housing volume allows usage in very harsh environments

Bauer Motors

- Low operating costs due to high motor efficiencies (IE1, IE2, IE3 and IE4 as Standard)
- All efficiency classes in the same motor frame size. No motor size change.
- Low installation costs through CAGE CLAMP® instead of the classical terminal block connection
- A variety of additional designs (connectors, brakes, backstops, rain covers, forced cooling, encoders etc.)
- Cost reduction of connection cabling and avoidance of additional protective elements (chokes, filters etc.), through built-on inverters (ETA-K2.0)
- Ideal for frequency inverter duty through insulation class F as standard

Bauer Brakes

- Low servicing costs through long lifetime of the brake discs (without adjustment)
- Brake-Motor correlation tailor made to the application by virtue of on average three brake sizes per motor size
- A variety of designs (lockable and non-lockable hand release, microswitch, heaters)
- Robust design for heavy duty applications
- Enclosure IP65 as Standard
- Very high wear resistance

Energy Efficient Geared Motors

AC Variable Speed



2

Product Description

Selection of geared motors	21
Installed positions of geared motors	21
Notes on safety	21
Guards for rotating parts	21
Touch protection	21
Operating noise	21
Painting and corrosion protection	21
Modular system overview	22

Energy Efficient Geared Motors

AC Variable Speed

2

Product Description

Selection of geared motors

Installed positions of geared motors

Bauer geared motors can be supplied for any type of fitting position. Vertical installation positions (motor-down) place a particularly severe strain on the shaft seal. It is advisable to avoid this arrangement especially at high motor speeds (e.g. above 1800 r/min) and continuous operation.

Notes on safety

See the notes on safety regarding installation in Operating Instructions.

Guards for rotating parts

The shrink disk (SSV) guards required under the German law relating to technical materials (Law Concerning Industrial Equipment - Equipment safety law GPSG) or by the Accident Prevention Regulations (UVV) are not included in the standard scope of supply because they are fitted by the customer in most cases, or the risk of accident can be eliminated by suitable installation.

See the Operating Instruction.

Touch protection

The fan hoods, via the externally mounted fan wheels, of the entire B2000 motor series fulfil the protection against contact with the standard finger (Ø12 mm).

Operating noise

The typical operating noise levels of BAUER geared motors are within the limits stipulated by VDI directive 2159 for gears and EN 60034-9, Table 2 for motors.

For physical reasons, low-ratio, high-speed gears produce more noise than medium- and high-ratio gears operating at low speeds.

Painting and corrosion protection

BAUER geared motors are spray-painted in RAL 7031 to DIN 1843 as standard. Other RAL colours are available at extra cost.

The output shafts are shipped in protective sleeves or with a protective coating to prevent corrosion.

The prerequisite for achieving a long protection period is the right choice of coating. The coating system from Bauer Gear Motor GmbH, based on DIN EN 12944-5, offers suitable and long-lasting corrosion protection for all areas of application.

Category	Loads	Examples of indoor areas	Examples of outdoor areas	Possible IP-Protection class
Standard	Insignificant	Insulated and heated buildings with neutral atmosphere	—	IP54 IP65
C1	Insignificant	Insulated and heated buildings with neutral atmosphere	—	IP54 IP65
C2	Low	Uninsulated and unheated buildings where condensation can occur, e.g. warehouses, sports halls	Atmosphere with low corrosive load, mostly rural areas	IP54 IP65
C3	Moderate	Production rooms with high relative humidity and some air pollution, e.g. facilities for food production, laundries, breweries, dairies	Urban and industrial atmosphere, moderate pollution by sulphur dioxide. Moderate coastal area with low salt pollution	IP65 IP66
C4	Strong	chemical plants, swimming pools, objects above sea water	Industrial and coastal areas with moderate salt exposure	IP65 IP66
C5-I	Very strong (industry)	areas with almost constant condensation and heavy contamination	Industrial areas with high relative humidity and aggressive atmosphere	IP66
C5-M	Very strong (sea)	areas with almost constant condensation and heavy contamination	Coastal and offshore areas with high salt pollution, buildings with almost constant condensation and heavy air pollution	IP66
IM2	Sea or brackish water	IP68 Underwater Drives	Port areas, lock gates, moles, offshore installations	IP68
Aseptics (proprietary development of Bauer)	Very strong	For indoor and outdoor use with very high environmental pollution and in hygiene-sensitive areas, in each case with high-pressure cleaning with chemical cleaning agents		IP67/IP69K

Duration of protection according to DIN EN ISO 12944-5: medium (M) 5 to 15 years

Product Description


Modular system overview

Gear design

2


BG

Helical gear




BF

Shaft-mounted gear

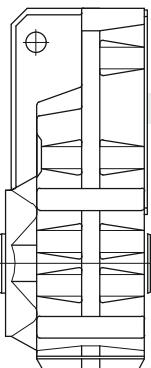


BK

Bevel gear

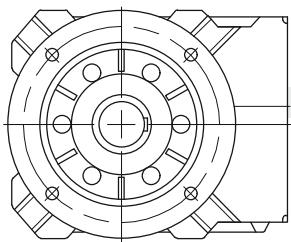


BS


Worm gear

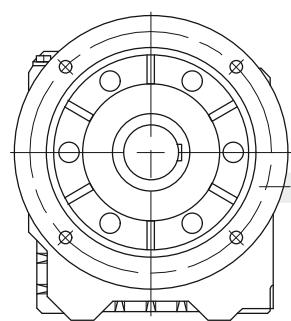


Motor terminal
box design

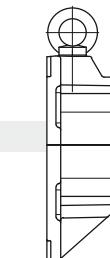


System cover




Motor with cast-on
terminal box (KAG)

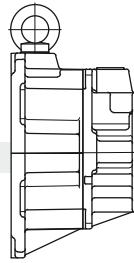



Pre-stage




Motor with screwed-on
terminal box (TB)

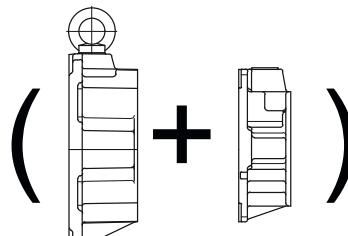


Pre-stage + System cover

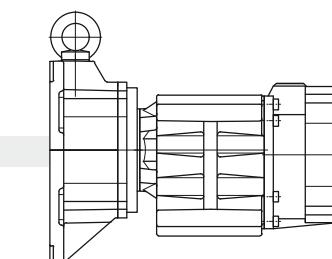

Intermediate gear



Motor with ETA-K-Converter

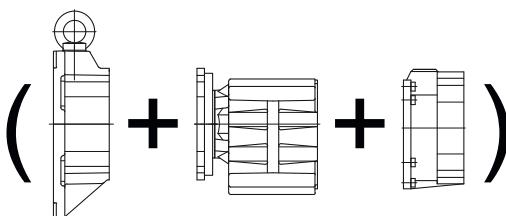


(System cover + Intermediate gear + System cover)

Product Description


Modular system overview

2


Covers B-Side




Standard fan cover



Forced Cooling



Brake fan cover



Forced cooling
with brake


Extensions
Standard Motor




2. Shaft end



Rain cover



Encoder



Extensions Motor
with Brake



2. Shaft end



Manual release



Encoder



Manual release



Manual release


Energy Efficient Geared Motors

AC Variable Speed

Energy Efficient Geared Motors

AC Variable Speed

3

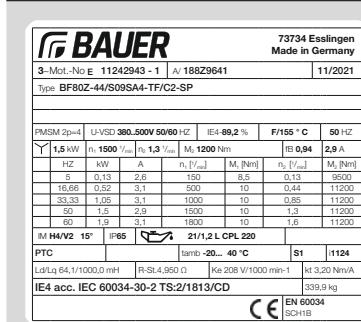

Type Designations

Significance of type designation	27
BG-series helical/geared motor	28
BF-series shaft-mounted geared motor	29
BK-series bevel/geared motor	30
BS-series worm/geared motor	31
Versions and options	32
BG and BF series	32
BK and BS series	32
Motor	33
Permanentmagnet synchronous motor (PMSM)	33
Motor protection	33
Brake rectifier in motor terminal box	33
Plug connector	33
Heavy-duty fan	33
Protective cover	33
CleanDrive	33
Supplement types	34
Brake	34
Digital and analogue encoder	34
Second shaft end	34
Forced ventilation	34
Overall design	34

Energy Efficient Geared Motors

AC Variable Speed

3

Type Designations

Significance of type designation


Example: Bauer bevel-geared motor with brake and standard add-ons

Significance of type designation

The type designation of a BAUER geared motor is a code designating all the features in the drive configuration.

The build-up of the type designation is explained with the help of the following example of a bevel geared motor with brake and series options.

3

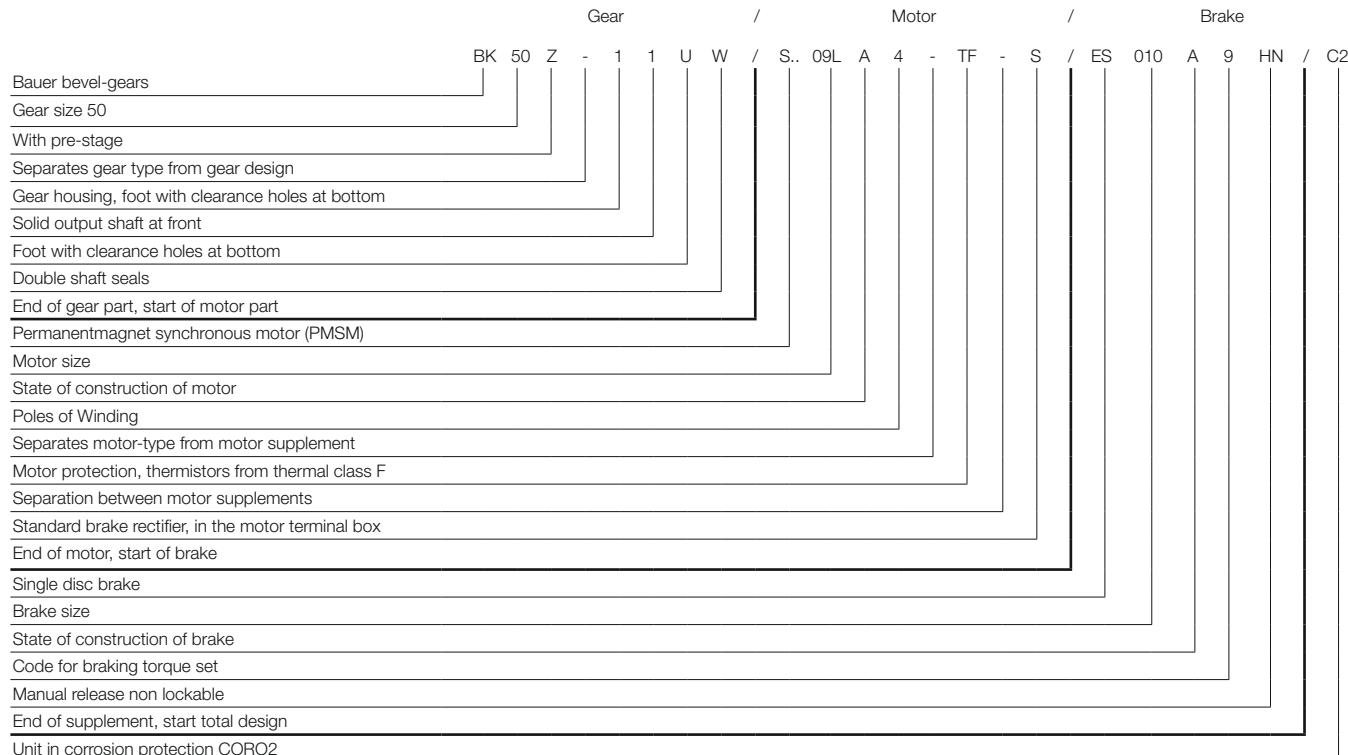

Type Designations

BG-series helical-gear motor

BG 10 Z X-71 / S..08 LA4

- Gear type
- Gear size
- Pre-stage
- Re-inforced bearings (only BG10)
- Code for gear design
- Code for shaft design
- Three-phase motor
- Motor size
- Core length
- Design edition
- Number of poles

Z- Gear with pre-stage
G- Tandem gear

1 Foot with clearance holes


2 Small A-flange with clearance holes
3 Standard A-flange with clearance holes
4 Large A-flange with clearance holes

6 . L Foot with tapped holes, left
6 . R Foot with tapped holes, right
6 . LR Foot with tapped holes, left and right

7 C-flange with threaded holes
8 Completely machined


9 . L Foot plate, left
9 . R Footplate, right
9 . LR Footplate, left and right

. 1 Solid shaft on gear side V
. 7 Solid shaft on gear side V for flange as from BG10
. W Double shaft seals

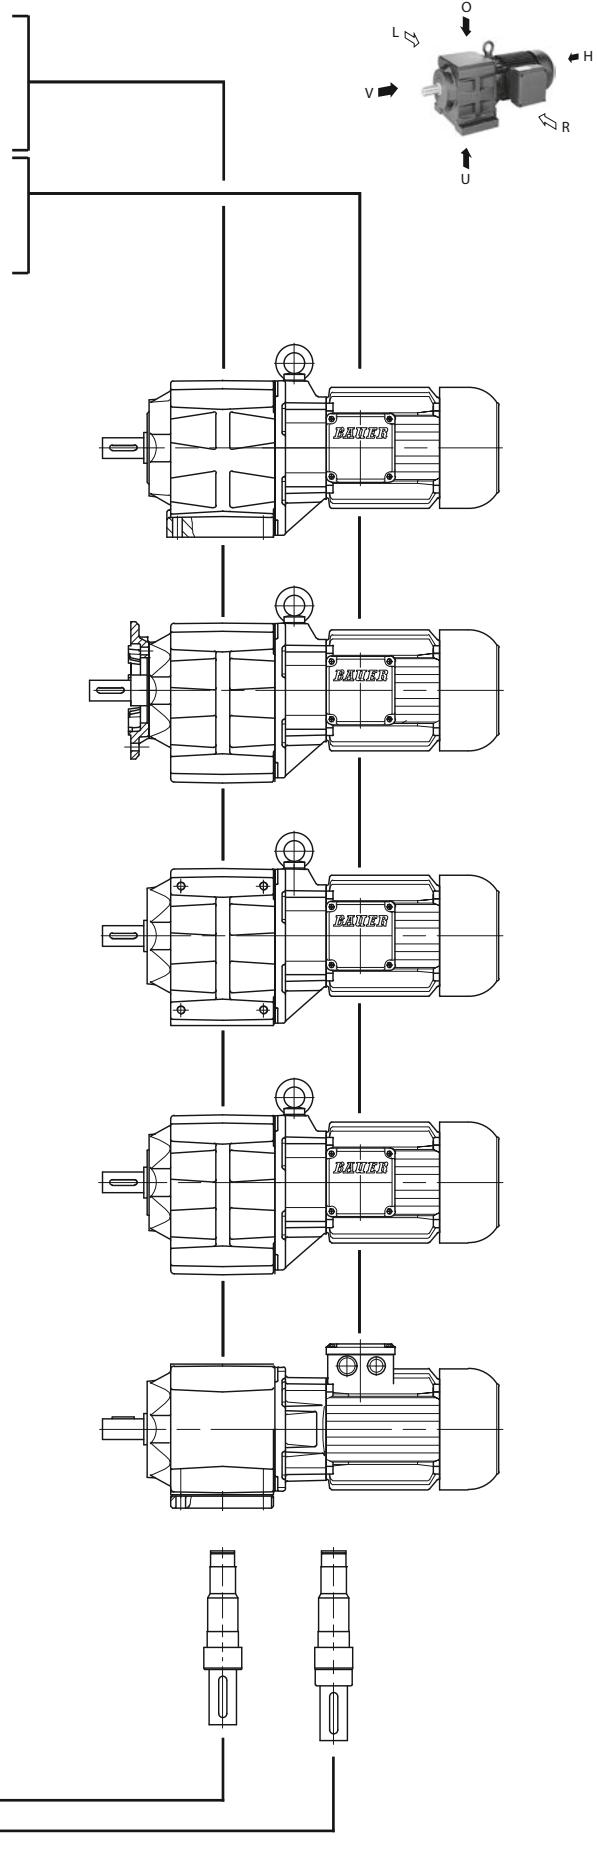

Type Designations


BF-series shaft-mounted geared motor

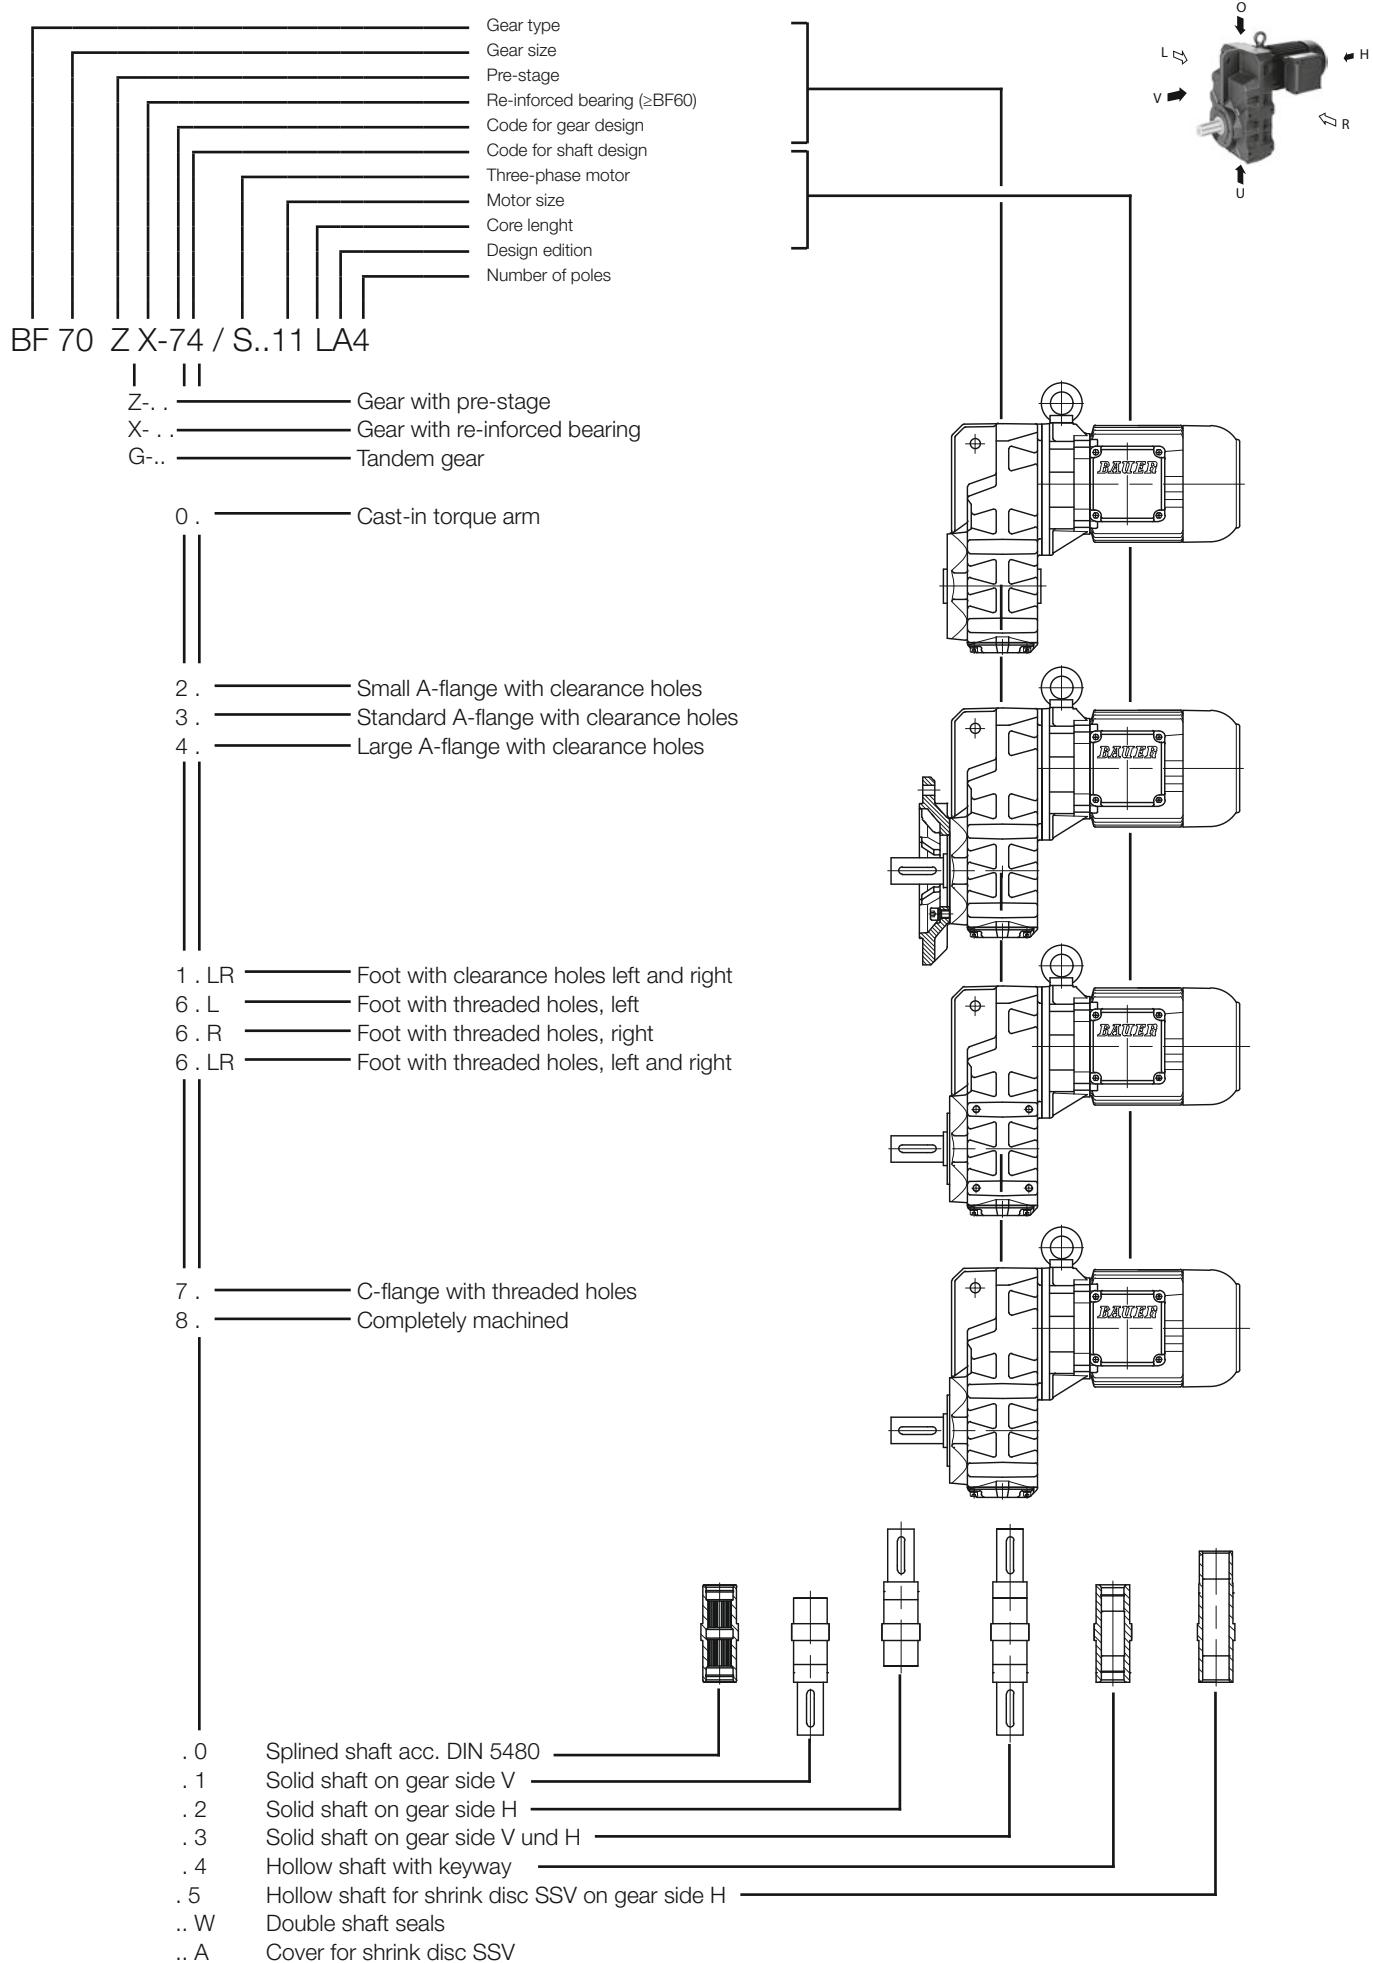

Type Designations


BK-series bevel-gear motor

3

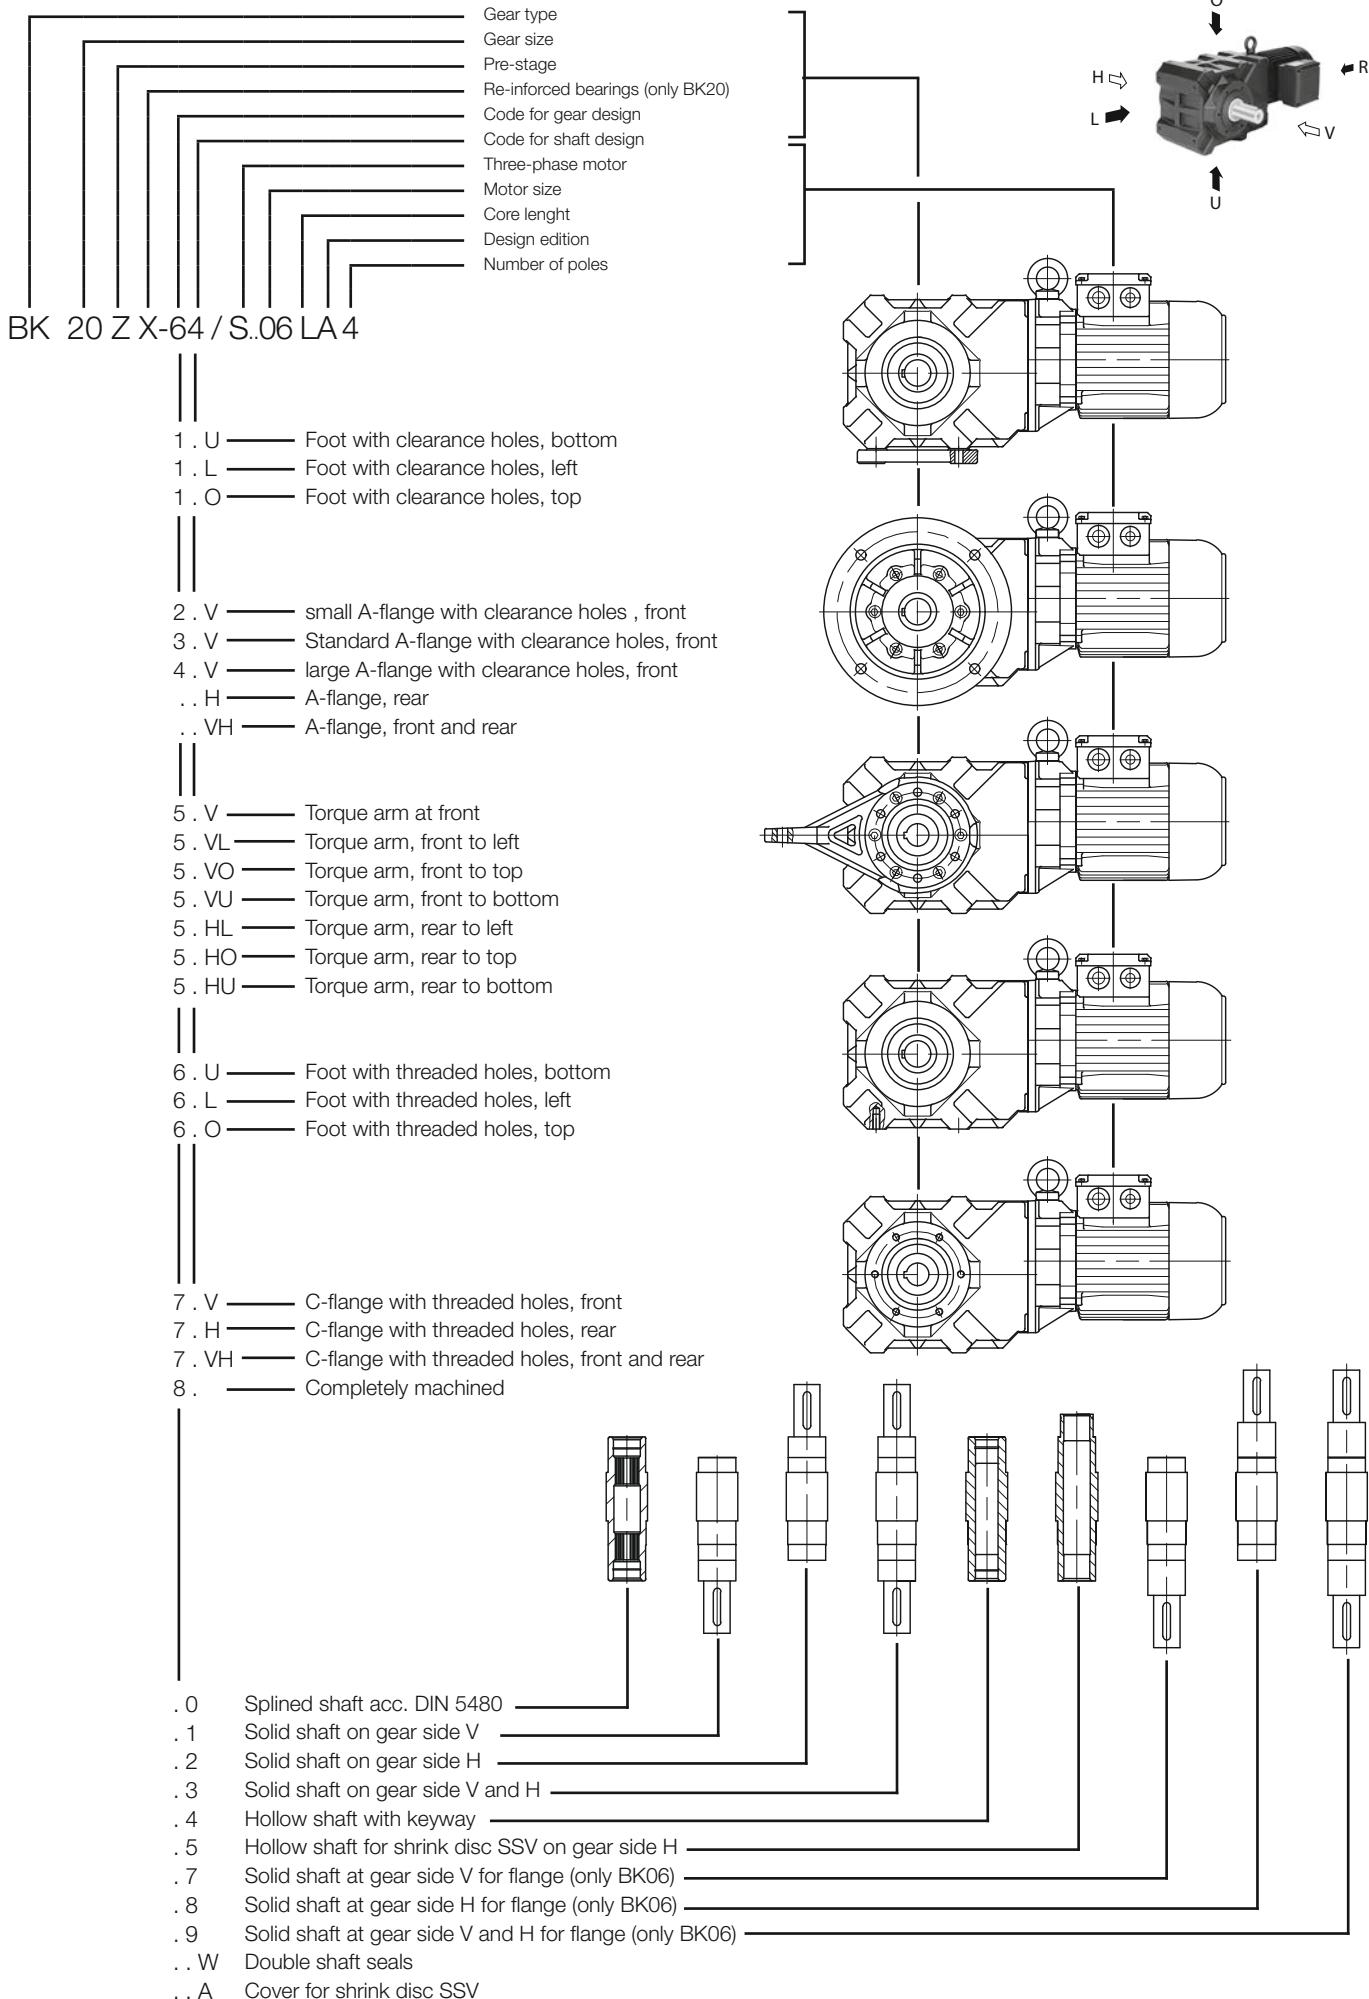

Type Designations

BS-series worm-geared motor

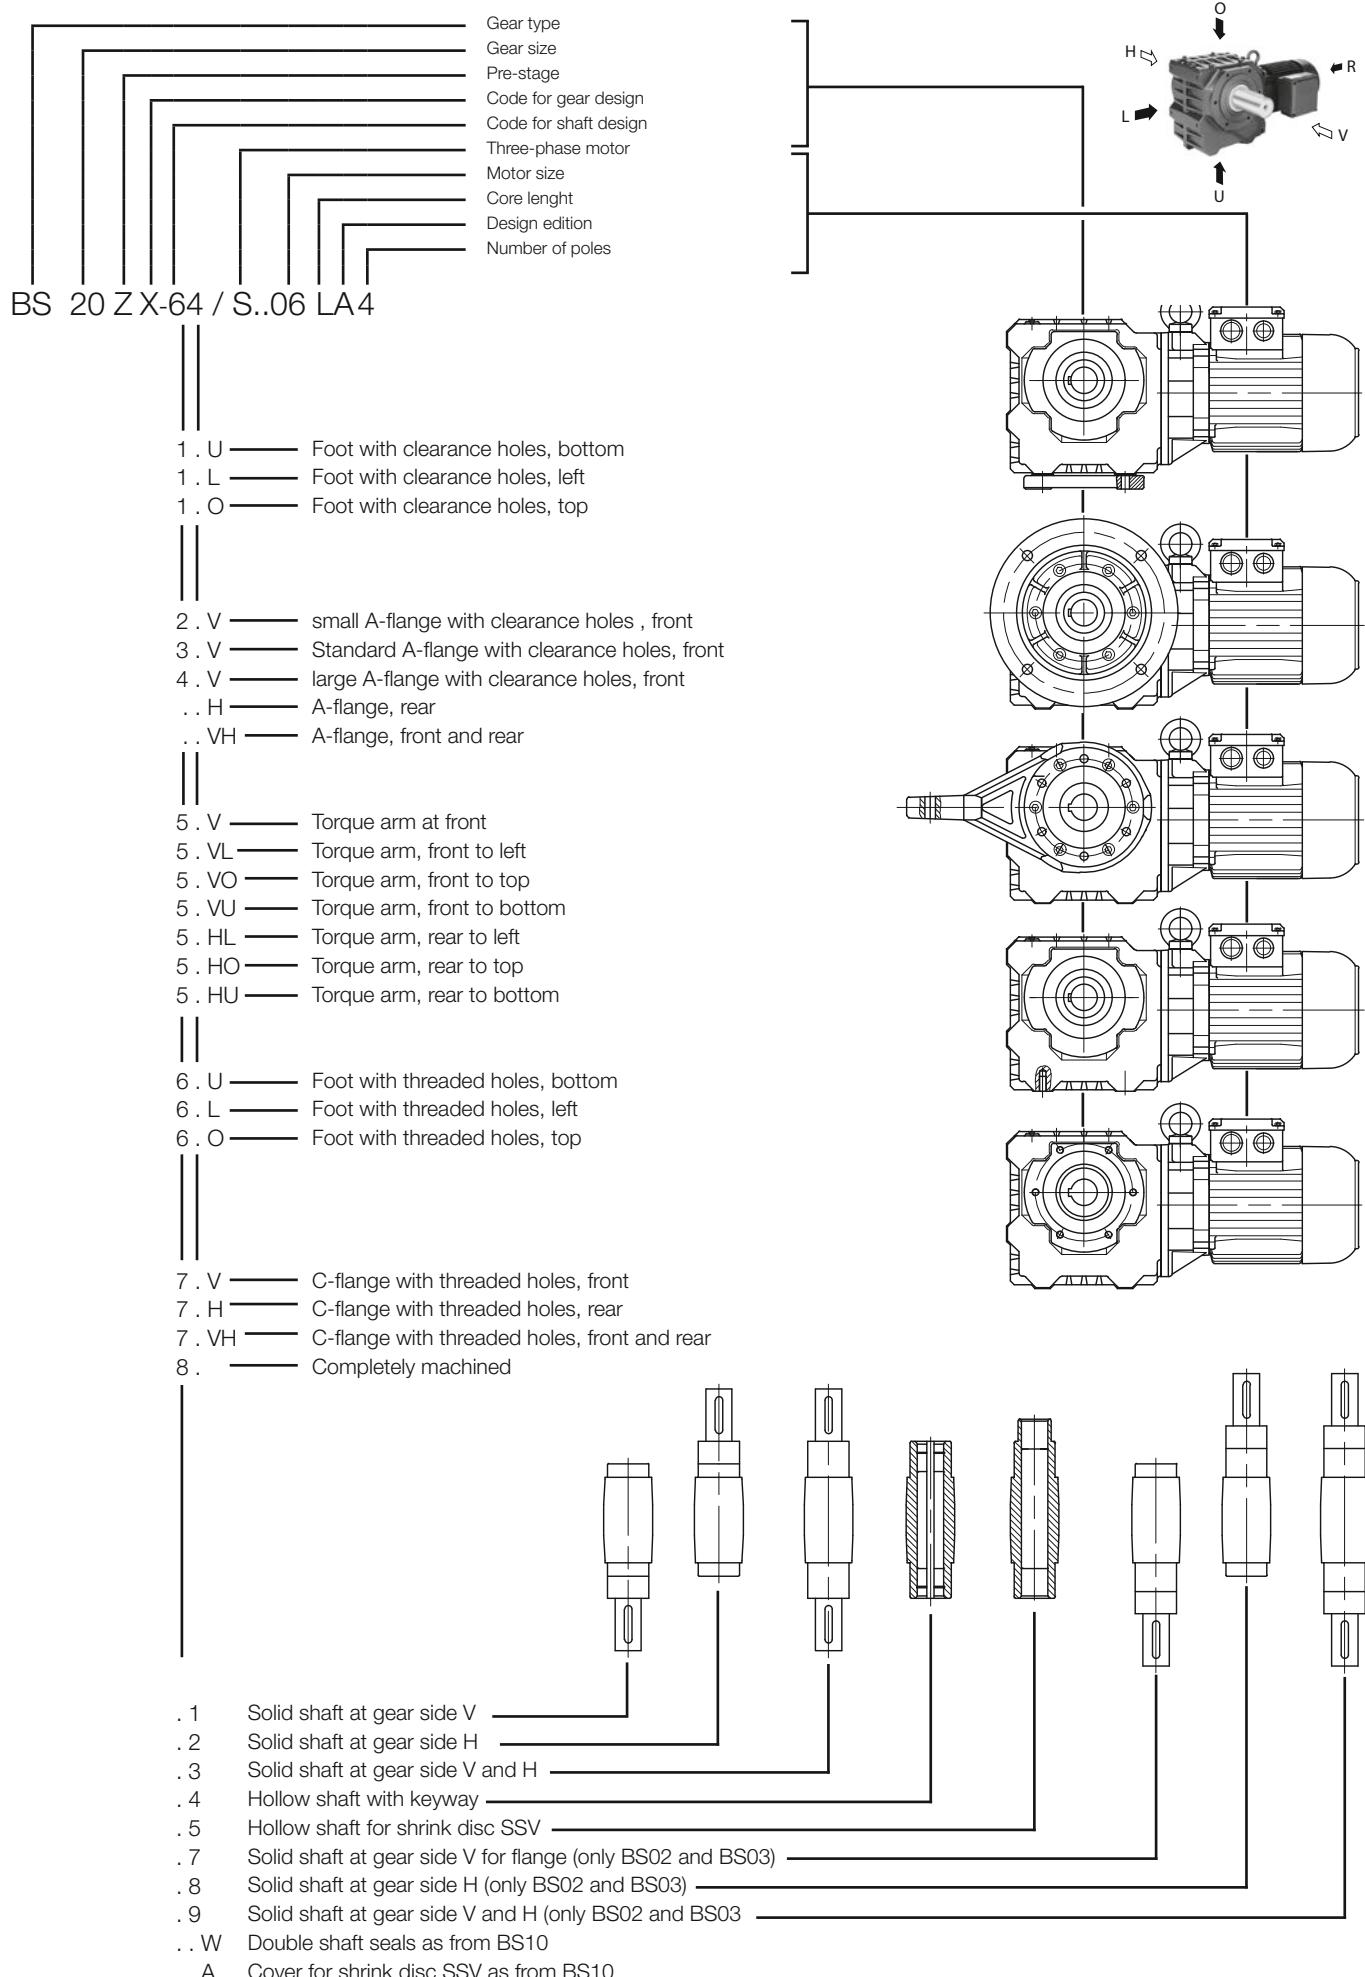


Type Designations


Versions and options

BG and BF series

BG series: type H4



BF series: type H4



3

V = Front

The side of the gear unit facing away from the motor or the source of motive power

H = Rear

The side of the gear unit facing toward the motor or the source of motive power

L = Left


The left side of the gear unit as viewed from the output shaft side of type B3 for the BG series or type H4 for the BF series

R = Right


The right side of the gear unit as viewed from the output shaft side of type B3 for the BG series or type H4 for the BF series

BK and BS series

BK series: type H1



BS series: type H1



V = Front

The side of the gear unit facing toward the viewer looking toward the type H1 unit

H = Rear

The side of the gear unit facing away from the viewer looking toward the type H1 unit

L = Left

The left side of the gear unit as viewed from the output shaft side of type H1, or the torque brace oriented to the left

O = Top


The top side of the gear unit as viewed from the output shaft side of type H1, or the torque brace oriented upwards

U = Bottom

The bottom side of the gear unit as viewed from the output shaft side of type H1, or the torque brace oriented downwards

Type Designations

Motor

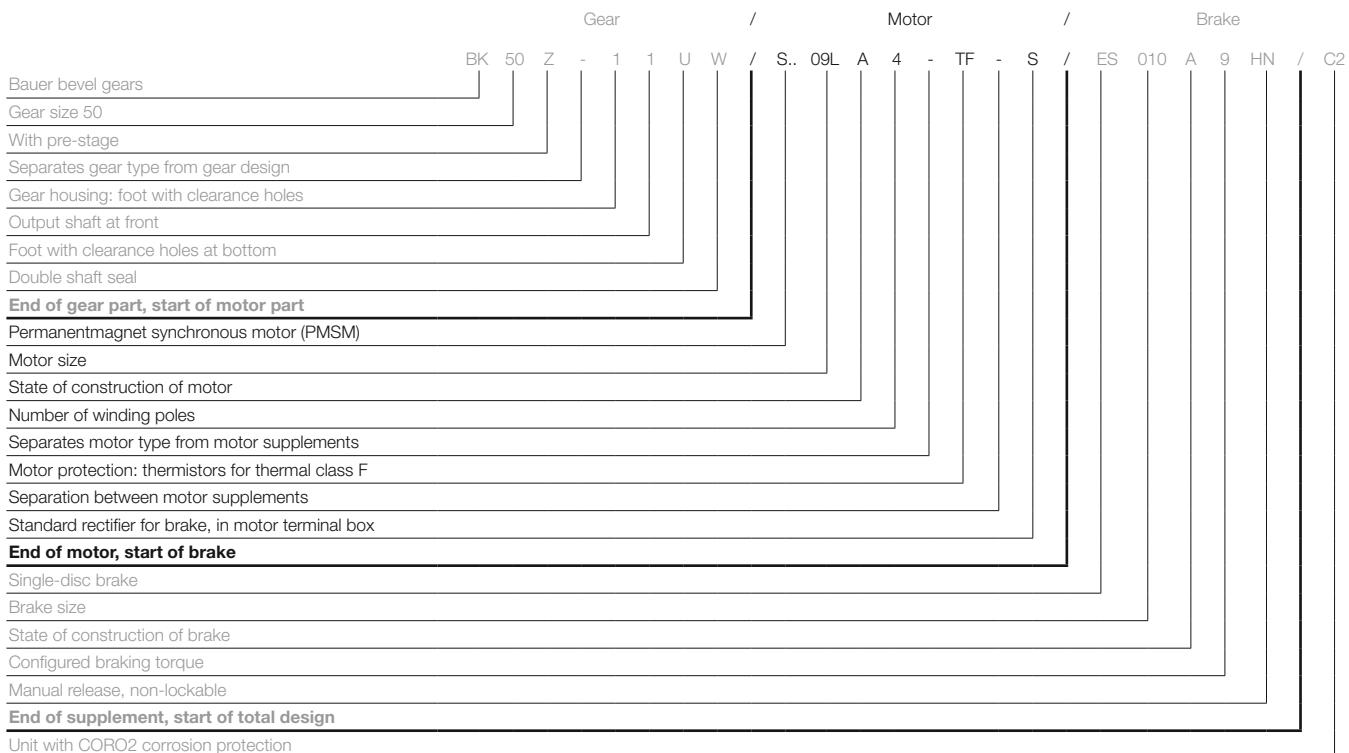

3

Permanentmagnet synchronous motor (PMSM) S = Permanentmagnet synchronous motor (PMSM)

. A = Aseptic motor (germ-free drive)
. N = Motor without gear unit; foot-mount version
. NF = Motor without gear unit; flange-mount version
. U = Unventilated (no forced ventilation)

Motor protection

TB = Thermistor 140°
TF = Thermistor 160°
TH = Thermistor 180°
TEB = Thermistor warning/shutdown 120°/140°
TBF = Thermistor warning/shutdown 140°/160°
TFH = Thermistor warning/shutdown 160°/180°
TOB = Thermostatic switch, NC 140°
TOF = Thermostatic switch, NC 160°
TOH = Thermostatic switch, NC 180°
TSB = Thermostatic switch, NO 125°
TSF = Thermostatic switch, NO 160°
TSH = Thermostatic switch, NO 180°
TX = Other

Brake rectifier in motor terminal box

S = Standard rectifier SG
E = Special rectifier ESG
M = Special rectifier MSG

Plug connector

ST = Harting (other)

Heavy-duty fan

SL

Protective cover

D


CleanDrive

CD

= Aseptic drive with cable

Type Designations

Supplement types

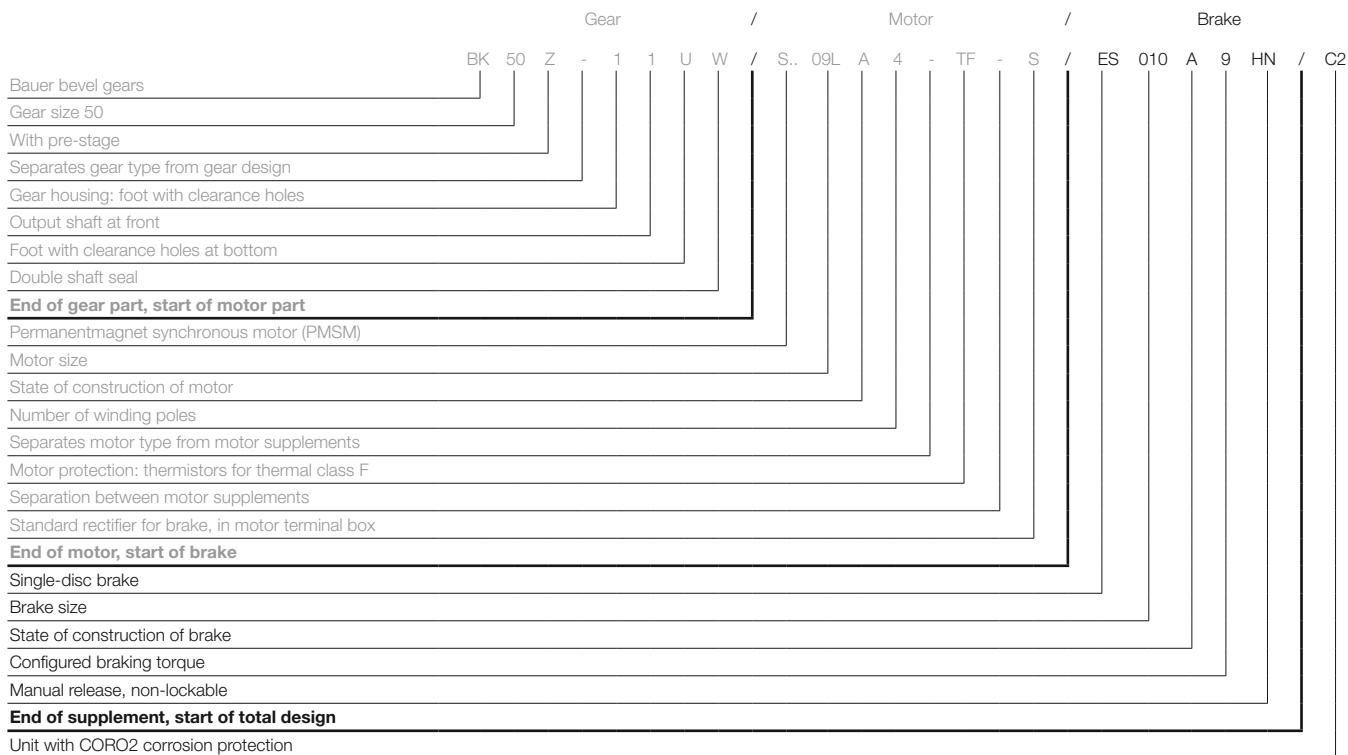

Brake

E	=	Single-disc brake
ES	=	Single-disc holding brake
EH	=	Single-disc holding brake in heavy duty
ZS	=	Two-disc holding brake
ESX	=	Single-disc service brake
EHX	=	Single-disc service brake in heavy duty version
ZSX	=	Two-disc service brake
... 010	=	Brake size
... ... A	=	Construction state
... 9	=	Code for configured braking torque
... HN	=	Manual release (not lockable)
... HA	=	Manual release (lockable)

Digital and analogue encoder

G

Second shaft end

ZW	=	With key
ZV	=	With square shaft

Forced ventilation

FV

Overall design

UL	=	US version
C1	=	Coro1 corrosion protection
C2	=	Coro2 corrosion protection
C3	=	Coro3 corrosion protection
C4	=	Coro4 corrosion protection
C5I	=	Coro5 corrosion protection
C5M	=	Coro5 corrosion protection
IM2	=	Protection against sea or brackish water
SP	=	Non-catalogue version



4

Gear Motor Selection

Selection of geared motors	259
Drive configuration	260
Drive configuration - General	260
Required data for drive configuration	260
Determining the motor power	261
Determining the required torque	261
Determining the gear reduction ratio	261
Determining the factor of inertia	261
Determining the shock load	262
Determining the minimum service factor f_{Bmin}	262
Brake specification	262
Motor configuration	263
Torque-speed characteristic	263
Radial and axial forces on the output shaft	267
Maximum allowable radial force at force application point X	267
Bearing load limit	267
Shaft strength	268
Helical gear unit BG series	268
Shaft-mounted gear unit BF series	269
Bevel gear unit BK series	270
Worm gear unit BS series	270
Transmission components	271
Factor f_z for the type of transmission component	271
Axial force	271
Shock loads of machinery	272

Energy Efficient Geared Motors

AC Variable Speed

4

Gear Motor Selection

Selection of geared motors



A REGAL REXNORD BRAND



Information

Company: _____
 Contact person: _____
 Phone: _____
 Email: _____

Bauer Gear Motor GmbH
 Eberhard-Bauer-Str. 37 73734 Esslingen
 +49 (711) 3518-0 info@bauergears.com

Questionnaire for geared motor selection

Gearbox type



BG
Helical gears BG



BF
Parallel shaft gears



BK
Bevel gears



BS
Worm gears



Hiflex
 Standard
 Stainless

Number of items: _____
 Country of operation: _____

Technical Data

Output shaft speed n2: _____ rpm

Torque M2: _____ Nm

Motor power: _____ kW

Temperature class: B F H

Rated speed: 1500 1/min 3000 1/min

Operation

Service factor required: min _____ max _____
 or Type of loads (conveyor, mixer, crusher, centrifuge, etc.): _____
 Number of switching per hour: _____

Daily operating time:	<input type="checkbox"/> 8 hour <input type="checkbox"/> Light shock load	<input type="checkbox"/> 16 hour <input type="checkbox"/> Medium shock load	<input type="checkbox"/> 24 hour <input type="checkbox"/> Heavy shock load
-----------------------	--	--	---

Output shaft design

- | | | |
|--|---|---|
| <input type="checkbox"/> Solid shaft on side V/H/VH: _____ | <input type="checkbox"/> Solid shaft without parallel key | <input type="checkbox"/> Other (sketch attached) |
| <input type="checkbox"/> Hollow shaft with keyway | <input type="checkbox"/> Hollow Shaft for shrink disk | <input type="checkbox"/> Splined Shaft acc. to DIN 5480 |
| | <input type="checkbox"/> Shrink disk | |
| <input type="checkbox"/> Special shaft dimensions (DxL), _____ x _____ mm | <input type="checkbox"/> Second shaft end on motor with parallel key (ZW) | |
| <input type="checkbox"/> Second shaft end on motor (DxL), _____ x _____ mm | <input type="checkbox"/> Second shaft end on motor with square shaft (ZV) | |

Mounting position

<input type="checkbox"/> Foot with clearance hole	<input type="checkbox"/> A-Flange	<input type="checkbox"/> rear	<input type="checkbox"/> bottom
<input type="checkbox"/> Foot with tapped holes	<input type="checkbox"/> C-Flange with tapped holes	<input type="checkbox"/> front	<input type="checkbox"/> top
<input type="checkbox"/> Torque arm with rubber buffers	<input type="checkbox"/> Foot plate	<input type="checkbox"/> left	<input type="checkbox"/> right

Mounting (acc. to page. 2 - H1, H2, V1, V2, etc.): _____

Terminal box position (acc. to page. 3): I II III IV

other: _____

Painting

- Standard RAL 7031
 other RAL _____

Environment

IP prot. type per EN 60034: IP54 IP65 IP66 IP67 IP68 IP69K

Indoor installation Outdoor installation Corrosive environment: _____

Ambient temperature range: from _____ °C to + _____ °C Relative humidity: _____ %

Motor Accessories

- Brake, voltage: _____ V
 Brake wear/function monitoring
 Thermistor motor protection
 Temperatursensor KTY
 Encoder type _____
 Rain cover

- Required braking torque: _____ Nm Manual brake release
 Brake heater Anticondensatemotor heater
 Thermostats motor protection
 Temperatursensor PT100
 No. of pulse: _____ Supply voltage HTL \ TTL
 Forced ventilation

Additional requirements may be specified in a free written form.

Gear Motor Selection

Drive configuration

Drive configuration - General

Motions are necessary in production plants and equipment for the manufacture of goods and products. Geared motors are used to implement these motions in stationary production equipment. The objective of drive configuration is to obtain the optimal motor for each type of motion.

Motions in machines and equipment vary considerably. Experienced design engineers reduce the necessary motions to a few standard types:

These are:

- continuous linear motion
- reciprocating linear motion
- horizontal linear motion
- vertical or oblique linear motion for lifting and lowering loads
- continuous rotary motion and reciprocating rotary motion

All motions can be divided into:

- an acceleration phase
- a constant-velocity phase
- a braking (deceleration) phase

These motion phases must be examined separately when sizing a drive, in order to determine the phase with the highest load. After the maximum load has been determined, the drive system can be selected.

See our separate "Design Guide" publication for assistance with various use cases.

Required data for drive configuration

In addition to the data on (Specification of geared motors), the following data is necessary for drive configuration:

Designation	Description	Unit
t_d	Operating time per day	[h]
t_a	Deceleration time	[s]
n_2	Output speed	[rpm]
n	Rated rotor shaft speed	[rpm]
J	Moment of inertia	[kgm ²]
J_{ext}	External moment of inertia	[kgm ²]
J_{ext}	External moment of inertia referred to the rotor shaft	[kgm ²]
J_{rot}	Rotor moment of inertia	[kgm ²]
F	Force	[N]
m	Mass	[kg]
v	Velocity	[m/s]
a	Acceleration	[m/s ²]
g	Earth gravitational constant	[m/s ²]
P_{dyn}	Dynamic power	[kW]
P_s	Static power	[kW]
P	Power	[kW]
M_2	Output torque	[Nm]
M_N	Rated torque at rotor shaft	[Nm]
M_a	Deceleration torque	[Nm]
M_L	Braking or driving load torque	[Nm]
M_{grenz}	Specific limiting torque of gearbox at gear ratio i	[Nm]
M_{br}	Rated braking torque	[Nm]
i	Gear reduction ratio	
FI	Inertia ratio	

Drive configuration process

Motor configuration

Determining the motor power

The required power can generally be calculated as follows:

$$P = \frac{F \times v}{\eta}$$

As previously described, all motions are divided into an acceleration phase (dynamic power), a constant-velocity phase (static power), and a braking (deceleration) phase.

Depending on the type of motion, the force F necessary to overcome all opposing forces such as rolling friction, linear friction, gravitational force, acceleration and so on arising from the drive train has a strong influence on the required power and must be determined explicitly for each use case.

Determining the required torque

After the motor power has been determined, the required gearbox output torque can be calculated with:

$$M_2 = \frac{P \times 9550}{n_2}$$

Determining the gear reduction ratio

The gear reduction ratio is the ratio of the rated speed of the motor (see the motor data in Section 13) to the desired output speed of the geared motor.

$$i = \frac{n}{n_2}$$

Gearbox size selection

Determining the factor of inertia

The inertia ratio is the ratio of the sum of the moments of inertia of all masses driven by the motor and converted to the motor speed, including the moment of inertia of the motor rotor, to the moment of inertia of the rotor:

$$FI = \frac{J_{ext} + J_{rot}}{J_{rot}} \quad \text{where} \quad J_{ext} = \frac{J_{ext}}{i^2}$$

Gear Motor Selection

Drive configuration

Determining the shock load

The shock load (see Sections 6, 7, 8 and 9) is determined from the inertia factor, the type of transmission component and the relative moment of acceleration.

Determining the minimum service factor $f_{B\min}$

Based on the operating time per day, the cycle rate and the ascertained shock load, the service factor $f_{B\min}$ can be taken from the tables in Sections 6, 7, 8 and 9.

Based on this minimum service factor $f_{B\min}$, select a geared motor from the tables that has a higher service factor as well as the required output speed, output torque and motor power.

Note: The service factor relates solely to the required torque for static operation needed by the application, which should be covered by the output torque of the selected geared motor. The dynamic portion is not taken into consideration here.

The actual service factor of the geared motor with regard to required torque for static operation can therefore be calculated as follows:

$$f_B = \frac{M_{gr}}{M_{2erf}}$$

The final step is to specify the accessory options for the geared motor.

Brake specification

Essentially it is necessary to determine, based on the amount of friction energy to be dissipated by the brake, whether the brake is a holding brake or a service brake.

See Section 14 for the definitions of holding brakes and service brakes.

Once all the necessary data and requirements are known, the required braking torque can be calculated as follows:

$$M_{br} = M_a \pm M_L$$
$$M_a = \frac{J \times n}{9,55 \times t_a}$$

If the specific application data is not known, for horizontally driven equipment we recommend selecting a braking torque that is 1.0 to 1.5 times the rated torque of the motor.

In the case of applications with significant external moments of inertia (F_l greater than 2) and with operating cycles per hour, the brake size must always be selected on the basis of the thermally allowable braking energy. See Section 14 for detailed information on brake configuration.

In the case of lifting equipment, for safety reasons a braking torque twice as large as the rated torque of the motor should always be selected.


Gear Motor Selection

Motor configuration

Torque-speed characteristic


The torque versus speed curve shows the operating characteristics of the PMSM. The reference points shown schematically on the torque versus speed curve are significant criteria for motor selection.

Torque vs. Speed Curve

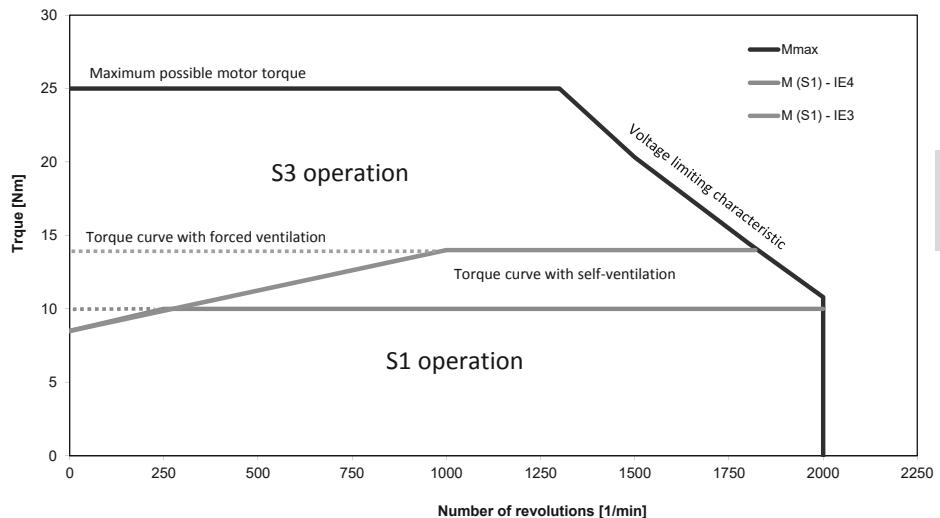

4

The motor is determined by the effective motor torque and the average motor speed. Both values M_{eff} and n_{eff} must be below the S1 limit characteristic curve of the motor to be selected.

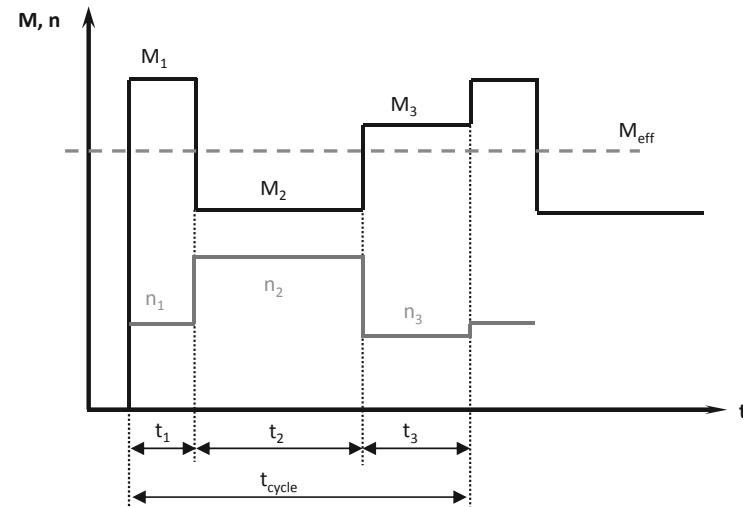

Gear Motor Selection

Motor configuration

Effective torque

$$M_{\text{eff}} = \sqrt{\frac{M_1^2 \cdot t_1 + M_2^2 \cdot t_2 + M_3^2 \cdot t_3 + \dots + M_n^2 \cdot t_n}{t_1 + t_2 + t_3 + \dots + t_n}}$$

Effective rpm

$$n_{\text{eff}} = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + n_3 \cdot t_3 + \dots + n_n \cdot t_n}{t_1 + t_2 + t_3 + \dots + t_n}$$

Acceleration

Dynamic power

The dynamic power is the power that accelerates the entire system (load, transmission components, gears and motor)

$$P_{\text{dyn}} = \frac{m \times a \times v}{\eta}$$

P_{dyn}	Dynamic power [W]
m	Mass [kg]
a	Acceleration [m/s^2]
v	Speed [m/s]
η	Level of efficiency

Dynamic load torque

$$M_{\text{dyn}} = m \cdot a \cdot \frac{1}{\eta} \cdot \frac{D}{2} \cdot \frac{1}{i}$$

D	Impeller diameter
i	Gear reduction ratio

Constant speed

Static performance

The static power takes into account all forces that occur in the unaccelerated state. These include: rolling friction, frictional forces, lifting capacity on slopes and wind force.

$$P_s = \frac{F_F \times v}{\eta}$$

P_s	Static power [W]
F_F	Driving resistance [N]

Static load torque (simplified)

$$M_{\text{statt}} = m \cdot g \cdot \frac{1}{\eta} \cdot \frac{D}{2} \cdot \frac{1}{i}$$

g Acceleration due to gravity

Gear Motor Selection

Motor configuration

Deceleration

Deceleration torque

$$M_{dyn2} = m \cdot (-a) \cdot \eta_L \cdot \frac{D}{2} \cdot \frac{1}{i}$$

$$M_{VER} = M_{stat} + M_{dyn2}$$

M_{verz} Deceleration torque

Load torques in the driving cycle

Acceleration phase

$$M_{Motor} = M_{stat} + M_{dyn1}$$

Constant speed


$$M_{Motor} = M_{stat}$$

Braking phase

$$M_{Motor} = M_{stat} + M_{dyn2}$$

Motor selection

Example:

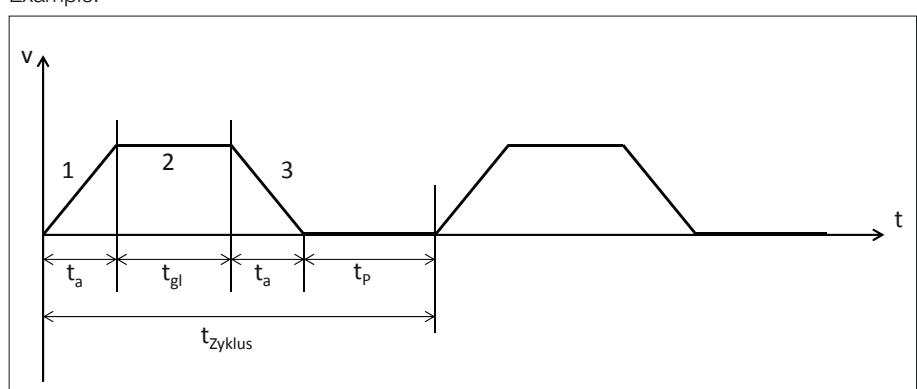

Required dynamic torque on the motor (acceleration): $M_1 = 20 \text{ Nm}$

Required static torque on the motor: $M_2 = 8,0 \text{ Nm}$

Deceleration torque: $M_3 = 10 \text{ Nm}$

Acceleration time/deceleration time $t_a = 0,5 \text{ s}$

Duration constant travel $t_{gl} = 5 \text{ s}$

Cycle time $t_{zykl} = 10 \text{ s}$

Motor speed for constant travel $n = 1450 \text{ 1/min}$

Effective motor torque and moderate motor speed

$$M_{eff} = \sqrt{\frac{M_1^2 \cdot t_a + M_2^2 \cdot t_{gl} + M_3^2 \cdot t_a}{t_{zykl}}} = 7,55 \text{ Nm}$$

$$n_{eff} = \frac{n \cdot t_a + n \cdot t_{gl} + n \cdot t_a}{t_{zykl}} = \frac{n \cdot (2 \cdot t_a + t_{gl})}{t_{zykl}} = 870 \text{ min}^{-1}$$

Gear Motor Selection

Motor configuration

The following motor is selected:

Type: SSE08LA4

Rated power $P_n = 1,55 \text{ kW}$

Rated torque $M_n = 10 \text{ mNm}$

Rated speed $n_n = 1500 \text{ min}^{-1}$

With proper utilisation of the gears by doubling the reduction and increasing the revs of the motor to 3000 min^{-1} , the torque requirement for the motor can be halved, and this makes it possible to decrease the size of the motor.

Instead of the S08LA4, the following motor could be selected in this case:

Type: S5E08MA4

Rated power $P_n = 1,55 \text{ kW}$

Rated torque $M_n = 5 \text{ Nm}$


Rated speed $n_n = 3000 \text{ min}^{-1}$

This increases the efficiency of the motor on the one hand, while also reducing the package length. The result is a cheaper drive with increased energy savings.

The diagram below shows the potential energy savings of using the different IE efficiency motors.

With the utilisation of the gears and the **use of the S08MA4 IE4 motor, compared with the IE3 S08LA4 the power loss can be reduced by 36.24% and by 45.58%** compared with the **IE2 DHE09XA4**.

With 8 hours of operation, 5 days a week and 50 weeks of the year, this results in an **energy saving of 187.37 kW/h** compared with the **IE3 S08LA4** and **276.14 kW/h compared with the IE2 DHE09XA4**.

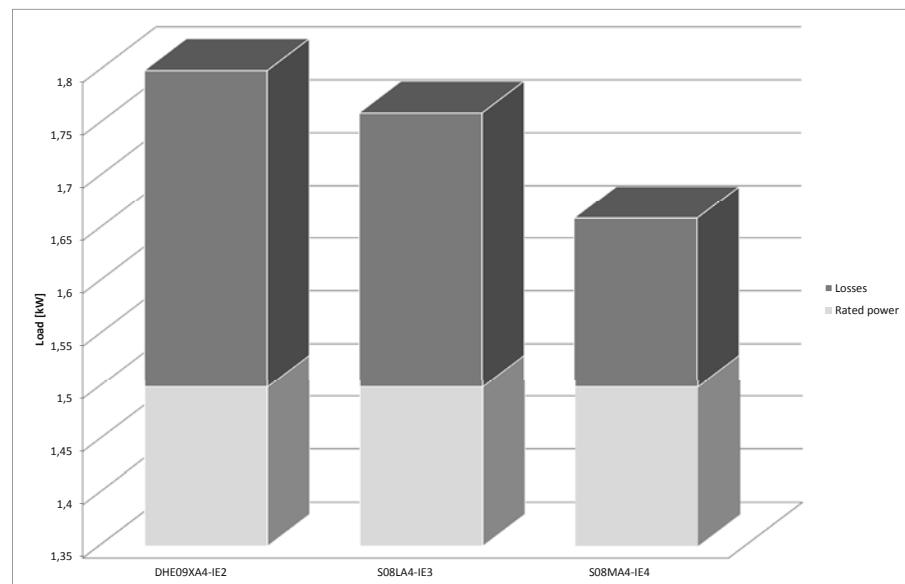


Gear Motor Selection

Radial and axial forces on the output shaft

For each geared motor with a solid shaft, the allowable radial force $F_{R(N,V)}$ referred to the centre of the output shaft, $x = l/2$, is listed in the selection tables. The listed data applies to both foot-mounted and flange-mounted versions. If the force application point F_x is off centre, the allowable radial force must be recalculated taking into account the bearing lifetime and the shaft strength.

Maximum allowable radial force at force application point X

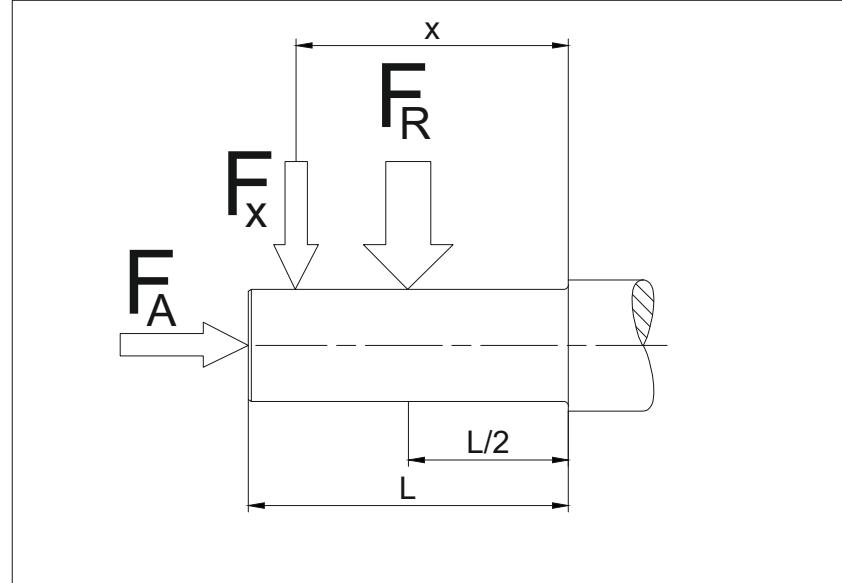

4

$F_{R(N,V)}$ Allowable radial force ($x = l/2$) according to the selection tables [N]
 X Distance from shaft junction to the force application point [mm]
 F_A Axial force [N]

To evaluate the radial force present at the force application point X, the allowable radial forces at position X must be determined with respect to the load limits of the bearings and the shaft strength.

If the calculated allowable radial forces at the force application point X are greater than the radial force that is present, the gearbox may be selected for the application.

If the calculated values are not sufficient or the force application point X is not within the stub shaft length l, please consult us.

Bearing load limit

$$F_{XL1} = F_q \times \frac{0,5 + b}{\left[\frac{x}{l} + b \right]}$$

$$F_{XL2} = F_q \times \frac{0,5 + a}{\left[\frac{x}{l} + a \right]}$$

Gear Motor Selection

Radial and axial forces on the output shaft

Shaft strength

$$F_{XW1} = F_{q\max} \times \frac{0,5}{\left[\frac{X}{I} \right]}$$

$$F_{XW2} = F_{q\max} \times \frac{0,5 + c}{\left[\frac{X}{I} + c \right]}$$

Thereby are:

4

For the selected gear ratio and bearing type (normal or reinforced), F_q is the allowable perpendicular force F_{RN} or F_{RV} from the geared motor selection tables.

$F_{q\max}$ is the maximum allowable perpendicular force for the selected gearbox size as listed in the geared motor selection tables, independent of the bearing type (normal or reinforced).

The factors a, b and c for the individual gearbox types are listed in the following tables.

Helical gear unit BG series

Taille	Paliers	Arbre Code	I	a	b	c
BG04	normaux	-.1	24	0.5625	1.5000	-
BG05	normaux	-.1	28	0.5893	1.3929	-
BG06	normaux	-.1	30	0.6667	1.4167	-
BG10	normaux	-.1	40	0.7125	1.6750	-
		-.7		1.1000	2.0625	-
BG20	normaux	-.1	50	0.6100	2.2500	-
		-.7		0.9400	2.5800	-
BG30	normaux	-.1	60	0.5917	2.1750	-
		-.7		0.9417	2.5250	-
BG40	normaux	-.1	60	0.6917	2.3667	-
		-.7		1.0083	2.6833	-
BG50	normaux	-.1	80	0.5625	2.0000	-
		-.7		0.8563	2.2938	-
BG60	normaux	-.1	100	0.5300	2.0200	-
		-.7		0.7650	2.2550	-
BG70	normaux	-.1	120	0.4750	1.7292	-
		-.7		0.7292	1.9833	-
BG80	normaux	-.1	140	0.4286	1.7000	-
		-.7		0.6000	1.8714	-
BG90	normaux	-.1	200	0.3675	1.5300	-
		-.7		0.5825	1.7450	-
BG100	normaux	-.1	220	0.3477	1.4341	-
		-.7		0.5386	1.6250	-

Gear Motor Selection

Radial and axial forces on the output shaft

Shaft-mounted gear unit BF series

Frame size	Bearings	Output shaft code	I	a	b	c
BF06	normal	-.1	50	0.4500	1.4100	-
BF10	normal	-.1	60	0.5083	1.4833	-
		-.2		0.6500	1.6250	-
BF20	normal	-.1	70	0.4286	1.3571	-
		-.2		0.5571	1.4857	-
BF30	normal	-.1	80	0.3875	1.2563	-
		-.2		0.5688	1.4375	-
BF40	normal	-.1	100	0.4050	1.2250	-
		-.2		0.5250	1.3450	-
BF50	normal	-.1	120	0.3125	1.0625	-
		-.2		0.3959	1.1458	-
BF60	normal	-.1	140	0.3286	1.0821	-
		-.2		0.4036	1.1571	-
	reinforced	-.1		-	-	0.2750
		-.2		-	-	0.3643
BF70	normal	-.1	180	0.2722	1.0566	-
		-.2		0.3056	1.0889	-
	reinforced	-.1		-	-	0.2194
		-.2		-	-	0.2639
BF80	normal	-.1	220	0.2878	1.3536	-
		-.2		0.2873	1.3518	-
	reinforced	-.1		-	-	0.2364
		-.2		-	-	0.2268
BF90	normal	-.1	260	0.2500	1.4231	-
		-.2		0.2500	1.4231	-
	reinforced	-.1		-	-	0.2027
		-.2		-	-	0.1950

Gear Motor Selection

Radial and axial forces on the output shaft

Bevel gear unit BK series

Frame size	Bearings	Output shaft code	I	a	b	c
BK06	normal	.1	50	0.4375	1.9875	-
		.2		0.4375	1.9875	-
		.7		0.9125	2.4625	-
		.8		0.9125	2.4625	-
BK10	normal	.1	60	0.5917	2.2417	-
		.2		0.5917	2.2417	-
BK20	normal	.1	70	0.5071	2.2357	-
		.2		0.5071	2.2357	-
	reinforced	.1		-	-	0.3929
		.2		-	-	0.3929
BK30	normal	.1	80	0.5250	2.2750	-
		.2		0.5250	2.2750	-
	reinforced	.1		-	-	0.4125
		.2		-	-	0.4125
BK40	normal	.1	100	0.4300	2.1700	-
		.2		0.4300	2.1700	-
	reinforced	.1		-	-	0.3400
		.2		-	-	0.3400
BK50	normal	.1	120	0.4083	1.9417	-
		.2		0.4083	1.417	-
	reinforced	.1		-	-	0.3250
		.2		-	-	0.3250
BK60	normal	.1	140	0.3536	1.8036	-
		.2		0.3536	1.0836	-
	reinforced	.1		-	-	0.3121
		.2		-	-	0.2979
BK70	normal	.1	180	0.2861	1.6694	-
		.2		0.2861	1.6694	-
	reinforced	.1		-	-	0.2428
		.2		-	-	0.2317
BK80	normal	.1	220	0.2818	1.5545	-
		.2		0.2818	1.5545	-
	reinforced	.1		-	-	0.2305
		.2		-	-	0.2214
BK90	normal	.1	260	0.2519	1.6096	-
		.2		0.2519	1.6096	-
	reinforced	.1		-	-	0.1989
		.2		-	-	0.1912

Worm gear unit BS series

Frame size	Bearings	Output shaft code	I	a	b	c
BS02	normal	.1	30	0.6000	2.1000	-
		.2		-	-	-
		.7		1.3333	2.8333	-
		.8		-	-	-
BS03	normal	.1	40	0.4375	1.9875	-
		.2		-	-	-
		.7		0.9125	2.4625	-
		.8		-	-	-
BS04	normal	.1	40	0.5375	1.7875	-
		.2		-	-	-
BS06	normal	.1	50	0.4800	1.9400	-
		.2		-	-	-
BS10	normal	.1	60	0.5917	2.3083	-
		.2		-	-	-
BS20	normal	.1	70	0.5500	2.4357	-
		.2		-	-	-
BS30	normal	.1	80	0.5312	2.4313	-
		.2		-	-	-
BS40	normal	.1	120	0.4292	1.7042	-
		.2		-	-	-

Gear Motor Selection

Radial and axial forces on the output shaft

Transmission components

If a transmission component is used (gearwheels, chainwheels, V-belt, etc.), the resulting radial forces can be determined as follows.

$$F_R = \frac{2000 \times M}{D_T} \times f_z \leq F_{R(N,V)}$$

F_R Radial force [N]

M Torque [Nm]

D_T Pitch radius of the transmission component [mm]

f_z Safety factor

Factor f_z for the type of transmission component

A safety factor f_z depending on the type of transmission component attached to the output shaft must be included when determining the value of the radial force F_R that is present.

4

Transmission component	Safety factor f_z	Note
Gearwheel	1	= > 17 teeth
Gearwheel	1,15	< 17 teeth
Chainwheel	1	= > 17 teeth
Chainwheel	1,25	< 17 teeth
Toothed rack	1,15	< 17 teeth (pinion)
V-belt	2.....2,5	From tensioning force
Flat belt	2....3	From tensioning force
Friction wheel	3....4	

Axial force

The following specification applies to the allowable axial force F_A on the output shaft (either tension or compression) for all Bauer geared motors and for foot, flange or hollow-shaft versions:

$$F_A = 0,5 \times F_{R(N,V)}$$

Please consult us in case of larger axial forces.

Gear Motor Selection

Shock loads of machinery

Shock loads for various types of machinery are listed in standards and guidelines as well as industry-specific documents and manufacturer's documents. If for example a crusher or a press is listed here with an shock load class of III, this is justified. On the other hand, under favourable conditions a belt conveyor could have an shock load class of I, but this could quickly change to III with on/off operation, high speed and overdrive due to a loose chain.

Consequently, the classifications in the following table should by no means be taken blindly. They provide a rough point of reference, but the ultimate classification of the shock load should always take into account the factors specified by Bauer, in particular the inertia ratio, the cycle rate and the transmission component(s).

Drive	Shock load	
Construction machinery		
Construction lifts	II	
Concrete mixers	II	
Road construction machinery	II	
Chemical industry		
Cooling drums	II	
Mixers	II	
Stirrers (light media)	I	
Stirrers (viscous media)	II	
Drying drums	II	
Centrifuges (light)	I	
Centrifuges (heavy)	II	
Transport and conveying systems		
Hauling winches	II	
Conveying machines		III
Apron conveyors	II	
Belt conveyors (bulk material)	I	
Belt conveyors (piece goods)	II	
Bucket belt conveyors	II	
Chain conveyors	II	
Circular conveyors	II	
Freight lifts	II	
Flour bucket conveyors	I	
Passenger lifts	II	
Flat belts	II	
Screw conveyors	II	
Gravel bucket conveyors	II	
Inclined lifts		III
Steel belt conveyors	II	
Chain conveyors	II	
Blowers and fans		
Roots blowers	II	
Blowers (axial and radial)	I	
Cooling tower fans	II	
Suction blowers	II	

Drive	Shock load	
Rubber		
Extruders		III
Calenders		II
Kneaders		III
Mixers		II
Rolling mills		III
Timber processing and woodworking		
Debarking drums		III
Planers		II
Woodworking machinery	I	
Saw frames		III
Crane systems		
Luffing mechanisms	I	
Traversing mechanisms		III
Hoisting mechanisms	I	
Slewing mechanisms		II
Jib mechanisms		II
Plastics		
Extruders		II
Calenders		II
Mixers		II
Grinders and pulverisers		II
Metalworking		
Plate bending machines		II
Plate straightening machines		III
Hammers		III
Planers		III
Presses		III
Shears		II
Forging presses		III
Punches		III
Countershafts and driveshafts	I	
Machine tools (principal)		II
Machine tools (ancillary)	I	

Gear Motor Selection

Shock loads of machinery

4


Drive	Shock load		
Food processing			
Filling machines	I		
Kneading machines		II	
Mashing machines		II	
Packaging machines	I		
Sugar cane cutters		II	
Sugar cane mills			III
Sugar beet cutters		II	
Sugar beet washers		II	
Paper			
Couching			III
Smoothing rolls			III
Hollander		II	
Pulp grinder			III
Calender		II	
Wet presses			III
Shredders			III
Suction presses			III
Suction rolls			III
Drying rolls			III
Stone and soil			
Crushers			III
Rotary kilns			III
Hammer mills			III
Tube mills			III
Beating mills			III
Tile and block presses			III
Fabrics			
Winders		II	
Printing and dyeing machines		II	
Tanning vats		II	
Shredders		II	
Looms		II	

Drive	Shock load		
Rolling mills			
Plate shears			III
Plate turners		II	
Billet presses			III
Billet and slab lines			III
Billet conveyors			III
Wire drawing machines		II	
Descaling machines			III
Sheet metal mills			III
Plate mills			III
Winders (strip and wire)		II	
Cold rolling mills			III
Chain transports		II	
Billet shears			III
Cooling beds		II	
Cross transports		II	
Roller tables (light)		II	
Roller tables (heavy)			III
Roll straighteners		II	
Tube welders			III
Trimming shears		II	
Cropping shears			III
Continuous casting machines			III
Roll adjustment devices		II	
Manipulators			III
Laundry			
Drum dryers		II	
Washing machines		II	
Water treatment			
Centrifugal aerators		II	
Archimedes screw		II	

Energy Efficient Geared Motors

AC Variable Speed

4

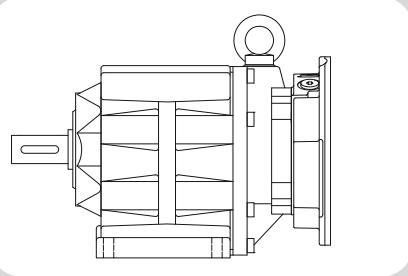

5

Gearboxes & Lubrication

Standard mounting positions	55
Position of the terminal box	57
Position of the terminal box and the cable entry points (BG and BF)	57
Position of the terminal box and the cable entry points (BK and BS)	58
Gearboxes	59
Radial and axial forces at the output shaft	59
Dimensions and fits of output shafts and keyways	59
Installing transmission elements	59
Gear with solid shaft	59
Gear with hollow shaft	59
Shrink disc coupling	59
Torque restraint	60
Notes for installing shaft mount gears with hollow shaft and keyway	60
Gear ventilation	60
Output shaft seals	60
Lubricants	61
Lubricant quantities	62
Lubricant quantities, BG-series gears	63
Lubricant quantities, BG20-01R	64
Lubricant quantities, BF-series gears	65
Lubricant quantities, BK-series gears	66
Lubricant quantities, BS-series gears	67
Lubricant quantities, pre-stage gears (Z)	68
Lubrication quantity for intermediate gear	69
Threaded plugs	70
Position of threaded plugs	70
-BG-series gears	70
-BG-20-01R	71
-BF-series gears	72
-BK-series gears	73
-BS-series gears	75
-pre-stage gears (Z)	75
-in the System Cover Design with Standard Geared Motor	76
-in the System Cover Design with foreign motor or gear design with input shaft	77

Energy Efficient Geared Motors


AC Variable Speed

5

Gearboxes & Lubrication

Standard mounting positions

BG series

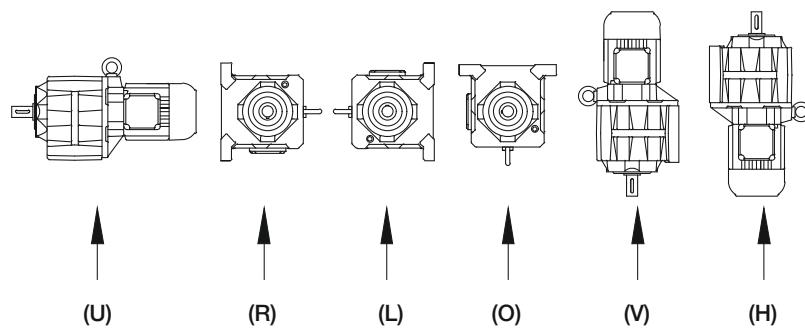

Gear side

(U)

(R)

(L)

(O)

(V)

(H)

Mounting position

H4

H1

H2


H3

V1

V2

5

BF series

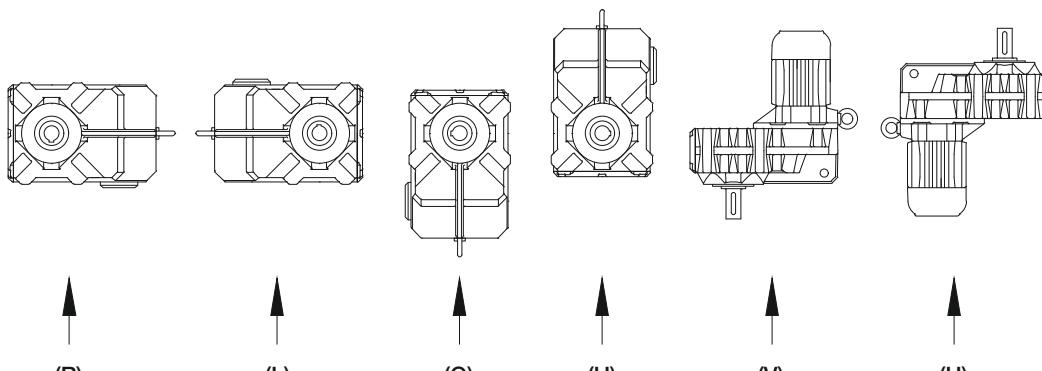

Gear side

(R)

(L)

(O)

(U)

(V)

(H)

Mounting position

H1

H2

H3

H4


V1

V2

Gearboxes & Lubrication

Standard mounting positions

BK series

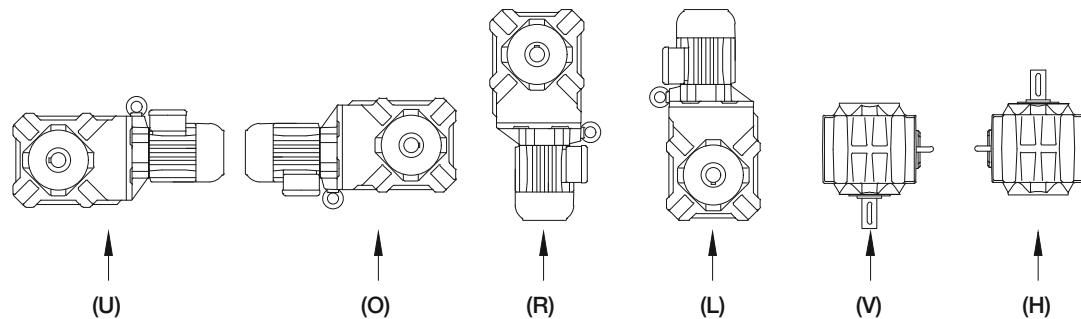

Gear side

(U)

(O)

(R)

(L)

(V)

(H)

Mounting position

H1

H2


H3

H4

V1

V2

BS series

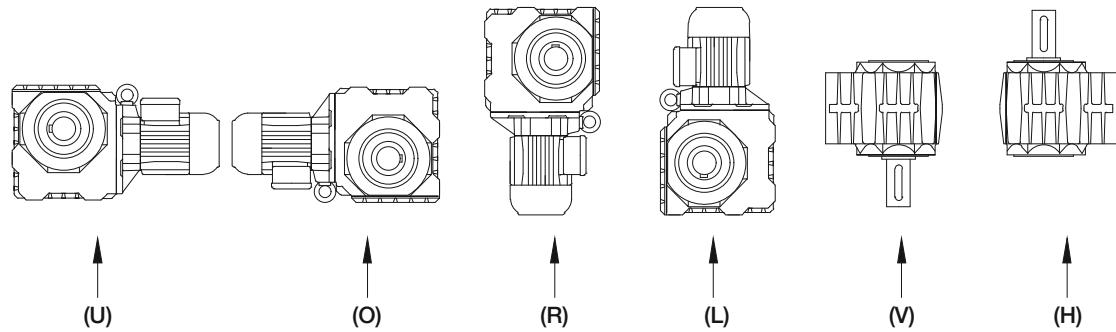

Gear side

(U)

(O)

(R)

(L)

(V)

(H)

Mounting position

H1

H2

H3

H4

V1



V2

Gearboxes & Lubrication

Position of the terminal box

Position of the terminal box and the cable entry points (BG and BF)

The standard position of the terminal box for helical-gear and shaft-mounted geared motors is position I. Cables may be introduced from side A or C.

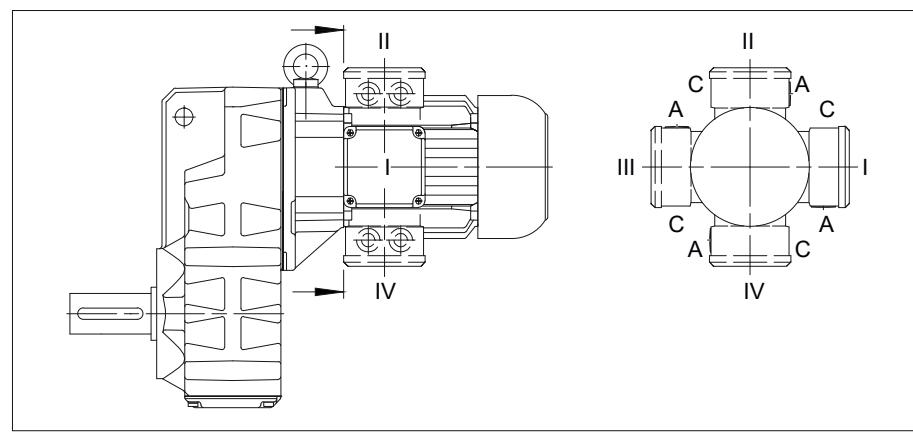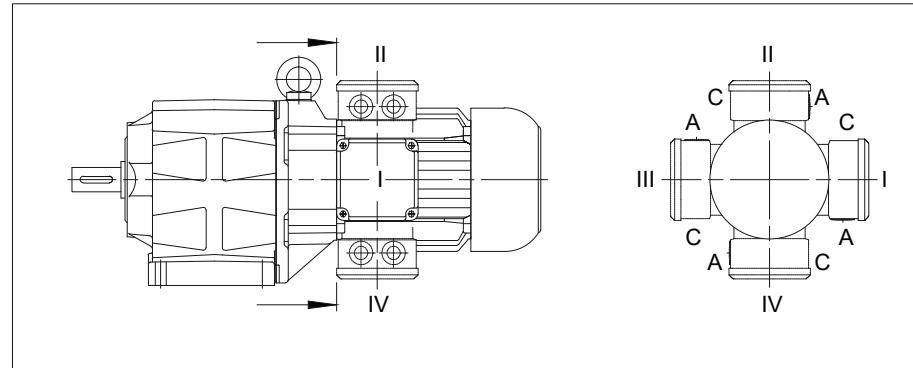

Turning or rotating the gearbox in space in the different mounting positions according to DIN 42950 does not influence the marking as shown. The details of the terminal box always show the position of the terminal box and the cable entry in relation to the gearbox and not in space. The mounting according to DIN 42950 is to be given separately.


Gearboxes & Lubrication

Position of the terminal box


Position of the terminal box and the cable entry points (BK and BS)

The standard position of the terminal box for bevel-gearred and worm-geared motors is position II.

Cable entry through side A or side C is possible

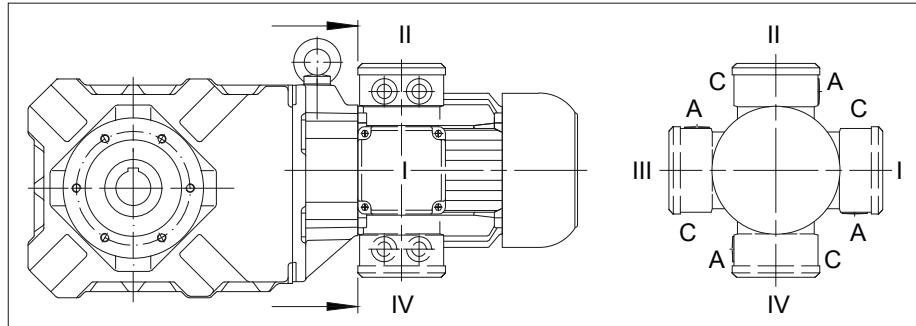

5

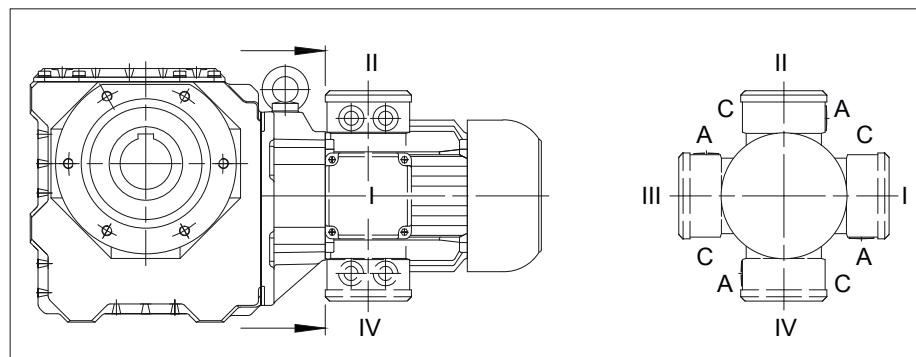

Turning or rotating the gearbox in space in the different mounting positions according to DIN 42950 does not influence the marking as shown. The details of the terminal box always show the position of the terminal box and the cable entry in relation to the gearbox and not in space. The mounting according to DIN 42950 is to be given separately.

Radial and axial forces at the output shaft

The output shafts and output-shaft bearings are matched to the motor torques. It is advisable to locate the drive-transmission element's point of application as close as possible to the shaft collar to ensure that the load imposed by external radial forces is not unnecessarily high. Permissible values for radial forces referred to the output shaft centreline are listed in the selection tables. Please consult us if your application involves extra-high axial loading.

Dimensions and fits of output shafts and keyways

Output shaft and second shaft stub, keyway and key are in compliance with the DIN standards and ISO fits listed below:

Solid shaft

Shaft diameter	to D = 50 mm in ISO k6 (DIN 748 Page1) as of D = 50 mm in ISO m6 (DIN 748 Page 1)
Keyway	ISO P9 (DIN 6885 Page 1)
Key, height	ISO h9 (DIN 6885 Page 1 and DIN 6880)
Bore - customer	ISO H7

Hollow shaft with keyway

Bore diameter	ISO H7 (DIN 748)
Keyway	ISO JS9 (DIN 6885 Page 1)
Key, height	ISO h9 (DIN 6885 Page 1 and DIN 6880)
Customer shaft	ISO h6

Hollow shaft for shrink-on disc coupling (SSV)

Outside diameter	ISO f7
Inside diameter	ISO H7
Customer shaft	ISO h6

Installing transmission elements

Note:

Gearboxes using torque reaction by means of a flange (Code 2.; 3; 4.; 7.; 8.) or torque arm (Code 5.), must have the side for the torque reaction the same as where the radial force on the output shaft occurs (see rubber buffers for torque arms)! Please consult the factory for other designs.

Gear with solid shaft

Always exercise meticulous care when fitting transmission elements onto output shafts and, whenever possible, use the DIN 332 tapped bore provided for this purpose. Fitting is usually easier if the transmission element can be heated to approximately 100° C for installation. Dimension the locating bore to ISO H7.

Gears with solid shaft at each end (gear code -.3/): alignment of the two keys is subject to the DIN 7168 tolerances, the degree of accuracy is "fine".

Gear with hollow shaft

Hollow shafts usually engage solid shafts of the driven machinery. The gear unit must be mounted such as to be free of constraint and be fixed axially (e.g. by means of assembly help acc. following description "notes for installing shaft mount gears with hollow shaft and keyway"). Special contract provision must be made if the hollow shaft has to guide the solid shaft or, for any other reason, close out-of-round tolerance referenced to a point on the gear housing (such as a flange, for instance) is required.

Shrink disc coupling

A shrink disc coupling (SSV) can transmit high torque from the non-grooved hub to the smooth shaft. The SSV is easily secured and released, using commercially available bolts. SSVs are the ideal supplement for shaft mount gears. The maximum transmittable torque for the selected shrink discs when fitted and mounted according to instructions is above the starting torque of the respective motors classified as standard (for classification of shrink disc sizes see chapter 11, 12, 13 "Additional dimensional drawings for Shrink disc coupling")

Gearboxes & Lubrication

Gearboxes

Torque restraint

Shaft-mounted geared motors require a suitable torque restraint to resist the reaction torque. Shaft-mounted gears have cast torque arms as standard. Bevel gears and worm gears are available with bolt-on torque arms on request. The torque arm is screwed onto the front "V" on the side of the gear unit. It is always important to ensure that the torque arm does not create excessive constraining forces due to the driven shaft running untrue, for example. Excessive play can result in excessive shock torques in switching or reversing operations. Consequently, we recommend the use of pre-tensioned rubber damping elements. These rubber buffers are part of the scope of supply for designs with a torque arm (see chapter 11, 12, 13 dimensional drawings "Rubber buffer for torque restraint")

Notes for installing shaft mount gears with hollow shaft and keyway

(1) Attaching the hollow shaft to the customer shaft

Threaded bolt (d) is screwed into the end thread of the shaft to be driven. By tightening the nut, apply force to thrust plate (b) and locating ring (c) to draw the gear unit onto the shaft.


(2) Axial fastening

Pressure piece (b) is rotated and fitted against retaining ring (c) using fixing screw (a).

(3) Removing

Extractor (f) is fitted between the end face of the shaft and retainer ring (c). Tighten press-off screw (e) against the end of the shaft and pull the gear unit off the shaft.

Manufacturing drawings for the required parts are available on request. These parts are not included in the scope of supply.

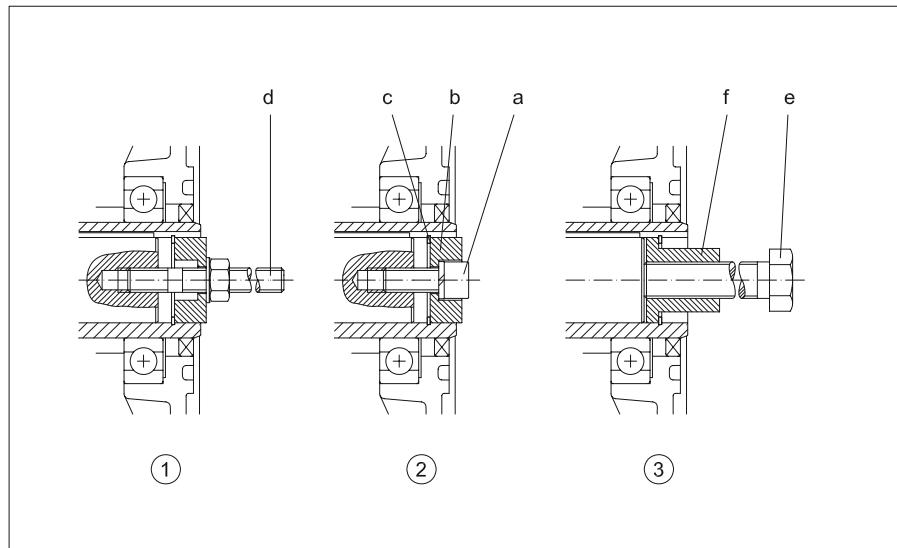

Detailed information on shaft-mounted gear units, bevel-gear units and worm-gear units is available (see chapter 11, 12, 13 dimensional drawings "Tools for fitting shaft-mounted gear with hollow shaft and keyway").

Gear ventilation

The lifetime of the gearbox lubricant increases the better it is protected from negative environmental influences. Should the oil level or the gearbox ratio cause a very high lubricant temperature, the gearbox will be supplied as standard with a breather plug. Either on request or for corresponding high ambient temperatures, all gearboxes from size 10 can be supplied with a breather plug.

For the position of the threaded plugs see chapter 5 theraded plugs.

Output shaft seals

All size 10 and larger gears are available with double seals for the output shaft on request and at extra cost. Double seals are particularly effective if the output shaft points down and as protection against external influences

Lubricants

The drives are shipped ready-filled with gear lubricant. Lubricated in this way, the gear units are suitable for ambient temperatures in the range -20 °C to + 40 °C. The quantity of lubricant is optimised for the desired installed position as is stated on the nameplate. The type of lubricant is stated in the Operating Instructions. Lubricants for other temperature ranges or special applications available on request.

Wear-protective EP gear oils as indicated in the following table have proven particularly effective:

Manufacturer	Lubricant type					
	Mineral Oil	Synthetic Oil			USDA H1 Oil	
	ISO VG 220	ISO VG 68	ISO VG 220	ISO VG 460	ISO VG 220	
	Standard oil for gearboxes in the series BF06-BF90 BG04-BG100 BK60-BK90	Low temperature oil for gearboxes in the series BF06-BF90 BG04-BG100 BK60-BK90	Standard oil for gearboxes in the series BS02-BS10 BK06-BK10 BM09-BM40 High temperature oil for gearboxes in the series BS02-BS10 BK06-BK10 BF06-BF90 BG04-BG100 BK60-BK90 BM09-BM10	Standard oil for gearboxes in the series BS20-BS40 BK17-BK50 BM20-BM40 High temperature oil for gearboxes BS20-BS40 BK17-BK50 BM20-BM40	Standard oil for gearboxes in the series BS20-BS40 BK17-BK50 BM20-BM40	Food and Beverage Industry Oil for gearboxes in the series BF06-BF90 BG04-BG100 BK06-BK90 BM09-BM40 BS02-BS40
AGIP 	BLASIA 220 [13 02 08]	—	—	BLASIA S 220 [13 02 06]	BLASIA S 460 [13 02 06]	—
BECHER RHUS 	STAROIL G 220 [13 02 08]	—	BERUSYNTH EP 68 [13 02 06]	BERUSYNTH EP 220 [13 02 06]	BERUSYNTH EP 460 [13 02 06]	BERUSYNTH EP 220 H1 [13 02 06]
CASTROL 	ALPHA EP 220 [13 02 08] ALPHA SP 220 [13 02 08] OPTIGEAR EP 220 [13 02 08] OPTIGEAR 1100/220 [13 02 08]	Alphasyn T68 [13 02 06]	—	ALPHASYN PG 220 [13 02 06] OPTIGEAR 800/220 [13 02 06] OPTIGEAR 1300/220 [13 02 06] ALPHASYN GS 220 [13 02 06]	ALPHASYN PG 460 [13 02 06] OPTIGEAR 800/460 [13 02 06] OPTIGEAR 1300/460 [13 02 06] ALPHASYN GS 460 [13 02 06]	OPTILEB GT 220 (CLP-HC) [13 02 06] OPTILEB GT 1800/220 (CLP-PG) [13 02 08]
CHEVRON	Meropa 220 [13 02 08] GEARTEX EP-A SAE 85W-90 [13 02 06]	—	Meropa Synlube WS 68 [13 02 06]	Meropa Synlube WS 220 [13 02 06]	Meropa Synlube WS 460 [13 02 06]	Chevron lubricating oils FM 220 (USA) [13 02 06]
FUCHS 	RENOLIN CLP 220 [13 02 08] RENOLIN CLPF 220 SUPER [13 02 08] RENOLIN CLP 220 PLUS [13 02 08]	RENOLIN UNI-SYN CLP 68 [13 02 06]	RENOLIN PG 68 [13 02 06]	RENOLIN PG 220 [13 02 06]	RENOLIN PG 460 [13 02 06]	CASSIDA FLUID GL 220 [13 02 06]
KLÜBER 	KLÜBEROIL GEM 1-220 N [13 02 08]	—	KLÜBER-SYNTH GH 6-80 [13 02 06]	KLÜBERSYNTH GH 6-220 [13 02 06]	KLÜBERSYNTH GH 6-460 [13 02 06]	KLÜBEROIL 4UH1-220 N [13 02 06] KLÜBERSYNTH UH1 6-220 [13 02 06]
MOBIL 	MOBILGEAR 600 XP 220 [13 02 08]	MOBIL SHC 626 [13 02 06]	—	MOBIL SHC Gear 220 [13 02 06] MOBIL SHC 630 [13 02 06]	MOBIL SHC Gear460 [13 02 06] MOBIL SHC 634 [13 02 06]	MOBIL SHC CIBUS 220 [13 02 06]
OEST 	Gearol 220 [13 02 06]	—	—	—	—	—
SHELL	OMALA S2 GX220 [13 02 08]	—	—	OMALA S4 WE 220 [13 02 06]	OMALA S4 WE 460 [13 02 06]	—
TOTAL 	CARTER EP 220 [13 02 08] CARTER XEP 220 [13 02 06]	—	—	CARTER SY 220 [13 02 06]	CARTER SY 460 [13 02 06]	NEVASTANE SL220 [13 02 06] NEVASTANE EP 220 [13 02 06] NEVASTANE SY 220 [13 02 06]
WINTERSHALL	SRS ERSOLAN 220 [13 02 08]	—	—	—	—	—

[...] European Waste Catalogue Code (Decision 2001/118/CE)

Gearboxes & Lubrication

Lubricants

Important:

Synthetic gear oils of a Polyglykol base (e.g. PGLP ...) must be disposed of separately to mineral oil as **Special Waste**.

So long as the ambient temperature does not fall below -20 °C the international definition of the viscosity class at 40 °C according to ISO 3448 and DIN 51519 ISO the viscosity class VG220 (SAE90) is recommended according, in North America AGMA 5EP.

For lower temperatures it is recommended to use oils of a lower nominal viscosity with a corresponding better starting characteristic, for instance a PGLP with a nominal viscosity VG68 (SAE80) or AGMA 2EP respectively. These types of oil can already be necessary at a temperature around the freezing point, if the break away torque of a drive is reduced by some smooth starting device or if the motor has a relatively low power

Lubricant quantities

5

The preferred quantity of lubricant for the planned type of installation is stated on the motor's rating plate (symbol "oil can"). When topping up care should be taken to ensure that, depending on the fitting position, gearwheels and rolling contact bearings positioned at the top are also properly oiled. In special versions the oil level mark should be noted. Information about the quantity of lubricant required for other types of installation can be obtained from the factory

Lubricant quantities, BG-series gears


Gear-housing with flange or foot

Flange (Code-2./Code-3./Code-4./Code-7.)

Foot with threaded holes (Code -6.)


Foot with clearance holes (Code-9.)

Completely machined (Code -8.)

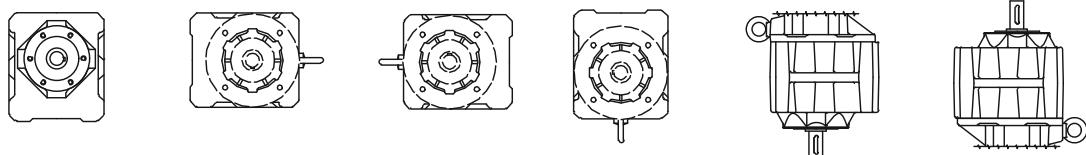

Foot housing

cast foot with clearance holes (Code -1.)

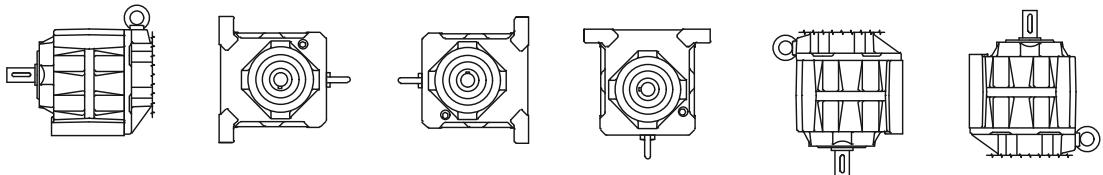

Gearbox type		H4	H1	H2	H3	V1	V2
BG04	*	0.03	0.03	0.03	0.03	0.05	0.05
	**	0.05	0.05	0.05	0.05	0.1	0.05
BG05	*	0.05	0.05	0.05	0.05	0.08	0.08
	**	0.08	0.08	0.08	0.08	0.16	0.8
BG06	*	0.08	0.08	0.08	0.08	0.15	0.15
	**	0.12	0.12	0.12	0.12	0.24	0.15
BG10	*	0.65	0.65	0.65	0.85	1.05	0.85
	**	0.45	0.45	0.45	0.6	0.75	0.6
BG15	**	0.4	0.4	0.4	0.35	0.62	0.55
BG20	*	0.8	0.8	0.8	1.1	1.4	1.1
	**	0.6	0.6	0.6	1.0	1.15	0.9
BG30	*	1.0	1.0	1.0	1.7	2.4	1.6
	**	1.0	1.0	1.0	1.7	2.3	1.7
BG40	*	1.7	1.7	1.7	2.5	3.5	2.1
	**	1.7	1.7	1.7	2.5	3.5	2.1
BG50	*	3.0	3.0	3.0	4.5	5.5	3.3
	**	3.0	3.0	3.0	4.5	5.5	3.3
BG60	*	5.5	5.5	5.5	7.0	10.9	6.4
	**	5.5	5.5	5.5	7.0	10.9	6.4
BG70		6.5	6.5	6.5	8.0	13.5	9.0
BG80		11.0	11.0	11.0	11.0	22.5	15.0
BG90		19.0	19.0	19.0	19.0	40.0	26.0
BG100		35.0	35.0	55.0	50.0	66.0	50.0

* Flange Housing
** Foot Housing

Lubrication quantity in litre


Gearboxes & Lubrication

Lubricants

Lubricant quantities, BG20-01R

Gear type	H4	H1	H2	H3	V1	V2
BG20R	0.8	1.0	0.8	1.4	1.65	1.0
Lubrication quantity in litre						

Lubricant quantities, BF-series gears

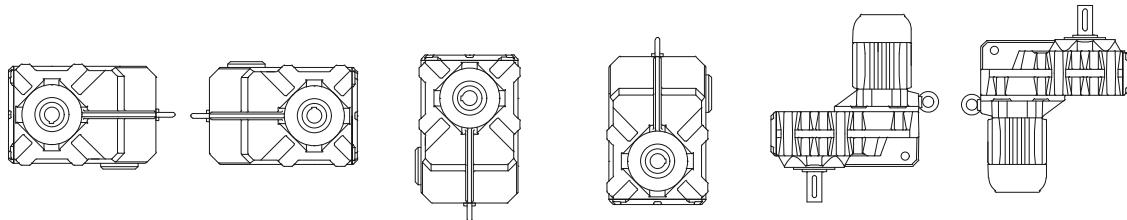


Gear type	H1	H2	H3	H4	V1	V2
BF06	0.25	0.25	0.25	0.37	0.35	0.3
BF10	0.85	0.85	0.85	1.1	1.45	1.5
BF20	1.3	1.3	1.3	1.7	2.2	2.25
BF30	1.7	1.7	1.7	2.2	3.2	3.0
BF40	2.7	2.7	2.7	3.5	4.9	4.8
BF50	3.8	3.8	3.8	5.0	6.7	6.7
BF60	6.7	6.7	6.7	9.0	12.3	12.0
BF70	12.2	12.2	12.2	16.0	24.2	21.8
BF80	17.0	17.0	17.0	21.0	32.2	27.5
BF90	32.0	32.0	32.0	41.0	62.0	53.0
Lubrication quantity in litre						

Gearboxes & Lubrication


Lubricants

Lubricant quantities, BK-series gears

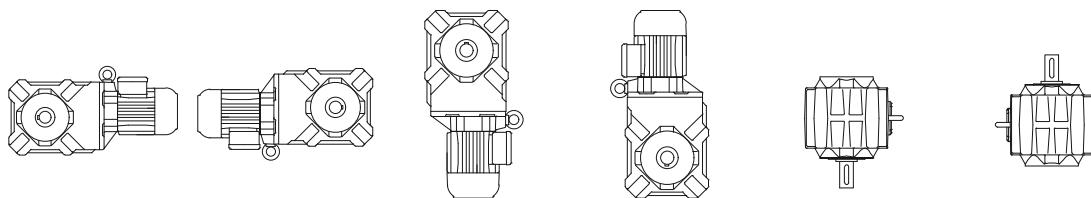

Gear type	H1	H2	H3	H4	V1	V2
BK06	0.15	0.23	0.29	0.31	0.18	0.23
BK10	0.83	0.83	0.92	1.75	0.92	0.92
BK17	1.0	1.7	1.8	2.6	1.3	1.8
BK20	1.5	1.5	1.6	2.9	1.65	1.65
BK30	2.2	2.2	2.3	4.4	2.4	2.4
BK40	3.5	3.5	3.5	7.0	3.7	3.7
BK50	5.8	5.8	5.8	11.5	6.0	6.0
BK60	6.0	8.7	6.9	12.0	8.6	8.6
BK70	10.2	15.0	11.5	20.5	13.5	14.5
BK80	18.0	25.5	19.0	37.0	23.5	25.5
BK90	33.0	48.0	36.0	69.0	45.0	48.0
Lubrication quantity in litre						

Lubricant quantities, BS-series gears

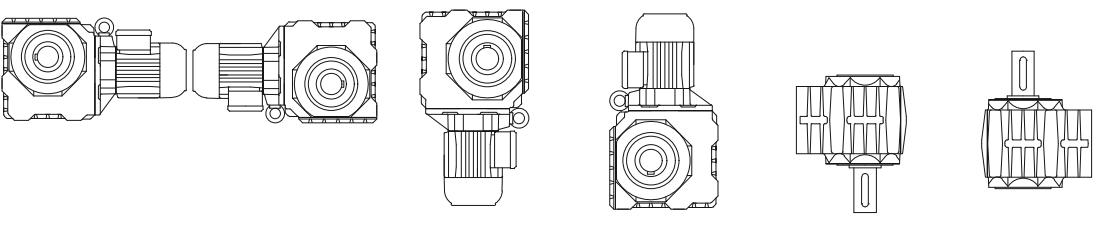


Gear type	H1	H2	H3	H4	V1	V2
BS02	0.06	0.06	0.06	0.06	0.06	0.06
BS03	0.17	0.17	0.17	0.17	0.17	0.17
BS04	0.11	0.17	0.11	0.2	0.11	0.11
BS06	0.24	0.36	0.24	0.45	0.24	0.24
BS10	0.9	1.3	0.9	1.6	0.9	0.9
BS20	1.5	2.1	1.5	2.7	1.5	1.5
BS30	2.2	3.0	2.2	3.8	2.2	2.2
BS40	3.5	4.7	3.5	6.0	3.5	3.5
Lubrication quantity in litre						

Gearboxes & Lubrication

Lubricants

Lubricant quantities, pre-stage gears (Z)

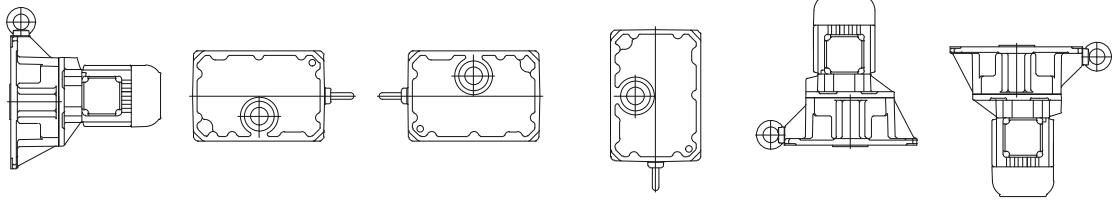


5

BF	H4	H1	H2	H3	V1	V2
BG						
BK						
BS	H1	V1	V2	H2	H4	H3
Gear type						
BF10Z BF10Z	0.10	0.05	0.12	0.07	0.16	0.07
BK10Z BS10Z						
BG20Z BF20Z	0.15	0.07	0.19	0.17	0.27	0.10
BK20Z BS20Z						
BG30Z BF30Z						
BK30Z BS30Z	0.2*	0.10	0.35	0.22	0.35	0.19
BM30Z BM30Z						
BG40Z BF40Z						
BK40Z BS40Z	0.32*	0.17	0.50	0.37	0.6	0.32
BM40Z						
BG50Z BF50Z	0.5	0.3	0.92	0.7	1.15	0.5
BK50Z						
BG60Z BF60Z						
BK60Z	0.9	0.5	1.55	1.1	2.0	0.7
BG70Z BF70Z	1.2	0.6	1.8	1.6	2.4	1.4
BK70Z BS70Z						
BG80Z BF80Z	3.1	1.3	4.0	2.6	5.2	2.0
BK80Z BS80Z						
BG90Z	4.2	1.5	5.4	3.5	7.7	3.0
BK90Z						
*: with BM30Z/BM40Z the pre-stage lubricant is filled via the main gearbox.						
Lubrication quantity in litre						

Lubrication quantity for intermediate gear

Definition of the terminal box position

Terminal box position for intermediate gear is similar to the main gearbox that means
 Main gearbox BG, BF terminal box pos. I -> intermediate gearbox terminal box pos. I
 Main gearbox BK, BS terminal box pos. II -> intermediate gearbox terminal box pos. II

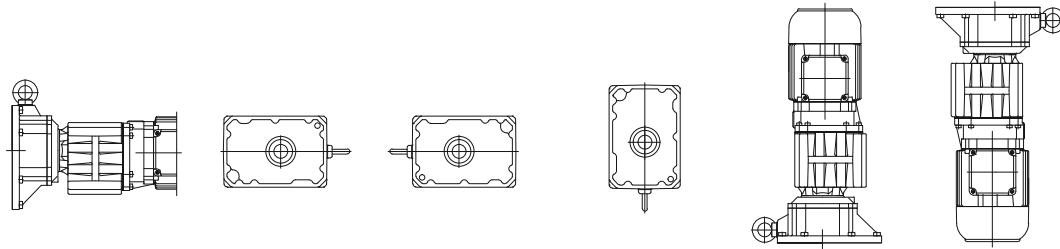

Mounting position of main gearbox	BF	H4	H1	H2	H3	V1	V2
	BG						
	BK	H1	V1	V2	H2	H4	H3
	BS						

Type designation of double gearbox combination

BG06G04	BS06G04	0.03	0.03	0.03	0.03	0.05	0.05
BK06G04							
BG10G06	BF10G06	0.08	0.08	0.08	0.08	0.15	0.15
BK10G06	BS10G06						
BG20G06	BF20G06	0.08	0.08	0.08	0.08	0.15	0.15
BK20G06	BS20G06						
BG30G06	BF30G06	0.08	0.08	0.08	0.08	0.15	0.15
BK30G06	BS30G06						
BG40G10	BF40G10	0.65	0.65	0.65	0.85	1.05	0.85
BK40G10	BS40G10						
BG50G10	BF50G10	0.65	0.65	0.65	0.85	1.05	0.85
BK50G10							
BG60G20	BF60G20	0.8	0.8	0.8	1.1	1.4	1.1
BK60G20							
BG70G20	BF70G20	0.8	0.8	0.8	1.1	1.4	1.1
BK70G20							
BG80G40	BF80G40	1.7	1.7	1.7	2.5	3.3	2.1
BK80G40							
BG90G50	BF90G50	3.0	3.0	3.0	4.5	5.5	3.3
BK90G50	BG100G50						


Lubrication quantity in litre

Gearboxes & Lubrication

Threaded plugs

Position of threaded plugs

-BG-series gears

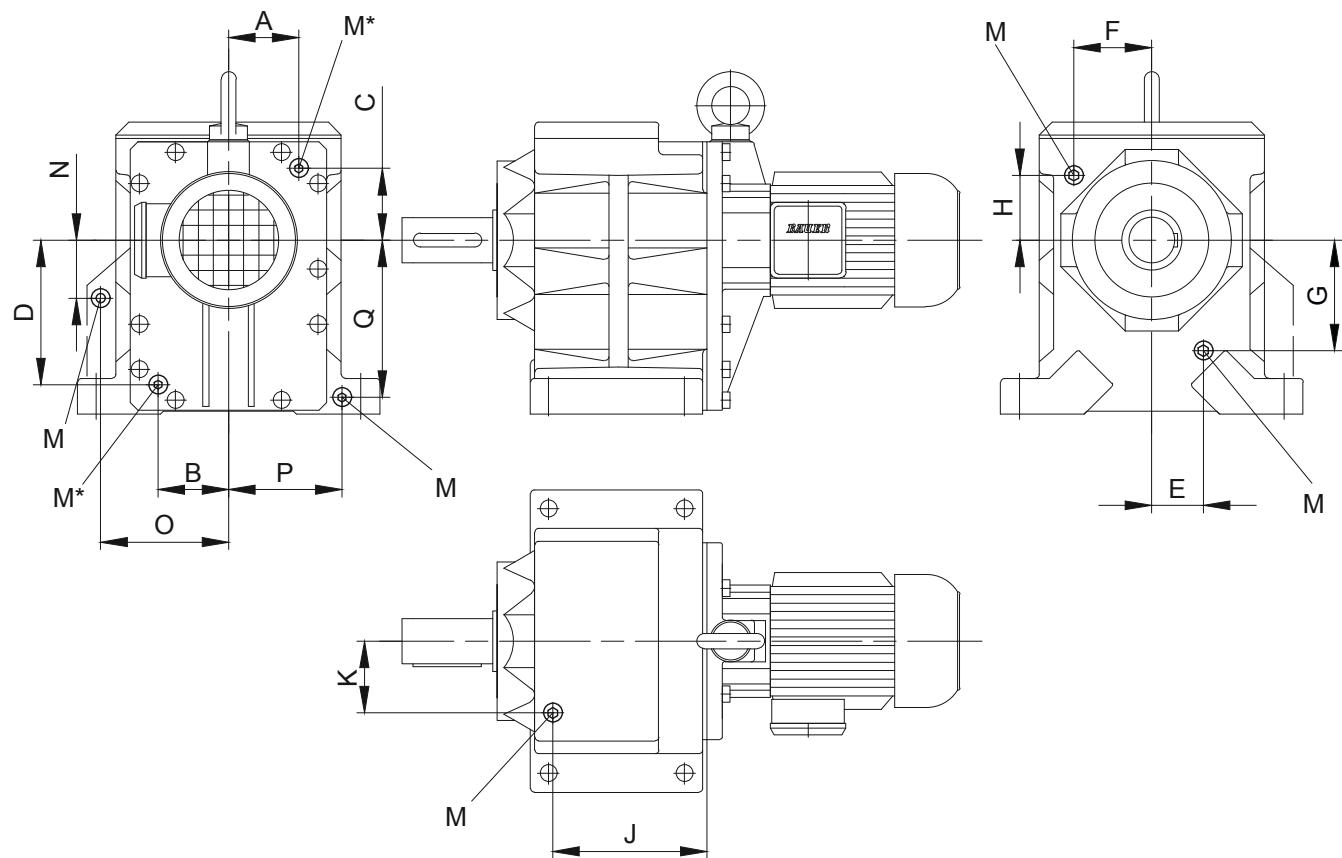

Typ		A	B	C	D	E	F	G	H	J	K	N	O	P	Q	M
BG10	Foot housing	see position of the oil drain and filler plugs on the system cover	Tab.I-Tab.III size B.10		33	42	48	41.5	-	-	-	-	-	-	M10x1	
BG10	Flange housing		Tab.I-Tab.III size B.10		27	-	73	-	-	-	-	-	-	-	M10x1	
BG15	Foot housing		Tab.I-Tab.III size B.10		-	-	-	-	-	-	-	-	-	-	-	
BG20	Foot housing		Tab.I-Tab.III size B.20		-	47	-	52.5	-	-	-	-	-	-	M10x1	
BG20	Flange housing		Tab.I-Tab.III size B.20		-	28	-	68	-	-	-	-	-	-	-	
BG30	Foot housing		Tab.I-Tab.III size B.30		-	54	-	58	-	-	-	-	-	-	M10x1	
BG30	Flange housing		Tab.I-Tab.III size B.30		-	58	-	48	-	-	-	-	-	-	M10x1	
BG40	Foot housing		Tab.I-Tab.III size B.40		-	75	-	48	-	-	-	-	-	-	M14x1.5	
BG40	Flange housing		Tab.I-Tab.III size B.40		-	75	-	48	-	-	-	-	-	-	M14x1.5	
BG50	Foot housing		Tab.I-Tab.III size B.50		-	53	-	100	-	-	-	-	-	-	M14x1.5	
BG50	Flange housing		Tab.I-Tab.III size B.50		-	53	-	100	-	-	-	-	-	-	M14x1.5	
BG60	Foot housing		Tab.I-Tab.III size B.60		-	70	-	119	-	-	-	-	-	-	M20x1.5	
BG60	Flange housing		Tab.I-Tab.III size B.60		-	70	-	119	-	-	-	-	-	-	M20x1.5	
BG70			Tab.I-Tab.III size B.70		-	103	-	86	204	95	-	-	-	-	M20x1.5	
BG80			Tab.I-Tab.III size B.80		-	133	-	110	237	111	-	-	-	-	M20x1.5	
BG90			Tab.I-Tab.III size B.90		-	165	-	124	297	140	-	-	-	-	M24x1.5	
BG100			Tab.I-Tab.III size B.80		-	202	-	128	420	165	135	263	202	293	M24x1.5	




M = Plug according to DIN 908

Dimensions in millimetres (mm)


M* = Size and position of the drain plug see page 76.

Position of threaded plugs

-BG-20-01R

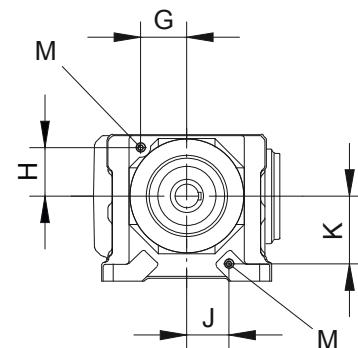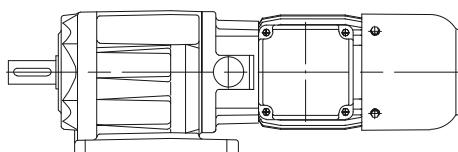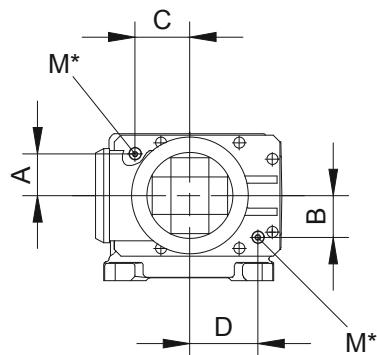

5

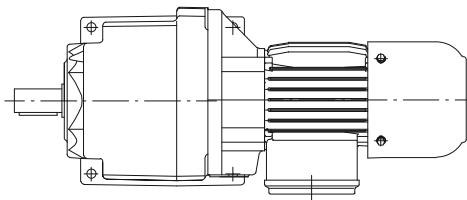

Type	A	B	C	D	G	H	J	K	M
BG20-01R Roller table	see position of the oil drain and filler plugs on the system cover Tab.I-Tab.III size B20				48.5	51.5	45	71.5	M10x1

M = Plug according to DIN 908
Dimensions in millimetres (mm)

M* = Size and position of the drain plug see page 76.





Gearboxes & Lubrication

Threaded plugs

Position of threaded plugs

-BF-series gears

5

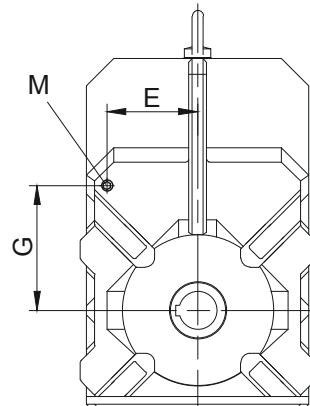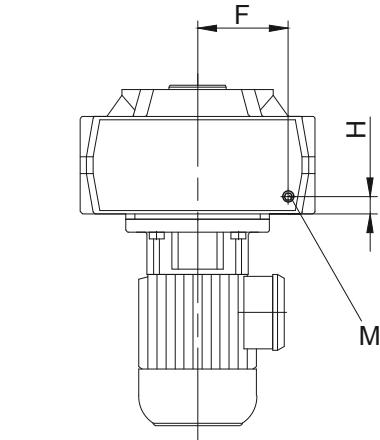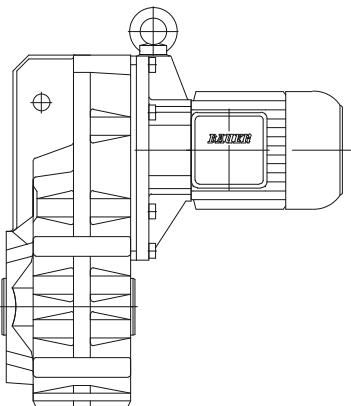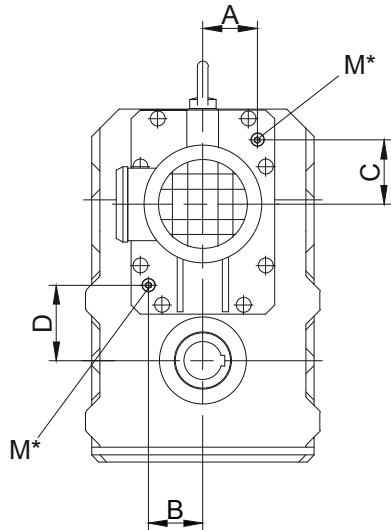

Type	A	B	C	D	E	F	G	H	M	
BF06									on request	
BF10				Tab.I-Tab.III size	B.10	64	65	97	28	M10x1
BF20				Tab.I-Tab.III size	B.20	77	70	115	30.5	M10x1
BF30				Tab.I-Tab.III size	B.30	88	82	125	36.5	M10x1
BF40				Tab.I-Tab.III size	B.40	100	86	141	33	M14x1.5
BF50				Tab.I-Tab.III size	B.50	120	105	165	42.3	M14x1.5
BF60				Tab.I-Tab.III size	B.60	140	145	200	50.5	M20x1.5
BF70				Tab.I-Tab.III size	B.70	165	177	235	52.5	M20x1.5
BF80				Tab.I-Tab.III size	B.70	145	148	255	123	M20x1.5
BF90				Tab.I-Tab.III size	B.80	155	176	347.5	260	M24x1.5


M = Plug according to DIN 908
Dimensions in millimetres (mm)

M* = Size and position of the drain plug see page 76.

Position of threaded plugs


-BK-series gears

BK10 - BK50

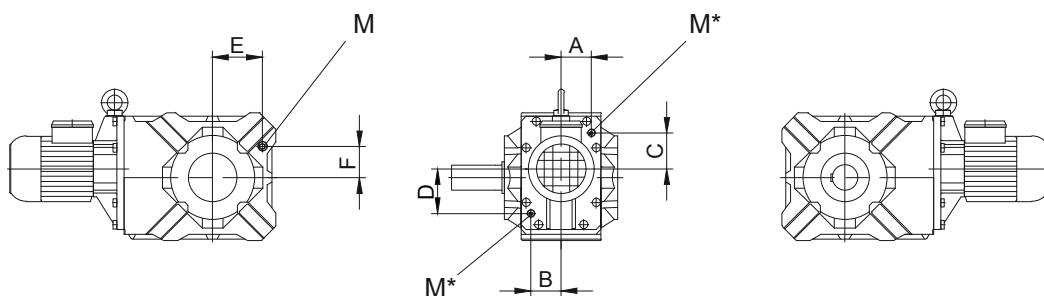

5

BK60 - BK90

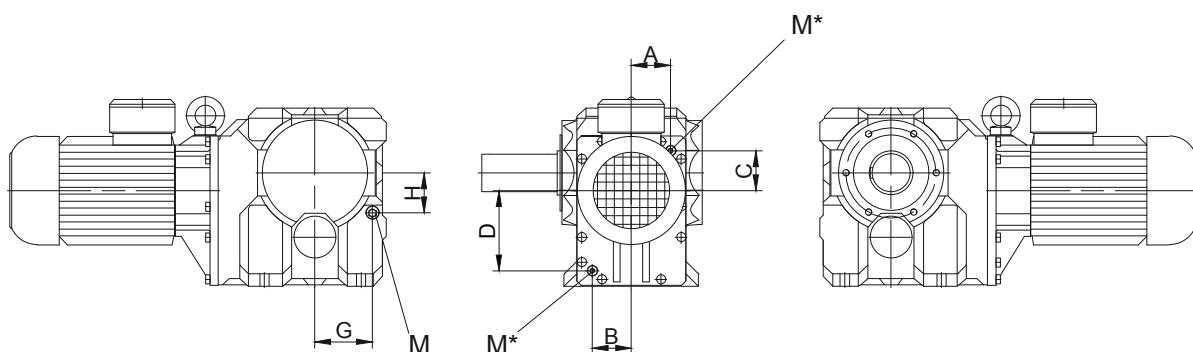

Type	A	B	C	D	E	F	G	H	M
BK06	see position of the oil drain and filler plugs on the system cover	on request							
BK10		Tab.I-Tab.III size B.10		62	32.5	-	-		M10x1
BK20		Tab.I-Tab.III size B.20		73.5	37.5	-	-		M10x1
BK30		Tab.I-Tab.III size B.30		80	43	-	-		M10x1
BK40		Tab.I-Tab.III size B.40		88	49	-	-		M14x1.5
BK50		Tab.I-Tab.III size B.50		118	74	-	-		M14x1.5
BK60		Tab.I-Tab.III size B.60		-	-	93	87		M20x1.5
BK70		Tab.I-Tab.III size B.70		-	-	137	95		M20x1.5
BK80		Tab.I-Tab.III size B.80		-	-	150	117		M20x1.5
BK90		Tab.I-Tab.III size B.90		-	-	208	135		M24x1.5

M = Plug according to DIN 908
Dimensions in millimetres (mm)

M* = Size and position of the drain plug see page 76.


Gearboxes & Lubrication

Threaded plugs

Position of threaded plugs


-BS-series gears

BS10 - BS20

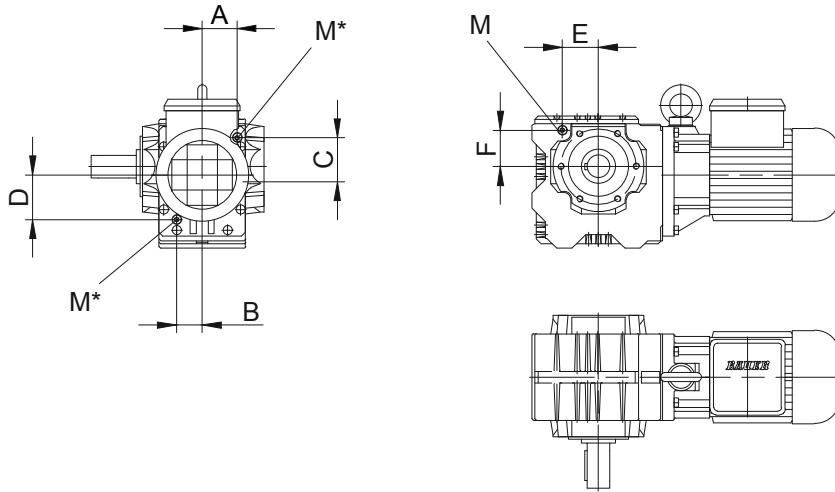

5

BS30 - BS40

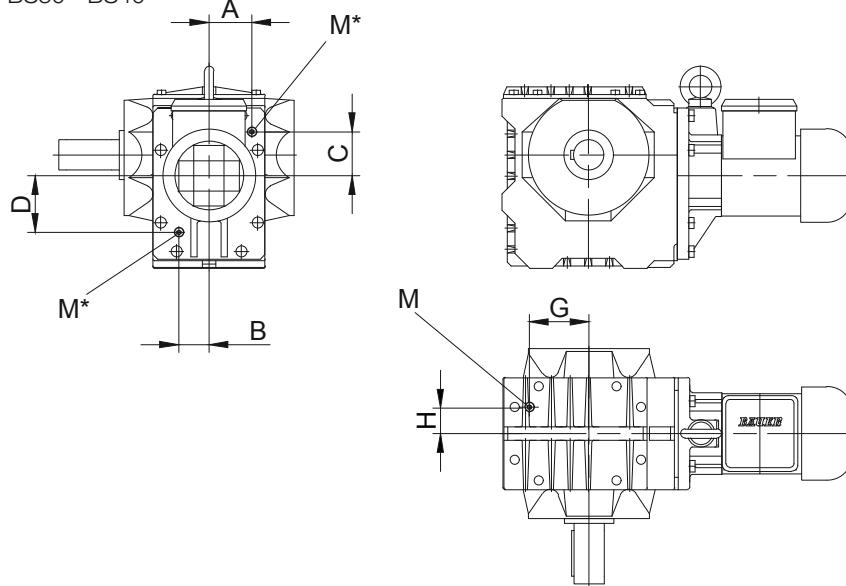


Type	A	B	C	D	E	F	G	H	M
BS10	see position of the oil drain and filler plugs on the system cover	Tab.I-Tab.III size B.10			48	50	-	-	M10x1
BS20		Tab.I-Tab.III size B.20			59	63	-	-	M10x1
BS30		Tab.I-Tab.III size B.30			-	-	79	35	M10x1
BS40		Tab.I-Tab.III size B.40			-	-	93.5	41.5	M14x1.5

M = Plug according to DIN 908

Dimensions in millimetres (mm)

M* = Size and position of the drain plug see page 76.

Position of threaded plugs -pre-stage gears (Z)

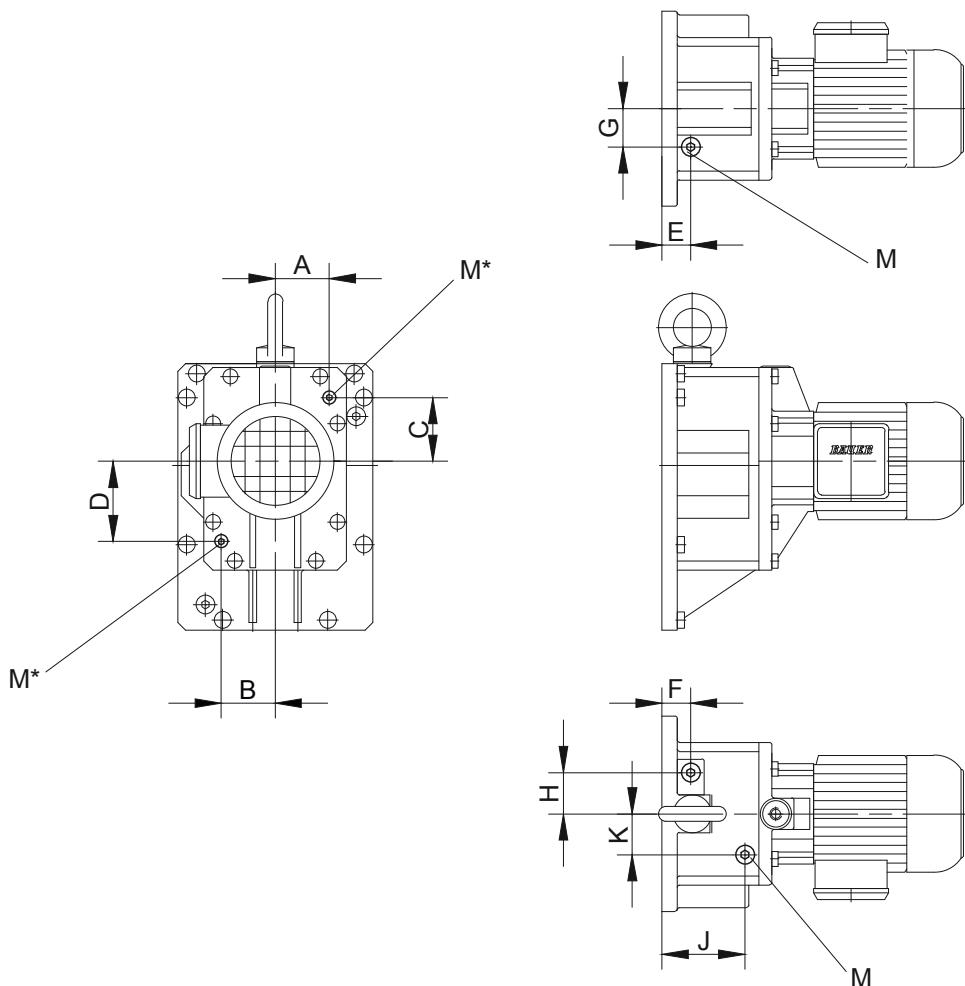

5

M* = Size and position of the drain plug see page 76.

Gearboxes & Lubrication

Threaded plugs

Position of threaded plugs

-in the System Cover Design with Standard Geared Motor

5

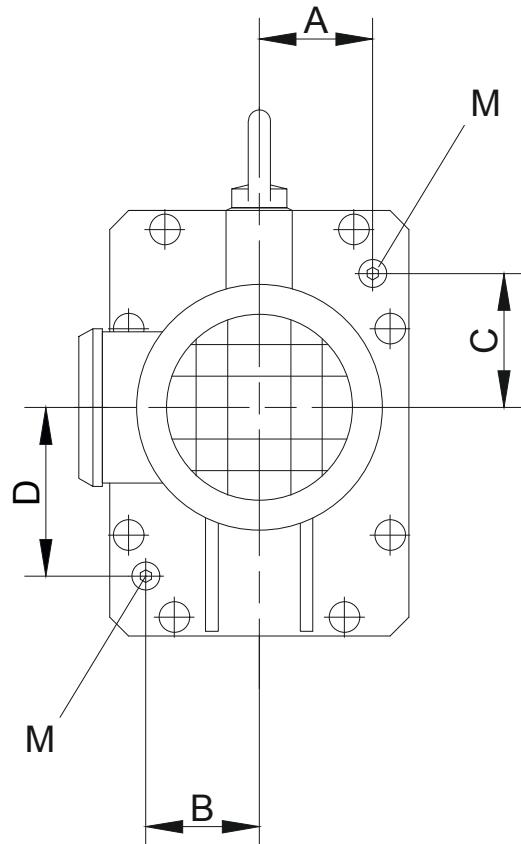


Table I: Design with Standard Geared Motor

Gear	Size	A	B	C	D	M
BG10(Z); BK10(Z);	D05-D..09	36	34	43.5	59	M10x1
BF10(Z);BS10(Z)						
BG15	D05-D..09	36	34	43.5	59	M10x1
BG20(Z); BK20(Z);	D05-D..09	44	44	58	72.5	M10x1
BF20(Z);BS20(Z)						
BG30(Z); BK30(Z);	D05-D..09	56.5	40	58.2	75	M10x1
BF30(Z);BS30(Z)						
BG40(Z); BK40(Z);	D..08-D..11	66	71	71	94	M14x1.5
BF40(Z);BS40(Z)						
BG50(Z); BK50(Z);	D..08-D..11	72	74	85	109	M14x1.5
BF50(Z);	D..13-D..16	78	74	82	109	M14x1.5
BG60(Z); BK60(Z);	D..09-D..13	84	81	120	155	M20x1.5
BF60(Z);	D..16	86	81	120	155	M20x1.5
BG70(Z); BK70(Z);	D..09-D..18	95	85	97	193	M20x1.5
BF70(Z);BF80(Z)						
BG80(Z); BK80(Z);	D..11-D..18	118	118	110	245	M20x1.5
BF90(Z);BG100(Z)						
BG90(Z); BK90(Z);	D..13-D..18	145	145	116	294	M24x1.5


M = Plug according to DIN 908

Dimensions in millimetres (mm)

Position of the drain plugs for BG, BK, BS and BF gear ranges and pre-stages.

Position of threaded plugs

-in the System Cover Design with foreign motor or gear design with input shaft

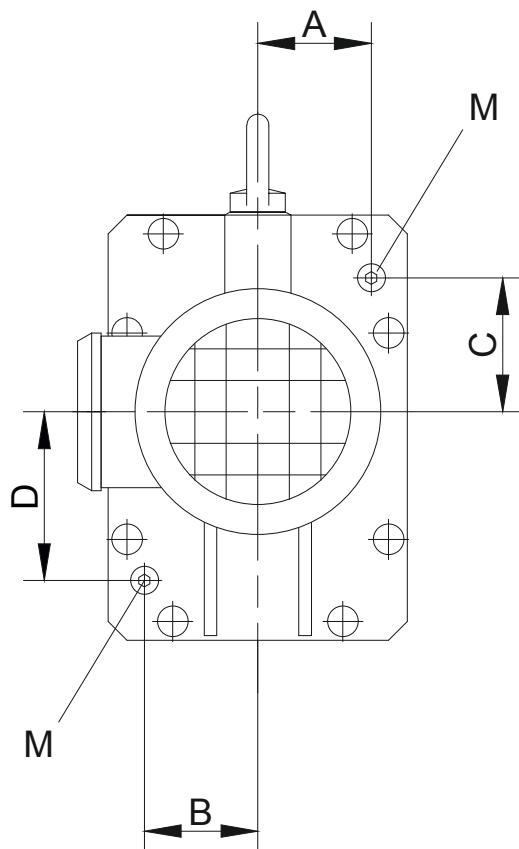

5


Table II: Design with foreign motor or gear design with input shaft

Gear	A	B	C	D	M
BG10(Z); BK10(Z);	1.34	1.34	1.59	2.24	M10x1
BF10(Z); BS10(Z)					
BG15	1.34	1.34	1.59	2.24	M10x1
BG20(Z); BK20(Z);	1.73	1.73	2.24	2.83	M10x1
BF20(Z); BS20(Z)					
BG30(Z); BK30(Z);	2.30	1.61	2.27	3.03	M10x1
BF30(Z); BS30(Z)					
BG40(Z); BK40(Z);	2.72	2.87	2.76	3.82	M14x1.5
BF40(Z); BS40(Z)					
BG50(Z); BK50(Z);	2.95	2.95	3.23	4.33	M14x1.5
BF50(Z);					
BG60(Z); BK60(Z);	3.31	3.19	4.69	6.10	M20x1.5
BF60(Z);					
BG70(Z); BK70(Z);	3.78	3.74	3.78	7.60	M20x1.5
BF70(Z); BF80(Z)					
BG80(Z); BK80(Z);	4.65	4.65	4.33	9.65	M20x1.5
BF90(Z); BG100(Z)					
BG90(Z); BK90(Z);	5.71	5.71	4.57	11.57	M24x1.5
M = Plug according to DIN 908					
Dimensions in millimetres (mm)					

Position of the drain plugs for BG, BK, BS and BF gear ranges and pre-stages.

Energy Efficient Geared Motors

AC Variable Speed

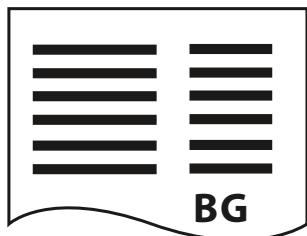

6

BG-series helical-gear motors - Selection

Description of helical-gear units	81
Sizes	81
Bauer service factors (f_B) for helical- geared motors	81
Continuous operation without switchingfrequency $Z \leq 1/h$	81
Switching duty	81
Bauer service factor	81
Explanation of shock classification	82
Key to abbreviations	82
Selection tables, helical-gearred motors	82
Selection helical-gearred motors - $n_1 = 1500 \text{ } 1/\text{min}$	83
Selection helical-gearred motors - $n_1 = 3000 \text{ } 1/\text{min}$	116

Energy Efficient Geared Motors

AC Variable Speed

6

BG-series helical-gear motors

Description of helical-gear units

Sizes

Bauer BG-series helical-gear motors are available in 13 standard sizes with torques from 20 Nm to 18,500 Nm. Higher torques are available on request. The geared unit is accommodated in a sturdy cast housing.

Bauer service factors (f_B) for helical-gear motors

Of the numerous factors influencing the total loading of a geared unit, the most important include:

- Mean torque (rated torque)
- Daily operating hours
- Severity of torque peaks (shock classification)
- Frequency of torque peaks (switching duty)

These factors can be represented in a simplified and practical manner by *service factors*. The tables and explanations below aim to provide an objective description of the *shock classification*, rather than a classification of the driven machinery. Experience has shown that, in addition to the torque shocks caused by the driven machinery (M_s/M_h), above all the power transmission components (clutches, chains etc.) plus the mass ratios play a decisive role in this.

See Bauer special imprint SD32 for more information (available on request).

Continuous operation without switching frequency $Z \leq 1/h$

Factor f_1 for shock classification and operating time

Shock classification	Operating hours per day t_d	>4 h	>8 h	>16 h
		$\leq 8 h$	$\leq 16 h$	$\leq 24 h$
I		0,8	1,0	1,2
II		1,05	1,25	1,45
III		1,45	1,55	1,7

Switching duty

Factor f_2 for shock classification and switching frequency

Switching frequency in single-shift operation $t_d \leq 8 h/d$

Shock classification	$1 < Z \leq 100$	$100 < Z \leq 1000$	$1000 < Z$
I	0,95	1,1	1,15
II	1,2	1,35	1,4
III	1,55	1,6	1,6

Switching frequency in multiple-shift operation $t_d > 8 h/d$

Shock classification	$1 < Z \leq 100$	$100 < Z \leq 1000$	$1000 < Z$
I	1,3	1,45	1,5
II	1,5	1,6	1,65
III	1,75	1,8	1,8

Bauer service factor

Bauer service factor $f_B = f_1$ or $f_B = f_2$

For example: Shock classification II for $Z = 100$ switching operations per hour and multiple-shift operation yields a service factor $f_B = f_2 = 1.5$

BG-series helical-gear motors

Description of helical-gear units

Explanation of shock classification

Shock classification I:

Uniform without shock loads. All the following requirements must be satisfied:

- $Fl \leq 1.3$
- $M_x/M_N \leq 1.0$
- Shock-absorbing power transmission components (e.g. highly resilient, zero-play coupling, $\varphi N \geq 5^\circ$)

Shock classification II:

Moderate shock loads. At least one of the following conditions applies:

- $1.3 < Fl \leq 4$
- $1 < M_x/M_N \leq 1.6$
- Shock-neutral power transmission components (e.g. gear wheels, zero-play rigid coupling or resilient coupling with $\varphi N < 5^\circ$)

Shock classification III:

Heavy shock loads. At least one of the following conditions applies:

- $Fl > 4$
- $1.6 < M_x/M_N \leq 2.0$
- Shock-amplifying power transmission components (e.g. coupling with play or chain drive)


Key to abbreviations

Z	Switching duty number of switching operations per hour
t_d	Daily operating time in hours (h/d)
Fl	Factor of inertia $Fl = (J_{ext} + J_{rot})/J_{rot}$
J_{ext}	Mass moment of inertia of the machine to be driven, in relation to the motor's rotor shaft (kgm^2)
J_{rot}	Mass moment of inertia of the motor rotor (kgm^2)
M_x	Highest impact torque above the static torque which can occur during normal operation or in emergency situations
M_N	Required static load torque for the application
M_x/M_N	Relative torque - Factor
φ_N	Torsional offset of the resilient coupling under rated torque

Selection tables, helical-gear motors

Key to abbreviations

P	Rated output Power
n_2	Rated speed of the output shaft
i	Gear reduction ratio
M_2	Rated torque at the output shaft
f_B	Bauer service factor
F_{RN}	Maximum permissible radial force with a standard solid shaft (Code -.1 and -.7)
F_{RV}	Maximum permissible radial force with reinforced bearings in each case with standard solid shaft (Code -.1 and -.7)

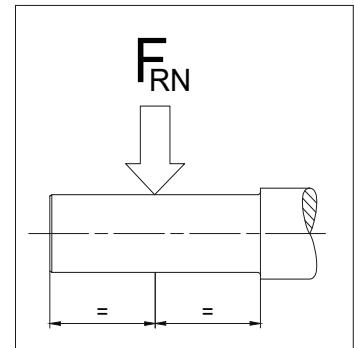

Use the selection tables to determine the size of geared motor required. The codes clearly define the Type of gear (see chapter 10 "dimensional drawings, helical-gear motors").


Motor power overload protection

Motor-power ratings, particularly in conjunction with four-stage and multi-stage gear units, are more than ample in some instances. Consequently, and in much the same way as with low-power motors, rated current is not a measure of gear loading and cannot be used to protect the gear unit against overloading. It is advisable to provide gears at risk from excessive load or blockage with a protective mechanism (e. g., slip clutch, slip hub, shear pin or an alternative).

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 0.76 Nm (PN = 0.12 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
0.76	0.12	590	1.9	2.1	2.51	IE4	BG04-./S4E04SA4-1	59	199	395	590	710	1.9	1.9	1.9	1.9	1.9	4.4	340	-
0.76	0.12	410	2.75	1.8	3.65	IE4	BG04-./S4E04SA4-1	41	136	270	410	490	2.75	2.75	2.75	2.75	2.75	4.4	390	-
0.76	0.12	340	3.3	2.1	4.39	IE4	BG04-./S4E04SA4-1	34	113	225	340	410	3.3	3.3	3.3	3.3	3.3	4.4	380	-
0.76	0.12	275	4.05	2.2	5.36	IE4	BG04-./S4E04SA4-1	27.5	93	186	275	335	4.05	4.05	4.05	4.05	4.05	4.4	380	-
0.76	0.12	240	4.65	2.3	6.18	IE4	BG04-./S4E04SA4-1	24	80	161	240	290	4.65	4.65	4.65	4.65	4.65	4.4	415	-
0.76	0.12	220	5	2	6.67	IE4	BG04-./S4E04SA4-1	22	74	149	220	265	5	5	5	5	5	4.4	410	-
0.76	0.12	220	5.1	2.1	6.8	IE4	BG04-./S4E04SA4-1	22	73	147	220	260	5.1	5.1	5.1	5.1	5.1	4.4	420	-
0.76	0.12	174	6.5	1.7	8.58	IE4	BG04-./S4E04SA4-1	17	58	116	174	205	6.5	6.5	6.5	6.5	6.5	4.4	410	-
0.76	0.12	166	6.8	1.8	9	IE4	BG04-./S4E04SA4-1	16.5	55	111	166	200	6.8	6.8	6.8	6.8	6.8	4.4	470	-
0.76	0.12	151	7.5	1.7	9.9	IE4	BG04-./S4E04SA4-1	15	50	101	151	181	7.5	7.5	7.5	7.5	7.5	4.4	480	-
0.76	0.12	138	8.2	1.7	10.82	IE4	BG04-./S4E04SA4-1	13.5	46	92	138	166	8.2	8.2	8.2	8.2	8.2	4.4	480	-
0.76	0.12	126	9	1.7	11.9	IE4	BG04-./S4E04SA4-1	12.5	42	84	126	151	9	9	9	9	9	4.4	490	-
0.76	0.12	119	9.5	1.6	12.55	IE4	BG04-./S4E04SA4-1	11.5	39.5	79	119	143	9.5	9.5	9.5	9.5	9.5	4.4	490	-
0.76	0.12	113	10	1.6	13.2	IE4	BG04-./S4E04SA4-1	11	37.5	75	113	136	10	10	10	10	10	4.4	500	-
0.76	0.12	103	11	1.5	14.52	IE4	BG04-./S4E04SA4-1	10	34	68	103	123	11	11	11	11	11	4.4	510	-
0.76	0.12	91	12.4	1.4	16.44	IE4	BG04-./S4E04SA4-1	9.1	30	60	91	109	12.4	12.4	12.4	12.4	12.4	4.4	530	-
0.76	0.12	82	13.7	1.3	18.08	IE4	BG04-./S4E04SA4-1	8.2	27.5	55	82	99	13.7	13.7	13.7	13.7	13.7	4.4	540	-
0.76	0.12	71	16	1.2	21.12	IE4	BG04-./S4E04SA4-1	7.1	23.5	47	71	85	16	16	16	16	16	4.4	560	-
0.76	0.12	64	17.6	1.1	23.23	IE4	BG04-./S4E04SA4-1	6.4	21.5	43	64	77	17.6	17.6	17.6	17.6	17.6	4.4	600	-
0.76	0.12	61	18.5	1.1	24.45	IE4	BG04-./S4E04SA4-1	6.1	20	40.5	61	73	18.5	18.5	18.5	18.5	18.5	4.4	610	-
0.76	0.12	55	20	0.98	26.89	IE4	BG04-./S4E04SA4-1	5.5	18.5	37	55	66	20	20	20	20	20	4.4	650	-
0.76	0.12	48.5	23	0.85	30.91	IE4	BG04-./S4E04SA4-1	4.8	16	32	48.5	58	23	23	23	23	23	4.4	690	-
0.76	0.12	192	5.9	3	7.8	IE4	BG05-./S4E04SA4-1	19	64	128	192	230	5.9	5.9	5.9	5.9	5.9	5.1	530	-
0.76	0.12	184	6.1	2.9	8.15	IE4	BG05-./S4E04SA4-1	18	61	122	184	220	6.1	6.1	6.1	6.1	6.1	5.1	510	-
0.76	0.12	176	6.4	2.9	8.51	IE4	BG05-./S4E04SA4-1	17.5	58	117	176	210	6.4	6.4	6.4	6.4	6.4	5.1	550	-
0.76	0.12	144	7.9	2.4	10.4	IE4	BG05-./S4E04SA4-1	14	48	96	144	173	7.9	7.9	7.9	7.9	7.9	5.1	510	-
0.76	0.12	141	8	2.5	10.59	IE4	BG05-./S4E04SA4-1	14	47	94	141	169	8	8	8	8	8	5.1	590	-
0.76	0.12	129	8.7	2.4	11.55	IE4	BG05-./S4E04SA4-1	12.5	43	86	129	155	8.7	8.7	8.7	8.7	8.7	5.1	600	-
0.76	0.12	124	9.1	2.3	12.05	IE4	BG05-./S4E04SA4-1	12	41	82	124	149	9.1	9.1	9.1	9.1	9.1	5.1	510	-
0.76	0.12	119	9.5	2.3	12.6	IE4	BG05-./S4E04SA4-1	11.5	39.5	79	119	142	9.5	9.5	9.5	9.5	9.5	5.1	610	-
0.76	0.12	109	10.4	2.2	13.75	IE4	BG05-./S4E04SA4-1	10.5	36	72	109	130	10.4	10.4	10.4	10.4	10.4	5.1	630	-
0.76	0.12	98	11.5	2.1	15.23	IE4	BG05-./S4E04SA4-1	9.8	32.5	65	98	118	11.5	11.5	11.5	11.5	11.5	5.1	640	-
0.76	0.12	90	12.6	2	16.62	IE4	BG05-./S4E04SA4-1	9	30	60	90	108	12.6	12.6	12.6	12.6	12.6	5.1	660	-
0.76	0.12	79	14.3	1.8	18.82	IE4	BG05-./S4E04SA4-1	7.9	26.5	53	79	95	14.3	14.3	14.3	14.3	14.3	5.1	680	-
0.76	0.12	73	15.6	1.7	20.53	IE4	BG05-./S4E04SA4-1	7.3	24	48.5	73	87	15.6	15.6	15.6	15.6	15.6	5.1	700	-
0.76	0.12	62	18.2	1.5	24	IE4	BG05-./S4E04SA4-1	6.2	20.5	41.5	62	75	18.2	18.2	18.2	18.2	18.2	5.1	740	-
0.76	0.12	57	19.8	1.5	26.18	IE4	BG05-./S4E04SA4-1	5.7	19	38	57	68	19.8	19.8	19.8	19.8	19.8	5.1	760	-
0.76	0.12	53	21	1.4	27.82	IE4	BG05-./S4E04SA4-1	5.3	17.5	35.5	53	64	21	21	21	21	21	5.1	770	-
0.76	0.12	49	23	1.3	30.35	IE4	BG05-./S4E04SA4-1	4.9	16	32.5	49	59	23	23	23	23	23	5.1	780	-
0.76	0.12	42.5	26.5	1.1	35	IE4	BG05-./S4E04SA4-1	4.2	14	28.5	42.5	51	26.5	26.5	26.5	26.5	26.5	5.1	810	-
0.76	0.12	39	29	1	38.18	IE4	BG05-./S4E04SA4-1	3.9	13	26	39	47	29	29	29	29	29	5.1	850	-
0.76	0.12	37.5	30	0.99	39.94	IE4	BG05-./S4E04SA4-1	3.7	12.5	25	37.5	45	30	30	30	30	30	5.1	860	-
0.76	0.12	34	33	0.91	43.57	IE4	BG05-./S4E04SA4-1	3.4	11	22.5	34	41	33	33	33	33	33	5.1	900	-
0.76	0.12	31.5	35.5	0.84	47	IE4	BG05-./S4E04SA4-1	3.1	10.5	21	31.5	38	35.5	35.5	35.5	35.5	35.5	5.1	930	-
0.76	0.12	101	11.2	3	14.78	IE4	BG06-./S4E04SA4-1	10	33.5	67	101	121	11.2	11.2	11.2	11.2	11.2	6.1	730	-
0.76	0.12	92	12.2	2.9	16.13	IE4	BG06-./S4E04SA4-1	9.2	30.5	61	92	111	12.2	12.2	12.2	12.2	12.2	6.1	740	-
0.76	0.12	86	13.2	2.9	17.4	IE4	BG06-./S4E04SA4-1	8.6	28.5	57	86	103	13.2	13.2	13.2	13.2	13.2	6.1	760	-
0.76	0.12	79	14.4	2.8	18.98	IE4	BG06-./S4E04SA4-1	7.9	26	52	79	94	14.4	14.4	14.4	14.4	14.4	6.1	770	-
0.76	0.12	72	15.8	2.5	20.82	IE4	BG06-./S4E04SA4-1	7.2	24	48	72	86	15.8	15.8	15.8	15.8	15.8	6.1	800	-
0.76	0.12	66	17.2	2.5	22.71	IE4	BG06-./S4E04SA4-1	6.6	22	44	66	79	17.2	17.2	17.2	17.2	17.2	6.1	810	-
0.76	0.12	58	19.3	2.3	25.48	IE4	BG06-./S4E04SA4-1	5.8	19.5	39	58	70	19.3	19.3	19.3	19.3	19.3	6.1	850	-
0.76	0.12	53	21	2.1	27.8	IE4	BG06-./S4E04SA4-1	5.3	17.5	35.5	53	64	21	21	21	21	21	6.1	840	-
0.76	0.12	46.5	24	1.8	32.22	IE4	BG06-./S4E04SA4-1	4.6	15.5	31	46.5	55	24	24	24	24	24	6.1	890	-
0.76</																				

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 0.76 Nm (PN = 0.12 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
0.76	0.12	15.5	71	2.8	94.27	IE4	BG20Z-../S4E04SA4-1	1.5	5.3	10.5	15.5	19	71	71	71	71	71	13	5000	-
0.76	0.12	14	79	2.5	104.7	IE4	BG20Z-../S4E04SA4-1	1.4	4.7	9.5	14	17	79	79	79	79	79	13	5000	-
0.76	0.12	13	85	2.3	112.8	IE4	BG20Z-../S4E04SA4-1	1.3	4.4	8.8	13	15.5	85	85	85	85	85	13	5000	-
0.76	0.12	11.5	95	2.1	125.3	IE4	BG20Z-../S4E04SA4-1	1.1	3.9	7.9	11.5	14	95	95	95	95	95	13	5000	-
0.76	0.12	10.5	107	1.9	141.3	IE4	BG20Z-../S4E04SA4-1	1	3.5	7	10.5	12.5	107	107	107	107	107	13	5000	-
0.76	0.12	9.5	119	1.7	157	IE4	BG20Z-../S4E04SA4-1	0.95	3.1	6.3	9.5	11	119	119	119	119	119	13	5000	-
0.76	0.12	9.2	123	1.6	162.2	IE4	BG20Z-../S4E04SA4-1	0.9	3	6.1	9.2	11	123	123	123	123	123	13	5000	-
0.76	0.12	8.3	136	1.5	180.1	IE4	BG20Z-../S4E04SA4-1	0.8	2.7	5.5	8.3	9.9	136	136	136	136	136	13	5000	-
0.76	0.12	7.5	151	1.3	199.9	IE4	BG20Z-../S4E04SA4-1	0.75	2.5	5	7.5	9	151	151	151	151	151	13	5000	-
0.76	0.12	6.7	168	1.2	222.1	IE4	BG20Z-../S4E04SA4-1	0.65	2.2	4.5	6.7	8.1	168	168	168	168	168	13	5000	-
0.76	0.12	6	188	1.2	248	IE4	BG20G06-../S4E04SA4-1	0.6	2	4	6	7.2	188	188	188	188	188	17	5000	2100
0.76	0.12	5	225	0.97	297.9	IE4	BG20G06-../S4E04SA4-1	0.5	1.6	3.3	5	6	225	225	225	225	225	17	5000	2100
0.76	0.12	4.2	265	0.82	352.1	IE4	BG20G06-../S4E04SA4-1	0.42	1.4	2.8	4.2	5.1	265	265	265	265	265	17	5000	2100
0.76	0.12	5.8	193	1.7	254.9	IE4	BG30G06-../S4E04SA4-1	0.55	1.9	3.9	5.8	7	193	193	193	193	193	21	6000	-
0.76	0.12	4.8	230	1.4	306.2	IE4	BG30G06-../S4E04SA4-1	0.48	1.6	3.2	4.8	5.8	230	230	230	230	230	21	6000	-
0.76	0.12	4.3	260	1.2	346.8	IE4	BG30G06-../S4E04SA4-1	0.43	1.4	2.8	4.3	5.1	260	260	260	260	260	21	6000	-
0.76	0.12	3.7	305	1.1	401.9	IE4	BG30G06-../S4E04SA4-1	0.37	1.2	2.4	3.7	4.4	305	305	305	305	305	21	6000	-
0.76	0.12	3.1	355	0.9	472.8	IE4	BG30G06-../S4E04SA4-1	0.31	1	2.1	3.1	3.8	355	355	355	355	355	21	6000	-

MN = 1 Nm (PN = 0.157 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1	0.157	590	2.5	1.6	2.51	IE2	BG04-../SHE04SA4-1	59	199	395	590	710	1.9	2.1	2.5	2.5	2.5	4.4	340	-
1	0.157	410	3.65	1.4	3.65	IE2	BG04-../SHE04SA4-1	41	136	270	410	490	2.75	3.1	3.65	3.65	3.65	4.4	390	-
1	0.157	340	4.35	1.6	4.39	IE2	BG04-../SHE04SA4-1	34	113	225	340	410	3.3	3.7	4.35	4.35	4.35	4.4	380	-
1	0.157	275	5.3	1.7	5.36	IE2	BG04-../SHE04SA4-1	27.5	93	186	275	335	4.05	4.55	5.3	5.3	5.3	4.4	380	-
1	0.157	240	6.1	1.8	6.18	IE2	BG04-../SHE04SA4-1	24	80	161	240	290	4.65	5.2	6.1	6.1	6.1	4.4	415	-
1	0.157	220	6.6	1.5	6.67	IE2	BG04-../SHE04SA4-1	22	74	149	220	265	5	5.6	6.6	6.6	6.6	4.4	410	-
1	0.157	220	6.8	1.6	6.8	IE2	BG04-../SHE04SA4-1	22	73	147	220	260	5.1	5.7	6.8	6.8	6.8	4.4	420	-
1	0.157	174	8.5	1.3	8.58	IE2	BG04-../SHE04SA4-1	17	58	116	174	205	6.5	7.2	8.5	8.5	8.5	4.4	410	-
1	0.157	166	9	1.3	9	IE2	BG04-../SHE04SA4-1	16.5	55	111	166	200	6.8	7.6	9	9	9	4.4	470	-
1	0.157	151	9.9	1.3	9.9	IE2	BG04-../SHE04SA4-1	15	50	101	151	181	7.5	8.4	9.9	9.9	9.9	4.4	480	-
1	0.157	138	10.8	1.3	10.82	IE2	BG04-../SHE04SA4-1	13.5	46	92	138	166	8.2	9.1	10.8	10.8	10.8	4.4	480	-
1	0.157	126	11.9	1.3	11.9	IE2	BG04-../SHE04SA4-1	12.5	42	84	126	151	9	10.1	11.9	11.9	11.9	4.4	490	-
1	0.157	119	12.5	1.2	12.55	IE2	BG04-../SHE04SA4-1	11.5	39.5	79	119	143	9.5	10.6	12.5	12.5	12.5	4.4	490	-
1	0.157	113	13.1	1.2	13.2	IE2	BG04-../SHE04SA4-1	11	37.5	75	113	136	10	11.2	13.1	13.1	13.1	4.4	500	-
1	0.157	103	14.5	1.2	14.52	IE2	BG04-../SHE04SA4-1	10	34	68	103	123	11	12.3	14.5	14.5	14.5	4.4	510	-
1	0.157	91	16.4	1.1	16.44	IE2	BG04-../SHE04SA4-1	9.1	30	60	91	109	12.4	13.9	16.4	16.4	16.4	4.4	530	-
1	0.157	82	18	1	18.08	IE2	BG04-../SHE04SA4-1	8.2	27.5	55	82	99	13.7	15.3	18	18	18	4.4	540	-
1	0.157	71	21	0.9	21.12	IE2	BG04-../SHE04SA4-1	7.1	23.5	47	71	85	16	17.9	21	21	21	4.4	560	-
1	0.157	64	23	0.86	23.23	IE2	BG04-../SHE04SA4-1	6.4	21.5	43	64	77	17.6	19.7	23	23	23	4.4	600	-
1	0.157	61	24	0.82	24.45	IE2	BG04-../SHE04SA4-1	6.1	20	40.5	61	73	18.5	20.5	24	24	24	4.4	610	-
1	0.157	440	3.35	3	3.38	IE2	BG05-../SHE04SA4-1	44	147	295	440	530	2.55	2.85	3.35	3.35	3.35	5.1	460	-
1	0.157	325	4.55	2.6	4.59	IE2	BG05-../SHE04SA4-1	32.5	108	215	325	390	3.45	3.9	4.55	4.55	4.55	5.1	490	-
1	0.157	270	5.4	2.6	5.46	IE2	BG05-../SHE04SA4-1	27	91	183	270	325	4.1	4.6	5.4	5.4	5.4	5.1	490	-
1	0.157	245	6	2.8	6.09	IE2	BG05-../SHE04SA4-1	24.5	82	164	245	295	4.6	5.1	6	6	6	5.1	480	-
1	0.157	225	6.5	2.4	6.6	IE2	BG05-../SHE04SA4-1	22.5	75	151	225	270	5	5.6	6.5	6.5	6.5	5.1	510	-
1	0.157	225	6.6	2.6	6.64	IE2	BG05-../SHE04SA4-1	22.5	75	150	225	270	5	5.6	6.6	6.6	6.6	5.1	500	-
1	0.157	192	7.8	2.3	7.8	IE2	BG05-../SHE04SA4-1	19	64	128	230	280	5.9	6.6	7.8	7.8	7.8	5.1	530	-
1	0.157	184	8.1	2.2	8.15	IE2	BG05-../SHE04SA4-1	18	61	122	184	220	6.1	6.9	8.1	8.1	8.1	5.1	510	-
1	0.157	176	8.5	2.2	8.51	IE2	BG05-../SHE04SA4-1	17.5	58	117	176	210	6.4	7.2	8					

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1 Nm (PN = 0.157 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1	0.157	79	18.9	2.1	18.98	IE2	BG06-../SHE04SA4-1	7.9	26	52	79	94	14.4	16.1	18.9	18.9	18.9	6.1	770	-
1	0.157	72	20.5	1.9	20.82	IE2	BG06-../SHE04SA4-1	7.2	24	48	72	86	15.8	17.6	20.5	20.5	20.5	6.1	800	-
1	0.157	66	22.5	1.9	22.71	IE2	BG06-../SHE04SA4-1	6.6	22	44	66	79	17.2	19.3	22.5	22.5	22.5	6.1	810	-
1	0.157	58	25	1.8	25.48	IE2	BG06-../SHE04SA4-1	5.8	19.5	39	58	70	19.3	21.5	25	25	25	6.1	850	-
1	0.157	53	27.5	1.6	27.8	IE2	BG06-../SHE04SA4-1	5.3	17.5	35.5	53	64	21	23.5	27.5	27.5	27.5	6.1	840	-
1	0.157	46.5	32	1.4	32.22	IE2	BG06-../SHE04SA4-1	4.6	15.5	31	46.5	55	24	27	32	32	32	6.1	890	-
1	0.157	42.5	35	1.3	35.15	IE2	BG06-../SHE04SA4-1	4.2	14	28	42.5	51	26.5	29.5	35	35	35	6.1	880	-
1	0.157	40.5	36.5	1.2	36.91	IE2	BG06-../SHE04SA4-1	4	13.5	27	40.5	48.5	28	31	36.5	36.5	36.5	6.1	890	-
1	0.157	37	40	1.1	40.26	IE2	BG06-../SHE04SA4-1	3.7	12	24.5	37	44.5	30.5	34	40	40	40	6.1	890	-
1	0.157	32	46	0.97	46.19	IE2	BG06-../SHE04SA4-1	3.2	10.5	21.5	32	38.5	35	39	46	46	46	6.1	890	-
1	0.157	29.5	50	0.89	50.38	IE2	BG06-../SHE04SA4-1	2.9	9.9	19.5	29.5	35.5	38	42.5	50	50	50	6.1	940	-
1	0.157	28.5	52	0.86	52.56	IE2	BG06-../SHE04SA4-1	2.8	9.5	19	28.5	34	39.5	44.5	52	52	6.1	950	-	
1	0.157	22	67	1.5	67.54	IE2	BG10Z-../SHE04SA4-1	2.2	7.4	14.5	22	26.5	51	57	67	67	67	11	2000	2800
1	0.157	19	77	1.6	77.4	IE2	BG10Z-../SHE04SA4-1	1.9	6.4	12.5	19	23	58	65	77	77	77	11	2000	2800
1	0.157	17	85	1.4	85.76	IE2	BG10Z-../SHE04SA4-1	1.7	5.8	11.5	17	20.5	65	72	85	85	85	11	2000	2800
1	0.157	16	92	1.3	92.19	IE2	BG10Z-../SHE04SA4-1	1.6	5.4	10.5	16	19.5	70	78	92	92	92	11	2000	2800
1	0.157	14.5	102	1.2	102.1	IE2	BG10Z-../SHE04SA4-1	1.4	4.8	9.7	14.5	17.5	77	86	102	102	102	11	2000	2800
1	0.157	13.5	109	1.1	109.8	IE2	BG10Z-../SHE04SA4-1	1.3	4.5	9.1	13.5	16	83	93	109	109	109	11	2000	2800
1	0.157	12	121	0.99	121.7	IE2	BG10Z-../SHE04SA4-1	1.2	4.1	8.2	12	14.5	92	103	121	121	121	11	2000	2800
1	0.157	11	131	0.91	131.8	IE2	BG10Z-../SHE04SA4-1	1.1	3.7	7.5	11	13.5	100	112	131	131	131	11	2000	2800
1	0.157	10	146	0.82	146	IE2	BG10Z-../SHE04SA4-1	1	3.4	6.8	10	12	110	124	146	146	146	11	2000	2800
1	0.157	9.9	150	0.87	150.1	IE2	BG10G06-../SHE04SA4-1	0.95	3.3	6.6	9.9	11.5	114	127	150	150	150	14	2000	2800
1	0.157	25.5	58	2.9	58.58	IE2	BG20Z-../SHE04SA4-1	2.5	8.5	17	25.5	30.5	44.5	49.5	58	58	58	13	5000	-
1	0.157	22	67	3	67.53	IE2	BG20Z-../SHE04SA4-1	2.2	7.4	14.5	22	26.5	51	57	67	67	67	13	5000	-
1	0.157	20	75	2.7	75	IE2	BG20Z-../SHE04SA4-1	2	6.6	13	20	24	57	63	75	75	75	13	5000	-
1	0.157	19	78	2.5	78.6	IE2	BG20Z-../SHE04SA4-1	1.9	6.3	12.5	19	22.5	59	66	78	78	78	13	5000	-
1	0.157	17	87	2.3	87.3	IE2	BG20Z-../SHE04SA4-1	1.7	5.7	11	17	20.5	66	74	87	87	87	13	5000	-
1	0.157	15.5	94	2.1	94.27	IE2	BG20Z-../SHE04SA4-1	1.5	5.3	10.5	15.5	19	71	80	94	94	94	13	5000	-
1	0.157	14	104	1.9	104.7	IE2	BG20Z-../SHE04SA4-1	1.4	4.7	9.5	14	17	79	88	104	104	104	13	5000	-
1	0.157	13	112	1.8	112.8	IE2	BG20Z-../SHE04SA4-1	1.3	4.4	8.8	13	15.5	85	95	112	112	112	13	5000	-
1	0.157	11.5	125	1.6	125.3	IE2	BG20Z-../SHE04SA4-1	1.1	3.9	7.9	11.5	14	95	106	125	125	125	13	5000	-
1	0.157	10.5	141	1.4	141.3	IE2	BG20Z-../SHE04SA4-1	1	3.5	7	10.5	12.5	107	120	141	141	141	13	5000	-
1	0.157	9.5	157	1.3	157	IE2	BG20Z-../SHE04SA4-1	0.95	3.1	6.3	9.5	11	119	133	157	157	157	13	5000	-
1	0.157	9.2	162	1.2	162.2	IE2	BG20Z-../SHE04SA4-1	0.9	3	6.1	9.2	11	123	137	162	162	162	13	5000	-
1	0.157	8.3	180	1.1	180.1	IE2	BG20Z-../SHE04SA4-1	0.8	2.7	5.5	8.3	9.9	136	153	180	180	180	13	5000	-
1	0.157	7.5	199	1	199.9	IE2	BG20Z-../SHE04SA4-1	0.75	2.5	5	7.5	9	151	169	199	199	199	13	5000	-
1	0.157	6.7	220	0.9	222.1	IE2	BG20Z-../SHE04SA4-1	0.65	2.2	4.5	6.7	8.1	168	188	220	220	220	13	5000	-
1	0.157	6	245	0.89	248	IE2	BG20G06-../SHE04SA4-1	0.6	2	4	6	7.2	188	210	245	245	245	17	5000	2100
1	0.157	5.8	250	1.3	254.9	IE2	BG30G06-../SHE04SA4-1	0.55	1.9	3.9	5.8	7	193	215	250	250	250	21	6000	-
1	0.157	4.8	305	1.1	306.2	IE2	BG30G06-../SHE04SA4-1	0.48	1.6	3.2	4.8	5.8	230	260	305	305	305	21	6000	-
1	0.157	4.3	345	0.94	346.8	IE2	BG30G06-../SHE04SA4-1	0.43	1.4	2.8	4.3	5.1	260	290	345	345	345	21	6000	-
1	0.157	3.7	400	0.81	401.9	IE2	BG30G06-../SHE04SA4-1	0.37	1.2	2.4	3.7	4.4	305	340	400	400	400	21	6000	-

MN = 1.3 Nm (PN = 0.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.3	0.2	560	3.4	2.6	2.64	IE5	BG05-../S5E06MA4	56	189	375	560	680	3.4	3.4	3.4	3.4	3.4	8.5	420	-
1.3	0.2	440	4.35	2.3	3.38	IE5	BG05-../S5E06MA4	44	147	295	440	530	4.35	4.35	4.35	4.35	4.35	8.5	460	-
1.3	0.2	325	5.9	2	4.59	IE5	BG05-../S5E06MA4	32.5	108	215	325	390	5.9	5.9	5.9	5.9	5.9	8.5	490	-
1.3	0.2	270	7	2	5.46	IE5	BG05-../S5E06MA4	27	91	183	270	325	7	7	7	7	7	8.5	490	-
1.3																				

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.3	0.2	146	13.3	2.3	10.24	IE5	BG06-..S5E06MA4	14.5	48.5	97	146	175	13.3	13.3	13.3	13.3	13.3	9.5	640	-
1.3	0.2	132	14.6	2.2	11.28	IE5	BG06-..S5E06MA4	13	44	88	132	159	14.6	14.6	14.6	14.6	14.6	9.5	670	-
1.3	0.2	121	15.9	2.1	12.3	IE5	BG06-..S5E06MA4	12	40.5	81	121	146	15.9	15.9	15.9	15.9	15.9	9.5	670	-
1.3	0.2	115	16.8	2	12.98	IE5	BG06-..S5E06MA4	11.5	38.5	77	115	138	16.8	16.8	16.8	16.8	16.8	9.5	600	-
1.3	0.2	101	19.2	1.8	14.78	IE5	BG06-..S5E06MA4	10	33.5	67	101	121	19.2	19.2	19.2	19.2	19.2	9.5	730	-
1.3	0.2	92	20.5	1.7	16.13	IE5	BG06-..S5E06MA4	9.2	30.5	61	92	111	20.5	20.5	20.5	20.5	20.5	9.5	740	-
1.3	0.2	86	22.5	1.7	17.4	IE5	BG06-..S5E06MA4	8.6	28.5	57	86	103	22.5	22.5	22.5	22.5	22.5	9.5	760	-
1.3	0.2	79	24.5	1.6	18.98	IE5	BG06-..S5E06MA4	7.9	26	52	79	94	24.5	24.5	24.5	24.5	24.5	9.5	770	-
1.3	0.2	72	27	1.5	20.82	IE5	BG06-..S5E06MA4	7.2	24	48	72	86	27	27	27	27	27	9.5	800	-
1.3	0.2	66	29.5	1.5	22.71	IE5	BG06-..S5E06MA4	6.6	22	44	66	79	29.5	29.5	29.5	29.5	29.5	9.5	810	-
1.3	0.2	58	33	1.4	25.48	IE5	BG06-..S5E06MA4	5.8	19.5	39	58	70	33	33	33	33	33	9.5	850	-
1.3	0.2	53	36	1.2	27.8	IE5	BG06-..S5E06MA4	5.3	17.5	35.5	53	64	36	36	36	36	36	9.5	840	-
1.3	0.2	46.5	41.5	1.1	32.22	IE5	BG06-..S5E06MA4	4.6	15.5	31	46.5	55	41.5	41.5	41.5	41.5	41.5	9.5	890	-
1.3	0.2	42.5	45.5	0.98	35.15	IE5	BG06-..S5E06MA4	4.2	14	28	42.5	51	45.5	45.5	45.5	45.5	45.5	9.5	880	-
1.3	0.2	40.5	47.5	0.94	36.91	IE5	BG06-..S5E06MA4	4	13.5	27	40.5	48.5	47.5	47.5	47.5	47.5	47.5	9.5	890	-
1.3	0.2	37	52	0.86	40.26	IE5	BG06-..S5E06MA4	3.7	12	24.5	37	44.5	52	52	52	52	52	9.5	890	-
1.3	0.2	47.5	40.5	2.9	31.52	IE5	BG10-..S5E06MA4	4.7	15.5	31.5	47.5	57	40.5	40.5	40.5	40.5	40.5	13	1600	2200
1.3	0.2	42.5	45	2.6	34.92	IE5	BG10-..S5E06MA4	4.2	14	28.5	42.5	51	45	45	45	45	13	1690	2350	
1.3	0.2	37.5	51	2.3	39.7	IE5	BG10-..S5E06MA4	3.7	12.5	25	37.5	45	51	51	51	51	51	13	1780	2450
1.3	0.2	34	57	2.1	43.99	IE5	BG10-..S5E06MA4	3.4	11	22.5	34	40.5	57	57	57	57	57	13	1880	2600
1.3	0.2	32	60	2	46.55	IE5	BG10-..S5E06MA4	3.2	10.5	21	32	38.5	60	60	60	60	60	13	1920	2650
1.3	0.2	29	67	1.8	51.57	IE5	BG10-..S5E06MA4	2.9	9.6	19	29	34.5	67	67	67	67	67	13	2000	2800
1.3	0.2	26	74	1.6	57.48	IE5	BG10-..S5E06MA4	2.6	8.6	17	26	31	74	74	74	74	74	13	2000	2800
1.3	0.2	23.5	82	1.4	63.69	IE5	BG10-..S5E06MA4	2.3	7.8	15.5	23.5	28	82	82	82	82	82	13	2000	2800
1.3	0.2	22.5	85	1.4	66	IE5	BG10-..S5E06MA4	2.2	7.5	15	22.5	27	85	85	85	85	85	13	2000	2800
1.3	0.2	20.5	95	1.3	73.13	IE5	BG10-..S5E06MA4	2	6.8	13.5	20.5	24.5	95	95	95	95	95	13	2000	2800
1.3	0.2	22	87	1.2	67.54	IE5	BG10Z-..S5E06MA4	2.2	7.4	14.5	22	26.5	87	87	87	87	87	14	2000	2800
1.3	0.2	19	100	1.2	77.4	IE5	BG10Z-..S5E06MA4	1.9	6.4	12.5	19	23	100	100	100	100	100	14	2000	2800
1.3	0.2	17	111	1.1	85.76	IE5	BG10Z-..S5E06MA4	1.7	5.8	11.5	17	20.5	111	111	111	111	111	14	2000	2800
1.3	0.2	16	119	1	92.19	IE5	BG10Z-..S5E06MA4	1.6	5.4	10.5	16	19.5	119	119	119	119	119	14	2000	2800
1.3	0.2	14.5	132	0.9	102.1	IE5	BG10Z-..S5E06MA4	1.4	4.8	9.7	14.5	17.5	132	132	132	132	132	14	2000	2800
1.3	0.2	13.5	142	0.84	109.8	IE5	BG10Z-..S5E06MA4	1.3	4.5	9.1	13.5	16	142	142	142	142	142	14	2000	2800
1.3	0.2	39.5	49	3	37.9	IE5	BG15-..S5E06MA4	3.9	13	26	39.5	47	49	49	49	49	13	3000	6000	
1.3	0.2	28	69	2.9	53.22	IE5	BG20-..S5E06MA4	2.8	9.3	18.5	28	33.5	69	69	69	69	69	16	4950	-
1.3	0.2	25	76	2.6	59.07	IE5	BG20-..S5E06MA4	2.5	8.4	16.5	25	30	76	76	76	76	76	16	5000	-
1.3	0.2	22.5	85	2.3	65.62	IE5	BG20-..S5E06MA4	2.2	7.6	15	22.5	27	85	85	85	85	85	16	5000	-
1.3	0.2	25.5	76	2.3	58.58	IE5	BG20Z-..S5E06MA4	2.5	8.5	17	25.5	30.5	76	76	76	76	76	16	5000	-
1.3	0.2	22	87	2.3	67.53	IE5	BG20Z-..S5E06MA4	2.2	7.4	14.5	22	26.5	87	87	87	87	87	16	5000	-
1.3	0.2	20	97	2.1	75	IE5	BG20Z-..S5E06MA4	2	6.6	13	20	24	97	97	97	97	97	16	5000	-
1.3	0.2	19	102	2	78.6	IE5	BG20Z-..S5E06MA4	1.9	6.3	12.5	19	22.5	102	102	102	102	102	16	5000	-
1.3	0.2	17	113	1.8	87.3	IE5	BG20Z-..S5E06MA4	1.7	5.7	11	17	20.5	113	113	113	113	113	16	5000	-
1.3	0.2	15.5	122	1.6	94.27	IE5	BG20Z-..S5E06MA4	1.5	5.3	10.5	15.5	19	122	122	122	122	122	16	5000	-
1.3	0.2	14	136	1.5	104.7	IE5	BG20Z-..S5E06MA4	1.4	4.7	9.5	14	17	136	136	136	136	136	16	5000	-
1.3	0.2	13	146	1.4	112.8	IE5	BG20Z-..S5E06MA4	1.3	4.4	8.8	13	15.5	146	146	146	146	146	16	5000	-
1.3	0.2	11.5	162	1.2	125.3	IE5	BG20Z-..S5E06MA4	1.1	3.9	7.9	11.5	14	162	162	162	162	162	16	5000	-
1.3	0.2	10.5	183	1.1	141.3	IE5	BG20Z-..S5E06MA4	1	3.5	7	10.5	12.5	183	183	183	183	183	16	5000	-
1.3	0.2	9.5	200	2.1	156.9	IE5	BG30Z-..S5E06MA4	0.95	3.3	6.6	9.9	11.5	196	196	196	196	196	22	6000	-
1.3	0.2	8.9	215	1.4	168.1	IE5	BG30Z-..S5E06MA4	0.85	2.9	5.9	8.9	10.5	215	215	215	215	215	22	6000	-
1.3	0.2	8.2	235	1.3	182.9	IE5	BG30Z-..S5E06MA4	0.8	2.7	5.4	8.2	9.8	235	235	235	235	235	22	6000	-
1.3	0.2	7.3	260	1.1	202.9	IE5	BG30Z-..S5E06MA4	0.7	2.4	4.9	7.3	8.8	260	260	260	260	260	22	6000	-
1.3	0.2	6.6	290	1	225.9	IE5	BG30Z-..S5E06MA4	0.65	2.2	4.4	6.6	7.9	290	290	290	290	290	22	6000	-
1.3	0.2	5.9	325	0.92	250.6	IE5	BG30Z-..S5E06MA4	0.55	1.9	3.9	5.9	7.1	325	325	325	325	325	22	6000	-
1.3	0.2	5.7	340	0.88	261.9	IE5	BG30Z-..S5E06MA4	0.55	1.9	3.8	5.7	6.8	340	340	340	340	340	22	6000	-
1.3	0.2	5.8	330	0.98	254.9	IE5	BG30G06-..S5E06MA4	0.55	1.9											

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.3	0.2	4.2	455	1	353.5	IE5	BG40G10-./S5E06MA4	0.42	1.4	2.8	4.2	5	455	455	455	455	455	43	7000	-
1.3	0.2	3.3	580	0.8	448.8	IE5	BG40G10-./S5E06MA4	0.33	1.1	2.2	3.3	4	580	580	580	580	580	43	7000	-
1.3	0.2	9	210	2.9	164.9	IE5	BG50Z-./S5E06MA4	0.9	3	6	9	10.5	210	210	210	210	210	47	10000	-
1.3	0.2	8.2	235	2.7	182.8	IE5	BG50Z-./S5E06MA4	0.8	2.7	5.4	8.2	9.8	235	235	235	235	235	47	10000	-
1.3	0.2	7.3	265	2.4	204.7	IE5	BG50Z-./S5E06MA4	0.7	2.4	4.8	7.3	8.7	265	265	265	265	265	47	10000	-
1.3	0.2	6.6	290	2.1	226.9	IE5	BG50Z-./S5E06MA4	0.65	2.2	4.4	6.6	7.9	290	290	290	290	290	47	10000	-
1.3	0.2	5.8	335	1.9	258.6	IE5	BG50Z-./S5E06MA4	0.55	1.9	3.8	5.8	6.9	335	335	335	335	335	47	10000	-
1.3	0.2	5.2	370	1.7	286.7	IE5	BG50Z-./S5E06MA4	0.5	1.7	3.4	5.2	6.2	370	370	370	370	370	47	10000	-
1.3	0.2	5.2	370	1.8	287.1	IE5	BG50G10-./S5E06MA4	0.5	1.7	3.4	5.2	6.2	370	370	370	370	370	51	10000	-
1.3	0.2	4.2	455	1.5	351.7	IE5	BG50G10-./S5E06MA4	0.42	1.4	2.8	4.2	5.1	455	455	455	455	455	51	10000	-
1.3	0.2	3.3	580	1.2	446.5	IE5	BG50G10-./S5E06MA4	0.33	1.1	2.2	3.3	4	580	580	580	580	580	51	10000	-
1.3	0.2	2.8	690	1	531.5	IE5	BG50G10-./S5E06MA4	0.28	0.9	1.8	2.8	3.3	690	690	690	690	690	51	10000	-
1.3	0.2	2.4	800	0.85	621.3	IE5	BG50G10-./S5E06MA4	0.24	0.8	1.6	2.4	2.8	800	800	800	800	800	51	10000	-
1.3	0.2	4.4	430	3	334.3	IE5	BG60G20-./S5E06MA4	0.44	1.4	2.9	4.4	5.3	430	430	430	430	430	100	16000	-
1.3	0.2	4	480	2.7	370.5	IE5	BG60G20-./S5E06MA4	0.4	1.3	2.6	4	4.8	480	480	480	480	480	100	16000	-
1.3	0.2	3.4	560	2.3	437.3	IE5	BG60G20-./S5E06MA4	0.34	1.1	2.2	3.4	4.1	560	560	560	560	560	100	16000	-
1.3	0.2	2.9	650	2	504.9	IE5	BG60G20-./S5E06MA4	0.29	0.95	1.9	2.9	3.5	650	650	650	650	650	100	16000	-
1.3	0.2	2.6	720	1.8	559.5	IE5	BG60G20-./S5E06MA4	0.26	0.85	1.7	2.6	3.2	720	720	720	720	720	100	16000	-
1.3	0.2	2.3	840	1.5	651.3	IE5	BG60G20-./S5E06MA4	0.23	0.75	1.5	2.3	2.7	840	840	840	840	840	100	16000	-
1.3	0.2	1.8	1040	1.2	804.5	IE5	BG60G20-./S5E06MA4	0.18	0.6	1.2	1.8	2.2	1040	1040	1040	1040	1040	100	16000	-
1.3	0.2	1.6	1150	1.1	891.5	IE5	BG60G20-./S5E06MA4	0.16	0.55	1.1	1.6	2	1150	1150	1150	1150	1150	100	16000	-
1.3	0.2	1.4	1360	0.95	1051	IE5	BG60G20-./S5E06MA4	0.14	0.47	0.95	1.4	1.7	1360	1360	1360	1360	1360	100	16000	-
1.3	0.2	1.2	1510	0.86	1168	IE5	BG60G20-./S5E06MA4	0.12	0.42	0.85	1.2	1.5	1510	1510	1510	1510	1510	100	16000	-
1.3	0.2	2.2	860	2.9	665.8	IE5	BG70G20-./S5E06MA4	0.22	0.75	1.5	2.2	2.7	860	860	860	860	860	130	20000	-
1.3	0.2	1.8	1020	2.4	790.2	IE5	BG70G20-./S5E06MA4	0.18	0.6	1.2	1.8	2.2	1020	1020	1020	1020	1020	130	20000	-
1.3	0.2	1.7	1140	2.2	877.6	IE5	BG70G20-./S5E06MA4	0.17	0.55	1.1	1.7	2	1140	1140	1140	1140	1140	130	20000	-
1.3	0.2	1.4	1340	1.9	1035	IE5	BG70G20-./S5E06MA4	0.14	0.48	0.95	1.4	1.7	1340	1340	1340	1340	1340	130	20000	-
1.3	0.2	1.2	1550	1.6	1193	IE5	BG70G20-./S5E06MA4	0.12	0.41	0.8	1.2	1.5	1550	1550	1550	1550	1550	130	20000	-
1.3	0.2	1	1800	1.4	1389	IE5	BG70G20-./S5E06MA4	0.1	0.35	0.7	1	1.2	1800	1800	1800	1800	1800	130	20000	-
1.3	0.2	0.95	2000	1.2	1543	IE5	BG70G20-./S5E06MA4	0.095	0.32	0.6	0.95	1.1	2000	2000	2000	2000	2000	130	20000	-
1.3	0.2	0.9	2150	1.2	1666	IE5	BG70G20-./S5E06MA4	0.09	0.3	0.6	0.9	1	2150	2150	2150	2150	2150	130	20000	-
1.3	0.2	0.75	2550	0.96	1994	IE5	BG70G20-./S5E06MA4	0.075	0.25	0.5	0.75	0.9	2550	2550	2550	2550	2550	130	20000	-
1.3	0.2	0.65	2850	0.87	2215	IE5	BG70G20-./S5E06MA4	0.065	0.22	0.45	0.65	0.8	2850	2850	2850	2850	2850	130	20000	-

MN = 1.6 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.6	0.25	560	4.2	2.1	2.64	IE4	BG05-./S4E06MA4	56	189	375	560	680	4.2	4.2	4.2	4.2	4.2	8.5	420	-
1.6	0.25	440	5.4	1.8	3.38	IE4	BG05-./S4E06MA4	44	147	295	440	530	5.4	5.4	5.4	5.4	5.4	8.5	460	-
1.6	0.25	325	7.3	1.6	4.59	IE4	BG05-./S4E06MA4	32.5	108	215	325	390	7.3	7.3	7.3	7.3	7.3	8.5	490	-
1.6	0.25	270	8.7	1.6	5.46	IE4	BG05-./S4E06MA4	27	91	183	270	325	8.7	8.7	8.7	8.7	8.7	8.5	490	-
1.6	0.25	245	9.7	1.7	6.09	IE4	BG05-./S4E06MA4	24.5	82	164	245	295	9.7	9.7	9.7	9.7	9.7	8.5	480	-
1.6	0.25	225	10.5	1.5	6.6	IE4	BG05-./S4E06MA4	22.5	75	151	225	270	10.5	10.5	10.5	10.5	10.5	8.5	510	-
1.6	0.25	225	10.6	1.6	6.64	IE4	BG05-./S4E06MA4	22.5	75	150	225	270	10.6	10.6	10.6	10.6	10.6	8.5	500	-
1.6	0.25	192	12.4	1.4	7.8	IE4	BG05-./S4E06MA4	19	64	128	192	230	12.4	12.4	12.4	12.4	12.4	8.5	530	-
1.6	0.25	184	13	1.4	8.15	IE4	BG05-./S4E06MA4	18	61	122	184	220	13	13	13	13	13	8.5	510	-
1.6	0.25	176	13.6	1.4	8.51	IE4	BG05-./S4E06MA4	17.5	58	117	176	210	13.6	13.6	13.6	13.6	13.6	8.5	550	-
1.6	0.25	144	16.6	1.1	10.4	IE4	BG05-./S4E06MA4	14	48	96	144	173	16.6	16.6	16.6	16.6	16.6	8.5	510	-
1.6	0.25	141	16.9	1.2	10.59	IE4	BG05-./S4E06MA4	14	47	94	141	169	16.9	16.9	16.9	16.9	16.9	8.5	590	-
1.6	0.25	129	18.4	1.1	11.55	IE4	BG05-./S4E06MA4	12.5	43	86	129	155	18.4	18.4	18.4	18.4	18.4	8		

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.6 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.6	0.25	58	40.5	1.1	25.48	IE4	BG06-./S4E06MA4	5.8	19.5	39	58	70	40.5	40.5	40.5	40.5	40.5	9.5	850	-
1.6	0.25	53	44	1	27.8	IE4	BG06-./S4E06MA4	5.3	17.5	35.5	53	64	44	44	44	44	44	9.5	840	-
1.6	0.25	46.5	51	0.87	32.22	IE4	BG06-./S4E06MA4	4.6	15.5	31	46.5	55	51	51	51	51	51	9.5	890	-
1.6	0.25	42.5	56	0.8	35.15	IE4	BG06-./S4E06MA4	4.2	14	28	42.5	51	56	56	56	56	56	9.5	880	-
1.6	0.25	57	42	2.9	26.26	IE4	BG10-./S4E06MA4	5.7	19	38	57	68	42	42	42	42	42	13	1460	2000
1.6	0.25	51	46.5	2.6	29.09	IE4	BG10-./S4E06MA4	5.1	17	34	51	61	46.5	46.5	46.5	46.5	46.5	13	1540	2150
1.6	0.25	47.5	50	2.4	31.52	IE4	BG10-./S4E06MA4	4.7	15.5	31.5	47.5	57	50	50	50	50	50	13	1600	2200
1.6	0.25	42.5	55	2.1	34.92	IE4	BG10-./S4E06MA4	4.2	14	28.5	42.5	51	55	55	55	55	55	13	1690	2350
1.6	0.25	37.5	63	1.9	39.7	IE4	BG10-./S4E06MA4	3.7	12.5	25	37.5	45	63	63	63	63	63	13	1780	2450
1.6	0.25	34	70	1.7	43.99	IE4	BG10-./S4E06MA4	3.4	11	22.5	34	40.5	70	70	70	70	70	13	1880	2600
1.6	0.25	32	74	1.6	46.55	IE4	BG10-./S4E06MA4	3.2	10.5	21	32	38.5	74	74	74	74	74	13	1920	2650
1.6	0.25	29	82	1.5	51.57	IE4	BG10-./S4E06MA4	2.9	9.6	19	29	34.5	82	82	82	82	82	13	2000	2800
1.6	0.25	26	91	1.3	57.48	IE4	BG10-./S4E06MA4	2.6	8.6	17	26	31	91	91	91	91	91	13	2000	2800
1.6	0.25	23.5	101	1.2	63.69	IE4	BG10-./S4E06MA4	2.3	7.8	15.5	23.5	28	101	101	101	101	101	13	2000	2800
1.6	0.25	22.5	105	1.1	66	IE4	BG10-./S4E06MA4	2.2	7.5	15	22.5	27	105	105	105	105	105	13	2000	2800
1.6	0.25	20.5	117	1	73.13	IE4	BG10-./S4E06MA4	2	6.8	13.5	20.5	24.5	117	117	117	117	117	13	2000	2800
1.6	0.25	22	108	0.95	67.54	IE4	BG10Z-./S4E06MA4	2.2	7.4	14.5	22	26.5	108	108	108	108	108	14	2000	2800
1.6	0.25	19	123	0.97	77.4	IE4	BG10Z-./S4E06MA4	1.9	6.4	12.5	19	23	123	123	123	123	123	14	2000	2800
1.6	0.25	17	137	0.87	85.76	IE4	BG10Z-./S4E06MA4	1.7	5.8	11.5	17	20.5	137	137	137	137	137	14	2000	2800
1.6	0.25	16	147	0.81	92.19	IE4	BG10Z-./S4E06MA4	1.6	5.4	10.5	16	19.5	147	147	147	147	147	14	2000	2800
1.6	0.25	43.5	54	2.7	34.2	IE4	BG15-./S4E06MA4	4.3	14.5	29	43.5	52	54	54	54	54	54	13	3000	6000
1.6	0.25	39.5	60	2.5	37.9	IE4	BG15-./S4E06MA4	3.9	13	26	39.5	47	60	60	60	60	60	13	3000	6000
1.6	0.25	35.5	66	3	41.76	IE4	BG20-./S4E06MA4	3.5	11.5	23.5	35.5	43	66	66	66	66	66	16	4500	-
1.6	0.25	32	74	2.7	46.38	IE4	BG20-./S4E06MA4	3.2	10.5	21.5	32	38.5	74	74	74	74	74	16	4700	-
1.6	0.25	31	76	2.6	47.92	IE4	BG20-./S4E06MA4	3.1	10	20.5	31	37.5	76	76	76	76	76	16	4750	-
1.6	0.25	28	85	2.3	53.22	IE4	BG20-./S4E06MA4	2.8	9.3	18.5	28	33.5	85	85	85	85	85	16	4950	-
1.6	0.25	25	94	2.1	59.07	IE4	BG20-./S4E06MA4	2.5	8.4	16.5	25	30	94	94	94	94	94	16	5000	-
1.6	0.25	22.5	104	1.9	65.62	IE4	BG20-./S4E06MA4	2.2	7.6	15	22.5	27	104	104	104	104	104	16	5000	-
1.6	0.25	25.5	93	1.8	58.58	IE4	BG20Z-./S4E06MA4	2.5	8.5	17	25.5	30.5	93	93	93	93	93	16	5000	-
1.6	0.25	22	108	1.9	67.53	IE4	BG20Z-./S4E06MA4	2.2	7.4	14.5	22	26.5	108	108	108	108	108	16	5000	-
1.6	0.25	20	120	1.7	75	IE4	BG20Z-./S4E06MA4	2	6.6	13	20	24	120	120	120	120	120	16	5000	-
1.6	0.25	19	125	1.6	78.6	IE4	BG20Z-./S4E06MA4	1.9	6.3	12.5	19	22.5	125	125	125	125	125	16	5000	-
1.6	0.25	17	139	1.4	87.3	IE4	BG20Z-./S4E06MA4	1.7	5.7	11	20.5	25	139	139	139	139	139	16	5000	-
1.6	0.25	15.5	150	1.3	94.27	IE4	BG20Z-./S4E06MA4	1.5	5.3	10.5	15.5	19	150	150	150	150	150	16	5000	-
1.6	0.25	14	167	1.2	104.7	IE4	BG20Z-./S4E06MA4	1.4	4.7	9.5	14	17	167	167	167	167	167	16	5000	-
1.6	0.25	13	180	1.1	112.8	IE4	BG20Z-./S4E06MA4	1.3	4.4	8.8	13	15.5	180	180	180	180	180	16	5000	-
1.6	0.25	11.5	200	1	125.3	IE4	BG20Z-./S4E06MA4	1.1	3.9	7.9	11.5	14	200	200	200	200	200	16	5000	-
1.6	0.25	10.5	225	0.88	141.3	IE4	BG20Z-./S4E06MA4	1	3.5	7	10.5	12.5	225	225	225	225	225	16	5000	-
1.6	0.25	9.5	250	0.8	157	IE4	BG20Z-./S4E06MA4	0.95	3.1	6.3	9.5	11	250	250	250	250	250	16	5000	-
1.6	0.25	22	107	2.8	67.44	IE4	BG30-./S4E06MA4	2.2	7.4	14.5	22	26.5	107	107	107	107	107	20	6000	-
1.6	0.25	22.5	105	2.5	65.79	IE4	BG30Z-./S4E06MA4	2.2	7.5	15	22.5	27	105	105	105	105	105	22	6000	-
1.6	0.25	20	117	2.6	73.51	IE4	BG30Z-./S4E06MA4	2	6.8	13.5	20	24	117	117	117	117	117	22	6000	-
1.6	0.25	18	130	2.3	81.55	IE4	BG30Z-./S4E06MA4	1.8	6.1	12	18	22	130	130	130	130	130	22	6000	-
1.6	0.25	17	137	2.2	86.13	IE4	BG30Z-./S4E06MA4	1.7	5.8	11.5	17	20.5	137	137	137	137	137	22	6000	-
1.6	0.25	15.5	152	2	95.55	IE4	BG30Z-./S4E06MA4	1.5	5.2	10	15.5	18.5	152	152	152	152	152	22	6000	-
1.6	0.25	13.5	175	1.7	109.6	IE4	BG30Z-./S4E06MA4	1.3	4.5	9.1	13.5	16	175	175	175	175	175	22	6000	-
1.6	0.25	12	194	1.5	121.6	IE4	BG30Z-./S4E06MA4	1.2	4.1	8.2	12	14.5	194	194	194	194	194	22	6000	-
1.6	0.25	11.5	205	1.5	128.5	IE4	BG30Z-./S4E06MA4	1.1	3.8	7.7	11.5	14	205	205	205	205	205	22	6000	-
1.6	0.25	10.5	225	1.3	142.5	IE4	BG30Z-./S4E06MA4	1	3.5	7	10.5	12.5	225	225	225	225	225	22	6000	-
1.6	0.25	9.9	240	1.2	151.5	IE4	BG30Z-./S4E06MA4	0.95	3.3	6.6	9.9	11.5	240	240	240	240	240	22	6000	-
1.6	0.25	8.9	265	1.1	168.1	IE4	BG30Z-./S4E06MA4	0.85	2.9	5.9	8.9	10.5	265	265	265	265	265	22	6000	-
1.6	0.25	8.2	290	1	182.9	IE4	BG30Z-./S4E06MA4	0.8	2.7	5.4	8.2	9.8	290	290	290	290	290	22	6000	-
1.6	0.25	7.3	320	0.92	202.9	IE4	BG30Z-./S4E06MA4	0.7	2.4	4.9	7.3	8.8	320	320	320	320	320	22	6000	-
1.6	0.25	6.6	360	0.83	225.9	IE4	BG30Z-./S4E06MA4	0.65	2.2	4.4	6.6	7.9	360	360	360	360	360	22	6000	-
1.6	0.25	5.8	405	0.8	254.9	IE4	BG30G06-./S4E06MA4	0.55	1.9	3.9										

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.6 Nm (PN = 0.25 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.6	0.25	5.2	455	1.4	286.7	IE4	BG50Z-../S4E06MA4	0.5	1.7	3.4	5.2	6.2	455	455	455	455	455	47	10000	-
1.6	0.25	5.2	455	1.5	287.1	IE4	BG50G10-../S4E06MA4	0.5	1.7	3.4	5.2	6.2	455	455	455	455	455	51	10000	-
1.6	0.25	4.2	560	1.2	351.7	IE4	BG50G10-../S4E06MA4	0.42	1.4	2.8	4.2	5.1	560	560	560	560	560	51	10000	-
1.6	0.25	3.3	710	0.97	446.5	IE4	BG50G10-../S4E06MA4	0.33	1.1	2.2	3.3	4	710	710	710	710	710	51	10000	-
1.6	0.25	2.8	850	0.81	531.5	IE4	BG50G10-../S4E06MA4	0.28	0.9	1.8	2.8	3.3	850	850	850	850	850	51	10000	-
1.6	0.25	5.4	440	2.9	276.2	IE4	BG60G20-../S4E06MA4	0.5	1.8	3.6	5.4	6.5	440	440	440	440	440	100	16000	-
1.6	0.25	4.9	485	2.7	306.1	IE4	BG60G20-../S4E06MA4	0.49	1.6	3.2	4.9	5.8	485	485	485	485	485	100	16000	-
1.6	0.25	4.4	530	2.4	334.3	IE4	BG60G20-../S4E06MA4	0.44	1.4	2.9	4.4	5.3	530	530	530	530	530	100	16000	-
1.6	0.25	4	590	2.2	370.5	IE4	BG60G20-../S4E06MA4	0.4	1.3	2.6	4	4.8	590	590	590	590	590	100	16000	-
1.6	0.25	3.4	690	1.9	437.3	IE4	BG60G20-../S4E06MA4	0.34	1.1	2.2	3.4	4.1	690	690	690	690	690	100	16000	-
1.6	0.25	2.9	800	1.6	504.9	IE4	BG60G20-../S4E06MA4	0.29	0.95	1.9	2.9	3.5	800	800	800	800	800	100	16000	-
1.6	0.25	2.6	890	1.5	559.5	IE4	BG60G20-../S4E06MA4	0.26	0.85	1.7	2.6	3.2	890	890	890	890	890	100	16000	-
1.6	0.25	2.3	1040	1.2	651.3	IE4	BG60G20-../S4E06MA4	0.23	0.75	1.5	2.3	2.7	1040	1040	1040	1040	1040	100	16000	-
1.6	0.25	1.8	1280	1	804.5	IE4	BG60G20-../S4E06MA4	0.18	0.6	1.2	1.8	2.2	1280	1280	1280	1280	1280	100	16000	-
1.6	0.25	1.6	1420	0.91	891.5	IE4	BG60G20-../S4E06MA4	0.16	0.55	1.1	1.6	2	1420	1420	1420	1420	1420	100	16000	-
1.6	0.25	2.5	920	2.7	577.3	IE4	BG70G20-../S4E06MA4	0.25	0.85	1.7	2.5	3.1	920	920	920	920	920	130	20000	-
1.6	0.25	2.2	1060	2.3	665.8	IE4	BG70G20-../S4E06MA4	0.22	0.75	1.5	2.2	2.7	1060	1060	1060	1060	1060	130	20000	-
1.6	0.25	1.8	1260	2	790.2	IE4	BG70G20-../S4E06MA4	0.18	0.6	1.2	1.8	2.2	1260	1260	1260	1260	1260	130	20000	-
1.6	0.25	1.7	1400	1.8	877.6	IE4	BG70G20-../S4E06MA4	0.17	0.55	1.1	1.7	2	1400	1400	1400	1400	1400	130	20000	-
1.6	0.25	1.4	1650	1.5	1035	IE4	BG70G20-../S4E06MA4	0.14	0.48	0.95	1.4	1.7	1650	1650	1650	1650	1650	130	20000	-
1.6	0.25	1.2	1900	1.3	1193	IE4	BG70G20-../S4E06MA4	0.12	0.41	0.8	1.2	1.5	1900	1900	1900	1900	1900	130	20000	-
1.6	0.25	1	2200	1.1	1389	IE4	BG70G20-../S4E06MA4	0.1	0.35	0.7	1	1.2	2200	2200	2200	2200	2200	130	20000	-
1.6	0.25	0.95	2450	1	1543	IE4	BG70G20-../S4E06MA4	0.095	0.32	0.6	0.95	1.1	2450	2450	2450	2450	2450	130	20000	-
1.6	0.25	0.9	2650	0.94	1666	IE4	BG70G20-../S4E06MA4	0.09	0.3	0.6	0.9	1	2650	2650	2650	2650	2650	130	20000	-

MN = 2.4 Nm (PN = 0.37 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.4	0.37	560	6.3	1.4	2.64	IE4	BG05-../S4E06LA4	56	189	375	560	680	6.3	6.3	6.3	6.3	6.3	8.5	420	-
2.4	0.37	560	6.3	1.4	2.64	IE1	BG05-../SSE06MA4	56	189	375	560	680	4.75	5.2	5.8	6.3	6.3	8.5	420	-
2.4	0.37	440	8.1	1.2	3.38	IE4	BG05-../S4E06LA4	44	147	295	440	530	8.1	8.1	8.1	8.1	8.1	8.5	460	-
2.4	0.37	440	8.1	1.2	3.38	IE1	BG05-../SSE06MA4	44	147	295	440	530	6	6.7	7.4	8.1	8.1	8.5	460	-
2.4	0.37	325	11	1.1	4.59	IE4	BG05-../S4E06LA4	32.5	108	215	325	390	11	11	11	11	11	8.5	490	-
2.4	0.37	325	11	1.1	4.59	IE1	BG05-../SSE06MA4	32.5	108	215	325	390	8.2	9.1	10	11	11	8.5	490	-
2.4	0.37	270	13.1	1.1	5.46	IE1	BG05-../SSE06MA4	27	91	183	270	325	9.8	10.9	12	13.1	13.1	8.5	490	-
2.4	0.37	270	13.1	1.1	5.46	IE4	BG05-../S4E06LA4	27	91	183	270	325	13.1	13.1	13.1	13.1	13.1	8.5	490	-
2.4	0.37	245	14.6	1.2	6.09	IE4	BG05-../S4E06LA4	24.5	82	164	245	295	14.6	14.6	14.6	14.6	14.6	8.5	480	-
2.4	0.37	245	14.6	1.2	6.09	IE1	BG05-../SSE06MA4	24.5	82	164	245	295	10.9	12.1	13.3	14.6	14.6	8.5	480	-
2.4	0.37	225	15.8	1	6.6	IE4	BG05-../S4E06LA4	22.5	75	151	225	270	15.8	15.8	15.8	15.8	15.8	8.5	510	-
2.4	0.37	225	15.9	1.1	6.64	IE1	BG05-../SSE06MA4	22.5	75	150	225	270	11.9	13.2	14.6	15.9	15.9	8.5	500	-
2.4	0.37	225	15.9	1.1	6.64	IE4	BG05-../SSE06MA4	22.5	75	150	225	270	15.9	15.9	15.9	15.9	15.9	8.5	500	-
2.4	0.37	225	15.8	1	6.6	IE1	BG05-../SSE06MA4	22.5	75	151	225	270	11.8	13.1	14.5	15.8	15.8	8.5	510	-
2.4	0.37	192	18.7	0.96	7.8	IE4	BG05-../S4E06LA4	19	64	128	192	230	18.7	18.7	18.7	18.7	18.7	8.5	530	-
2.4	0.37	192	18.7	0.96	7.8	IE1	BG05-../SSE06MA4	19	64	128	192	230	14	15.6	17.1	18.7	18.7	8.5	530	-
2.4	0.37	184	19.5	0.92	8.15	IE4	BG05-../S4E06LA4	18	61	122	184	220	19.5	19.5	19.5	19.5	19.5	8.5	510	-
2.4	0.37	184	19.5	0.92	8.15	IE1	BG05-../SSE06MA4	18	61	122	184	220	14.6	16.3	17.9	19.5	19.5	8.5	510	-
2.4	0.37	176	20	0.93	8.51	IE4	BG05-../S4E06LA4	17.5	58	117	176	210	20	20	20	20	20	8.5	550	-
2.4	0.37	176	20	0.93	8.51	IE1	BG05-../SSE06MA4	17.5	58	117	176	210	15.3	17	18.7	20	20	8.5	550	-
2.4	0.37	395	9	2.2	3.78	IE4	BG06-../S4E06LA4	39.5	132	260	395	475	9	9	9	9	9	9.5	520	-
2.4	0.37	395	9	2.2	3.78	IE1	BG06-../SSE06MA4	39.5	132	260	395	475	6.8	7.5	8.3	9				

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.37 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [>1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	1500	1800	150	500	1000	1500	1800				
2.4	0.37	86	41.5	0.91	17.4	IE4	BG06-..S4E06LA4	8.6	28.5	57	86	103	41.5	41.5	41.5	41.5	41.5	9.5	760	-	
2.4	0.37	86	41.5	0.91	17.4	IE1	BG06-..SSE06MA4	8.6	28.5	57	86	103	31	34.5	38	41.5	41.5	9.5	760	-	
2.4	0.37	79	45.5	0.88	18.98	IE4	BG06-..S4E06LA4	7.9	26	52	79	94	45.5	45.5	45.5	45.5	45.5	9.5	770	-	
2.4	0.37	79	45.5	0.88	18.98	IE1	BG06-..SSE06MA4	7.9	26	52	79	94	34	37.5	41.5	45.5	45.5	9.5	770	-	
2.4	0.37	72	49.5	0.8	20.82	IE1	BG06-..SSE06MA4	7.2	24	48	72	86	37	41.5	45.5	49.5	49.5	49.5	9.5	800	-
2.4	0.37	72	49.5	0.8	20.82	IE4	BG06-..S4E06LA4	7.2	24	48	72	86	49.5	49.5	49.5	49.5	49.5	9.5	800	-	
2.4	0.37	92	38.5	3	16.15	IE4	BG10-..S4E06LA4	9.2	30.5	61	92	111	38.5	38.5	38.5	38.5	38.5	13	1140	1590	
2.4	0.37	92	38.5	3	16.15	IE1	BG10-..SSE06MA4	9.2	30.5	61	92	111	29	32	35.5	38.5	38.5	13	1140	1590	
2.4	0.37	81	44	2.7	18.51	IE4	BG10-..S4E06LA4	8.1	27	54	81	97	44	44	44	44	44	13	1210	1690	
2.4	0.37	81	44	2.7	18.51	IE1	BG10-..SSE06MA4	8.1	27	54	81	97	33	37	40.5	44	44	13	1210	1690	
2.4	0.37	73	49	2.4	20.51	IE1	BG10-..SSE06MA4	7.3	24	48.5	73	87	36.5	41	45	49	49	13	1290	1800	
2.4	0.37	73	49	2.4	20.51	IE4	BG10-..S4E06LA4	7.3	24	48.5	73	87	49	49	49	49	49	13	1290	1800	
2.4	0.37	68	52	2.3	22.04	IE1	BG10-..SSE06MA4	6.8	22.5	45	68	81	39.5	44	48	52	52	13	1330	1860	
2.4	0.37	68	52	2.3	22.04	IE4	BG10-..S4E06LA4	6.8	22.5	45	68	81	52	52	52	52	52	13	1330	1860	
2.4	0.37	61	58	2	24.42	IE1	BG10-..SSE06MA4	6.1	20	40.5	61	73	43.5	48.5	53	58	58	13	1410	1970	
2.4	0.37	61	58	2	24.42	IE4	BG10-..S4E06LA4	6.1	20	40.5	61	73	58	58	58	58	58	13	1410	1970	
2.4	0.37	57	63	1.9	26.26	IE1	BG10-..SSE06MA4	5.7	19	38	57	68	47	52	57	63	63	13	1460	2000	
2.4	0.37	57	63	1.9	26.26	IE4	BG10-..S4E06LA4	5.7	19	38	57	68	63	63	63	63	63	13	1460	2000	
2.4	0.37	51	69	1.7	29.09	IE1	BG10-..SSE06MA4	5.1	17	34	51	61	52	58	63	69	69	13	1540	2150	
2.4	0.37	51	69	1.7	29.09	IE4	BG10-..S4E06LA4	5.1	17	34	51	61	69	69	69	69	69	13	1540	2150	
2.4	0.37	47.5	75	1.6	31.52	IE4	BG10-..S4E06LA4	4.7	15.5	31.5	47.5	57	75	75	75	75	75	13	1600	2200	
2.4	0.37	47.5	75	1.6	31.52	IE1	BG10-..SSE06MA4	4.7	15.5	31.5	47.5	57	56	63	69	75	75	13	1600	2200	
2.4	0.37	42.5	83	1.4	34.92	IE4	BG10-..S4E06LA4	4.2	14	28.5	42.5	51	83	83	83	83	83	13	1690	2350	
2.4	0.37	42.5	83	1.4	34.92	IE1	BG10-..SSE06MA4	4.2	14	28.5	42.5	51	62	69	76	83	83	13	1690	2350	
2.4	0.37	37.5	95	1.3	39.7	IE1	BG10-..SSE06MA4	3.7	12.5	25	37.5	45	71	79	87	95	95	13	1780	2450	
2.4	0.37	37.5	95	1.3	39.7	IE4	BG10-..S4E06LA4	3.7	12.5	25	37.5	45	95	95	95	95	95	13	1780	2450	
2.4	0.37	34	105	1.1	43.99	IE1	BG10-..SSE06MA4	3.4	11	22.5	34	40.5	79	87	96	105	105	13	1880	2600	
2.4	0.37	34	105	1.1	43.99	IE4	BG10-..S4E06LA4	3.4	11	22.5	34	40.5	105	105	105	105	105	13	1880	2600	
2.4	0.37	32	111	1.1	46.55	IE4	BG10-..S4E06LA4	3.2	10.5	21	32	38.5	111	111	111	111	111	13	1920	2650	
2.4	0.37	32	111	1.1	46.55	IE1	BG10-..SSE06MA4	3.2	10.5	21	32	38.5	83	93	102	111	111	13	1920	2650	
2.4	0.37	29	123	0.97	51.57	IE4	BG10-..S4E06LA4	2.9	9.6	19	29	34.5	123	123	123	123	123	13	2000	2800	
2.4	0.37	29	123	0.97	51.57	IE1	BG10-..SSE06MA4	2.9	9.6	19	29	34.5	92	103	113	123	123	13	2000	2800	
2.4	0.37	26	137	0.87	57.48	IE4	BG10-..S4E06LA4	2.6	8.6	17	26	31	137	137	137	137	137	13	2000	2800	
2.4	0.37	26	137	0.87	57.48	IE1	BG10-..SSE06MA4	2.6	8.6	17	26	31	103	114	126	137	137	13	2000	2800	
2.4	0.37	55	64	2.3	27.08	IE1	BG15-..SSE06MA4	5.5	18	36.5	55	66	48.5	54	59	64	64	13	3000	6000	
2.4	0.37	55	64	2.3	27.08	IE4	BG15-..S4E06LA4	5.5	18	36.5	55	66	64	64	64	64	64	13	3000	6000	
2.4	0.37	49.5	72	2.1	30.08	IE4	BG15-..S4E06LA4	4.9	16.5	33	49.5	59	72	72	72	72	72	13	3000	6000	
2.4	0.37	49.5	72	2.1	30.08	IE1	BG15-..SSE06MA4	4.9	16.5	33	49.5	59	54	60	66	72	72	13	3000	6000	
2.4	0.37	43.5	82	1.8	34.2	IE1	BG15-..SSE06MA4	4.3	14.5	29	43.5	52	61	68	75	82	82	13	3000	6000	
2.4	0.37	43.5	82	1.8	34.2	IE4	BG15-..S4E06LA4	4.3	14.5	29	43.5	52	82	82	82	82	82	13	3000	6000	
2.4	0.37	39.5	90	1.6	37.9	IE1	BG15-..SSE06MA4	3.9	13	26	39.5	47	68	75	83	90	90	13	3000	6000	
2.4	0.37	39.5	90	1.6	37.9	IE4	BG15-..S4E06LA4	3.9	13	26	39.5	47	90	90	90	90	90	13	3000	6000	
2.4	0.37	53	66	3	27.85	IE1	BG20-..SSE06MA4	5.3	17.5	35.5	53	64	50	55	61	66	66	16	3800	-	
2.4	0.37	53	66	3	27.85	IE4	BG20-..S4E06LA4	5.3	17.5	35.5	53	64	66	66	66	66	66	16	3800	-	
2.4	0.37	48	74	2.7	30.94	IE1	BG20-..SSE06MA4	4.8	16	32	48	58	55	61	68	74	74	16	4000	-	
2.4	0.37	48	74	2.7	30.94	IE4	BG20-..S4E06LA4	4.8	16	32	48	58	74	74	74	74	74	16	4000	-	
2.4	0.37	45	79	2.5	33.33	IE4	BG20-..S4E06LA4	4.5	15	30	45	54	79	79	79	79	79	16	4100	-	
2.4	0.37	45	79	2.5	33.33	IE1	BG20-..SSE06MA4	4.5	15	30	45	54	59	66	73	79	79	16	4100	-	
2.4	0.37	40.5	88	2.3	37.02	IE4	BG20-..S4E06LA4	4	13.5	27	40.5	48.5	88	88	88	88	88	16	4300	-	
2.4	0.37	40.5	88	2.3	37.02	IE1	BG20-..SSE06MA4	4	13.5	27	40.5	48.5	66	74	81	88	88	16	4300	-	
2.4	0.37	35.5	100	2	41.76	IE1	BG20-..SSE06MA4	3.5	11.5	23.5	35.5	43	75	83	91	100	100	16	4500	-	
2.4	0.37	35.5	100	2	41.76	IE4	BG20-..S4E06LA4	3.5	11.5	23.5	35.5	43	100	100	100	100	100	16	4500	-	
2.4	0.37	32	111	1.8	46.38	IE4	BG20-..S4E06LA4	3.2	10.5	21.5	32	38.5	111	111	111	111	111	16	4700	-	
2.4	0.37	31	115	1.7	47.92	IE1	BG20-..SSE06MA4	3.1	10	20.5	31	37.5	86	95	105	115	115	16	4750	-</	

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.37 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [-]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.4	0.37	31.5	113	2.7	47.11	IE4	BG30-..S4E06LA4	3.1	10.5	21	31.5	38	113	113	113	113	113	20	6000	-
2.4	0.37	31.5	113	2.7	47.11	IE1	BG30-..SSE06MA4	3.1	10.5	21	31.5	38	84	94	103	113	113	20	6000	-
2.4	0.37	28.5	125	2.4	52.44	IE1	BG30-..SSE06MA4	2.8	9.5	19	28.5	34	94	104	115	125	125	20	6000	-
2.4	0.37	28.5	125	2.4	52.44	IE4	BG30-..S4E06LA4	2.8	9.5	19	28.5	34	125	125	125	125	125	20	6000	-
2.4	0.37	25.5	139	2.1	58.18	IE1	BG30-..SSE06MA4	2.5	8.5	17	25.5	30.5	104	116	127	139	139	20	6000	-
2.4	0.37	25.5	139	2.1	58.18	IE4	BG30-..S4E06LA4	2.5	8.5	17	25.5	30.5	139	139	139	139	139	20	6000	-
2.4	0.37	24.5	145	2.1	60.79	IE4	BG30-..S4E06LA4	2.4	8.2	16	24.5	29.5	145	145	145	145	145	20	6000	-
2.4	0.37	24.5	145	2.1	60.79	IE1	BG30-..SSE06MA4	2.4	8.2	16	24.5	29.5	109	121	133	145	145	20	6000	-
2.4	0.37	22	161	1.9	67.44	IE4	BG30-..S4E06LA4	2.2	7.4	14.5	22	26.5	161	161	161	161	161	20	6000	-
2.4	0.37	22	161	1.9	67.44	IE1	BG30-..SSE06MA4	2.2	7.4	14.5	22	26.5	121	134	148	161	161	20	6000	-
2.4	0.37	22.5	157	1.7	65.79	IE4	BG30Z-..S4E06LA4	2.2	7.5	15	22.5	27	157	157	157	157	157	22	6000	-
2.4	0.37	22.5	157	1.7	65.79	IE1	BG30Z-..SSE06MA4	2.2	7.5	15	22.5	27	118	131	144	157	157	22	6000	-
2.4	0.37	20	176	1.7	73.51	IE1	BG30Z-..SSE06MA4	2	6.8	13.5	20	24	132	147	161	176	176	22	6000	-
2.4	0.37	20	176	1.7	73.51	IE4	BG30Z-..S4E06LA4	2	6.8	13.5	20	24	176	176	176	176	176	22	6000	-
2.4	0.37	18	195	1.5	81.55	IE1	BG30Z-..SSE06MA4	1.8	6.1	12	18	22	146	163	179	195	195	22	6000	-
2.4	0.37	18	195	1.5	81.55	IE4	BG30Z-..S4E06LA4	1.8	6.1	12	18	22	195	195	195	195	195	22	6000	-
2.4	0.37	17	205	1.5	86.13	IE4	BG30Z-..S4E06LA4	1.7	5.8	11.5	17	20.5	205	205	205	205	205	22	6000	-
2.4	0.37	17	205	1.5	86.13	IE1	BG30Z-..SSE06MA4	1.7	5.8	11.5	17	20.5	155	172	189	205	205	22	6000	-
2.4	0.37	15.5	225	1.3	95.55	IE4	BG30Z-..S4E06LA4	1.5	5.2	10	15.5	18.5	225	225	225	225	225	22	6000	-
2.4	0.37	15.5	225	1.3	95.55	IE1	BG30Z-..SSE06MA4	1.5	5.2	10	15.5	18.5	171	191	210	225	225	22	6000	-
2.4	0.37	13.5	260	1.1	109.6	IE4	BG30Z-..S4E06LA4	1.3	4.5	9.1	13.5	16	260	260	260	260	260	22	6000	-
2.4	0.37	13.5	260	1.1	109.6	IE1	BG30Z-..SSE06MA4	1.3	4.5	9.1	13.5	16	197	215	240	260	260	22	6000	-
2.4	0.37	12	290	1	121.6	IE1	BG30Z-..SSE06MA4	1.2	4.1	8.2	12	14.5	215	240	265	290	290	22	6000	-
2.4	0.37	12	290	1	121.6	IE4	BG30Z-..S4E06LA4	1.2	4.1	8.2	12	14.5	290	290	290	290	290	22	6000	-
2.4	0.37	11.5	305	0.97	128.5	IE4	BG30Z-..S4E06LA4	1.1	3.8	7.7	11.5	14	305	305	305	305	305	22	6000	-
2.4	0.37	11.5	305	0.97	128.5	IE1	BG30Z-..SSE06MA4	1.1	3.8	7.7	11.5	14	230	255	280	305	305	22	6000	-
2.4	0.37	10.5	340	0.88	142.5	IE1	BG30Z-..SSE06MA4	1	3.5	7	10.5	12.5	255	285	310	340	340	22	6000	-
2.4	0.37	10.5	340	0.88	142.5	IE4	BG30Z-..S4E06LA4	1	3.5	7	10.5	12.5	340	340	340	340	340	22	6000	-
2.4	0.37	9.9	360	0.83	151.5	IE4	BG30Z-..S4E06LA4	0.95	3.3	6.6	9.9	11.5	360	360	360	360	360	22	6000	-
2.4	0.37	9.9	360	0.83	151.5	IE1	BG30Z-..SSE06MA4	0.95	3.3	6.6	9.9	11.5	270	300	330	360	360	22	6000	-
2.4	0.37	22	162	2.6	67.74	IE1	BG40Z-..SSE06MA4	2.2	7.3	14.5	22	26.5	121	135	149	162	162	38	7000	-
2.4	0.37	22	162	2.6	67.74	IE4	BG40Z-..S4E06LA4	2.2	7.3	14.5	22	26.5	162	162	162	162	162	38	7000	-
2.4	0.37	19.5	180	2.4	75.19	IE1	BG40Z-..SSE06MA4	1.9	6.6	13	19.5	23.5	135	150	165	180	180	38	7000	-
2.4	0.37	19.5	180	2.4	75.19	IE4	BG40Z-..S4E06LA4	1.9	6.6	13	19.5	23.5	180	180	180	180	180	38	7000	-
2.4	0.37	18	196	2.2	82	IE1	BG40Z-..SSE06MA4	1.8	6	12	18	21.5	147	164	180	196	196	38	7000	-
2.4	0.37	18	196	2.2	82	IE4	BG40Z-..S4E06LA4	1.8	6	12	18	21.5	196	196	196	196	196	38	7000	-
2.4	0.37	16	215	1.9	91.02	IE4	BG40Z-..S4E06LA4	1.6	5.4	10.5	16	19.5	215	215	215	215	215	38	7000	-
2.4	0.37	16	215	1.9	91.02	IE1	BG40Z-..SSE06MA4	1.6	5.4	10.5	16	19.5	163	182	200	215	215	38	7000	-
2.4	0.37	15	230	1.8	96.86	IE1	BG40Z-..SSE06MA4	1.5	5.1	10	15	18.5	174	193	210	230	230	38	7000	-
2.4	0.37	13.5	255	1.6	107.5	IE4	BG40Z-..S4E06LA4	1.3	4.6	9.3	13.5	16.5	255	255	255	255	255	38	7000	-
2.4	0.37	13.5	255	1.6	107.5	IE1	BG40Z-..SSE06MA4	1.3	4.6	9.3	13.5	16.5	193	215	235	255	255	38	7000	-
2.4	0.37	12	290	1.5	121.3	IE4	BG40Z-..S4E06LA4	1.2	4.1	8.2	12	14.5	290	290	290	290	290	38	7000	-
2.4	0.37	12	290	1.5	121.3	IE1	BG40Z-..SSE06MA4	1.2	4.1	8.2	12	14.5	215	240	265	290	290	38	7000	-
2.4	0.37	11	320	1.3	134.6	IE4	BG40Z-..S4E06LA4	1.1	3.7	7.4	11	13	320	320	320	320	320	38	7000	-
2.4	0.37	10.5	335	1.3	141.4	IE1	BG40Z-..SSE06MA4	1	3.5	7	10.5	12.5	250	280	310	335	335	38	7000	-
2.4	0.37	10.5	335	1.3	141.4	IE4	BG40Z-..S4E06LA4	1	3.5	7	10.5	12.5	335	335	335	335	335	38	7000	-
2.4	0.37	9.5	375	1.1	156.9	IE1	BG40Z-..SSE06MA4	0.95	3.1	6.3	9.5	11	280	310	345	375	375	38	7000	-
2.4	0.37	9.5	375	1.1	156.9	IE4	BG40Z-..S4E06LA4	0.95	3.1	6.3	9.5	11	375	375	375	375	375	38	7000	-
2.4	0.37	9	395	1.1	166.1	IE1	BG40Z-..SSE06MA4	0.9	3	6	9	10.5	295	330	365	395	395	38	7000	-
2.4	0.37	9	395	1.1	166.1	IE4	BG40Z-..S4E06LA4	0.9	3	6	9	10.5	395	395	395	395	395	38	7000	-
2.4	0.37	8.1	440	0.96	184.4	IE4	BG40Z-..S4E06LA4	0.8	2.7	5.4	8.1	9.7	440	440	440	440	440	38	7000	-
2.4	0.37	8.1	440	0.96	184.4	IE1	BG40Z-..SSE06MA4	0.8	2.7	5.4	8.1	9.7	330	365	405	440	440	38	7000	-
2.4	0.37	7.5	475	0.89	199.9	IE1	BG40Z-..SSE06MA4	0.75	2.5	5	7.5	9	355	395	435	475	475	38	7000	-
2.4	0.37	7.5	475	0.89	199.9	IE4	BG40Z-..S4E06													

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.37 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.4	0.37	4.2	840	0.82	351.7	IE1	BG50G10-./SSE06MA4	0.42	1.4	2.8	4.2	5.1	630	700	770	840	840	51	10000	-
2.4	0.37	4.2	840	0.82	351.7	IE4	BG50G10-./S4E06LA4	0.42	1.4	2.8	4.2	5.1	840	840	840	840	840	51	10000	-
2.4	0.37	5.4	660	2	276.2	IE4	BG60G20-./S4E06LA4	0.5	1.8	3.6	5.4	6.5	660	660	660	660	660	100	16000	-
2.4	0.37	5.4	660	2	276.2	IE1	BG60G20-./SSE06MA4	0.5	1.8	3.6	5.4	6.5	495	550	600	660	660	100	16000	-
2.4	0.37	4.9	730	1.8	306.1	IE4	BG60G20-./S4E06LA4	0.49	1.6	3.2	4.9	5.8	730	730	730	730	730	100	16000	-
2.4	0.37	4.9	730	1.8	306.1	IE1	BG60G20-./SSE06MA4	0.49	1.6	3.2	4.9	5.8	550	610	670	730	730	100	16000	-
2.4	0.37	4.4	800	1.6	334.3	IE4	BG60G20-./S4E06LA4	0.44	1.4	2.9	4.4	5.3	800	800	800	800	800	100	16000	-
2.4	0.37	4.4	800	1.6	334.3	IE1	BG60G20-./SSE06MA4	0.44	1.4	2.9	4.4	5.3	600	660	730	800	800	100	16000	-
2.4	0.37	4	880	1.5	370.5	IE4	BG60G20-./S4E06LA4	0.4	1.3	2.6	4	4.8	880	880	880	880	880	100	16000	-
2.4	0.37	4	880	1.5	370.5	IE1	BG60G20-./SSE06MA4	0.4	1.3	2.6	4	4.8	660	740	810	880	880	100	16000	-
2.4	0.37	3.4	1040	1.2	437.3	IE4	BG60G20-./S4E06LA4	0.34	1.1	2.2	3.4	4.1	1040	1040	1040	1040	1040	100	16000	-
2.4	0.37	3.4	1040	1.2	437.3	IE1	BG60G20-./SSE06MA4	0.34	1.1	2.2	3.4	4.1	780	870	960	1040	1040	100	16000	-
2.4	0.37	2.9	1210	1.1	504.9	IE1	BG60G20-./SSE06MA4	0.29	0.95	1.9	2.9	3.5	900	1000	1110	1210	1210	100	16000	-
2.4	0.37	2.9	1210	1.1	504.9	IE4	BG60G20-./S4E06LA4	0.29	0.95	1.9	2.9	3.5	1210	1210	1210	1210	1210	100	16000	-
2.4	0.37	2.6	1340	0.97	559.5	IE4	BG60G20-./S4E06LA4	0.26	0.85	1.7	2.6	3.2	1340	1340	1340	1340	1340	100	16000	-
2.4	0.37	2.6	1340	0.97	559.5	IE1	BG60G20-./SSE06MA4	0.26	0.85	1.7	2.6	3.2	1000	1110	1230	1340	1340	100	16000	-
2.4	0.37	2.3	1560	0.83	651.3	IE1	BG60G20-./SSE06MA4	0.23	0.75	1.5	2.3	2.7	1170	1300	1430	1560	1560	100	16000	-
2.4	0.37	2.3	1560	0.83	651.3	IE4	BG60G20-./S4E06LA4	0.23	0.75	1.5	2.3	2.7	1560	1560	1560	1560	1560	100	16000	-
2.4	0.37	3.8	930	2.7	387.6	IE1	BG70G20-./SSE06MA4	0.38	1.2	2.5	3.8	4.6	690	770	850	930	930	130	20000	-
2.4	0.37	3.8	930	2.7	387.6	IE4	BG70G20-./S4E06LA4	0.38	1.2	2.5	3.8	4.6	930	930	930	930	930	130	20000	-
2.4	0.37	3.5	1000	2.5	417.8	IE4	BG70G20-./S4E06LA4	0.35	1.1	2.3	3.5	4.3	1000	1000	1000	1000	1000	130	20000	-
2.4	0.37	3.5	1000	2.5	417.8	IE1	BG70G20-./SSE06MA4	0.35	1.1	2.3	3.5	4.3	750	830	910	1000	1000	130	20000	-
2.4	0.37	3	1190	2.1	495.9	IE4	BG70G20-./S4E06LA4	0.3	1	2	3	3.6	1190	1190	1190	1190	1190	130	20000	-
2.4	0.37	3	1190	2.1	495.9	IE1	BG70G20-./SSE06MA4	0.3	1	2	3	3.6	890	990	1090	1190	1190	130	20000	-
2.4	0.37	2.5	1380	1.8	577.3	IE1	BG70G20-./SSE06MA4	0.25	0.85	1.7	2.5	3.1	1030	1150	1270	1380	1380	130	20000	-
2.4	0.37	2.5	1380	1.8	577.3	IE4	BG70G20-./S4E06LA4	0.25	0.85	1.7	2.5	3.1	1380	1380	1380	1380	1380	130	20000	-
2.4	0.37	2.2	1590	1.6	665.8	IE4	BG70G20-./S4E06LA4	0.22	0.75	1.5	2.2	2.7	1590	1590	1590	1590	1590	130	20000	-
2.4	0.37	2.2	1590	1.6	665.8	IE1	BG70G20-./SSE06MA4	0.22	0.75	1.5	2.2	2.7	1190	1330	1460	1590	1590	130	20000	-
2.4	0.37	1.8	1890	1.3	790.2	IE1	BG70G20-./SSE06MA4	0.18	0.6	1.2	1.8	2.2	1420	1580	1730	1890	1890	130	20000	-
2.4	0.37	1.8	1890	1.3	790.2	IE4	BG70G20-./S4E06LA4	0.18	0.6	1.2	1.8	2.2	1890	1890	1890	1890	1890	130	20000	-
2.4	0.37	1.7	2100	1.2	877.6	IE4	BG70G20-./S4E06LA4	0.17	0.55	1.1	1.7	2	2100	2100	2100	2100	2100	130	20000	-
2.4	0.37	1.7	2100	1.2	877.6	IE1	BG70G20-./SSE06MA4	0.17	0.55	1.1	1.7	2	1570	1750	1930	2100	2100	130	20000	-
2.4	0.37	1.4	2450	1	1035	IE1	BG70G20-./SSE06MA4	0.14	0.48	0.95	1.4	1.7	1860	2050	2250	2450	2450	130	20000	-
2.4	0.37	1.4	2450	1	1035	IE4	BG70G20-./S4E06LA4	0.14	0.48	0.95	1.4	1.7	2450	2450	2450	2450	2450	130	20000	-
2.4	0.37	1.2	2850	0.87	1193	IE4	BG70G20-./S4E06LA4	0.12	0.41	0.8	1.2	1.5	2850	2850	2850	2850	2850	130	20000	-
2.4	0.37	1.2	2850	0.87	1193	IE1	BG70G20-./SSE06MA4	0.12	0.41	0.8	1.2	1.5	2100	2350	2600	2850	2850	130	20000	-

MN = 2.6 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	560	6.8	1.3	2.64	IE4	BG05-./S4E06LA4	56	189	375	560	680	6.6	6.8	6.8	6.8	6.8	8.5	420	-
2.6	0.4	440	8.7	1.1	3.38	IE4	BG05-./S4E06LA4	44	147	295	440	530	8.4	8.7	8.7	8.7	8.7	8.5	460	-
2.6	0.4	325	11.9	1	4.59	IE4	BG05-./S4E06LA4	32.5	108	215	325	390	11.4	11.9	11.9	11.9	11.9	8.5	490	-
2.6	0.4	270	14.1	0.99	5.46	IE4	BG05-./S4E06LA4	27	91	183	270	325	13.6	14.1	14.1	14.1	14.1	8.5	490	-
2.6	0.4	245	15.8	1.1	6.09	IE4	BG05-./S4E06LA4	24.5	82	164	245	295	15.2	15.8	15.8	15.8	15.8	8.5	480	-
2.6	0.4	225	17.1	0.93	6.6	IE4	BG05-./S4E06LA4	22.5	75	151	225	270	16.5	17.1	17.1	17.1	17.1	8.5	510	-
2.6	0.4	225	17.2	0.98	6.64	IE4	BG05-./S4E06LA4	22.5	75	150	225	270	16.5	17.2	17.2	17.2	17.2	8.5	500	-
2.6	0.4	192	20	0.89	7.8	IE4	BG05-./S4E06LA4	19	64	128	192	230	19.5	20	20	20	20	8.5	530	-
2.6	0.4	184	21	0.85	8.15	IE4	BG05-./S4E06LA4	18	61	122	184	220	20	21	21	21	21	8.5	510	-
2.6	0.4	101	38	0.88	14.78	IE4	BG0													

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.6 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	51	75	1.6	29.09	IE4	BG10-./S4E06LA4	5.1	17	34	51	61	72	75	75	75	75	13	1540	2150
2.6	0.4	47.5	81	1.5	31.52	IE4	BG10-./S4E06LA4	4.7	15.5	31.5	47.5	57	78	81	81	81	13	1600	2200	
2.6	0.4	42.5	90	1.3	34.92	IE4	BG10-./S4E06LA4	4.2	14	28.5	42.5	51	87	90	90	90	13	1690	2350	
2.6	0.4	37.5	103	1.2	39.7	IE4	BG10-./S4E06LA4	3.7	12.5	25	37.5	45	99	103	103	103	103	13	1780	2450
2.6	0.4	34	114	1	43.99	IE4	BG10-./S4E06LA4	3.4	11	22.5	34	40.5	109	114	114	114	114	13	1880	2600
2.6	0.4	32	121	0.99	46.55	IE4	BG10-./S4E06LA4	3.2	10.5	21	32	38.5	116	121	121	121	121	13	1920	2650
2.6	0.4	29	134	0.89	51.57	IE4	BG10-./S4E06LA4	2.9	9.6	19	29	34.5	128	134	134	134	134	13	2000	2800
2.6	0.4	26	149	0.8	57.48	IE4	BG10-./S4E06LA4	2.6	8.6	17	26	31	143	149	149	149	149	13	2000	2800
2.6	0.4	55	70	2.1	27.08	IE4	BG15-./S4E06LA4	5.5	18	36.5	55	66	67	70	70	70	70	13	3000	6000
2.6	0.4	49.5	78	1.9	30.08	IE4	BG15-./S4E06LA4	4.9	16.5	33	49.5	59	75	78	78	78	78	13	3000	6000
2.6	0.4	43.5	88	1.7	34.2	IE4	BG15-./S4E06LA4	4.3	14.5	29	43.5	52	85	88	88	88	88	13	3000	6000
2.6	0.4	39.5	98	1.5	37.9	IE4	BG15-./S4E06LA4	3.9	13	26	39.5	47	94	98	98	98	98	13	3000	6000
2.6	0.4	58	67	3	25.79	IE4	BG20-./S4E06LA4	5.8	19	38.5	58	69	64	67	67	67	67	16	3700	-
2.6	0.4	53	72	2.8	27.85	IE4	BG20-./S4E06LA4	5.3	17.5	35.5	53	64	69	72	72	72	72	16	3800	-
2.6	0.4	48	80	2.5	30.94	IE4	BG20-./S4E06LA4	4.8	16	32	48	58	77	80	80	80	80	16	4000	-
2.6	0.4	45	86	2.3	33.33	IE4	BG20-./S4E06LA4	4.5	15	30	45	54	83	86	86	86	86	16	4100	-
2.6	0.4	40.5	96	2.1	37.02	IE4	BG20-./S4E06LA4	4	13.5	27	40.5	48.5	92	96	96	96	96	16	4300	-
2.6	0.4	35.5	108	1.8	41.76	IE4	BG20-./S4E06LA4	3.5	11.5	23.5	35.5	43	104	108	108	108	108	16	4500	-
2.6	0.4	32	120	1.7	46.38	IE4	BG20-./S4E06LA4	3.2	10.5	21.5	32	38.5	115	120	120	120	120	16	4700	-
2.6	0.4	31	124	1.6	47.92	IE4	BG20-./S4E06LA4	3.1	10	20.5	31	37.5	119	124	124	124	124	16	4750	-
2.6	0.4	28	138	1.4	53.22	IE4	BG20-./S4E06LA4	2.8	9.3	18.5	28	33.5	133	138	138	138	138	16	4950	-
2.6	0.4	25	153	1.3	59.07	IE4	BG20-./S4E06LA4	2.5	8.4	16.5	25	30	147	153	153	153	153	16	5000	-
2.6	0.4	22.5	170	1.2	65.62	IE4	BG20-./S4E06LA4	2.2	7.6	15	22.5	27	164	170	170	170	170	16	5000	-
2.6	0.4	25.5	152	1.1	58.58	IE4	BG20Z-./S4E06LA4	2.5	8.5	17	25.5	30.5	146	152	152	152	152	16	5000	-
2.6	0.4	22	175	1.1	67.53	IE4	BG20Z-./S4E06LA4	2.2	7.4	14.5	22	26.5	168	175	175	175	175	16	5000	-
2.6	0.4	20	195	1	75	IE4	BG20Z-./S4E06LA4	2	6.6	13	20	24	187	195	195	195	195	16	5000	-
2.6	0.4	19	200	0.98	78.6	IE4	BG20Z-./S4E06LA4	1.9	6.3	12.5	19	22.5	196	200	200	200	200	16	5000	-
2.6	0.4	17	225	0.88	87.3	IE4	BG20Z-./S4E06LA4	1.7	5.7	11	17	20.5	215	225	225	225	225	16	5000	-
2.6	0.4	15.5	245	0.82	94.27	IE4	BG20Z-./S4E06LA4	1.5	5.3	10.5	15.5	19	235	245	245	245	245	16	5000	-
2.6	0.4	38	101	3	39.02	IE4	BG30-./S4E06LA4	3.8	12.5	25.5	38	46	97	101	101	101	101	20	5800	-
2.6	0.4	35	110	2.7	42.46	IE4	BG30-./S4E06LA4	3.5	11.5	23.5	35	42	106	110	110	110	110	20	5900	-
2.6	0.4	31.5	122	2.4	47.11	IE4	BG30-./S4E06LA4	3.1	10.5	21	31.5	38	117	122	122	122	122	20	6000	-
2.6	0.4	28.5	136	2.2	52.44	IE4	BG30-./S4E06LA4	2.8	9.5	19	28.5	34	131	136	136	136	136	20	6000	-
2.6	0.4	25.5	151	2	58.18	IE4	BG30-./S4E06LA4	2.5	8.5	17	25.5	30.5	145	151	151	151	151	20	6000	-
2.6	0.4	24.5	158	1.9	60.79	IE4	BG30-./S4E06LA4	2.4	8.2	16	24.5	29.5	151	158	158	158	158	20	6000	-
2.6	0.4	22	175	1.7	67.44	IE4	BG30-./S4E06LA4	2.2	7.4	14.5	22	26.5	168	175	175	175	175	20	6000	-
2.6	0.4	22.5	171	1.5	65.79	IE4	BG30Z-./S4E06LA4	2.2	7.5	15	22.5	27	164	171	171	171	171	22	6000	-
2.6	0.4	20	191	1.6	73.51	IE4	BG30Z-./S4E06LA4	2	6.8	13.5	20	24	183	191	191	191	191	22	6000	-
2.6	0.4	18	210	1.4	81.55	IE4	BG30Z-./S4E06LA4	1.8	6.1	12	18	22	200	210	210	210	210	22	6000	-
2.6	0.4	17	220	1.3	86.13	IE4	BG30Z-./S4E06LA4	1.7	5.8	11.5	17	20.5	215	220	220	220	220	22	6000	-
2.6	0.4	15.5	245	1.2	95.55	IE4	BG30Z-./S4E06LA4	1.5	5.2	10	15.5	18.5	235	245	245	245	245	22	6000	-
2.6	0.4	13.5	280	1.1	109.6	IE4	BG30Z-./S4E06LA4	1.3	4.5	9.1	13.5	16.5	275	275	275	275	275	20	6000	-
2.6	0.4	12	315	1.3	121.6	IE4	BG30Z-./S4E06LA4	1.2	4.1	8.2	12	14.5	300	315	315	315	315	22	6000	-
2.6	0.4	11	345	1.2	134.6	IE4	BG40Z-./S4E06LA4	1.1	3.7	7.4	11	13	335	345	345	345	345	38	7000	-
2.6	0.4	10.5	365	1.2	141.4	IE4	BG40Z-./S4E06LA4	1	3.5	7	10.5	12.5	350	365	365	365	365	38	7000	-
2.6	0.4	9.5	405	1	156.9	IE4	BG40Z-./S4E06LA4	0.95	3.1	6.3	9.5	11	390	405	405	405	405	38	7000	-
2.6	0.4	9	430	0.98	166.1	IE4	BG40Z-./S4E06LA4	0.9	3	6	9	10.5	415	430	430	430	430	38	7000	-
2.6	0.4	8.1	475	0.89	184.4	IE4	BG40Z-./S4E06LA4	0.8	2.7	5.4	8.1	9.7	460	475	475	475	475	38	7000	-
2.6	0.4	7.5	510	0.82	199.9	IE4	BG40Z-./S4E06LA4	0.75	2.5	5	7.5	9	495	510	510	510	510	38	7000	-
2.6	0.4	18.5	205	3	79.78	IE4	BG50Z-./S4E06LA4	1.8	6.2	12.5	18.5	22.5	199	205	205	205	205	47	10000	-
2.6	0.4	15.5	245	2.5	95.58	IE4	BG50Z-./S4E06LA4	1.5	5.2	10	15.5	18.5	235	245	245	245	245	47	10000	-
2.6	0.4	14	275	2.3	106	IE4	BG50Z-./S4E06LA4	1.4	4.7	9.4	14	16.5	265	275	275	275	275	47	10000	-
2.6	0.4	11.5	335	1.9	128.9	IE4	BG50Z-./S4E06LA4	1.1	3.8	7.7	11.5	13.5	320	335	335	335	335	47	10000	-
2.6	0.4	10	370	1.7	142.9	IE4	BG50Z-./S4E06LA4	1	3.4	6.9	10	12.5	355	370	370	370	370	47	10000	-
2.6	0.4	9	425	1.5	164.9	IE4	BG50Z-./S4E06LA4	0.9	3	6	9	10.5	410	425	425	425	425	47	10000	-

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.6 Nm (PN = 0.4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	2.6	1450	0.89	559.5	IE4	BG60G20-..S4E06LA4	0.26	0.85	1.7	2.6	3.2	1390	1450	1450	1450	1450	100	16000	-
2.6	0.4	4.5	850	2.9	328.4	IE4	BG70G20-..S4E06LA4	0.45	1.5	3	4.5	5.4	820	850	850	850	850	130	20000	-
2.6	0.4	3.8	1000	2.5	387.6	IE4	BG70G20-..S4E06LA4	0.38	1.2	2.5	3.8	4.6	960	1000	1000	1000	1000	130	20000	-
2.6	0.4	3.5	1080	2.3	417.8	IE4	BG70G20-..S4E06LA4	0.35	1.1	2.3	3.5	4.3	1040	1080	1080	1080	1080	130	20000	-
2.6	0.4	3	1280	1.9	495.9	IE4	BG70G20-..S4E06LA4	0.3	1	2	3	3.6	1230	1280	1280	1280	1280	130	20000	-
2.6	0.4	2.5	1500	1.7	577.3	IE4	BG70G20-..S4E06LA4	0.25	0.85	1.7	2.5	3.1	1440	1500	1500	1500	1500	130	20000	-
2.6	0.4	2.2	1730	1.4	665.8	IE4	BG70G20-..S4E06LA4	0.22	0.75	1.5	2.2	2.7	1660	1730	1730	1730	1730	130	20000	-
2.6	0.4	1.8	2050	1.2	790.2	IE4	BG70G20-..S4E06LA4	0.18	0.6	1.2	1.8	2.2	1970	2050	2050	2050	2050	130	20000	-
2.6	0.4	1.7	2250	1.1	877.6	IE4	BG70G20-..S4E06LA4	0.17	0.55	1.1	1.7	2	2150	2250	2250	2250	2250	130	20000	-
2.6	0.4	1.4	2650	0.93	1035	IE4	BG70G20-..S4E06LA4	0.14	0.48	0.95	1.4	1.7	2550	2650	2650	2650	2650	130	20000	-
2.6	0.4	1.2	3100	0.81	1193	IE4	BG70G20-..S4E06LA4	0.12	0.41	0.8	1.2	1.5	2950	3100	3100	3100	3100	130	20000	-

MN = 3.5 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
3.5	0.55	560	9.2	0.97	2.64	IE1	BG05-..SSE06LA4	56	189	375	560	680	6.6	7.6	9.2	9.2	9.2	8.5	420	-
3.5	0.55	440	11.8	0.85	3.38	IE1	BG05-..SSE06LA4	44	147	295	440	530	8.4	9.8	11.8	11.8	11.8	8.5	460	-
3.5	0.55	245	21	0.8	6.09	IE1	BG05-..SSE06LA4	24.5	82	164	245	295	15.2	17.6	21	21	21	8.5	480	-
3.5	0.55	395	13.2	1.5	3.78	IE1	BG06-..SSE06LA4	39.5	132	260	395	475	9.4	10.9	13.2	13.2	13.2	9.5	520	-
3.5	0.55	330	15.8	1.4	4.54	IE1	BG06-..SSE06LA4	33	110	220	330	395	11.3	13.1	15.8	15.8	15.8	9.5	530	-
3.5	0.55	250	20.5	1.2	5.96	IE1	BG06-..SSE06LA4	25	83	167	250	300	14.9	17.2	20.5	20.5	20.5	9.5	570	-
3.5	0.55	210	24.5	1.1	7.01	IE1	BG06-..SSE06LA4	21	71	142	210	255	17.5	20	24.5	24.5	24.5	9.5	580	-
3.5	0.55	178	29	0.95	8.39	IE1	BG06-..SSE06LA4	17.5	59	119	178	210	20.5	24	29	29	29	9.5	600	-
3.5	0.55	159	32.5	0.91	9.38	IE1	BG06-..SSE06LA4	15.5	53	106	159	191	23	27	32.5	32.5	32.5	9.5	640	-
3.5	0.55	146	35.5	0.86	10.24	IE1	BG06-..SSE06LA4	14.5	48.5	97	146	175	25.5	29.5	35.5	35.5	35.5	9.5	640	-
3.5	0.55	132	39	0.81	11.28	IE1	BG06-..SSE06LA4	13	44	88	132	159	28	32.5	39	39	39	9.5	670	-
3.5	0.55	125	41.5	2.5	11.92	IE1	BG10-..SSE06LA4	12.5	41.5	83	125	151	29.5	34.5	41.5	41.5	41.5	13	1030	1440
3.5	0.55	113	46	2.4	13.21	IE1	BG10-..SSE06LA4	11	37.5	75	113	136	33	38	46	46	46	13	1070	1490
3.5	0.55	102	51	2.2	14.58	IE1	BG10-..SSE06LA4	10	34	68	102	123	36	42	51	51	51	13	1100	1540
3.5	0.55	92	56	2.1	16.15	IE1	BG10-..SSE06LA4	9.2	30.5	61	92	111	40	46.5	56	56	56	13	1140	1590
3.5	0.55	81	64	1.9	18.51	IE1	BG10-..SSE06LA4	8.1	27	54	81	97	46	53	64	64	64	13	1210	1690
3.5	0.55	73	71	1.7	20.51	IE1	BG10-..SSE06LA4	7.3	24	48.5	73	87	51	59	71	71	71	13	1290	1800
3.5	0.55	68	77	1.6	22.04	IE1	BG10-..SSE06LA4	6.8	22.5	45	68	81	55	63	77	77	77	13	1330	1860
3.5	0.55	61	85	1.4	24.42	IE1	BG10-..SSE06LA4	6.1	20	40.5	61	73	61	70	85	85	85	13	1410	1970
3.5	0.55	57	91	1.3	26.26	IE1	BG10-..SSE06LA4	5.7	19	38	57	68	65	76	91	91	91	13	1460	2000
3.5	0.55	51	101	1.2	29.09	IE1	BG10-..SSE06LA4	5.1	17	34	51	61	72	84	101	101	101	13	1540	2150
3.5	0.55	47.5	110	1.1	31.52	IE1	BG10-..SSE06LA4	4.7	15.5	31.5	47.5	57	78	91	110	110	13	1600	2200	
3.5	0.55	42.5	122	0.98	34.92	IE1	BG10-..SSE06LA4	4.2	14	28.5	42.5	51	87	101	122	122	13	1690	2350	
3.5	0.55	37.5	138	0.86	39.7	IE1	BG10-..SSE06LA4	3.7	12.5	25	37.5	45	99	115	138	138	13	1780	2450	
3.5	0.55	55	94	1.6	27.08	IE1	BG15-..SSE06LA4	5.5	18	36.5	55	66	67	78	94	94	94	13	3000	6000
3.5	0.55	49.5	105	1.4	30.08	IE1	BG15-..SSE06LA4	4.9	16.5	33	49.5	59	75	87	105	105	13	3000	6000	
3.5	0.55	43.5	119	1.3	34.2	IE1	BG15-..SSE06LA4	4.3	14.5	29	43.5	52	85	99	119	119	13	3000	6000	
3.5	0.55	39.5	132	1.1	37.9	IE1	BG15-..SSE06LA4	3.9	13	26	39.5	47	94	109	132	132	13	3000	6000	
3.5	0.55	86	60	3	17.31	IE1	BG20-..SSE06LA4	8.6	28.5	57	86	103	43	50	60	60	60	16	3200	-
3.5	0.55	75	69	2.8	19.95	IE1	BG20-..SSE06LA4	7.5	25	50	75	90	49.5	57	69	69	69	16	3350	-
3.5	0.55	67	77	2.6	22.16	IE1	BG20-..SSE06LA4	6.7	22.5	45	67	81	55	64	77	77	77	16	3500	-
3.5	0.55	64	81	2.5	23.22	IE1	BG20-..SSE06LA4	6.4	21.5	43	64	77	58	67	81	81	81	16	3550	-
3.5	0.55	58	90	2.2	25.79	IE1	BG20-..SSE06LA4	5.8	19	38.5	58	69	64	74	90	90	90	16	3700	-
3.5	0.55	53	97	2.1	27.85	IE1	BG20-..SSE06LA4	5.3	17.5	35.5	53	64	69	80	97	97	97	16	3800	-
3.5	0.55	48	108	1.8	30.94	IE1	BG20-..SSE06LA4	4.8	16	32	48	58	77	89	108	108	108	16	4000	-
3.5	0.55	45	116	1.7	33.33	IE1	BG20-..SSE06LA4	4.5	15	30	45	54	83	96	116	116	116	16	4100	-
3.5	0.55	40.5	129	1.5	37.02	IE1														

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$


MN = 3.5 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
3.5	0.55	24.5	210	1.4	60.79	IE1	BG30-../SSE06LA4	2.4	8.2	16	24.5	29.5	151	176	210	210	210	20	6000	-
3.5	0.55	22	235	1.3	67.44	IE1	BG30-../SSE06LA4	2.2	7.4	14.5	22	26.5	168	195	235	235	235	20	6000	-
3.5	0.55	22.5	230	1.2	65.79	IE1	BG30Z-../SSE06LA4	2.2	7.5	15	22.5	27	164	190	230	230	230	22	6000	-
3.5	0.55	20	255	1.2	73.51	IE1	BG30Z-../SSE06LA4	2	6.8	13.5	20	24	183	210	255	255	255	22	6000	-
3.5	0.55	18	285	1.1	81.55	IE1	BG30Z-../SSE06LA4	1.8	6.1	12	18	22	200	235	285	285	285	22	6000	-
3.5	0.55	17	300	1	86.13	IE1	BG30Z-../SSE06LA4	1.7	5.8	11.5	17	20.5	215	245	300	300	300	22	6000	-
3.5	0.55	15.5	330	0.9	95.55	IE1	BG30Z-../SSE06LA4	1.5	5.2	10	15.5	18.5	235	275	330	330	330	22	6000	-
3.5	0.55	22	235	1.8	67.74	IE1	BG40Z-../SSE06LA4	2.2	7.3	14.5	22	26.5	169	196	235	235	235	38	7000	-
3.5	0.55	19.5	260	1.6	75.19	IE1	BG40Z-../SSE06LA4	1.9	6.6	13	19.5	23.5	187	215	260	260	260	38	7000	-
3.5	0.55	18	285	1.5	82	IE1	BG40Z-../SSE06LA4	1.8	6	12	18	21.5	205	235	285	285	285	38	7000	-
3.5	0.55	16	315	1.3	91.02	IE1	BG40Z-../SSE06LA4	1.6	5.4	10.5	16	19.5	225	260	315	315	315	38	7000	-
3.5	0.55	15	335	1.3	96.86	IE1	BG40Z-../SSE06LA4	1.5	5.1	10	15	18.5	240	280	335	335	335	38	7000	-
3.5	0.55	13.5	375	1.1	107.5	IE1	BG40Z-../SSE06LA4	1.3	4.6	9.3	13.5	16.5	265	310	375	375	375	38	7000	-
3.5	0.55	12	420	1	121.3	IE1	BG40Z-../SSE06LA4	1.2	4.1	8.2	12	14.5	300	350	420	420	420	38	7000	-
3.5	0.55	11	470	0.9	134.6	IE1	BG40Z-../SSE06LA4	1.1	3.7	7.4	11	13	335	390	470	470	470	38	7000	-
3.5	0.55	10.5	490	0.86	141.4	IE1	BG40Z-../SSE06LA4	1	3.5	7	10.5	12.5	350	410	490	490	490	38	7000	-
3.5	0.55	20.5	250	2.5	71.97	IE1	BG50Z-../SSE06LA4	2	6.9	13.5	20.5	25	179	205	250	250	250	47	10000	-
3.5	0.55	18.5	275	2.3	79.78	IE1	BG50Z-../SSE06LA4	1.8	6.2	12.5	18.5	22.5	199	230	275	275	275	47	10000	-
3.5	0.55	15.5	330	1.9	95.58	IE1	BG50Z-../SSE06LA4	1.5	5.2	10	15.5	18.5	235	275	330	330	330	47	10000	-
3.5	0.55	14	370	1.7	106	IE1	BG50Z-../SSE06LA4	1.4	4.7	9.4	14	16.5	265	305	370	370	370	47	10000	-
3.5	0.55	11.5	450	1.4	128.9	IE1	BG50Z-../SSE06LA4	1.1	3.8	7.7	11.5	13.5	320	370	450	450	450	47	10000	-
3.5	0.55	10	500	1.3	142.9	IE1	BG50Z-../SSE06LA4	1	3.4	6.9	10	12.5	355	410	500	500	500	47	10000	-
3.5	0.55	9	570	1.1	164.9	IE1	BG50Z-../SSE06LA4	0.9	3	6	9	10.5	410	475	570	570	570	47	10000	-
3.5	0.55	8.2	630	0.98	182.8	IE1	BG50Z-../SSE06LA4	0.8	2.7	5.4	8.2	9.8	455	530	630	630	630	47	10000	-
3.5	0.55	7.3	710	0.88	204.7	IE1	BG50Z-../SSE06LA4	0.7	2.4	4.8	7.3	8.7	510	590	710	710	710	47	10000	-
3.5	0.55	5.4	960	1.3	276.2	IE1	BG60G20-../SSE06LA4	0.5	1.8	3.6	5.4	6.5	690	800	960	960	960	100	16000	-
3.5	0.55	4.9	1070	1.2	306.1	IE1	BG60G20-../SSE06LA4	0.49	1.6	3.2	4.9	5.8	760	880	1070	1070	1070	100	16000	-
3.5	0.55	4.4	1170	1.1	334.3	IE1	BG60G20-../SSE06LA4	0.44	1.4	2.9	4.4	5.3	830	960	1170	1170	1170	100	16000	-
3.5	0.55	4	1290	1	370.5	IE1	BG60G20-../SSE06LA4	0.4	1.3	2.6	4	4.8	920	1070	1290	1290	1290	100	16000	-
3.5	0.55	3.4	1530	0.85	437.3	IE1	BG60G20-../SSE06LA4	0.34	1.1	2.2	3.4	4.1	1090	1260	1530	1530	1530	100	16000	-
3.5	0.55	5.8	890	2.8	255.5	IE1	BG70G20-../SSE06LA4	0.55	1.9	3.9	5.8	7	630	740	890	890	890	130	20000	-
3.5	0.55	5.4	960	2.6	276.7	IE1	BG70G20-../SSE06LA4	0.5	1.8	3.6	5.4	6.5	690	800	960	960	960	130	20000	-
3.5	0.55	4.5	1140	2.2	328.4	IE1	BG70G20-../SSE06LA4	0.45	1.5	3	4.5	5.4	820	950	1140	1140	1140	130	20000	-
3.5	0.55	3.8	1350	1.8	387.6	IE1	BG70G20-../SSE06LA4	0.38	1.2	2.5	3.8	4.6	960	1120	1350	1350	1350	130	20000	-
3.5	0.55	3.5	1460	1.7	417.8	IE1	BG70G20-../SSE06LA4	0.35	1.1	2.3	3.5	4.3	1040	1210	1460	1460	1460	130	20000	-
3.5	0.55	3	1730	1.4	495.9	IE1	BG70G20-../SSE06LA4	0.3	1	2	3	3.6	1230	1430	1730	1730	1730	130	20000	-
3.5	0.55	2.5	2000	1.2	577.3	IE1	BG70G20-../SSE06LA4	0.25	0.85	1.7	2.5	3.1	1440	1670	2000	2000	2000	130	20000	-
3.5	0.55	2.2	2300	1.1	665.8	IE1	BG70G20-../SSE06LA4	0.22	0.75	1.5	2.2	2.7	1660	1930	2300	2300	2300	130	20000	-
3.5	0.55	1.8	2750	0.9	790.2	IE1	BG70G20-../SSE06LA4	0.18	0.6	1.2	1.8	2.2	1970	2250	2750	2750	2750	130	20000	-
3.5	0.55	1.7	3050	0.81	877.6	IE1	BG70G20-../SSE06LA4	0.17	0.55	1.1	1.7	2	2150	2500	3050	3050	3050	130	20000	-

6

MN = 5 Nm (PN = 0.78 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	530	14.1	1.3	2.82	IE4	BG06-../S4E08MA4	53	177	350	530	630	14.1	14.1	14.1	14.1	14.1	16	470	-
5	0.78	395	18.8	1.1	3.78	IE4	BG06-../S4E08MA4	39.5	132	260	395	475	18.8	18.8	18.8	18.8	18.8	16	520	-
5	0.78	330	22.5	0.97	4.54	IE4	BG06-../S4E08MA4	33	110	220	330	395	22.5	22.5	22.5	22.5	22.5	16	530	-
5	0.78	250	29.5	0.81	5.96	IE4	BG06-../S4E08MA4	25	83	167	250	300	29.5	29.5	29.5	29.5	29.5	16	570	-
5	0.78	280	26.5	2.8	5.34	IE4	BG10-../S4E08MA4	28	93	187	280	335	26.5	26.5	26.5	26.5	26.5	16	620	910
5	0.78	220	33.5	2.4	6.78	IE4	BG10-../S4E08MA4	22	73	147	220	265	33.5	33.5	33.5	33.5	33.5	16	660	

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 0.78 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	155	48	2.5	9.65	IE4	BG20-./S4E08MA4	15.5	51	103	155	186	48	48	48	48	48	19	2250	-
5	0.78	142	52	2.9	10.54	IE4	BG20-./S4E08MA4	14	47	94	142	170	52	52	52	52	52	19	2700	-
5	0.78	128	58	2.7	11.71	IE4	BG20-./S4E08MA4	12.5	42.5	85	128	153	58	58	58	58	58	19	2800	-
5	0.78	113	66	2.5	13.21	IE4	BG20-./S4E08MA4	11	37.5	75	113	136	66	66	66	66	66	19	2900	-
5	0.78	102	73	2.3	14.67	IE4	BG20-./S4E08MA4	10	34	68	102	122	73	73	73	73	73	19	3050	-
5	0.78	96	77	2.3	15.58	IE4	BG20-./S4E08MA4	9.6	32	64	96	115	77	77	77	77	77	19	3100	-
5	0.78	86	86	2.1	17.31	IE4	BG20-./S4E08MA4	8.6	28.5	57	86	103	86	86	86	86	86	19	3200	-
5	0.78	75	99	2	19.95	IE4	BG20-./S4E08MA4	7.5	25	50	75	90	99	99	99	99	99	19	3350	-
5	0.78	67	110	1.8	22.16	IE4	BG20-./S4E08MA4	6.7	22.5	45	67	81	110	110	110	110	110	19	3500	-
5	0.78	64	116	1.7	23.22	IE4	BG20-./S4E08MA4	6.4	21.5	43	64	77	116	116	116	116	116	19	3550	-
5	0.78	58	128	1.6	25.79	IE4	BG20-./S4E08MA4	5.8	19	38.5	58	69	128	128	128	128	128	19	3700	-
5	0.78	53	139	1.4	27.85	IE4	BG20-./S4E08MA4	5.3	17.5	35.5	53	64	139	139	139	139	139	19	3800	-
5	0.78	48	154	1.3	30.94	IE4	BG20-./S4E08MA4	4.8	16	32	48	58	154	154	154	154	154	19	4000	-
5	0.78	45	166	1.2	33.33	IE4	BG20-./S4E08MA4	4.5	15	30	45	54	166	166	166	166	166	19	4100	-
5	0.78	40.5	185	1.1	37.02	IE4	BG20-./S4E08MA4	4	13.5	27	40.5	48.5	185	185	185	185	185	19	4300	-
5	0.78	35.5	205	0.96	41.76	IE4	BG20-./S4E08MA4	3.5	11.5	23.5	35.5	43	205	205	205	205	205	19	4500	-
5	0.78	32	230	0.86	46.38	IE4	BG20-./S4E08MA4	3.2	10.5	21.5	32	38.5	230	230	230	230	230	19	4700	-
5	0.78	31	235	0.83	47.92	IE4	BG20-./S4E08MA4	3.1	10	20.5	31	37.5	235	235	235	235	235	19	4750	-
5	0.78	75	99	3	19.99	IE4	BG30-./S4E08MA4	7.5	25	50	75	90	99	99	99	99	99	23	4200	-
5	0.78	67	110	2.7	22.18	IE4	BG30-./S4E08MA4	6.7	22.5	45	67	81	110	110	110	110	110	23	4600	-
5	0.78	58	127	2.4	25.45	IE4	BG30-./S4E08MA4	5.8	19.5	39	58	70	127	127	127	127	127	23	4850	-
5	0.78	53	141	2.1	28.24	IE4	BG30-./S4E08MA4	5.3	17.5	35	53	63	141	141	141	141	141	23	5100	-
5	0.78	50	149	2	29.83	IE4	BG30-./S4E08MA4	5	16.5	33.5	50	60	149	149	149	149	149	23	5200	-
5	0.78	45	165	1.8	33.09	IE4	BG30-./S4E08MA4	4.5	15	30	45	54	165	165	165	165	165	23	5400	-
5	0.78	42.5	175	1.7	35.17	IE4	BG30-./S4E08MA4	4.2	14	28	42.5	51	175	175	175	175	175	23	5500	-
5	0.78	38	195	1.5	39.02	IE4	BG30-./S4E08MA4	3.8	12.5	25.5	38	46	195	195	195	195	195	23	5800	-
5	0.78	35	210	1.4	42.46	IE4	BG30-./S4E08MA4	3.5	11.5	23.5	35	42	210	210	210	210	210	23	5900	-
5	0.78	31.5	235	1.3	47.11	IE4	BG30-./S4E08MA4	3.1	10.5	21	31.5	38	235	235	235	235	235	23	6000	-
5	0.78	28.5	260	1.1	52.44	IE4	BG30-./S4E08MA4	2.8	9.5	19	28.5	34	260	260	260	260	260	23	6000	-
5	0.78	25.5	290	1	58.18	IE4	BG30-./S4E08MA4	2.5	8.5	17	25.5	30.5	290	290	290	290	290	23	6000	-
5	0.78	24.5	300	0.99	60.79	IE4	BG30-./S4E08MA4	2.4	8.2	16	24.5	29.5	300	300	300	300	300	23	6000	-
5	0.78	22	335	0.89	67.44	IE4	BG30-./S4E08MA4	2.2	7.4	14.5	22	26.5	335	335	335	335	335	23	6000	-
5	0.78	22.5	325	0.81	65.79	IE4	BG30Z-./S4E08MA4	2.2	7.5	15	22.5	27	325	325	325	325	325	26	6000	-
5	0.78	20	365	0.82	73.51	IE4	BG30Z-./S4E08MA4	2	6.8	13.5	20	24	365	365	365	365	365	26	6000	-
5	0.78	51	146	2.9	29.34	IE4	BG40-./S4E08MA4	5.1	17	34	51	61	146	146	146	146	146	38	6800	-
5	0.78	46	162	2.6	32.57	IE4	BG40-./S4E08MA4	4.6	15	30.5	46	55	162	162	162	162	162	38	7000	-
5	0.78	43.5	171	2.5	34.2	IE4	BG40-./S4E08MA4	4.3	14.5	29	43.5	52	171	171	171	171	171	38	7000	-
5	0.78	39.5	189	2.2	37.96	IE4	BG40-./S4E08MA4	3.9	13	26	39.5	47	189	189	189	189	189	38	7000	-
5	0.78	37	200	2.1	40.19	IE4	BG40-./S4E08MA4	3.7	12	24.5	37	44.5	200	200	200	200	200	38	7000	-
5	0.78	33.5	220	1.9	44.62	IE4	BG40-./S4E08MA4	3.3	11	22	33.5	40	220	220	220	220	220	38	7000	-
5	0.78	31	240	1.8	48.36	IE4	BG40-./S4E08MA4	3.1	10	20.5	31	37	240	240	240	240	240	38	7000	-
5	0.78	27.5	265	1.6	53.69	IE4	BG40-./S4E08MA4	2.7	9.3	18.5	27.5	33.5	265	265	265	265	265	38	7000	-
5	0.78	25	295	1.4	59.64	IE4	BG40-./S4E08MA4	2.5	8.3	16.5	25	30	295	295	295	295	295	38	7000	-
5	0.78	22.5	330	1.3	66.2	IE4	BG40-./S4E08MA4	2.2	7.5	15	22.5	27	330	330	330	330	330	38	7000	-
5	0.78	22	335	1.3	67.74	IE4	BG40Z-./S4E08MA4	2.2	7.3	14.5	22	26.5	335	335	335	335	335	42	7000	-
5	0.78	19.5	375	1.1	75.19	IE4	BG40Z-./S4E08MA4	1.9	6.6	13	19.5	23.5	375	375	375	375	375	42	7000	-
5	0.78	18	410	1	82	IE4	BG40Z-./S4E08MA4	1.8	6	12	18	21.5	410	410	410	410	410	42	7000	-
5	0.78	16	455	0.93	91.02	IE4	BG40Z-./S4E08MA4	1.6	5.4	10.5	16	19.5	455	455	455	455	455	42	7000	-
5	0.78	31.5	235	2.7	47.02	IE4	BG50-./S4E08MA4	3.1	10.5	21	31.5	38	235	235	235	235	235	46	10000	-
5	0.78	28.5	260	2.4	52.12	IE4	BG50-./S4E08MA4	2.8	9.5	19	28.5	34.5	260	260	260	260	260	46	10000	-
5	0.78	25	295	2.1	59.42	IE4	BG50-./S4E08MA4	2.5	8.4	16.5	25	30	295	295	295	295	295	46	10000	-
5	0.78	22.5	325	1.9	65.86	IE4	BG50-./S4E08MA4	2.2	7.5	15	22.5	27	325	325	325	325	325	46	10000	-
5	0.78	20.5	355	1.8	71.97	IE4	BG50Z-./S4E08MA4	2	6.9	13.5	20.5	25	355	355	355	355	355	51	10000	-
5	0.78	18.5	395	1.6	79.78	IE4	BG50Z-./S4E08MA4	1.8	6.2	12.5	18.5	22.5	395	395	395	395	395	51	10000	-
5	0.78	15.5	475	1.3	95.58	IE4	BG50Z-./S4E08MA4	1.5	5.2	10	15.5	18.5	475	475	475	475	475	51	10000	-
5	0.78	14	530	1.2	106	IE4	BG50Z-./S4E08MA4	1.4	4.7	9.4	14</									

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 0.78 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	5.4	1380	1.8	276.7	IE4	BG70G20-./S4E08MA4	0.5	1.8	3.6	5.4	6.5	1380	1380	1380	1380	1380	133	20000	-
5	0.78	4.5	1640	1.5	328.4	IE4	BG70G20-./S4E08MA4	0.45	1.5	3	4.5	5.4	1640	1640	1640	1640	1640	133	20000	-
5	0.78	3.8	1930	1.3	387.6	IE4	BG70G20-./S4E08MA4	0.38	1.2	2.5	3.8	4.6	1930	1930	1930	1930	1930	133	20000	-
5	0.78	3.5	2050	1.2	417.8	IE4	BG70G20-./S4E08MA4	0.35	1.1	2.3	3.5	4.3	2050	2050	2050	2050	2050	133	20000	-
5	0.78	3	2450	1	495.9	IE4	BG70G20-./S4E08MA4	0.3	1	2	3	3.6	2450	2450	2450	2450	2450	133	20000	-
5	0.78	2.5	2850	0.87	577.3	IE4	BG70G20-./S4E08MA4	0.25	0.85	1.7	2.5	3.1	2850	2850	2850	2850	2850	133	20000	-
5	0.78	4.7	1570	2.9	314	IE4	BG80G40-./S4E08MA4	0.47	1.5	3.1	4.7	5.7	1570	1570	1570	1570	1570	215	26000	-
5	0.78	4.1	1800	2.6	360	IE4	BG80G40-./S4E08MA4	0.41	1.3	2.7	4.1	5	1800	1800	1800	1800	1800	215	26000	-
5	0.78	3.7	1990	2.3	399.8	IE4	BG80G40-./S4E08MA4	0.37	1.2	2.5	3.7	4.5	1990	1990	1990	1990	1990	215	26000	-
5	0.78	3.4	2150	2.1	436.2	IE4	BG80G40-./S4E08MA4	0.34	1.1	2.2	3.4	4.1	2150	2150	2150	2150	2150	215	26000	-
5	0.78	3	2400	1.9	484.3	IE4	BG80G40-./S4E08MA4	0.3	1	2	3	3.7	2400	2400	2400	2400	2400	215	26000	-
5	0.78	2.6	2850	1.6	572	IE4	BG80G40-./S4E08MA4	0.26	0.85	1.7	2.6	3.1	2850	2850	2850	2850	2850	215	26000	-
5	0.78	2.2	3250	1.4	657.8	IE4	BG80G40-./S4E08MA4	0.22	0.75	1.5	2.2	2.7	3250	3250	3250	3250	3250	215	26000	-
5	0.78	2	3650	1.3	730.3	IE4	BG80G40-./S4E08MA4	0.2	0.65	1.3	2	2.4	3650	3650	3650	3650	3650	215	26000	-
5	0.78	1.8	4050	1.1	817.4	IE4	BG80G40-./S4E08MA4	0.18	0.6	1.2	1.8	2.2	4050	4050	4050	4050	4050	215	26000	-
5	0.78	1.6	4500	1	907.6	IE4	BG80G40-./S4E08MA4	0.16	0.55	1.1	1.6	1.9	4500	4500	4500	4500	4500	215	26000	-
5	0.78	1.4	5200	0.88	1042	IE4	BG80G40-./S4E08MA4	0.14	0.47	0.95	1.4	1.7	5200	5200	5200	5200	5200	215	26000	-
5	0.78	2.3	3200	2.9	644.7	IE4	BG90G50-./S4E08MA4	0.23	0.75	1.5	2.3	2.7	3200	3200	3200	3200	3200	324	65000	-
5	0.78	2.1	3550	2.6	714.2	IE4	BG90G50-./S4E08MA4	0.21	0.7	1.4	2.1	2.5	3550	3550	3550	3550	3550	324	65000	-
5	0.78	1.6	4400	2.1	883.7	IE4	BG90G50-./S4E08MA4	0.16	0.55	1.1	1.6	2	4400	4400	4400	4400	4400	324	65000	-
5	0.78	1.2	5800	1.6	1174	IE4	BG90G50-./S4E08MA4	0.12	0.42	0.85	1.2	1.5	5800	5800	5800	5800	5800	324	65000	-
5	0.78	1.1	6500	1.4	1301	IE4	BG90G50-./S4E08MA4	0.11	0.38	0.75	1.1	1.3	6500	6500	6500	6500	6500	324	65000	-
5	0.78	0.9	7900	1.2	1583	IE4	BG90G50-./S4E08MA4	0.09	0.31	0.6	0.9	1.1	7900	7900	7900	7900	7900	324	65000	-
5	0.78	0.85	8700	1	1756	IE4	BG90G50-./S4E08MA4	0.085	0.28	0.55	0.85	1	8700	8700	8700	8700	8700	324	65000	-
5	0.78	0.7	10100	0.91	2026	IE4	BG90G50-./S4E08MA4	0.07	0.24	0.49	0.7	0.85	10100	10100	10100	10100	10100	324	65000	-
5	0.78	1	7200	2.6	1444	IE4	BG100G50-./S4E08MA4	0.1	0.34	0.65	1	1.2	7200	7200	7200	7200	7200	512	90000	-
5	0.78	0.85	8300	2.2	1678	IE4	BG100G50-./S4E08MA4	0.085	0.29	0.55	0.85	1	8300	8300	8300	8300	8300	512	90000	-
5	0.78	0.8	9300	2	1867	IE4	BG100G50-./S4E08MA4	0.08	0.26	0.5	0.8	0.95	9300	9300	9300	9300	9300	512	90000	-
5	0.78	0.65	10700	1.7	2154	IE4	BG100G50-./S4E08MA4	0.065	0.23	0.46	0.65	0.8	10700	10700	10700	10700	10700	512	90000	-
5	0.78	0.55	13200	1.4	2656	IE4	BG100G50-./S4E08MA4	0.055	0.18	0.37	0.55	0.65	13200	13200	13200	13200	13200	512	90000	-
5	0.78	0.5	14700	1.3	2952	IE4	BG100G50-./S4E08MA4	0.05	0.16	0.33	0.5	0.6	14700	14700	14700	14700	14700	512	90000	-
5	0.78	0.45	16400	1.1	3286	IE4	BG100G50-./S4E08MA4	0.045	0.15	0.3	0.45	0.5	16400	16400	16400	16400	16400	512	90000	-
5	0.78	0.41	18200	1	3644	IE4	BG100G50-./S4E08MA4	0.041	0.13	0.27	0.41	0.49	18200	18200	18200	18200	18200	512	90000	-
5	0.78	0.34	21500	0.85	4366	IE4	BG100G50-./S4E08MA4	0.034	0.11	0.22	0.34	0.41	21500	21500	21500	21500	21500	512	90000	-

6

MN = 7 Nm (PN = 1.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	530	19.7	0.91	2.82	IE3	BG06-./SPE08LA4	53	177	350	530	630	18.3	19.7	19.7	19.7	19.7	18	470	-
7	1.1	435	23.5	2.6	3.42	IE3	BG10-./SPE08LA4	43.5	146	290	435	520	22	23.5	23.5	23.5	23.5	18	630	880
7	1.1	340	30.5	2.2	4.36	IE3	BG10-./SPE08LA4	34	114	225	340	410	28	30.5	30.5	30.5	30.5	18	650	910
7	1.1	280	37	2	5.34	IE3	BG10-./SPE08LA4	28	93	187	280	335	34.5	37	37	37	37	18	620	910
7	1.1	220	47	1.7	6.78	IE3	BG10-./SPE08LA4	22	73	147	220	265	44	47	47	47	47	18	660	920
7	1.1	215	48	1.8	6.89	IE3	BG10-./SPE08LA4	21.5	72	145	215	260	44.5	48	48	48	48	18	850	1200
7	1.1	196	53	1.7	7.63	IE3	BG10-./SPE08LA4	19.5	65	131	196	235	49.5	53	53	53	53	18	900	1250
7	1.1	185	56	1.6	8.07	IE3	BG10-./SPE08LA4	18.5	61	123	185	220	52	56	56	56	56	18	660	920
7	1.1	160	65	1.5	9.33	IE3	BG10-./SPE08LA4	16	53	107	160	192	60	65	65	65	65	18	950	1330
7	1.1	145	72	1.4	10.34	IE3	BG10-./SPE08LA4	14.5	48	96	145	174	67	72	72	72	72	18	1000	1400
7	1.1	125	83	1.3	11.92	IE3	BG10-./SPE08LA4	12.5	41.5	83	125	151	77	83	83	83	83	18	1030	1440
7	1																			

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 1.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	58	180	1.1	25.79	IE3	BG20-..SPE08LA4	5.8	19	38.5	58	69	167	180	180	180	180	20	3700	-
7	1.1	53	194	1	27.85	IE3	BG20-..SPE08LA4	5.3	17.5	35.5	53	64	181	194	194	194	194	20	3800	-
7	1.1	48	215	0.92	30.94	IE3	BG20-..SPE08LA4	4.8	16	32	48	58	200	215	215	215	215	20	4000	-
7	1.1	45	230	0.86	33.33	IE3	BG20-..SPE08LA4	4.5	15	30	45	54	215	230	230	230	230	20	4100	-
7	1.1	108	96	3	13.77	IE3	BG30-..SPE08LA4	10.5	36	72	108	130	89	96	96	96	96	25	3150	-
7	1.1	98	106	2.8	15.27	IE3	BG30-..SPE08LA4	9.8	32.5	65	98	117	99	106	106	106	106	25	3450	-
7	1.1	87	119	2.5	17.06	IE3	BG30-..SPE08LA4	8.7	29	58	87	105	110	119	119	119	119	25	3700	-
7	1.1	79	132	2.3	18.93	IE3	BG30-..SPE08LA4	7.9	26	52	79	95	123	132	132	132	132	25	4100	-
7	1.1	75	139	2.1	19.99	IE3	BG30-..SPE08LA4	7.5	25	50	75	90	129	139	139	139	139	25	4200	-
7	1.1	67	155	1.9	22.18	IE3	BG30-..SPE08LA4	6.7	22.5	45	67	81	144	155	155	155	155	25	4600	-
7	1.1	58	178	1.7	25.45	IE3	BG30-..SPE08LA4	5.8	19.5	39	58	70	165	178	178	178	178	25	4850	-
7	1.1	53	197	1.5	28.24	IE3	BG30-..SPE08LA4	5.3	17.5	35	53	63	183	197	197	197	197	25	5100	-
7	1.1	50	205	1.4	29.83	IE3	BG30-..SPE08LA4	5	16.5	33.5	50	60	193	205	205	205	205	25	5200	-
7	1.1	45	230	1.3	33.09	IE3	BG30-..SPE08LA4	4.5	15	30	45	54	215	230	230	230	230	25	5400	-
7	1.1	42.5	245	1.2	35.17	IE3	BG30-..SPE08LA4	4.2	14	28	42.5	51	225	245	245	245	245	25	5500	-
7	1.1	38	270	1.1	39.02	IE3	BG30-..SPE08LA4	3.8	12.5	25.5	38	46	250	270	270	270	270	25	5800	-
7	1.1	35	295	1	42.46	IE3	BG30-..SPE08LA4	3.5	11.5	23.5	35	42	275	295	295	295	295	25	5900	-
7	1.1	31.5	325	0.91	47.11	IE3	BG30-..SPE08LA4	3.1	10.5	21	31.5	38	305	325	325	325	325	25	6000	-
7	1.1	28.5	365	0.82	52.44	IE3	BG30-..SPE08LA4	2.8	9.5	19	28.5	34	340	365	365	365	365	25	6000	-
7	1.1	68	154	2.8	22.02	IE3	BG40-..SPE08LA4	6.8	22.5	45	68	81	143	154	154	154	154	40	6000	-
7	1.1	64	164	2.6	23.43	IE3	BG40-..SPE08LA4	6.4	21	42.5	64	76	152	164	164	164	164	40	6200	-
7	1.1	57	182	2.3	26.01	IE3	BG40-..SPE08LA4	5.7	19	38	57	69	169	182	182	182	182	40	6500	-
7	1.1	51	205	2.1	29.34	IE3	BG40-..SPE08LA4	5.1	17	34	51	61	190	205	205	205	205	40	6800	-
7	1.1	46	225	1.9	32.57	IE3	BG40-..SPE08LA4	4.6	15	30.5	46	55	210	225	225	225	225	40	7000	-
7	1.1	43.5	235	1.8	34.2	IE3	BG40-..SPE08LA4	4.3	14.5	29	43.5	52	220	235	235	235	235	40	7000	-
7	1.1	39.5	265	1.6	37.96	IE3	BG40-..SPE08LA4	3.9	13	26	39.5	47	245	265	265	265	265	40	7000	-
7	1.1	37	280	1.5	40.19	IE3	BG40-..SPE08LA4	3.7	12	24.5	37	44.5	260	280	280	280	280	40	7000	-
7	1.1	33.5	310	1.4	44.62	IE3	BG40-..SPE08LA4	3.3	11	22	33.5	40	290	310	310	310	310	40	7000	-
7	1.1	31	335	1.3	48.36	IE3	BG40-..SPE08LA4	3.1	10	20.5	31	37	310	335	335	335	335	40	7000	-
7	1.1	27.5	375	1.1	53.69	IE3	BG40-..SPE08LA4	2.7	9.3	18.5	27.5	33.5	345	375	375	375	375	40	7000	-
7	1.1	25	415	1	59.64	IE3	BG40-..SPE08LA4	2.5	8.3	16.5	25	30	385	415	415	415	415	40	7000	-
7	1.1	22.5	460	0.92	66.2	IE3	BG40-..SPE08LA4	2.2	7.5	15	22.5	27	430	460	460	460	460	40	7000	-
7	1.1	22	470	0.9	67.74	IE3	BG40Z-..SPE08LA4	2.2	7.3	14.5	22	26.5	440	470	470	470	470	43	7000	-
7	1.1	19.5	520	0.81	75.19	IE3	BG40Z-..SPE08LA4	1.9	6.6	13	19.5	23.5	485	520	520	520	520	43	7000	-
7	1.1	50	205	3	29.62	IE3	BG50-..SPE08LA4	5	16.5	33.5	50	60	192	205	205	205	205	48	8000	-
7	1.1	45.5	225	2.7	32.84	IE3	BG50-..SPE08LA4	4.5	15	30	45.5	54	210	225	225	225	225	48	8700	-
7	1.1	39.5	265	2.4	37.89	IE3	BG50-..SPE08LA4	3.9	13	26	39.5	47.5	245	265	265	265	265	48	10000	-
7	1.1	35.5	290	2.1	42	IE3	BG50-..SPE08LA4	3.5	11.5	23.5	35.5	42.5	270	290	290	290	290	48	10000	-
7	1.1	31.5	325	1.9	47.02	IE3	BG50-..SPE08LA4	3.1	10.5	21	31.5	38	305	325	325	325	325	48	10000	-
7	1.1	28.5	360	1.7	52.12	IE3	BG50-..SPE08LA4	2.8	9.5	19	28.5	34.5	335	360	360	360	360	48	10000	-
7	1.1	25	415	1.5	59.42	IE3	BG50-..SPE08LA4	2.5	8.4	16.5	25	30	385	415	415	415	415	48	10000	-
7	1.1	22.5	460	1.4	65.86	IE3	BG50-..SPE08LA4	2.2	7.5	15	22.5	27	425	460	460	460	460	48	10000	-
7	1.1	20.5	500	1.3	71.97	IE3	BG50Z-..SPE08LA4	2	6.9	13.5	20.5	25	465	500	500	500	500	52	10000	-
7	1.1	18.5	550	1.1	79.78	IE3	BG50Z-..SPE08LA4	1.8	6.2	12.5	18.5	22.5	510	550	550	550	550	52	10000	-
7	1.1	15.5	660	0.94	95.58	IE3	BG50Z-..SPE08LA4	1.5	5.2	10	15.5	18.5	620	660	660	660	660	52	10000	-
7	1.1	14	740	0.85	106	IE3	BG50Z-..SPE08LA4	1.4	4.7	9.4	14	16.5	680	740	740	740	740	52	10000	-
7	1.1	21.5	475	2.5	68.32	IE3	BG60Z-..SPE08LA4	2.1	7.3	14.5	21.5	26	440	475	475	475	475	97	16000	-
7	1.1	19.5	520	2.3	75.71	IE3	BG60Z-..SPE08LA4	1.9	6.6	13	19.5	23.5	490	520	520	520	520	97	16000	-
7	1.1	16	630	1.9	91.09	IE3	BG60Z-..SPE08LA4	1.6	5.4	10.5	16	19.5	590	630	630	630	630	97	16000	-
7	1.1	14.5	700	1.7	101	IE3	BG60Z-..SPE08LA4	1.4	4.9	9.9	14.5	17.5	650	700	700	700	700	97	16000	-
7	1.1	12.5	830	1.4	119.2	IE3	BG60Z-..SPE08LA4	1.2	4.1	8.3	12.5	15	770	830	830	830	830	97	16000	-
7	1.1	11	920	1.3	132.1	IE3	BG60Z-..SPE08LA4	1.1	3.7	7.5	11	13.5	850	920	920	920	920	97	16000	-
7	1.1	9.4	1100	1.1	158	IE3	BG60Z-..SPE08LA4	0.9	3.1	6.3	9.4	11	1020	1100	1100	1100	1100	97	16000	-
7	1.1	8.5	1220	0.98	175.1	IE3	BG60Z-..SPE08LA4	0.85	2.8	5.7	8.5	10	1130	1220	1220	1220	1220	97	16000	-
7	1.1	7.3	1430	0.84	204.6	IE3	BG60Z-..SPE08LA4	0.7	2.4	4.8	7.3	8.7	1320	1430	1430	1430	1430	97	16000	-
7	1.1	13	790	2.9	113.6	IE3	BG70Z-..SPE08LA4	1.3	4.4	8.8	13	15.5	730	7						

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 1.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	2.2	4600	1	657.8	IE3	BG80G40-..SPE08LA4	0.22	0.75	1.5	2.2	2.7	4250	4600	4600	4600	4600	216	26000	-
7	1.1	2	5100	0.9	730.3	IE3	BG80G40-..SPE08LA4	0.2	0.65	1.3	2	2.4	4700	5100	5100	5100	5100	216	26000	-
7	1.1	1.8	5700	0.8	817.4	IE3	BG80G40-..SPE08LA4	0.18	0.6	1.2	1.8	2.2	5300	5700	5700	5700	5700	216	26000	-
7	1.1	3.4	3050	3	435.8	IE3	BG90G50-..SPE08LA4	0.34	1.1	2.2	3.4	4.1	2800	3050	3050	3050	3050	326	65000	-
7	1.1	2.9	3500	2.6	504.7	IE3	BG90G50-..SPE08LA4	0.29	0.95	1.9	2.9	3.5	3250	3500	3500	3500	3500	326	65000	-
7	1.1	2.5	4100	2.2	588.8	IE3	BG90G50-..SPE08LA4	0.25	0.8	1.6	2.5	3	3800	4100	4100	4100	4100	326	65000	-
7	1.1	2.3	4500	2	644.7	IE3	BG90G50-..SPE08LA4	0.23	0.75	1.5	2.3	2.7	4150	4500	4500	4500	4500	326	65000	-
7	1.1	2.1	4950	1.8	714.2	IE3	BG90G50-..SPE08LA4	0.21	0.7	1.4	2.1	2.5	4600	4950	4950	4950	4950	326	65000	-
7	1.1	1.6	6100	1.5	883.7	IE3	BG90G50-..SPE08LA4	0.16	0.55	1.1	1.6	2	5700	6100	6100	6100	6100	326	65000	-
7	1.1	1.2	8200	1.1	1174	IE3	BG90G50-..SPE08LA4	0.12	0.42	0.85	1.2	1.5	7600	8200	8200	8200	8200	326	65000	-
7	1.1	1.1	9100	1	1301	IE3	BG90G50-..SPE08LA4	0.11	0.38	0.75	1.1	1.3	8400	9100	9100	9100	9100	326	65000	-
7	1.1	0.9	11000	0.83	1583	IE3	BG90G50-..SPE08LA4	0.09	0.31	0.6	0.9	1.1	10200	11000	11000	11000	11000	326	65000	-
7	1.1	1.5	6800	2.7	976.1	IE3	BG100G50-..SPE08LA4	0.15	0.5	1	1.5	1.8	6300	6800	6800	6800	6800	513	90000	-
7	1.1	1.4	7300	2.5	1043	IE3	BG100G50-..SPE08LA4	0.14	0.47	0.95	1.4	1.7	6700	7300	7300	7300	7300	513	90000	-
7	1.1	1.2	8400	2.2	1204	IE3	BG100G50-..SPE08LA4	0.12	0.41	0.8	1.2	1.4	7800	8400	8400	8400	8400	513	90000	-
7	1.1	1	10100	1.8	1444	IE3	BG100G50-..SPE08LA4	0.1	0.34	0.65	1	1.2	9300	10100	10100	10100	10100	513	90000	-
7	1.1	0.85	11700	1.6	1678	IE3	BG100G50-..SPE08LA4	0.085	0.29	0.55	0.85	1	10900	11700	11700	11700	11700	513	90000	-
7	1.1	0.8	13000	1.4	1867	IE3	BG100G50-..SPE08LA4	0.08	0.26	0.5	0.8	0.95	12100	13000	13000	13000	13000	513	90000	-
7	1.1	0.65	15000	1.2	2154	IE3	BG100G50-..SPE08LA4	0.065	0.23	0.46	0.65	0.8	14000	15000	15000	15000	15000	513	90000	-
7	1.1	0.55	18500	1	2656	IE3	BG100G50-..SPE08LA4	0.055	0.18	0.37	0.55	0.65	17200	18500	18500	18500	18500	513	90000	-
7	1.1	0.5	20500	0.9	2952	IE3	BG100G50-..SPE08LA4	0.05	0.16	0.33	0.5	0.6	19100	20500	20500	20500	20500	513	90000	-
7	1.1	0.45	23000	0.8	3286	IE3	BG100G50-..SPE08LA4	0.045	0.15	0.3	0.45	0.5	21000	23000	23000	23000	23000	513	90000	-

MN = 10 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	590	25	2.2	2.52	IE1	BG10-..SSE08LA4	59	198	395	590	710	16.3	20	25	25	25	18	570	790
10	1.55	590	25	2.2	2.52	IE4	BG10-..S4E09SA4	59	198	395	590	710	21	25	25	25	25	22	570	790
10	1.55	435	34	1.8	3.42	IE1	BG10-..SSE08LA4	43.5	146	290	435	520	22	27	34	34	34	18	630	880
10	1.55	435	34	1.8	3.42	IE4	BG10-..S4E09SA4	43.5	146	290	435	520	29	34	34	34	34	22	630	880
10	1.55	340	43.5	1.6	4.36	IE4	BG10-..S4E09SA4	34	114	225	340	410	37	43.5	43.5	43.5	43.5	22	650	910
10	1.55	340	43.5	1.6	4.36	IE1	BG10-..SSE08LA4	34	114	225	340	410	28	34.5	43.5	43.5	43.5	18	650	910
10	1.55	280	53	1.4	5.34	IE4	BG10-..S4E09SA4	28	93	187	280	335	45	53	53	53	53	22	620	910
10	1.55	280	53	1.4	5.34	IE1	BG10-..SSE08LA4	28	93	187	280	335	34.5	42.5	53	53	53	18	620	910
10	1.55	220	67	1.2	6.78	IE4	BG10-..S4E09SA4	22	73	147	220	265	57	67	67	67	67	22	660	920
10	1.55	220	67	1.2	6.78	IE1	BG10-..SSE08LA4	22	73	147	220	265	44	54	67	67	67	18	660	920
10	1.55	215	68	1.3	6.89	IE4	BG10-..S4E09SA4	21.5	72	145	215	260	44.5	55	68	68	68	22	850	1200
10	1.55	196	76	1.2	7.63	IE4	BG10-..S4E09SA4	19.5	65	131	196	235	64	76	76	76	76	22	900	1250
10	1.55	196	76	1.2	7.63	IE1	BG10-..SSE08LA4	19.5	65	131	196	235	49.5	61	76	76	76	18	900	1250
10	1.55	185	80	1.1	8.07	IE4	BG10-..S4E09SA4	18.5	61	123	185	220	68	80	80	80	80	22	660	920
10	1.55	160	93	1	9.33	IE4	BG10-..S4E09SA4	16	53	107	160	192	79	93	93	93	93	22	950	1330
10	1.55	160	93	1	9.33	IE1	BG10-..SSE08LA4	16	53	107	160	192	60	74	93	93	93	18	950	1330
10	1.55	145	103	0.96	10.34	IE4	BG10-..S4E09SA4	14.5	48	96	145	174	87	103	103	103	103	22	1000	1400
10	1.55	145	103	0.96	10.34	IE1	BG10-..SSE08LA4	14.5	48	96	145	174	67	82	103	103	103	18	1000	1400
10	1.55	125	119	0.88	11.92	IE4	BG10-..S4E09SA4	12.5	41.5	83	125	151	77	95	119	119	119	22	1030	1440
10	1.55	125	119	0.88	11.92	IE1	BG10-..SSE08LA4	12.5	41.5	83	125	151	101	119	119	119	119	22	1030	1440
10	1.55	113	132	0.83	13.21	IE1	BG10-..SSE08LA4	11	37.5	75	113	136	85	105	132	132	132	18	1070	1490
10	1.55	113	132	0.83	13.21	IE4	BG10-..S4E09SA4	11	37.5	75	113	136	112	132	132	132	132	22	1070	1490
10	1.55	450	33	2.8	3.33	IE4	BG20-..S4E09SA4	45	150	300	450	540	28	33	33	33	33	24	1830	-
10	1.55	450	33	2																

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	128	117	1.3	11.71	IE4	BG20-./S4E09SA4	12.5	42.5	85	128	153	99	117	117	117	117	24	2800	-
10	1.55	113	132	1.3	13.21	IE4	BG20-./S4E09SA4	11	37.5	75	113	136	112	132	132	132	132	24	2900	-
10	1.55	113	132	1.3	13.21	IE1	BG20-./SSE08LA4	11	37.5	75	113	136	85	105	132	132	132	20	2900	-
10	1.55	102	146	1.2	14.67	IE1	BG20-./SSE08LA4	10	34	68	102	122	95	117	146	146	146	20	3050	-
10	1.55	102	146	1.2	14.67	IE4	BG20-./S4E09SA4	10	34	68	102	122	124	146	146	146	146	24	3050	-
10	1.55	96	155	1.1	15.58	IE4	BG20-./S4E09SA4	9.6	32	64	96	115	132	155	155	155	155	24	3100	-
10	1.55	96	155	1.1	15.58	IE1	BG20-./SSE08LA4	9.6	32	64	96	115	101	124	155	155	155	20	3100	-
10	1.55	86	173	1.1	17.31	IE4	BG20-./S4E09SA4	8.6	28.5	57	86	103	147	173	173	173	173	24	3200	-
10	1.55	86	173	1.1	17.31	IE1	BG20-./SSE08LA4	8.6	28.5	57	86	103	112	138	173	173	173	20	3200	-
10	1.55	75	199	0.98	19.95	IE4	BG20-./S4E09SA4	7.5	25	50	75	90	169	199	199	199	199	24	3350	-
10	1.55	75	199	0.98	19.95	IE1	BG20-./SSE08LA4	7.5	25	50	75	90	129	159	199	199	199	20	3350	-
10	1.55	67	220	0.9	22.16	IE1	BG20-./SSE08LA4	6.7	22.5	45	67	81	144	177	220	220	220	20	3500	-
10	1.55	67	220	0.9	22.16	IE4	BG20-./S4E09SA4	6.7	22.5	45	67	81	188	220	220	220	220	24	3500	-
10	1.55	64	230	0.86	23.22	IE4	BG20-./S4E09SA4	6.4	21.5	43	64	77	197	230	230	230	230	24	3550	-
10	1.55	64	230	0.86	23.22	IE1	BG20-./SSE08LA4	6.4	21.5	43	64	77	150	185	230	230	230	20	3550	-
10	1.55	189	79	2.7	7.91	IE4	BG30-./S4E09SA4	18.5	63	126	189	225	67	79	79	79	79	29	1760	-
10	1.55	189	79	2.7	7.91	IE1	BG30-./SSE08LA4	18.5	63	126	189	225	51	63	79	79	79	25	1760	-
10	1.55	174	86	2.8	8.6	IE4	BG30-./S4E09SA4	17	58	116	174	205	73	86	86	86	86	29	2800	-
10	1.55	174	86	2.8	8.6	IE1	BG30-./SSE08LA4	17	58	116	174	205	55	68	86	86	86	25	2800	-
10	1.55	157	95	2.6	9.55	IE4	BG30-./SSE08LA4	15.5	52	104	157	188	81	95	95	95	95	29	3000	-
10	1.55	157	95	2.6	9.55	IE1	BG30-./S4E09SA4	15.5	52	104	157	188	106	106	106	106	106	29	2950	-
10	1.55	140	106	2.5	10.65	IE4	BG30-./S4E09SA4	14	46.5	93	140	169	90	106	106	106	106	25	2950	-
10	1.55	140	106	2.5	10.65	IE1	BG30-./SSE08LA4	14	46.5	93	140	169	69	85	106	106	106	25	2950	-
10	1.55	126	118	2.3	11.82	IE4	BG30-./S4E09SA4	12.5	42	84	126	152	76	94	118	118	118	25	3200	-
10	1.55	126	118	2.3	11.82	IE1	BG30-./SSE08LA4	12.5	42	84	126	152	117	129	152	152	152	29	3200	-
10	1.55	108	137	2.1	13.77	IE4	BG30-./SSE08LA4	10.5	36	72	108	130	89	110	137	137	137	25	3150	-
10	1.55	108	137	2.1	13.77	IE1	BG30-./S4E09SA4	10.5	36	72	108	130	117	137	137	137	137	29	3150	-
10	1.55	98	152	2	15.27	IE4	BG30-./S4E09SA4	9.8	32.5	65	98	117	129	152	152	152	29	3450	-	
10	1.55	98	152	2	15.27	IE1	BG30-./SSE08LA4	9.8	32.5	65	98	117	99	122	152	152	152	25	3450	-
10	1.55	87	170	1.8	17.06	IE4	BG30-./S4E09SA4	8.7	29	58	87	105	145	170	170	170	29	3700	-	
10	1.55	87	170	1.8	17.06	IE1	BG30-./SSE08LA4	8.7	29	58	87	105	110	136	170	170	25	3700	-	
10	1.55	79	189	1.6	18.93	IE4	BG30-./S4E09SA4	7.9	26	52	79	95	160	189	189	189	189	29	4100	-
10	1.55	79	189	1.6	18.93	IE1	BG30-./SSE08LA4	7.9	26	52	79	95	123	151	189	189	189	25	4100	-
10	1.55	75	199	1.5	19.99	IE1	BG30-./SSE08LA4	7.5	25	50	75	90	129	159	199	199	199	25	4200	-
10	1.55	75	199	1.5	19.99	IE4	BG30-./S4E09SA4	7.5	25	50	75	90	169	199	199	199	199	29	4200	-
10	1.55	67	220	1.4	22.18	IE4	BG30-./S4E09SA4	6.7	22.5	45	67	81	188	220	220	220	220	29	4600	-
10	1.55	67	220	1.4	22.18	IE1	BG30-./SSE08LA4	6.7	22.5	45	67	81	144	177	220	220	220	25	4600	-
10	1.55	58	250	1.2	25.45	IE1	BG30-./SSE08LA4	5.8	19.5	39	58	70	165	200	250	250	250	25	4850	-
10	1.55	58	250	1.2	25.45	IE4	BG30-./S4E09SA4	5.8	19.5	39	58	70	215	250	250	250	250	29	4850	-
10	1.55	53	280	1.1	28.24	IE1	BG30-./SSE08LA4	5.3	17.5	35	53	63	183	225	280	280	280	25	5100	-
10	1.55	53	280	1.1	28.24	IE4	BG30-./S4E09SA4	5.3	17.5	35	53	63	240	280	280	280	280	29	5100	-
10	1.55	50	295	1	29.83	IE1	BG30-./SSE08LA4	5	16.5	33.5	50	60	193	235	295	295	295	25	5200	-
10	1.55	50	295	1	29.83	IE4	BG30-./S4E09SA4	5	16.5	33.5	50	60	250	295	295	295	295	29	5200	-
10	1.55	45	330	0.91	33.09	IE4	BG30-./S4E09SA4	4.5	15	30	45	54	280	330	330	330	330	29	5400	-
10	1.55	45	330	0.91	33.09	IE1	BG30-./SSE08LA4	4.5	15	30	45	54	215	260	330	330	330	25	5400	-
10	1.55	42.5	350	0.85	35.17	IE1	BG30-./SSE08LA4	4.2	14	28	42.5	51	225	280	350	350	350	25	5500	-
10	1.55	42.5	350	0.85	35.17	IE4	BG30-./S4E09SA4	4.2	14	28	42.5	51	295	350	350	350	350	29	5500	-
10	1.55	105	142	2.9	14.28	IE1	BG40-./SSE08LA4	10.5	35	70	105	126	92	114	142	142	142	40	4900	-
10	1.55	105	142	2.9	14.28	IE4	BG40-./S4E09SA4	10.5	35	70	105	126	121	142	142	142	142	43	4900	-
10	1.55	91	163	2.6	16.39	IE4	BG40-./S4E09SA4	9.1	30.5	61	91	109	139	163	163	163	43	5300	-	
10	1.55	91	163	2.6	16.39	IE1	BG40-./SSE08LA4	9.1	30.5	61	91	109	106	131	163	163	163	40	5300	-
10	1.55	82	181	2.3	18.19	IE4	BG40-./S4E09SA4	8.2	27	54	82	98	154	181	181	181	181	43	5600	-
10	1.55	82	181	2.3	18.19	IE1	BG40-./SSE08LA4	8.2	27	54	82	98	118	145	181	181	181	40	5600	-
10	1.55	75	198	2.1	19.84	IE1	BG40-./SSE08LA4	7.5	25	50	75	90	128	158	198	198	198	40	5800	-
10	1.55	75	198	2.1	19.84	IE4	BG40-./S4E09SA4	7.5	25	50	75	90	168	198	198	198	198	43	5800	-
10	1.55	68	220	1.9	22.02	IE4	BG40-./S4E09SA4	6.8	22.5	45	68	81	187	220	220	220	220	43	6000	-
10	1.																			

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	50	295	2.1	29.62	IE1	BG50-./SSE08LA4	5	16.5	33.5	50	60	192	235	295	295	295	48	8000	-
10	1.55	50	295	2.1	29.62	IE4	BG50-./S4E09SA4	5	16.5	33.5	50	60	250	295	295	295	295	51	8000	-
10	1.55	45.5	325	1.9	32.84	IE4	BG50-./S4E09SA4	4.5	15	30	45.5	54	275	325	325	325	325	51	8700	-
10	1.55	45.5	325	1.9	32.84	IE1	BG50-./SSE08LA4	4.5	15	30	45.5	54	210	260	325	325	325	48	8700	-
10	1.55	39.5	375	1.7	37.89	IE4	BG50-./S4E09SA4	3.9	13	26	39.5	47.5	320	375	375	375	375	51	10000	-
10	1.55	39.5	375	1.7	37.89	IE1	BG50-./SSE08LA4	3.9	13	26	39.5	47.5	245	300	375	375	375	48	10000	-
10	1.55	35.5	420	1.5	42	IE1	BG50-./SSE08LA4	3.5	11.5	23.5	35.5	42.5	270	335	420	420	420	48	10000	-
10	1.55	35.5	420	1.5	42	IE4	BG50-./S4E09SA4	3.5	11.5	23.5	35.5	42.5	355	420	420	420	420	51	10000	-
10	1.55	31.5	470	1.3	47.02	IE1	BG50-./SSE08LA4	3.1	10.5	21	31.5	38	305	375	470	470	470	48	10000	-
10	1.55	31.5	470	1.3	47.02	IE4	BG50-./S4E09SA4	3.1	10.5	21	31.5	38	395	470	470	470	470	51	10000	-
10	1.55	28.5	520	1.2	52.12	IE1	BG50-./SSE08LA4	2.8	9.5	19	28.5	34.5	335	415	520	520	520	48	10000	-
10	1.55	28.5	520	1.2	52.12	IE4	BG50-./S4E09SA4	2.8	9.5	19	28.5	34.5	440	520	520	520	520	51	10000	-
10	1.55	25	590	1.1	59.42	IE4	BG50-./S4E09SA4	2.5	8.4	16.5	25	30	500	590	590	590	590	51	10000	-
10	1.55	25	590	1.1	59.42	IE1	BG50-./SSE08LA4	2.5	8.4	16.5	25	30	385	475	590	590	590	48	10000	-
10	1.55	22.5	650	0.96	65.86	IE1	BG50-./SSE08LA4	2.2	7.5	15	22.5	27	425	520	650	650	650	48	10000	-
10	1.55	22.5	650	0.96	65.86	IE4	BG50-./S4E09SA4	2.2	7.5	15	22.5	27	550	650	650	650	650	51	10000	-
10	1.55	20.5	710	0.88	71.97	IE1	BG50Z-./SSE08LA4	2	6.9	13.5	20.5	25	465	570	710	710	710	52	10000	-
10	1.55	20.5	710	0.88	71.97	IE4	BG50Z-./S4E09SA4	2	6.9	13.5	20.5	25	610	710	710	710	710	56	10000	-
10	1.55	34.5	430	2.8	43.05	IE4	BG60-./S4E09SA4	3.4	11.5	23	34.5	41.5	365	430	430	430	430	82	16000	-
10	1.55	29.5	500	2.4	50.31	IE4	BG60-./S4E09SA4	2.9	9.9	19.5	29.5	35.5	425	500	500	500	500	82	16000	-
10	1.55	26.5	550	2.2	55.76	IE4	BG60-./S4E09SA4	2.6	8.9	17.5	26.5	32	470	550	550	550	550	82	16000	-
10	1.55	24.5	600	2	60.9	IE4	BG60-./S4E09SA4	2.4	8.2	16	24.5	29.5	510	600	600	600	600	82	16000	-
10	1.55	22	670	1.8	67.49	IE4	BG60-./S4E09SA4	2.2	7.4	14.5	22	26.5	570	670	670	670	670	82	16000	-
10	1.55	21.5	680	1.8	68.32	IE1	BG60Z-./SSE08LA4	2.1	7.3	14.5	21.5	26	440	540	680	680	680	97	16000	-
10	1.55	21.5	680	1.8	68.32	IE4	BG60Z-./S4E09SA4	2.1	7.3	14.5	21.5	26	580	680	680	680	680	101	16000	-
10	1.55	19.5	750	1.6	75.71	IE1	BG60Z-./SSE08LA4	1.9	6.6	13	19.5	23.5	490	600	750	750	750	97	16000	-
10	1.55	19.5	750	1.6	75.71	IE4	BG60Z-./S4E09SA4	1.9	6.6	13	19.5	23.5	640	750	750	750	750	101	16000	-
10	1.55	16	910	1.3	91.09	IE4	BG60Z-./S4E09SA4	1.6	5.4	10.5	16	19.5	590	770	910	910	910	97	16000	-
10	1.55	14.5	1010	1.2	101	IE1	BG60Z-./SSE08LA4	1.4	4.9	9.9	14.5	17.5	650	800	1010	1010	1010	97	16000	-
10	1.55	14.5	1010	1.2	101	IE4	BG60Z-./S4E09SA4	1.4	4.9	9.9	14.5	17.5	850	1010	1010	1010	1010	101	16000	-
10	1.55	12.5	1190	1	119.2	IE1	BG60Z-./SSE08LA4	1.2	4.1	8.3	12.5	15	770	950	1190	1190	1190	97	16000	-
10	1.55	12.5	1190	1	119.2	IE4	BG60Z-./S4E09SA4	1.2	4.1	8.3	12.5	15	1010	1190	1190	1190	1190	101	16000	-
10	1.55	11	1320	0.91	132.1	IE1	BG60Z-./SSE08LA4	1.1	3.7	7.5	11	13.5	850	1050	1320	1320	1320	97	16000	-
10	1.55	11	1320	0.91	132.1	IE4	BG60Z-./S4E09SA4	1.1	3.7	7.5	11	13.5	1120	1320	1320	1320	1320	101	16000	-
10	1.55	17	870	2.6	87.61	IE1	BG70Z-./SSE08LA4	1.7	5.7	11	20.5	26	560	700	870	870	870	137	20000	-
10	1.55	17	870	2.6	87.61	IE4	BG70Z-./S4E09SA4	1.7	5.7	11	20.5	26	740	870	870	870	870	141	20000	-
10	1.55	15.5	950	2.4	95.74	IE4	BG70Z-./S4E09SA4	1.5	5.2	10	15.5	18.5	810	950	950	950	950	141	20000	-
10	1.55	15.5	950	2.4	95.74	IE1	BG70Z-./SSE08LA4	1.5	5.2	10	15.5	18.5	620	760	950	950	950	137	20000	-
10	1.55	13	1130	2	113.6	IE1	BG70Z-./SSE08LA4	1.3	4.4	8.8	13	15.5	730	900	1130	1130	1130	137	20000	-
10	1.55	13	1130	2	113.6	IE4	BG70Z-./S4E09SA4	1.3	4.4	8.8	13	15.5	960	1130	1130	1130	1130	141	20000	-
10	1.55	12	1240	1.9	124	IE4	BG70Z-./S4E09SA4	1.2	4	8	12	14.5	1050	1240	1240	1240	1240	141	20000	-
10	1.55	12	1240	1.9	124	IE1	BG70Z-./SSE08LA4	1.2	4	8	12	14.5	800	990	1240	1240	1240	137	20000	-
10	1.55	10	1470	1.6	147.2	IE1	BG70Z-./SSE08LA4	1	3.3	6.7	10	12	950	1170	1470	1470	1470	137	20000	-
10	1.55	10	1470	1.6	147.2	IE4	BG70Z-./S4E09SA4	1	3.3	6.7	10	12	1250	1470	1470	1470	1470	141	20000	-
10	1.55	9.1	1630	1.4	163.8	IE4	BG70Z-./S4E09SA4	0.9	3	6.1	9.1	10.5	1390	1630	1630	1630	1630	141	20000	-
10	1.55	9.1	1630	1.4	163.8	IE1	BG70Z-./SSE08LA4	0.9	3	6.1	9.1	10.5	1060	1310	1630	1630	1630	137	20000	-
10	1.55	7.7	1940	1.2	194.4	IE4	BG70Z-./S4E09SA4	0.75	2.5	5.1	7.7	9.2	1650	1940	1940	1940	1940	141	20000	-
10	1.55	7.7	1940	1.2	194.4	IE1	BG70Z-./SSE08LA4	0.75	2.5	5.1	7.7	9.2	1260	1550	1940	1940	1940	137	20000	-
10	1.55	7.1	2100	1.1	210.5	IE4	BG70Z-./S4E09SA4	0.7	2.3	4.7	7.1	8.5	1780	2100	2100	2100	2100	141	20000	-
10	1.55	7.1	2100	1.1	210.5	IE1	BG70Z-./SSE08LA4	0.7	2.3	4.7	7.1	8.5	1360	1680	2100	2100	2100	137	20000	-
10	1.55	6	2450	0.92	249.8	IE4	BG70Z-./S4E09SA4	0.6	2	4	6	7.2	2100	2450	2450	2450	2450	141	20000	-
10	1.55	6	2450	0.92	249.8	IE1	BG70Z-./SSE08LA4	0.6	2	4	6	7.2	1620	1990	2450	2450	2450	137	20000	-
10	1.55	5.8	2550	0.98	255.5	IE4	BG70G20-./S4E09SA4	0.55	1.9	3.9	5.8	7	2150	2550	2550	2550	2550	138	20000	-
10	1.55	5.8	2550	0.98	255.5	IE1	BG70G20-./SSE08LA4	0.55	1.9	3.9	5.8	7</								

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 1.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	4.1	3600	2.6	360.3	IE1	BG90G50-..SSE08LA4	0.41	1.3	2.7	4.1	4.9	2300	2850	3600	3600	3600	326	65000	-
10	1.55	4.1	3600	2.6	360.3	IE4	BG90G50-..S4E09SA4	0.41	1.3	2.7	4.1	4.9	3050	3600	3600	3600	3600	330	65000	-
10	1.55	3.4	4350	2.1	435.8	IE1	BG90G50-..SSE08LA4	0.34	1.1	2.2	3.4	4.1	2800	3450	4350	4350	4350	326	65000	-
10	1.55	3.4	4350	2.1	435.8	IE4	BG90G50-..S4E09SA4	0.34	1.1	2.2	3.4	4.1	3700	4350	4350	4350	4350	330	65000	-
10	1.55	2.9	5000	1.8	504.7	IE4	BG90G50-..S4E09SA4	0.29	0.95	1.9	2.9	3.5	4250	5000	5000	5000	5000	330	65000	-
10	1.55	2.9	5000	1.8	504.7	IE1	BG90G50-..SSE08LA4	0.29	0.95	1.9	2.9	3.5	3250	4000	5000	5000	5000	326	65000	-
10	1.55	2.5	5800	1.6	588.8	IE4	BG90G50-..S4E09SA4	0.25	0.8	1.6	2.5	3	5000	5800	5800	5800	5800	330	65000	-
10	1.55	2.5	5800	1.6	588.8	IE1	BG90G50-..SSE08LA4	0.25	0.8	1.6	2.5	3	3800	4700	5800	5800	5800	326	65000	-
10	1.55	2.3	6400	1.4	644.7	IE4	BG90G50-..S4E09SA4	0.23	0.75	1.5	2.3	2.7	5400	6400	6400	6400	6400	330	65000	-
10	1.55	2.3	6400	1.4	644.7	IE1	BG90G50-..SSE08LA4	0.23	0.75	1.5	2.3	2.7	4150	5100	6400	6400	6400	326	65000	-
10	1.55	2.1	7100	1.3	714.2	IE4	BG90G50-..S4E09SA4	0.21	0.7	1.4	2.1	2.5	6000	7100	7100	7100	7100	330	65000	-
10	1.55	2.1	7100	1.3	714.2	IE1	BG90G50-..SSE08LA4	0.21	0.7	1.4	2.1	2.5	4600	5700	7100	7100	7100	326	65000	-
10	1.55	1.6	8800	1	883.7	IE4	BG90G50-..S4E09SA4	0.16	0.55	1.1	1.6	2	7500	8800	8800	8800	8800	330	65000	-
10	1.55	1.6	8800	1	883.7	IE1	BG90G50-..SSE08LA4	0.16	0.55	1.1	1.6	2	5700	7000	8800	8800	8800	326	65000	-
10	1.55	2.2	6500	2.8	658.1	IE4	BG100Z-..S4E09SA4	0.22	0.75	1.5	2.2	2.7	5500	6500	6500	6500	6500	518	90000	-
10	1.55	1.9	7500	2.4	759	IE4	BG100Z-..S4E09SA4	0.19	0.65	1.3	1.9	2.3	6400	7500	7500	7500	7500	518	90000	-
10	1.55	1.7	8400	2.2	845.1	IE4	BG100Z-..S4E09SA4	0.17	0.55	1.1	1.7	2.1	7100	8400	8400	8400	8400	518	90000	-
10	1.55	1.5	9700	1.9	976.1	IE1	BG100G50-..SSE08LA4	0.15	0.5	1	1.5	1.8	6300	7800	9700	9700	9700	513	90000	-
10	1.55	1.5	9700	1.9	976.1	IE4	BG100G50-..S4E09SA4	0.15	0.5	1	1.5	1.8	8200	9700	9700	9700	9700	517	90000	-
10	1.55	1.4	10400	1.8	1043	IE4	BG100G50-..S4E09SA4	0.14	0.47	0.95	1.4	1.7	8800	10400	10400	10400	10400	517	90000	-
10	1.55	1.4	10400	1.8	1043	IE1	BG100G50-..SSE08LA4	0.14	0.47	0.95	1.4	1.7	6700	8300	10400	10400	10400	513	90000	-
10	1.55	1.2	12000	1.5	1204	IE4	BG100G50-..S4E09SA4	0.12	0.41	0.8	1.2	1.4	10200	12000	12000	12000	12000	517	90000	-
10	1.55	1.2	12000	1.5	1204	IE1	BG100G50-..SSE08LA4	0.12	0.41	0.8	1.2	1.4	7800	9600	12000	12000	12000	513	90000	-
10	1.55	1	14400	1.3	1444	IE4	BG100G50-..S4E09SA4	0.1	0.34	0.65	1	1.2	12200	14400	14400	14400	14400	517	90000	-
10	1.55	1	14400	1.3	1444	IE1	BG100G50-..SSE08LA4	0.1	0.34	0.65	1	1.2	9300	11500	14400	14400	14400	513	90000	-
10	1.55	0.85	16700	1.1	1678	IE4	BG100G50-..S4E09SA4	0.085	0.29	0.55	0.85	1	14200	16700	16700	16700	16700	517	90000	-
10	1.55	0.85	16700	1.1	1678	IE1	BG100G50-..SSE08LA4	0.085	0.29	0.55	0.85	1	10900	13400	16700	16700	16700	513	90000	-
10	1.55	0.8	18600	0.99	1867	IE4	BG100G50-..S4E09SA4	0.08	0.26	0.5	0.8	0.95	15800	18600	18600	18600	18600	517	90000	-
10	1.55	0.8	18600	0.99	1867	IE1	BG100G50-..SSE08LA4	0.08	0.26	0.5	0.8	0.95	12100	14900	18600	18600	18600	513	90000	-
10	1.55	0.65	21500	0.86	2154	IE1	BG100G50-..SSE08LA4	0.065	0.23	0.46	0.65	0.8	14000	17200	21500	21500	21500	513	90000	-
10	1.55	0.65	21500	0.86	2154	IE4	BG100G50-..S4E09SA4	0.065	0.23	0.46	0.65	0.8	18300	21500	21500	21500	21500	517	90000	-

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	590	35	1.6	2.52	IE5	BG10-..S5E09XA4	59	198	395	590	710	32.5	35	35	35	35	30	570	790
14	2.2	590	35	1.6	2.52	IE2	BG10-..SHE09SA4	59	198	395	590	710	21	25	35	35	35	22	570	790
14	2.2	435	47.5	1.3	3.42	IE2	BG10-..SHE09SA4	43.5	146	290	435	520	29	34	47.5	47.5	47.5	22	630	880
14	2.2	435	47.5	1.3	3.42	IE5	BG10-..S5E09XA4	43.5	146	290	435	520	44	47.5	47.5	47.5	47.5	30	630	880
14	2.2	340	61	1.1	4.36	IE5	BG10-..S5E09XA4	34	114	225	340	410	56	61	61	61	61	30	650	910
14	2.2	340	61	1.1	4.36	IE2	BG10-..SHE09SA4	34	114	225	340	410	37	43.5	61	61	61	22	650	910
14	2.2	280	74	1	5.34	IE5	BG10-..S5E09XA4	28	93	187	280	335	69	74	74	74	74	30	620	910
14	2.2	280	74	1	5.34	IE2	BG10-..SHE09SA4	28	93	187	280	335	45	53	74	74	74	22	620	910
14	2.2	220	94	0.85	6.78	IE5	BG10-..S5E09XA4	22	73	147	220	265	88	94	94	94	94	30	660	920
14	2.2	220	94	0.85	6.78	IE2	BG10-..SHE09SA4	22	73	147	220	265	57	67	94	94	94	22	660	920
14	2.2	215	96	0.91	6.89	IE2	BG10-..SHE09SA4	21.5	72	145	215	260	58	68	96	96	96	22	850	1200
14	2.2	215	96	0.91	6.89	IE5	BG10-..S5E09XA4	21.5	72	145	215	260	89	96	96	96	96	30	850	1200
14	2.2	196	106	0.83	7.63	IE2	BG10-..SHE09SA4	19.5	65	131	196	235	64	76	106	106	106	22	900	1250
14	2.2	196	106	0.83	7.63	IE5	BG10-..S5E09XA4	19.5	65	131	196	235	99	106	106	106	106	30	900	1250
14	2.2	590	35	2.4</td																

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	128	163	0.96	11.71	IE5	BG20-..S5E09XA4	12.5	42.5	85	128	153	152	163	163	163	163	32	2800	-
14	2.2	113	184	0.9	13.21	IE5	BG20-..S5E09XA4	11	37.5	75	113	136	171	184	184	184	184	32	2900	-
14	2.2	113	184	0.9	13.21	IE2	BG20-..SHE09SA4	11	37.5	75	113	136	112	132	184	184	184	24	2900	-
14	2.2	102	205	0.84	14.67	IE5	BG20-..S5E09XA4	10	34	68	102	122	124	146	205	205	205	32	3050	-
14	2.2	102	205	0.84	14.67	IE2	BG20-..SHE09SA4	10	34	68	102	122	200	215	215	215	215	24	3050	-
14	2.2	96	215	0.81	15.58	IE5	BG20-..S5E09XA4	9.6	32	64	96	115	200	215	215	215	215	32	3100	-
14	2.2	96	215	0.81	15.58	IE2	BG20-..SHE09SA4	9.6	32	64	96	115	132	155	215	215	215	24	3100	-
14	2.2	440	47.5	2.9	3.4	IE5	BG30-..S5E09XA4	44	147	290	440	520	44	47.5	47.5	47.5	47.5	37	1580	-
14	2.2	440	47.5	2.9	3.4	IE2	BG30-..SHE09SA4	44	147	290	440	520	28.5	34	47.5	47.5	47.5	29	1580	-
14	2.2	355	58	2.9	4.21	IE5	BG30-..S5E09XA4	35.5	118	235	355	425	54	58	58	58	58	37	1630	-
14	2.2	355	58	2.9	4.21	IE2	BG30-..SHE09SA4	35.5	118	235	355	425	35.5	42	58	58	58	29	1630	-
14	2.2	275	76	2.6	5.44	IE2	BG30-..SHE09SA4	27.5	91	183	275	330	46	54	76	76	76	29	1670	-
14	2.2	275	76	2.6	5.44	IE5	BG30-..S5E09XA4	27.5	91	183	275	330	70	76	76	76	76	37	1670	-
14	2.2	220	94	2.3	6.75	IE5	BG30-..S5E09XA4	22	74	148	220	265	87	94	94	94	94	37	1760	-
14	2.2	220	94	2.4	6.76	IE2	BG30-..SHE09SA4	22	73	147	220	265	57	67	94	94	94	29	2550	-
14	2.2	220	94	2.4	6.76	IE5	BG30-..S5E09XA4	22	73	147	220	265	87	94	94	94	94	37	2550	-
14	2.2	220	94	2.3	6.75	IE2	BG30-..SHE09SA4	22	74	148	220	265	57	67	94	94	94	29	1760	-
14	2.2	200	105	2.2	7.5	IE5	BG30-..S5E09XA4	20	66	133	200	240	97	105	105	105	105	37	2750	-
14	2.2	200	105	2.2	7.5	IE2	BG30-..SHE09SA4	20	66	133	200	240	63	75	105	105	105	29	2750	-
14	2.2	189	110	1.9	7.91	IE5	BG30-..S5E09XA4	18.5	63	126	189	225	102	110	110	110	110	37	1760	-
14	2.2	189	110	1.9	7.91	IE2	BG30-..SHE09SA4	18.5	63	126	189	225	67	79	110	110	110	29	1760	-
14	2.2	174	120	2	8.6	IE2	BG30-..SHE09SA4	17	58	116	174	205	73	86	120	120	120	29	2800	-
14	2.2	174	120	2	8.6	IE5	BG30-..S5E09XA4	17	58	116	174	205	111	120	120	120	120	37	2800	-
14	2.2	157	133	1.9	9.55	IE5	BG30-..S5E09XA4	15.5	52	104	157	188	124	133	133	133	133	37	3000	-
14	2.2	157	133	1.9	9.55	IE2	BG30-..SHE09SA4	15.5	52	104	157	188	81	95	133	133	133	29	3000	-
14	2.2	140	149	1.8	10.65	IE5	BG30-..S5E09XA4	14	46.5	93	140	169	138	149	149	149	149	37	2950	-
14	2.2	140	149	1.8	10.65	IE2	BG30-..SHE09SA4	14	46.5	93	140	169	90	106	149	149	149	29	2950	-
14	2.2	126	165	1.6	11.82	IE5	BG30-..S5E09XA4	12.5	42	84	126	152	100	118	165	165	165	37	3200	-
14	2.2	126	165	1.6	11.82	IE2	BG30-..SHE09SA4	12.5	42	84	126	152	100	118	165	165	165	29	3200	-
14	2.2	108	192	1.5	13.77	IE5	BG30-..S5E09XA4	10.5	36	72	108	130	179	192	192	192	192	37	3150	-
14	2.2	108	192	1.5	13.77	IE2	BG30-..SHE09SA4	10.5	36	72	108	130	117	137	192	192	192	29	3150	-
14	2.2	98	210	1.4	15.27	IE2	BG30-..SHE09SA4	9.8	32.5	65	98	117	129	152	210	210	210	37	3450	-
14	2.2	98	210	1.4	15.27	IE5	BG30-..S5E09XA4	9.8	32.5	65	98	117	198	210	210	210	210	37	3450	-
14	2.2	87	235	1.3	17.06	IE2	BG30-..SHE09SA4	8.7	29	58	87	105	145	170	235	235	235	29	3700	-
14	2.2	87	235	1.3	17.06	IE5	BG30-..S5E09XA4	8.7	29	58	87	105	220	235	235	235	235	37	3700	-
14	2.2	79	265	1.1	18.93	IE5	BG30-..S5E09XA4	7.9	26	52	79	95	245	265	265	265	265	37	4100	-
14	2.2	79	265	1.1	18.93	IE2	BG30-..SHE09SA4	7.9	26	52	79	95	160	189	265	265	265	29	4100	-
14	2.2	75	275	1.1	19.99	IE5	BG30-..S5E09XA4	7.5	25	50	75	90	255	275	275	275	275	37	4200	-
14	2.2	75	275	1.1	19.99	IE2	BG30-..SHE09SA4	7.5	25	50	75	90	169	199	275	275	275	29	4200	-
14	2.2	67	310	0.97	22.18	IE2	BG30-..SHE09SA4	6.7	22.5	45	67	81	188	220	310	310	310	29	4600	-
14	2.2	67	310	0.97	22.18	IE5	BG30-..S5E09XA4	6.7	22.5	45	67	81	285	310	310	310	310	37	4600	-
14	2.2	58	355	0.84	25.45	IE5	BG30-..S5E09XA4	5.8	19.5	39	58	70	330	355	355	355	355	37	4850	-
14	2.2	58	355	0.84	25.45	IE2	BG30-..SHE09SA4	5.8	19.5	39	58	70	215	250	355	355	355	29	4850	-
14	2.2	196	106	2.8	7.62	IE2	BG40-..SHE09SA4	19.5	65	131	196	235	64	76	106	106	106	43	2650	-
14	2.2	196	106	2.8	7.62	IE5	BG40-..S5E09XA4	19.5	65	131	196	235	99	106	106	106	106	51	2650	-
14	2.2	180	116	2.9	8.31	IE5	BG40-..S5E09XA4	18	60	120	180	215	108	116	116	116	116	51	4100	-
14	2.2	180	116	2.9	8.31	IE2	BG40-..SHE09SA4	18	60	120	180	215	70	83	116	116	116	43	4100	-
14	2.2	166	126	2.3	9	IE2	BG40-..SHE09SA4	16.5	55	111	166	200	76	90	126	126	126	51	2650	-
14	2.2	166	126	2.3	9	IE5	BG40-..S5E09XA4	16.5	55	111	166	200	117	126	126	126	126	51	2650	-
14	2.2	162	129	2.7	9.23	IE5	BG40-..S5E09XA4	16	54	108	162	195	119	129	129	129	129	51	4350	-
14	2.2	162	129	2.7	9.23	IE2	BG40-..SHE09SA4	16	54	108	162	195	78	92	129	129	129	43	4350	-
14	2.2	144	144	2.6	10.35	IE5	BG40-..S5E09XA4	14	48	96	144	173	134	144	144	144	144	51	4350	-
14	2.2	144	144	2.6	10.35	IE2	BG40-..SHE09SA4	14	48	96	144	173	87	103	144	144	144	43	4350	-
14	2.2	130	160	2.4	11.49	IE5	BG40-..S5E09XA4	13	43.5	87	130	156	149	160	160	160	160	51	4600	-
14	2.2	116	180	2.3	12.86	IE2	BG40-..SHE09SA4	11.5	38.5	77	116	139	109	128	180	180	180	43	4500	-
14	2.2	116	180	2.3	12.86	IE5	BG40-..S5E09XA4	11.5	38.5	77	116	139	167	180	180	180	180	51	4500	-
14	2.2	105</																		

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	90	230	2.7	16.53	IE5	BG50-..S5E09XA4	9	30	60	90	108	210	230	230	230	230	59	6500	-
14	2.2	90	230	2.7	16.53	IE2	BG50-..SHE09SA4	9	30	60	90	108	140	165	230	230	230	51	6500	-
14	2.2	81	255	2.5	18.33	IE2	BG50-..SHE09SA4	8.1	27	54	81	98	155	183	255	255	255	51	7200	-
14	2.2	81	255	2.5	18.33	IE5	BG50-..S5E09XA4	8.1	27	54	81	98	235	255	255	255	255	59	7200	-
14	2.2	68	305	2	21.96	IE5	BG50-..S5E09XA4	6.8	22.5	45.5	68	81	285	305	305	305	305	59	8000	-
14	2.2	68	305	2	21.96	IE2	BG50-..SHE09SA4	6.8	22.5	45.5	68	81	186	215	305	305	305	51	8000	-
14	2.2	61	340	1.8	24.34	IE2	BG50-..SHE09SA4	6.1	20.5	41	61	73	205	240	340	340	340	51	8700	-
14	2.2	61	340	1.8	24.34	IE5	BG50-..S5E09XA4	6.1	20.5	41	61	73	315	340	340	340	340	59	8700	-
14	2.2	50	410	1.5	29.62	IE2	BG50-..SHE09SA4	5	16.5	33.5	50	60	250	295	410	410	410	51	8000	-
14	2.2	50	410	1.5	29.62	IE5	BG50-..S5E09XA4	5	16.5	33.5	50	60	385	410	410	410	410	59	8000	-
14	2.2	45.5	455	1.4	32.84	IE5	BG50-..S5E09XA4	4.5	15	30	45.5	54	425	455	455	455	455	59	8700	-
14	2.2	45.5	455	1.4	32.84	IE2	BG50-..SHE09SA4	4.5	15	30	45.5	54	275	325	455	455	455	51	8700	-
14	2.2	39.5	530	1.2	37.89	IE2	BG50-..SHE09SA4	3.9	13	26	39.5	47.5	320	375	530	530	530	51	10000	-
14	2.2	39.5	530	1.2	37.89	IE5	BG50-..S5E09XA4	3.9	13	26	39.5	47.5	490	530	530	530	530	59	10000	-
14	2.2	35.5	580	1.1	42	IE2	BG50-..SHE09SA4	3.5	11.5	23.5	35.5	42.5	355	420	580	580	580	51	10000	-
14	2.2	35.5	580	1.1	42	IE5	BG50-..S5E09XA4	3.5	11.5	23.5	35.5	42.5	540	580	580	580	580	59	10000	-
14	2.2	31.5	650	0.96	47.02	IE2	BG50-..SHE09SA4	3.1	10.5	21	31.5	38	395	470	650	650	650	51	10000	-
14	2.2	31.5	650	0.96	47.02	IE5	BG50-..S5E09XA4	3.1	10.5	21	31.5	38	610	650	650	650	650	59	10000	-
14	2.2	28.5	720	0.86	52.12	IE5	BG50-..S5E09XA4	2.8	9.5	19	28.5	34.5	670	720	720	720	720	59	10000	-
14	2.2	28.5	720	0.86	52.12	IE2	BG50-..SHE09SA4	2.8	9.5	19	28.5	34.5	440	520	720	720	720	51	10000	-
14	2.2	51	410	2.9	29.31	IE2	BG60-..SHE09SA4	5.1	17	34	51	61	245	290	410	410	410	82	14800	-
14	2.2	51	410	2.9	29.31	IE5	BG60-..S5E09XA4	5.1	17	34	51	61	380	410	410	410	410	90	14800	-
14	2.2	46	450	2.6	32.48	IE5	BG60-..S5E09XA4	4.6	15	30.5	46	55	420	450	450	450	450	90	15400	-
14	2.2	46	450	2.6	32.48	IE2	BG60-..SHE09SA4	4.6	15	30.5	46	55	275	320	450	450	450	82	15400	-
14	2.2	38.5	540	2.2	38.85	IE5	BG60-..S5E09XA4	3.8	12.5	25.5	38.5	46	500	540	540	540	540	90	16000	-
14	2.2	38.5	540	2.2	38.85	IE2	BG60-..SHE09SA4	3.8	12.5	25.5	38.5	46	330	385	540	540	540	82	16000	-
14	2.2	34.5	600	2	43.05	IE2	BG60-..SHE09SA4	3.4	11.5	23	34.5	41.5	365	430	600	600	600	82	16000	-
14	2.2	34.5	600	2	43.05	IE5	BG60-..S5E09XA4	3.4	11.5	23	34.5	41.5	550	600	600	600	600	90	16000	-
14	2.2	29.5	700	1.7	50.31	IE5	BG60-..S5E09XA4	2.9	9.9	19.5	29.5	35.5	650	700	700	700	700	90	16000	-
14	2.2	29.5	700	1.7	50.31	IE2	BG60-..SHE09SA4	2.9	9.9	19.5	29.5	35.5	425	500	700	700	700	82	16000	-
14	2.2	26.5	780	1.5	55.76	IE2	BG60-..SHE09SA4	2.6	8.9	17.5	26.5	32	470	550	780	780	780	82	16000	-
14	2.2	26.5	780	1.5	55.76	IE5	BG60-..S5E09XA4	2.6	8.9	17.5	26.5	32	720	780	780	780	780	90	16000	-
14	2.2	24.5	850	1.4	60.9	IE2	BG60-..SHE09SA4	2.4	8.2	16	24.5	29.5	510	600	850	850	850	82	16000	-
14	2.2	24.5	850	1.4	60.9	IE5	BG60-..S5E09XA4	2.4	8.2	16	24.5	29.5	790	850	850	850	850	90	16000	-
14	2.2	22	940	1.3	67.49	IE5	BG60-..S5E09XA4	2.2	7.4	14.5	22	26.5	870	940	940	940	940	90	16000	-
14	2.2	22	940	1.3	67.49	IE2	BG60-..SHE09SA4	2.2	7.4	14.5	22	26.5	570	670	940	940	940	82	16000	-
14	2.2	21.5	950	1.3	68.32	IE2	BG60Z-..SHE09SA4	2.1	7.3	14.5	21.5	26	580	680	950	950	950	101	16000	-
14	2.2	21.5	950	1.3	68.32	IE5	BG60Z-..S5E09XA4	2.1	7.3	14.5	21.5	26	880	950	950	950	950	109	16000	-
14	2.2	19.5	1050	1.1	75.71	IE5	BG60Z-..S5E09XA4	1.9	6.6	13	19.5	23.5	640	750	1050	1050	1050	109	16000	-
14	2.2	16	1270	0.94	91.09	IE5	BG60Z-..S5E09XA4	1.6	5.4	10.5	16	19.5	1180	1270	1270	1270	1270	109	16000	-
14	2.2	16	1270	0.94	91.09	IE2	BG60Z-..SHE09SA4	1.6	5.4	10.5	16	19.5	770	910	1270	1270	1270	101	16000	-
14	2.2	14.5	1410	0.85	101	IE2	BG60Z-..SHE09SA4	1.4	4.9	9.9	14.5	17.5	850	1010	1410	1410	1410	101	16000	-
14	2.2	14.5	1410	0.85	101	IE5	BG60Z-..S5E09XA4	1.4	4.9	9.9	14.5	17.5	1310	1410	1410	1410	1410	109	16000	-
14	2.2	25	830	2.7	59.82	IE5	BG70-..S5E09XA4	2.5	8.3	16.5	25	30	770	830	830	830	830	128	20000	-
14	2.2	25	830	2.7	59.82	IE2	BG70-..SHE09SA4	2.5	8.3	16.5	25	30	500	590	830	830	830	120	20000	-
14	2.2	27	760	2.5	54.64	IE5	BG70Z-..S5E09XA4	2.7	9.1	18	27	32.5	710	760	760	760	760	149	20000	-
14	2.2	27	760	2.5	54.64	IE2	BG70Z-..SHE09SA4	2.7	9.1	18	27	32.5	460	540	760	760	760	141	20000	-
14	2.2	23	900	2.5	64.85	IE5	BG70Z-..S5E09XA4	2.3	7.7	15	23	27.5	840	900	900	900	900	149	20000	-
14	2.2	23	900	2.5	64.85	IE2	BG70Z-..SHE09SA4	2.3	7.7	15	23	27.5	550	640	900	900	900	141	20000	-
14	2.2	20	1030	2.2	73.82	IE5	BG70Z-..S5E09XA4	2	6.7	13.5	20	24	950	1030	1030	1030	1030	149	20000	-
14	2.2	20	1030	2.2	73.82	IE2	BG70Z-..SHE09SA4	2	6.7	13.5	20	24	620	730	1030	1030	1030	141	20000	-
14	2.2	17	1220	1.9	87.61	IE5	BG70Z-..S5E09XA4	1.7	5.7	11	17	20.5	1130	1220	1220	1220	1220	149	20000	-
14	2.2	17	1220	1.9	87.61	IE2	BG70Z-..SHE09SA4	1.7	5.7	11	17	20.5	740	870	1220	1220	1220	141	20000	-
14	2.2	15.5	1340	1.7	95.74	IE5	BG70Z-..S5E09XA4	1.5	5.2	10	15.5	18.5	810	950	1340	1340	1340	141	20000	-
14	2.2	15.5	1340	1.7	95.74	IE2	BG70Z-..SHE09SA4	1.5	5.2	10	1									

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	6.6	3150	1.4	227.2	IE5	BG80G40-..S5E09XA4	0.65	2.2	4.4	6.6	7.9	2950	3150	3150	3150	3150	228	26000	-
14	2.2	5.9	3500	1.3	252.3	IE5	BG80G40-..S5E09XA4	0.55	1.9	3.9	5.9	7.1	3250	3500	3500	3500	3500	228	26000	-
14	2.2	5.9	3500	1.3	252.3	IE2	BG80G40-..SHE09SA4	0.55	1.9	3.9	5.9	7.1	2100	2500	3500	3500	3500	220	26000	-
14	2.2	5.3	3950	1.2	282.8	IE5	BG80G40-..S5E09XA4	0.5	1.7	3.5	5.3	6.3	3650	3950	3950	3950	3950	228	26000	-
14	2.2	5.3	3950	1.2	282.8	IE2	BG80G40-..SHE09SA4	0.5	1.7	3.5	5.3	6.3	2400	2800	3950	3950	3950	220	26000	-
14	2.2	4.7	4350	1	314	IE2	BG80G40-..SHE09SA4	0.47	1.5	3.1	4.7	5.7	2650	3100	4350	4350	4350	220	26000	-
14	2.2	4.7	4350	1	314	IE5	BG80G40-..S5E09XA4	0.47	1.5	3.1	4.7	5.7	4050	4350	4350	4350	4350	228	26000	-
14	2.2	4.1	5000	0.91	360	IE5	BG80G40-..S5E09XA4	0.41	1.3	2.7	4.1	5	4650	5000	5000	5000	5000	228	26000	-
14	2.2	4.1	5000	0.91	360	IE2	BG80G40-..SHE09SA4	0.41	1.3	2.7	4.1	5	3050	3600	5000	5000	5000	220	26000	-
14	2.2	3.7	5500	0.82	399.8	IE5	BG80G40-..S5E09XA4	0.37	1.2	2.5	3.7	4.5	5100	5500	5500	5500	5500	228	26000	-
14	2.2	3.7	5500	0.82	399.8	IE2	BG80G40-..SHE09SA4	0.37	1.2	2.5	3.7	4.5	3350	3950	5500	5500	5500	220	26000	-
14	2.2	7.2	2900	2.9	208.3	IE5	BG90Z-..S5E09XA4	0.7	2.4	4.8	7.2	8.6	2700	2900	2900	2900	2900	327	65000	-
14	2.2	7.2	2900	2.9	208.3	IE2	BG90Z-..SHE09SA4	0.7	2.4	4.8	7.2	8.6	1770	2050	2900	2900	2900	319	65000	-
14	2.2	6.5	3150	2.6	228.1	IE5	BG90Z-..S5E09XA4	0.65	2.1	4.3	6.5	7.8	2950	3150	3150	3150	3150	327	65000	-
14	2.2	6.5	3150	2.6	228.1	IE2	BG90Z-..SHE09SA4	0.65	2.1	4.3	6.5	7.8	1930	2250	3150	3150	3150	319	65000	-
14	2.2	6.8	3050	3	219.9	IE5	BG90G50-..S5E09XA4	0.65	2.2	4.5	6.8	8.1	2850	3050	3050	3050	3050	338	65000	-
14	2.2	6.8	3050	3	219.9	IE2	BG90G50-..SHE09SA4	0.65	2.2	4.5	6.8	8.1	1860	2150	3050	3050	3050	330	65000	-
14	2.2	5.7	3650	2.5	262.5	IE5	BG90G50-..S5E09XA4	0.55	1.9	3.8	5.7	6.8	3400	3650	3650	3650	3650	330	65000	-
14	2.2	5.7	3650	2.5	262.5	IE2	BG90G50-..SHE09SA4	0.55	1.9	3.8	5.7	6.8	2200	2600	3650	3650	3650	330	65000	-
14	2.2	5	4150	2.2	298.8	IE5	BG90G50-..S5E09XA4	0.5	1.6	3.3	5	6	3850	4150	4150	4150	4150	338	65000	-
14	2.2	5	4150	2.2	298.8	IE2	BG90G50-..SHE09SA4	0.5	1.6	3.3	5	6	2500	2950	4150	4150	4150	330	65000	-
14	2.2	4.1	5000	1.8	360.3	IE5	BG90G50-..S5E09XA4	0.41	1.3	2.7	4.1	4.9	4650	5000	5000	5000	5000	338	65000	-
14	2.2	4.1	5000	1.8	360.3	IE2	BG90G50-..SHE09SA4	0.41	1.3	2.7	4.1	4.9	3050	3600	5000	5000	5000	330	65000	-
14	2.2	3.4	6100	1.5	435.8	IE5	BG90G50-..S5E09XA4	0.34	1.1	2.2	3.4	4.1	5600	6100	6100	6100	6100	338	65000	-
14	2.2	2.9	7000	1.3	504.7	IE5	BG90G50-..S5E09XA4	0.29	0.95	1.9	2.9	3.5	6500	7000	7000	7000	7000	338	65000	-
14	2.2	2.9	7000	1.3	504.7	IE2	BG90G50-..SHE09SA4	0.29	0.95	1.9	2.9	3.5	4250	5000	7000	7000	7000	330	65000	-
14	2.2	2.5	8200	1.1	588.8	IE5	BG90G50-..S5E09XA4	0.25	0.8	1.6	2.5	3	7600	8200	8200	8200	8200	338	65000	-
14	2.2	2.5	8200	1.1	588.8	IE2	BG90G50-..SHE09SA4	0.25	0.8	1.6	2.5	3	5000	5800	8200	8200	8200	330	65000	-
14	2.2	2.3	9000	1	644.7	IE2	BG90G50-..SHE09SA4	0.23	0.75	1.5	2.3	2.7	5400	6400	9000	9000	9000	330	65000	-
14	2.2	2.3	9000	1	644.7	IE5	BG90G50-..S5E09XA4	0.23	0.75	1.5	2.3	2.7	8300	9000	9000	9000	9000	338	65000	-
14	2.2	2.1	9900	0.92	714.2	IE5	BG90G50-..S5E09XA4	0.21	0.7	1.4	2.1	2.5	9200	9900	9900	9900	9900	338	65000	-
14	2.2	2.1	9900	0.92	714.2	IE2	BG90G50-..SHE09SA4	0.21	0.7	1.4	2.1	2.5	6000	7100	9900	9900	9900	330	65000	-
14	2.2	3.2	6300	2.9	456.7	IE5	BG100Z-..S5E09XA4	0.32	1	2.1	3.2	3.9	5900	6300	6300	6300	6300	526	90000	-
14	2.2	3.2	6300	2.9	456.7	IE2	BG100Z-..SHE09SA4	0.32	1	2.1	3.2	3.9	3850	4550	6300	6300	6300	518	90000	-
14	2.2	2.9	7100	2.6	508.5	IE5	BG100Z-..S5E09XA4	0.29	0.95	1.9	2.9	3.5	6600	7100	7100	7100	7100	526	90000	-
14	2.2	2.9	7100	2.6	508.5	IE2	BG100Z-..SHE09SA4	0.29	0.95	1.9	2.9	3.5	4300	5000	7100	7100	7100	518	90000	-
14	2.2	2.5	8200	2.2	591.1	IE5	BG100Z-..S5E09XA4	0.25	0.8	1.6	2.5	3	7600	8200	8200	8200	8200	526	90000	-
14	2.2	2.5	8200	2.2	591.1	IE2	BG100Z-..SHE09SA4	0.25	0.8	1.6	2.5	3	5000	5900	8200	8200	8200	518	90000	-
14	2.2	2.2	9200	2	658.1	IE2	BG100Z-..SHE09SA4	0.22	0.75	1.5	2.2	2.7	5500	6500	9200	9200	9200	518	90000	-
14	2.2	2.2	9200	2	658.1	IE5	BG100Z-..S5E09XA4	0.22	0.75	1.5	2.2	2.7	8500	9200	9200	9200	9200	526	90000	-
14	2.2	1.9	10600	1.7	759	IE5	BG100Z-..S5E09XA4	0.19	0.65	1.3	1.9	2.3	9800	10600	10600	10600	10600	526	90000	-
14	2.2	1.9	10600	1.7	759	IE2	BG100Z-..SHE09SA4	0.19	0.65	1.3	1.9	2.3	6400	7500	10600	10600	10600	518	90000	-
14	2.2	1.7	11800	1.6	845.1	IE5	BG100Z-..S5E09XA4	0.17	0.55	1.1	1.7	2.1	10900	11800	11800	11800	11800	526	90000	-
14	2.2	1.7	11800	1.6	845.1	IE2	BG100Z-..SHE09SA4	0.17	0.55	1.1	1.7	2.1	7100	8400	11800	11800	11800	518	90000	-
14	2.2	1.5	13600	1.4	976.1	IE5	BG100G50-..S5E09XA4	0.15	0.5	1	1.5	1.8	12600	13600	13600	13600	13600	525	90000	-
14	2.2	1.5	13600	1.4	976.1	IE2	BG100G50-..SHE09SA4	0.15	0.5	1	1.5	1.8	8200	9700	13600	13600	13600	517	90000	-
14	2.2	1.4	14600	1.3	1043	IE5	BG100G50-..S5E09XA4	0.14	0.47	0.95	1.4	1.7	8800	10400	14600	14600	14600	517	90000	-
14	2.2	1.4	14600	1.3	1043	IE2	BG100G50-..SHE09SA4	0.14	0.47	0.95	1.4	1.7	13500	14600	14600	14600	14600	525	90000	-
14	2.2	1.2	16800	1.1	1204	IE5	BG100G50-..S5E09XA4	0.12	0.41	0.8	1.2	1.4	15600	16800	16800	16800	16800	525	90000	-
14	2.2	1.2	16800	1.1	1204	IE2	BG100G50-..SHE09SA4	0.12	0.41	0.8	1.2	1.4	10200	12000	16800	16800	16800	517	90000	-
14	2.2	1	20000	0.92	1444	IE5	BG100G50-..S5E09XA4	0.1	0.34	0.65	1	1.2	18700	20000	20000	20000	20000	525	90000	-
14	2.2	1	20000	0.92	1444	IE2	BG100G50-..SHE09SA4	0.1	0.34	0.65	1	1.2								

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 19 Nm (PN = 3 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
19	3	300	93	2.8	4.94	IE4	BG40-..S4E11SA6	30	101	200	300	360	93	93	93	93	93	65	2450	-
19	3	235	119	2.5	6.29	IE4	BG40-..S4E11SA6	23.5	79	158	235	285	119	119	119	119	119	65	2600	-
19	3	230	121	2.6	6.4	IE4	BG40-..S4E11SA6	23	78	156	230	280	121	121	121	121	121	65	3750	-
19	3	210	135	2.4	7.11	IE4	BG40-..S4E11SA6	21	70	140	210	250	135	135	135	135	135	65	3950	-
19	3	196	144	2	7.62	IE4	BG40-..S4E11SA6	19.5	65	131	196	235	144	144	144	144	144	65	2650	-
19	3	180	157	2.2	8.31	IE4	BG40-..S4E11SA6	18	60	120	180	215	157	157	157	157	157	65	4100	-
19	3	166	171	1.7	9	IE4	BG40-..S4E11SA6	16.5	55	111	166	200	171	171	171	171	171	65	2650	-
19	3	162	175	2	9.23	IE4	BG40-..S4E11SA6	16	54	108	162	195	175	175	175	175	175	65	4350	-
19	3	144	196	1.9	10.35	IE4	BG40-..S4E11SA6	14	48	96	144	173	196	196	196	196	196	65	4350	-
19	3	130	215	1.8	11.49	IE4	BG40-..S4E11SA6	13	43.5	87	130	156	215	215	215	215	215	65	4600	-
19	3	116	240	1.7	12.86	IE4	BG40-..S4E11SA6	11.5	38.5	77	116	139	240	240	240	240	240	65	4500	-
19	3	105	270	1.5	14.28	IE4	BG40-..S4E11SA6	10.5	35	70	105	126	270	270	270	270	270	65	4900	-
19	3	91	310	1.4	16.39	IE4	BG40-..S4E11SA6	9.1	30.5	61	91	109	310	310	310	310	310	65	5300	-
19	3	82	345	1.2	18.19	IE4	BG40-..S4E11SA6	8.2	27	54	82	98	345	345	345	345	345	65	5600	-
19	3	75	375	1.1	19.84	IE4	BG40-..S4E11SA6	7.5	25	50	75	90	375	375	375	375	375	65	5800	-
19	3	68	415	1	22.02	IE4	BG40-..S4E11SA6	6.8	22.5	45	68	81	415	415	415	415	415	65	6000	-
19	3	64	445	0.95	23.43	IE4	BG40-..S4E11SA6	6.4	21	42.5	64	76	445	445	445	445	445	65	6200	-
19	3	57	490	0.86	26.01	IE4	BG40-..S4E11SA6	5.7	19	38	57	69	490	490	490	490	490	65	6500	-
19	3	172	165	3	8.7	IE4	BG50-..S4E11SA6	17	57	114	172	205	165	165	165	165	165	75	5300	-
19	3	155	183	2.8	9.65	IE4	BG50-..S4E11SA6	15.5	51	103	155	186	183	183	183	183	183	75	5600	-
19	3	124	225	2.5	12.06	IE4	BG50-..S4E11SA6	12	41	82	124	149	225	225	225	225	225	75	5700	-
19	3	112	250	2.3	13.36	IE4	BG50-..S4E11SA6	11	37	74	112	134	250	250	250	250	250	75	6100	-
19	3	90	310	2	16.53	IE4	BG50-..S4E11SA6	9	30	60	90	108	310	310	310	310	310	75	6500	-
19	3	81	345	1.8	18.33	IE4	BG50-..S4E11SA6	8.1	27	54	81	98	345	345	345	345	345	75	7200	-
19	3	68	415	1.5	21.96	IE4	BG50-..S4E11SA6	6.8	22.5	45.5	68	81	415	415	415	415	415	75	8000	-
19	3	61	460	1.4	24.34	IE4	BG50-..S4E11SA6	6.1	20.5	41	61	73	460	460	460	460	460	75	8700	-
19	3	50	560	1.1	29.62	IE4	BG50-..S4E11SA6	5	16.5	33.5	50	60	560	560	560	560	560	75	8000	-
19	3	45.5	620	1	32.84	IE4	BG50-..S4E11SA6	4.5	15	30	45.5	54	620	620	620	620	620	75	8700	-
19	3	39.5	710	0.88	37.89	IE4	BG50-..S4E11SA6	3.9	13	26	39.5	47.5	710	710	710	710	710	75	10000	-
19	3	66	425	2.8	22.4	IE4	BG60-..S4E11SA6	6.6	22	44.5	66	80	425	425	425	425	425	107	13300	-
19	3	60	470	2.5	24.82	IE4	BG60-..S4E11SA6	6	20	40	60	72	470	470	470	470	470	107	13800	-
19	3	51	550	2.2	29.31	IE4	BG60-..S4E11SA6	5.1	17	34	51	61	550	550	550	550	550	107	14800	-
19	3	46	610	1.9	32.48	IE4	BG60-..S4E11SA6	4.6	15	30.5	46	55	610	610	610	610	610	107	15400	-
19	3	38.5	730	1.6	38.85	IE4	BG60-..S4E11SA6	3.8	12.5	25.5	38.5	46	730	730	730	730	730	107	16000	-
19	3	34.5	810	1.5	43.05	IE4	BG60-..S4E11SA6	3.4	11.5	23	34.5	41.5	810	810	810	810	810	107	16000	-
19	3	29.5	950	1.3	50.31	IE4	BG60-..S4E11SA6	2.9	9.9	19.5	29.5	35.5	950	950	950	950	950	107	16000	-
19	3	26.5	1050	1.1	55.76	IE4	BG60-..S4E11SA6	2.6	8.9	17.5	26.5	32	1050	1050	1050	1050	1050	107	16000	-
19	3	24.5	1150	1	60.9	IE4	BG60-..S4E11SA6	2.4	8.2	16	24.5	29.5	1150	1150	1150	1150	1150	107	16000	-
19	3	22	1280	0.94	67.49	IE4	BG60-..S4E11SA6	2.2	7.4	14.5	22	26.5	1280	1280	1280	1280	1280	107	16000	-
19	3	21.5	1290	0.92	68.32	IE4	BG60Z-..S4E11SA6	2.1	7.3	14.5	21.5	26	1290	1290	1290	1290	1290	123	16000	-
19	3	19.5	1430	0.83	75.71	IE4	BG60Z-..S4E11SA6	1.9	6.6	13	19.5	23.5	1430	1430	1430	1430	1430	123	16000	-
19	3	32	880	2.6	46.54	IE4	BG70-..S4E11SA6	3.2	10.5	21	32	38.5	880	880	880	880	880	138	20000	-
19	3	29.5	950	2.4	50.4	IE4	BG70-..S4E11SA6	2.9	9.9	19.5	29.5	35.5	950	950	950	950	950	138	20000	-
19	3	25	1130	2	59.82	IE4	BG70-..S4E11SA6	2.5	8.3	16.5	25	30	1130	1130	1130	1130	1130	138	20000	-
19	3	27	1030	1.9	54.64	IE4	BG70Z-..S4E11SA6	2.7	9.1	18	27	32.5	1030	1030	1030	1030	1030	164	20000	-
19	3	23	1230	1.9	64.85	IE4	BG70Z-..S4E11SA6	2.3	7.7	15	23	27.5	1230	1230	1230	1230	1230	164	20000	-
19	3	20	1400	1.6	73.82	IE4	BG70Z-..S4E11SA6	2	6.7	13.5	20	24	1400	1400	1400	1400	1400	164	20000	-
19	3	17	1660	1.4	87.61	IE4	BG70Z-..S4E11SA6	1.7	5.7	11	17	20.5	1660	1660	1660	1660	1660	164	20000	-
19	3	15.5	1810	1.3	95.74	IE4	BG70Z-..S4E11SA6	1.5	5.2	10	15.5	18.5	1810	1810	1810	1810	1810	164	20000	-
19	3	13	2150	1.1	113.6	IE4	BG70Z-..S4E11SA6	1.3	4.4	8.8	13	15.5	2150	2150	2150	2150	2150	164	20000	-
19	3	12	2350	0.98	124	IE4	BG70Z-..S4E11SA6	1.2	4	8	12	14.5	2350	2350	2350	2350	2350	164	20000	-
19	3	10	2750	0.82	147.2	IE4	BG70Z-..S4E11SA6	1	3.3	6.7	10	12	2750	2750	2750	2750	2750	164	20000	-
19	3	20	1400	3	73.73	IE4	BG80Z-..S4E11SA6	2	6.7	13.5	20	24	1400	1400	1400	1400	1400	234	26000	-
19	3	17.5	1600	2.6	84.55	IE4	BG80Z-..S4E11SA6	1.7	5.9	11.5	21	26	1600	1600	1600	1600	1600	234	26000	-
19	3	15.5	1780	2.4	93.89	IE4	BG													

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 19 Nm (PN = 3 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
19	3	3.9	7200	2.5	382.6	IE4	BG100Z-..S4E11SA6	0.39	1.3	2.6	3.9	4.7	7200	7200	7200	7200	7200	543	90000	-
19	3	3.2	8600	2.1	456.7	IE4	BG100Z-..S4E11SA6	0.32	1	2.1	3.2	3.9	8600	8600	8600	8600	8600	543	90000	-
19	3	2.9	9600	1.9	508.5	IE4	BG100Z-..S4E11SA6	0.29	0.95	1.9	2.9	3.5	9600	9600	9600	9600	9600	543	90000	-
19	3	2.5	11200	1.6	591.1	IE4	BG100Z-..S4E11SA6	0.25	0.8	1.6	2.5	3	11200	11200	11200	11200	11200	543	90000	-
19	3	2.2	12500	1.5	658.1	IE4	BG100Z-..S4E11SA6	0.22	0.75	1.5	2.2	2.7	12500	12500	12500	12500	12500	543	90000	-
19	3	1.9	14400	1.3	759	IE4	BG100Z-..S4E11SA6	0.19	0.65	1.3	1.9	2.3	14400	14400	14400	14400	14400	543	90000	-
19	3	1.7	16000	1.2	845.1	IE4	BG100Z-..S4E11SA6	0.17	0.55	1.1	1.7	2.1	16000	16000	16000	16000	16000	543	90000	-
19	3	1.5	18500	1	976.1	IE4	BG100G50-..S4E11SA6	0.15	0.5	1	1.5	1.8	18500	18500	18500	18500	18500	540	90000	-
19	3	1.4	19800	0.93	1043	IE4	BG100G50-..S4E11SA6	0.14	0.47	0.95	1.4	1.7	19800	19800	19800	19800	19800	540	90000	-
19	3	1.2	22500	0.81	1204	IE4	BG100G50-..S4E11SA6	0.12	0.41	0.8	1.2	1.4	22500	22500	22500	22500	22500	540	90000	-

MN = 20 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	1500	1800	150	500	1000	1500	1800				
20	3.1	590	50	1.1	2.52	IE3	BG10-..SPE09XA4	59	198	395	590	710	32.5	40	50	50	50	30	570	790	
20	3.1	435	68	0.91	3.42	IE3	BG10-..SPE09XA4	43.5	146	290	435	520	44	54	68	68	68	30	630	880	
20	3.1	590	50	1.7	2.52	IE3	BG20-..SPE09XA4	59	198	395	590	710	32.5	40	50	50	50	32	1650	-	
20	3.1	450	66	1.4	3.33	IE3	BG20-..SPE09XA4	45	150	300	450	540	43	53	66	66	66	32	1830	-	
20	3.1	340	87	1.2	4.38	IE3	BG20-..SPE09XA4	34	114	225	340	410	56	70	87	87	87	32	1990	-	
20	3.1	270	109	1	5.49	IE3	BG20-..SPE09XA4	27	91	182	270	325	71	87	109	109	109	32	2100	-	
20	3.1	245	121	1	6.06	IE3	BG20-..SPE09XA4	24.5	82	165	245	295	78	96	121	121	121	32	2250	-	
20	3.1	230	129	0.94	6.48	IE3	BG20-..SPE09XA4	23	77	154	230	275	84	103	129	129	129	32	2250	-	
20	3.1	220	134	0.97	6.73	IE3	BG20-..SPE09XA4	22	74	148	220	265	87	107	134	134	134	32	2350	2100	
20	3.1	187	160	0.85	8.02	IE3	BG20-..SPE09XA4	18.5	62	124	187	220	104	128	160	160	160	32	2500	-	
20	3.1	168	178	0.8	8.91	IE3	BG20-..SPE09XA4	16.5	56	112	168	200	115	142	178	178	178	32	2600	-	
20	3.1	560	53	2.4	2.67	IE3	BG30-..SPE09XA4	56	187	370	560	670	34.5	42.5	53	53	53	37	1450	-	
20	3.1	440	68	2	3.4	IE3	BG30-..SPE09XA4	44	147	290	440	520	44	54	68	68	68	37	1580	-	
20	3.1	355	84	2	4.21	IE3	BG30-..SPE09XA4	35.5	118	235	355	425	54	67	84	84	84	37	1630	-	
20	3.1	275	108	1.8	5.44	IE3	BG30-..SPE09XA4	27.5	91	183	275	330	70	87	108	108	108	37	1670	-	
20	3.1	220	135	1.7	6.76	IE3	BG30-..SPE09XA4	22	73	147	220	265	87	108	135	135	135	37	2550	-	
20	3.1	220	135	1.6	6.75	IE3	BG30-..SPE09XA4	22	74	148	220	265	87	108	135	135	135	37	1760	-	
20	3.1	200	150	1.5	7.5	IE3	BG30-..SPE09XA4	20	66	133	200	240	97	120	150	150	150	37	2750	-	
20	3.1	189	158	1.4	7.91	IE3	BG30-..SPE09XA4	18.5	63	126	189	225	102	126	158	158	158	37	1760	-	
20	3.1	174	172	1.4	8.6	IE3	BG30-..SPE09XA4	17	58	116	174	205	111	137	172	172	172	37	2800	-	
20	3.1	157	191	1.3	9.55	IE3	BG30-..SPE09XA4	15.5	52	104	157	188	124	152	191	191	191	37	3000	-	
20	3.1	140	210	1.2	10.65	IE3	BG30-..SPE09XA4	14	46.5	93	140	169	138	170	210	210	210	37	2950	-	
20	3.1	126	235	1.1	11.82	IE3	BG30-..SPE09XA4	12.5	42	84	126	152	153	189	235	235	235	37	3200	-	
20	3.1	108	275	1.1	13.77	IE3	BG30-..SPE09XA4	10.5	36	72	108	130	179	220	275	275	275	37	3150	-	
20	3.1	98	305	0.98	15.27	IE3	BG30-..SPE09XA4	9.8	32.5	65	98	117	198	240	305	305	305	37	3450	-	
20	3.1	87	340	0.88	17.06	IE3	BG30-..SPE09XA4	8.7	29	58	87	105	220	270	340	340	340	37	3700	-	
20	3.1	375	79	3	3.97	IE3	BG40-..SPE09XA4	37.5	125	250	375	450	51	63	79	79	79	51	2400	-	
20	3.1	300	98	2.7	4.94	IE3	BG40-..SPE09XA4	30	101	200	300	360	64	79	98	98	98	51	2450	-	
20	3.1	235	125	2.3	6.29	IE3	BG40-..SPE09XA4	23.5	79	158	235	285	81	100	125	125	125	51	2600	-	
20	3.1	230	128	2.4	6.4	IE3	BG40-..SPE09XA4	23	78	156	230	280	83	102	128	128	128	51	3750	-	
20	3.1	210	142	2.3	7.11	IE3	BG40-..SPE09XA4	21	70	140	210	250	92	113	142	142	142	51	3950	-	
20	3.1	196	152	1.9	7.62	IE3	BG40-..SPE09XA4	19.5	65	131	196	235	99	121	152	152	152	51	2650	-	
20	3.1	180	166	2	8.31	IE3	BG40-..SPE09XA4	18	60	120	180	215	108	132	166	166	166	51	4100	-	
20	3.1	166	180	1.6	9	IE3	BG40-..SPE09XA4	16.5	55	111	166	200	117	144	180	180	180	51	2650	-	
20	3.1	162	184	1.9	9.23	IE3	BG40-..SPE09XA4	16	54	108	162	195	119	147	184	184	184	51	4350	-	
20	3.1	144	205	1.8	10.35	IE3	BG40-..SPE09XA4	14	48	96	144	173	134	165	205	205	205	51	4350	-	

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 20 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
20	3.1	46	640	1.8	32.48	IE3	BG60-..SPE09XA4	4.6	15	30.5	46	55	420	510	640	640	640	90	15400	-
20	3.1	38.5	770	1.5	38.85	IE3	BG60-..SPE09XA4	3.8	12.5	25.5	38.5	46	500	620	770	770	770	90	16000	-
20	3.1	34.5	860	1.4	43.05	IE3	BG60-..SPE09XA4	3.4	11.5	23	34.5	41.5	550	680	860	860	860	90	16000	-
20	3.1	29.5	1000	1.2	50.31	IE3	BG60-..SPE09XA4	2.9	9.9	19.5	29.5	35.5	650	800	1000	1000	1000	90	16000	-
20	3.1	26.5	1110	1.1	55.76	IE3	BG60-..SPE09XA4	2.6	8.9	17.5	26.5	32	720	890	1110	1110	1110	90	16000	-
20	3.1	24.5	1210	0.99	60.9	IE3	BG60-..SPE09XA4	2.4	8.2	16	24.5	29.5	790	970	1210	1210	1210	90	16000	-
20	3.1	22	1340	0.89	67.49	IE3	BG60-..SPE09XA4	2.2	7.4	14.5	22	26.5	870	1070	1340	1340	1340	90	16000	-
20	3.1	21.5	1360	0.88	68.32	IE3	BG60Z-..SPE09XA4	2.1	7.3	14.5	21.5	26	880	1090	1360	1360	1360	109	16000	-
20	3.1	38	780	2.9	39.22	IE3	BG70-..SPE09XA4	3.8	12.5	25	38	45.5	500	620	780	780	780	128	19100	-
20	3.1	32	930	2.5	46.54	IE3	BG70-..SPE09XA4	3.2	10.5	21	32	38.5	600	740	930	930	930	128	20000	-
20	3.1	29.5	1000	2.3	50.4	IE3	BG70-..SPE09XA4	2.9	9.9	19.5	29.5	35.5	650	800	1000	1000	1000	128	20000	-
20	3.1	25	1190	1.9	59.82	IE3	BG70-..SPE09XA4	2.5	8.3	16.5	25	30	770	950	1190	1190	1190	128	20000	-
20	3.1	27	1090	1.8	54.64	IE3	BG70Z-..SPE09XA4	2.7	9.1	18	27	32.5	710	870	1090	1090	1090	149	20000	-
20	3.1	23	1290	1.8	64.85	IE3	BG70Z-..SPE09XA4	2.3	7.7	15	23	27.5	840	1030	1290	1290	1290	149	20000	-
20	3.1	20	1470	1.6	73.82	IE3	BG70Z-..SPE09XA4	2	6.7	13.5	20	24	950	1180	1470	1470	1470	149	20000	-
20	3.1	17	1750	1.3	87.61	IE3	BG70Z-..SPE09XA4	1.7	5.7	11	17	20.5	1130	1400	1750	1750	1750	149	20000	-
20	3.1	15.5	1910	1.2	95.74	IE3	BG70Z-..SPE09XA4	1.5	5.2	10	15.5	18.5	1240	1530	1910	1910	1910	149	20000	-
20	3.1	13	2250	1	113.6	IE3	BG70Z-..SPE09XA4	1.3	4.4	8.8	13	15.5	1470	1810	2250	2250	2250	149	20000	-
20	3.1	12	2450	0.93	124	IE3	BG70Z-..SPE09XA4	1.2	4	8	12	14.5	1610	1980	2450	2450	2450	149	20000	-
20	3.1	20	1470	2.8	73.73	IE3	BG80Z-..SPE09XA4	2	6.7	13.5	20	24	950	1170	1470	1470	1470	217	26000	-
20	3.1	17.5	1690	2.5	84.55	IE3	BG80Z-..SPE09XA4	1.7	5.9	11.5	17.5	21	1090	1350	1690	1690	1690	217	26000	-
20	3.1	15.5	1870	2.2	93.89	IE3	BG80Z-..SPE09XA4	1.5	5.3	10.5	15.5	19	1220	1500	1870	1870	1870	217	26000	-
20	3.1	13	2200	1.9	112.4	IE3	BG80Z-..SPE09XA4	1.3	4.4	8.8	13	16	1460	1790	2200	2200	2200	217	26000	-
20	3.1	12	2450	1.7	124.8	IE3	BG80Z-..SPE09XA4	1.2	4	8	12	14	1620	1990	2450	2450	2450	217	26000	-
20	3.1	10	2900	1.4	145.4	IE3	BG80Z-..SPE09XA4	1	3.4	6.8	10	12	1890	2300	2900	2900	2900	217	26000	-
20	3.1	9.2	3200	1.3	161.5	IE3	BG80Z-..SPE09XA4	0.9	3	6.1	9.2	11	2050	2550	3200	3200	3200	217	26000	-
20	3.1	8	3700	1.1	186.8	IE3	BG80Z-..SPE09XA4	0.8	2.6	5.3	8	9.6	2400	2950	3700	3700	3700	217	26000	-
20	3.1	7.2	4100	1	207.4	IE3	BG80Z-..SPE09XA4	0.7	2.4	4.8	7.2	8.6	2650	3300	4100	4100	4100	217	26000	-
20	3.1	6.6	4500	1	227.2	IE3	BG80G40-..SPE09XA4	0.65	2.2	4.4	6.6	7.9	2950	3600	4500	4500	4500	228	26000	-
20	3.1	5.9	5000	0.91	252.3	IE3	BG80G40-..SPE09XA4	0.55	1.9	3.9	5.9	7.1	3250	4000	5000	5000	5000	228	26000	-
20	3.1	5.3	5600	0.81	282.8	IE3	BG80G40-..SPE09XA4	0.5	1.7	3.5	5.3	6.3	3650	4500	5600	5600	5600	228	26000	-
20	3.1	10.5	2750	3	139.2	IE3	BG90Z-..SPE09XA4	1	3.5	7.1	10.5	12.5	1800	2200	2750	2750	2750	327	65000	-
20	3.1	9.2	3250	2.6	163	IE3	BG90Z-..SPE09XA4	0.9	3	6.1	9.2	11	2100	2600	3250	3250	3250	327	65000	-
20	3.1	8.4	3550	2.4	178.5	IE3	BG90Z-..SPE09XA4	0.8	2.8	5.6	8.4	10	2300	2850	3550	3550	3550	327	65000	-
20	3.1	7.2	4150	2	208.3	IE3	BG90Z-..SPE09XA4	0.7	2.4	4.8	7.2	8.6	2700	3300	4150	4150	4150	327	65000	-
20	3.1	6.5	4550	1.8	228.1	IE3	BG90Z-..SPE09XA4	0.65	2.1	4.3	6.5	7.8	2950	3600	4550	4550	4550	327	65000	-
20	3.1	6.8	4350	2.1	219.9	IE3	BG90G50-..SPE09XA4	0.65	2.2	4.5	6.8	8.1	2850	3500	4350	4350	4350	338	65000	-
20	3.1	5.7	5200	1.8	262.5	IE3	BG90G50-..SPE09XA4	0.55	1.9	3.8	5.7	6.8	3400	4200	5200	5200	5200	338	65000	-
20	3.1	5	5900	1.5	298.8	IE3	BG90G50-..SPE09XA4	0.5	1.6	3.3	5	6	3850	4750	5900	5900	5900	338	65000	-
20	3.1	4.1	7200	1.3	360.3	IE3	BG90G50-..SPE09XA4	0.41	1.3	2.7	4.1	4.9	4650	5700	7200	7200	7200	338	65000	-
20	3.1	3.4	8700	1.1	435.8	IE3	BG90G50-..SPE09XA4	0.34	1.1	2.2	3.4	4.1	5600	6900	8700	8700	8700	338	65000	-
20	3.1	2.9	10000	0.91	504.7	IE3	BG90G50-..SPE09XA4	0.29	0.95	1.9	2.9	3.5	6500	8000	10000	10000	10000	338	65000	-
20	3.1	4.3	6800	2.7	343.6	IE3	BG100Z-..SPE09XA4	0.43	1.4	2.9	4.3	5.2	4450	5400	6800	6800	6800	526	90000	-
20	3.1	3.9	7600	2.4	382.6	IE3	BG100Z-..SPE09XA4	0.39	1.3	2.6	3.9	4.7	4950	6100	7600	7600	7600	526	90000	-
20	3.1	3.2	9100	2	456.7	IE3	BG100Z-..SPE09XA4	0.32	1	2.1	3.2	3.9	5900	7300	9100	9100	9100	526	90000	-
20	3.1	2.9	10100	1.8	508.5	IE3	BG100Z-..SPE09XA4	0.29	0.95	1.9	2.9	3.5	6600	8100	10100	10100	10100	526	90000	-
20	3.1	2.5	11800	1.6	591.1	IE3	BG100Z-..SPE09XA4	0.25	0.8	1.6	2.5	3	7600	9400	11800	11800	11800	526	90000	-
20	3.1	2.2	13100	1.4	658.1	IE3	BG100Z-..SPE09XA4	0.22	0.75	1.5	2.2	2.7	8500	10500	13100	13100	13100	526	90000	-
20	3.1	1.9	15100	1.2	759	IE3	BG100Z-..SPE09XA4	0.19	0.65	1.3	1.9	2.3	9800	12100	15100	15100	15100	526	90000	-
20	3.1	1.7	16900	1.1	845.1	IE3	BG100Z-..SPE09XA4	0.17	0.55	1.1	1.7	2.1	10900	13500	16900	16900	16900	526	90000	-
20	3.1	1.5	19500	0.95	976.1	IE3	BG100G50-..SPE09XA4	0.15	0.5	1	1.5	1.8	12600	15600	19500	19500	19500	525	90000	-
20	3.1	1.4	20500	0.89	1043	IE3	BG100G50-..SPE09XA4	0.14	0.47	0.95	1.4	1.7	13500	16600	20500	20500	20500	525	90000	-
25.5	4	560	68	1.9	2.67	IE3	BG30-..SPE11SA6	56	187	370	560	670	50	58	6					

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 25.5 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
25.5	4	300	125	2.1	4.94	IE3	BG40-../SPE11SA6	30	101	200	300	360	93	108	125	125	125	65	2450	-
25.5	4	235	160	1.8	6.29	IE3	BG40-../SPE11SA6	23.5	79	158	235	285	119	138	160	160	160	65	2600	-
25.5	4	230	163	1.9	6.4	IE3	BG40-../SPE11SA6	23	78	156	230	280	121	140	163	163	163	65	3750	-
25.5	4	210	181	1.8	7.11	IE3	BG40-../SPE11SA6	21	70	140	210	250	135	156	181	181	181	65	3950	-
25.5	4	196	194	1.5	7.62	IE3	BG40-../SPE11SA6	19.5	65	131	196	235	144	167	194	194	194	65	2650	-
25.5	4	180	210	1.6	8.31	IE3	BG40-../SPE11SA6	18	60	120	180	215	157	182	210	210	210	65	4100	-
25.5	4	166	225	1.3	9	IE3	BG40-../SPE11SA6	16.5	55	111	166	200	171	198	225	225	225	65	2650	-
25.5	4	162	235	1.5	9.23	IE3	BG40-../SPE11SA6	16	54	108	162	195	175	200	235	235	235	65	4350	-
25.5	4	144	260	1.4	10.35	IE3	BG40-../SPE11SA6	14	48	96	144	173	196	225	260	260	260	65	4350	-
25.5	4	130	290	1.3	11.49	IE3	BG40-../SPE11SA6	13	43.5	87	130	156	215	250	290	290	290	65	4600	-
25.5	4	116	325	1.3	12.86	IE3	BG40-../SPE11SA6	11.5	38.5	77	116	139	240	280	325	325	325	65	4500	-
25.5	4	105	360	1.2	14.28	IE3	BG40-../SPE11SA6	10.5	35	70	105	126	270	310	360	360	360	65	4900	-
25.5	4	91	415	1	16.39	IE3	BG40-../SPE11SA6	9.1	30.5	61	91	109	310	360	415	415	415	65	5300	-
25.5	4	82	460	0.92	18.19	IE3	BG40-../SPE11SA6	8.2	27	54	82	98	345	400	460	460	460	65	5600	-
25.5	4	75	500	0.84	19.84	IE3	BG40-../SPE11SA6	7.5	25	50	75	90	375	435	500	500	500	65	5800	-
25.5	4	245	154	2.9	6.07	IE3	BG50-../SPE11SA6	24.5	82	164	245	295	115	133	154	154	154	75	4700	-
25.5	4	220	171	2.6	6.74	IE3	BG50-../SPE11SA6	22	74	148	220	265	128	148	171	171	171	75	3750	-
25.5	4	172	220	2.3	8.7	IE3	BG50-../SPE11SA6	17	57	114	172	205	165	191	220	220	220	75	5300	-
25.5	4	155	245	2.1	9.65	IE3	BG50-../SPE11SA6	15.5	51	103	155	186	183	210	245	245	245	75	5600	-
25.5	4	124	305	1.9	12.06	IE3	BG50-../SPE11SA6	12	41	82	124	149	225	265	305	305	305	75	5700	-
25.5	4	112	340	1.7	13.36	IE3	BG50-../SPE11SA6	11	37	74	112	134	250	290	340	340	340	75	6100	-
25.5	4	90	420	1.5	16.53	IE3	BG50-../SPE11SA6	9	30	60	90	108	310	360	420	420	420	75	6500	-
25.5	4	81	465	1.3	18.33	IE3	BG50-../SPE11SA6	8.1	27	54	81	98	345	400	465	465	465	75	7200	-
25.5	4	68	550	1.1	21.96	IE3	BG50-../SPE11SA6	6.8	22.5	45.5	68	81	415	480	550	550	550	75	8000	-
25.5	4	61	620	1	24.34	IE3	BG50-../SPE11SA6	6.1	20.5	41	61	73	460	530	620	620	620	75	8700	-
25.5	4	50	750	0.83	29.62	IE3	BG50-../SPE11SA6	5	16.5	33.5	50	60	560	650	750	750	750	75	8000	-
25.5	4	111	340	3	13.47	IE3	BG60-../SPE11SA6	11	37	74	111	133	255	295	340	340	340	107	11200	-
25.5	4	89	425	2.6	16.8	IE3	BG60-../SPE11SA6	8.9	29.5	59	89	107	315	365	425	425	425	107	12000	-
25.5	4	80	470	2.4	18.62	IE3	BG60-../SPE11SA6	8	26.5	53	80	96	350	405	470	470	470	107	12400	-
25.5	4	66	570	2.1	22.4	IE3	BG60-../SPE11SA6	6.6	22	44.5	66	80	425	490	570	570	570	107	13300	-
25.5	4	60	630	1.9	24.82	IE3	BG60-../SPE11SA6	6	20	40	60	72	470	540	630	630	630	107	13800	-
25.5	4	51	740	1.6	29.31	IE3	BG60-../SPE11SA6	5.1	17	34	51	61	550	640	740	740	740	107	14800	-
25.5	4	46	820	1.4	32.48	IE3	BG60-../SPE11SA6	4.6	15	30.5	46	55	610	710	820	820	820	107	15400	-
25.5	4	38.5	990	1.2	38.85	IE3	BG60-../SPE11SA6	3.8	12.5	25.5	38.5	46	730	850	990	990	990	107	16000	-
25.5	4	34.5	1090	1.1	43.05	IE3	BG60-../SPE11SA6	3.4	11.5	23	34.5	41.5	810	940	1090	1090	1090	107	16000	-
25.5	4	29.5	1280	0.94	50.31	IE3	BG60-../SPE11SA6	2.9	9.9	19.5	29.5	35.5	950	1100	1280	1280	1280	107	16000	-
25.5	4	26.5	1420	0.84	55.76	IE3	BG60-../SPE11SA6	2.6	8.9	17.5	26.5	32	1050	1220	1420	1420	1420	107	16000	-
25.5	4	50	750	3	29.69	IE3	BG70-../SPE11SA6	5	16.5	33.5	50	60	560	650	750	750	750	138	16900	-
25.5	4	42.5	890	2.6	35.24	IE3	BG70-../SPE11SA6	4.2	14	28	42.5	51	660	770	890	890	890	138	18300	-
25.5	4	38	1000	2.3	39.22	IE3	BG70-../SPE11SA6	3.8	12.5	25	38	45.5	740	860	1000	1000	1000	138	19100	-
25.5	4	32	1180	1.9	46.54	IE3	BG70-../SPE11SA6	3.2	10.5	21	32	38.5	880	1020	1180	1180	1180	138	20000	-
25.5	4	29.5	1280	1.8	50.4	IE3	BG70-../SPE11SA6	2.9	9.9	19.5	29.5	35.5	950	1100	1280	1280	1280	138	20000	-
25.5	4	25	1520	1.5	59.82	IE3	BG70-../SPE11SA6	2.5	8.3	16.5	25	30	1130	1310	1520	1520	1520	138	20000	-
25.5	4	27	1390	1.4	54.64	IE3	BG70Z-../SPE11SA6	2.7	9.1	18	27	32.5	1030	1200	1390	1390	1390	164	20000	-
25.5	4	23	1650	1.4	64.85	IE3	BG70Z-../SPE11SA6	2.3	7.7	15	23	27.5	1230	1420	1650	1650	1650	164	20000	-
25.5	4	20	1880	1.2	73.82	IE3	BG70Z-../SPE11SA6	2	6.7	13.5	20	24	1400	1620	1880	1880	1880	164	20000	-
25.5	4	17	2200	1	87.61	IE3	BG70Z-../SPE11SA6	1.7	5.7	11	17	20.5	1660	1920	2200	2200	2200	164	20000	-
25.5	4	15.5	2400	0.94	95.74	IE3	BG70Z-../SPE11SA6	1.5	5.2	10	15.5	18.5	1810	2100	2400	2400	2400	164	20000	-
25.5	4	26	1450	2.9	57.24	IE3	BG80-../SPE11SA6	2.6	8.7	17	26	31	1080	1250	1450	1450	1450	192	25400	-
25.5	4	23.5	1620	2.6	63.56	IE3	BG80-../SPE11SA6	2.3	7.8	15.5	23.5	28	1200	1390	1620	1620	1620	192	26000	-
25.5	4	22.5	1690	2.5	66.4	IE3	BG80Z-../SPE11SA6	2.2	7.5	15	22.5	27	1260	1460	1690	1690	1690	234	26000	-
25.5	4	20	1880	2.2	73.73	IE3	BG80Z-../SPE11SA6	2	6.7	13.5	20	24	1400	1620	1880	1880	1880	234	26000	-
25.5	4	17.5	2150	1.9	84.55	IE3	BG80Z-../SPE11SA6	1.7	5.9	11.5	17.5	21	1600	1860	2150	2150	2150	234	26000	-
25.5	4	15.5	2350	1.8	93.89	IE3	BG80Z-../SPE11SA6	1.5												

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 1500 \text{ 1/min}$

MN = 25.5 Nm (PN = 4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
25.5	4	3.2	11600	1.6	456.7	IE3	BG100Z-..SPE11SA6	0.32	1	2.1	3.2	3.9	8600	10000	11600	11600	11600	543	90000	-
25.5	4	2.9	12900	1.4	508.5	IE3	BG100Z-..SPE11SA6	0.29	0.95	1.9	2.9	3.5	9600	11100	12900	12900	12900	543	90000	-
25.5	4	2.5	15000	1.2	591.1	IE3	BG100Z-..SPE11SA6	0.25	0.8	1.6	2.5	3	11200	13000	15000	15000	15000	543	90000	-
25.5	4	2.2	16700	1.1	658.1	IE3	BG100Z-..SPE11SA6	0.22	0.75	1.5	2.2	2.7	12500	14400	16700	16700	16700	543	90000	-
25.5	4	1.9	19300	0.96	759	IE3	BG100Z-..SPE11SA6	0.19	0.65	1.3	1.9	2.3	14400	16600	19300	19300	19300	543	90000	-
25.5	4	1.7	21500	0.86	845.1	IE3	BG100Z-..SPE11SA6	0.17	0.55	1.1	1.7	2.1	16000	18500	21500	21500	21500	543	90000	-

MN = 26.5 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
26.5	4	560	70	1.8	2.67	IE5	BG30-..S5E11MA6	56	187	370	560	670	70	70	70	70	70	46	1450	-
26.5	4	440	90	1.5	3.4	IE5	BG30-..S5E11MA6	44	147	290	440	520	90	90	90	90	90	46	1580	-
26.5	4	355	111	1.5	4.21	IE5	BG30-..S5E11MA6	35.5	118	235	355	425	111	111	111	111	111	46	1630	-
26.5	4	275	144	1.4	5.44	IE5	BG30-..S5E11MA6	27.5	91	183	275	330	144	144	144	144	144	46	1670	-
26.5	4	220	179	1.3	6.76	IE5	BG30-..S5E11MA6	22	73	147	220	265	179	179	179	179	179	46	2550	-
26.5	4	220	178	1.2	6.75	IE5	BG30-..S5E11MA6	22	74	148	220	265	178	178	178	178	178	46	1760	-
26.5	4	200	198	1.2	7.5	IE5	BG30-..S5E11MA6	20	66	133	200	240	198	198	198	198	198	46	2750	-
26.5	4	189	205	1	7.91	IE5	BG30-..S5E11MA6	18.5	63	126	189	225	205	205	205	205	205	46	1760	-
26.5	4	174	225	1.1	8.6	IE5	BG30-..S5E11MA6	17	58	116	174	205	225	225	225	225	225	46	2800	-
26.5	4	157	250	0.99	9.55	IE5	BG30-..S5E11MA6	15.5	52	104	157	188	250	250	250	250	250	46	3000	-
26.5	4	140	280	0.94	10.65	IE5	BG30-..S5E11MA6	14	46.5	93	140	169	280	280	280	280	280	46	2950	-
26.5	4	126	310	0.86	11.82	IE5	BG30-..S5E11MA6	12.5	42	84	126	152	310	310	310	310	310	46	3200	-
26.5	4	470	84	2.6	3.19	IE5	BG40-..S5E11MA6	47	156	310	470	560	84	84	84	84	84	65	2350	-
26.5	4	375	105	2.3	3.97	IE5	BG40-..S5E11MA6	37.5	125	250	375	450	105	105	105	105	105	65	2400	-
26.5	4	300	130	2	4.94	IE5	BG40-..S5E11MA6	30	101	200	300	360	130	130	130	130	130	65	2450	-
26.5	4	235	166	1.8	6.29	IE5	BG40-..S5E11MA6	23.5	79	158	235	285	166	166	166	166	166	65	2600	-
26.5	4	230	169	1.8	6.4	IE5	BG40-..S5E11MA6	23	78	156	230	280	169	169	169	169	169	65	3750	-
26.5	4	210	188	1.7	7.11	IE5	BG40-..S5E11MA6	21	70	140	210	250	188	188	188	188	188	65	3950	-
26.5	4	196	200	1.5	7.62	IE5	BG40-..S5E11MA6	19.5	65	131	196	235	200	200	200	200	200	65	2650	-
26.5	4	180	220	1.5	8.31	IE5	BG40-..S5E11MA6	18	60	120	180	215	220	220	220	220	220	65	4100	-
26.5	4	166	235	1.2	9	IE5	BG40-..S5E11MA6	16.5	55	111	166	200	235	235	235	235	235	65	2650	-
26.5	4	162	240	1.5	9.23	IE5	BG40-..S5E11MA6	16	54	108	162	195	240	240	240	240	240	65	4350	-
26.5	4	144	270	1.4	10.35	IE5	BG40-..S5E11MA6	14	48	96	144	173	270	270	270	270	270	65	4350	-
26.5	4	130	300	1.3	11.49	IE5	BG40-..S5E11MA6	13	43.5	87	130	156	300	300	300	300	300	65	4600	-
26.5	4	116	340	1.2	12.86	IE5	BG40-..S5E11MA6	11.5	38.5	77	116	139	340	340	340	340	340	65	4500	-
26.5	4	105	375	1.1	14.28	IE5	BG40-..S5E11MA6	10.5	35	70	105	126	375	375	375	375	375	65	4900	-
26.5	4	91	430	0.98	16.39	IE5	BG40-..S5E11MA6	9.1	30.5	61	91	109	430	430	430	430	430	65	5300	-
26.5	4	82	480	0.88	18.19	IE5	BG40-..S5E11MA6	8.2	27	54	82	98	480	480	480	480	480	65	5600	-
26.5	4	75	520	0.81	19.84	IE5	BG40-..S5E11MA6	7.5	25	50	75	90	520	520	520	520	520	65	5800	-
26.5	4	305	130	3	4.91	IE5	BG50-..S5E11MA6	30.5	101	200	305	365	130	130	130	130	130	75	3500	-
26.5	4	245	160	2.8	6.07	IE5	BG50-..S5E11MA6	24.5	82	164	245	295	160	160	160	160	160	75	4700	-
26.5	4	220	178	2.5	6.74	IE5	BG50-..S5E11MA6	22	74	148	220	265	178	178	178	178	178	75	3750	-
26.5	4	172	230	2.2	8.7	IE5	BG50-..S5E11MA6	17	57	114	172	205	230	230	230	230	230	75	5300	-
26.5	4	155	255	2	9.65	IE5	BG50-..S5E11MA6	15.5	51	103	155	186	255	255	255	255	255	75	5600	-
26.5	4	124	315	1.8	12.06	IE5	BG50-..S5E11MA6	12	41	82	124	149	315	315	315	315	315	75	5700	-
26.5	4	112	350	1.7	13.36	IE5	BG50-..S5E11MA6	11	37	74	112	134	350	350	350	350	350	75	6100	-
26.5	4	90	435	1.4	16.53	IE5	BG50-..S5E11MA6	9	30	60	90	108	435	435	435	435	435	75	6500	-
26.5	4	81	485	1.3	18.33	IE5	BG50-..S5E11MA6	8.1	27	54	81	98	485	485	485	485	485	75	7200	-
26.5	4	68	580	1.1	21.96	IE5	BG50-..S5E11MA6	6.8	22.5	45.5	68	81	580	580	580	580	580	75	8000	-
26.5	4	61	640	0.98	24.34	IE5	BG50-..S5E11MA6	6.1	20.5	41	61	73	640	640	640	640	640	75	8700	-
26.5	4	50	780	0.8	29.62	IE5	BG50-..S5E11MA6	5	16.5	33.5	50	60	780	780	780	780	780	75	8000	-
26.5	4	123	320	3	12.16	IE5	BG60-..S5E11MA6	12	41	82	123	148	320	320</						

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 26.5 Nm (PN = 4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
26.5	4	17	2300	0.99	87.61	IE5	BG70Z-..S5E11MA6	1.7	5.7	11	17	20.5	2300	2300	2300	2300	2300	164	20000	-
26.5	4	15.5	2500	0.91	95.74	IE5	BG70Z-..S5E11MA6	1.5	5.2	10	15.5	18.5	2500	2500	2500	2500	2500	164	20000	-
26.5	4	26	1510	2.8	57.24	IE5	BG80-..S5E11MA6	2.6	8.7	17	26	31	1510	1510	1510	1510	1510	192	25400	-
26.5	4	23.5	1680	2.5	63.56	IE5	BG80-..S5E11MA6	2.3	7.8	15.5	23.5	28	1680	1680	1680	1680	1680	192	26000	-
26.5	4	22.5	1750	2.4	66.4	IE5	BG80Z-..S5E11MA6	2.2	7.5	15	22.5	27	1750	1750	1750	1750	1750	234	26000	-
26.5	4	20	1950	2.1	73.73	IE5	BG80Z-..S5E11MA6	2	6.7	13.5	20	24	1950	1950	1950	1950	1950	234	26000	-
26.5	4	17.5	2200	1.9	84.55	IE5	BG80Z-..S5E11MA6	1.7	5.9	11.5	17.5	21	2200	2200	2200	2200	2200	234	26000	-
26.5	4	15.5	2450	1.7	93.89	IE5	BG80Z-..S5E11MA6	1.5	5.3	10.5	15.5	19	2450	2450	2450	2450	2450	234	26000	-
26.5	4	13	2950	1.4	112.4	IE5	BG80Z-..S5E11MA6	1.3	4.4	8.8	13	16	2950	2950	2950	2950	2950	234	26000	-
26.5	4	12	3300	1.3	124.8	IE5	BG80Z-..S5E11MA6	1.2	4	8	12	14	3300	3300	3300	3300	3300	234	26000	-
26.5	4	10	3850	1.1	145.4	IE5	BG80Z-..S5E11MA6	1	3.4	6.8	10	12	3850	3850	3850	3850	3850	234	26000	-
26.5	4	9.2	4250	0.98	161.5	IE5	BG80Z-..S5E11MA6	0.9	3	6.1	9.2	11	4250	4250	4250	4250	4250	234	26000	-
26.5	4	8	4950	0.85	186.8	IE5	BG80Z-..S5E11MA6	0.8	2.6	5.3	8	9.6	4950	4950	4950	4950	4950	234	26000	-
26.5	4	14	2800	3	105.7	IE5	BG90Z-..S5E11MA6	1.4	4.7	9.4	14	17	2800	2800	2800	2800	2800	336	65000	-
26.5	4	11.5	3350	2.5	127.1	IE5	BG90Z-..S5E11MA6	1.1	3.9	7.8	11.5	14	3350	3350	3350	3350	3350	336	65000	-
26.5	4	10.5	3650	2.3	139.2	IE5	BG90Z-..S5E11MA6	1	3.5	7.1	10.5	12.5	3650	3650	3650	3650	3650	336	65000	-
26.5	4	9.2	4300	1.9	163	IE5	BG90Z-..S5E11MA6	0.9	3	6.1	9.2	11	4300	4300	4300	4300	4300	336	65000	-
26.5	4	8.4	4700	1.8	178.5	IE5	BG90Z-..S5E11MA6	0.8	2.8	5.6	8.4	10	4700	4700	4700	4700	4700	336	65000	-
26.5	4	7.2	5500	1.5	208.3	IE5	BG90Z-..S5E11MA6	0.7	2.4	4.8	7.2	8.6	5500	5500	5500	5500	5500	336	65000	-
26.5	4	6.5	6000	1.4	228.1	IE5	BG90Z-..S5E11MA6	0.65	2.1	4.3	6.5	7.8	6000	6000	6000	6000	6000	336	65000	-
26.5	4	6.8	5800	1.6	219.9	IE5	BG90G50-..S5E11MA6	0.65	2.2	4.5	6.8	8.1	5800	5800	5800	5800	5800	353	65000	-
26.5	4	5.7	6900	1.3	262.5	IE5	BG90G50-..S5E11MA6	0.55	1.9	3.8	5.7	6.8	6900	6900	6900	6900	6900	353	65000	-
26.5	4	5	7900	1.2	298.8	IE5	BG90G50-..S5E11MA6	0.5	1.6	3.3	5	6	7900	7900	7900	7900	7900	353	65000	-
26.5	4	4.1	9500	0.96	360.3	IE5	BG90G50-..S5E11MA6	0.41	1.3	2.7	4.1	4.9	9500	9500	9500	9500	9500	353	65000	-
26.5	4	3.4	11500	0.8	435.8	IE5	BG90G50-..S5E11MA6	0.34	1.1	2.2	3.4	4.1	11500	11500	11500	11500	11500	353	65000	-
26.5	4	6.4	6100	2.7	232.6	IE5	BG100-..S5E11MA6	0.6	2.1	4.2	6.4	7.7	6100	6100	6100	6100	6100	453	90000	-
26.5	4	5.7	6800	2.4	259	IE5	BG100-..S5E11MA6	0.55	1.9	3.8	5.7	6.9	6800	6800	6800	6800	6800	453	90000	-
26.5	4	5.5	7100	2.6	269.8	IE5	BG100Z-..S5E11MA6	0.55	1.8	3.7	5.5	6.6	7100	7100	7100	7100	7100	543	90000	-
26.5	4	4.9	7900	2.3	304.0	IE5	BG100Z-..S5E11MA6	0.49	1.6	3.3	4.9	5.9	7900	7900	7900	7900	7900	543	90000	-
26.5	4	4.3	9100	2	343.6	IE5	BG100Z-..S5E11MA6	0.43	1.4	2.9	4.3	5.2	9100	9100	9100	9100	9100	543	90000	-
26.5	4	3.9	10100	1.8	382.6	IE5	BG100Z-..S5E11MA6	0.39	1.3	2.6	3.9	4.7	10100	10100	10100	10100	10100	543	90000	-
26.5	4	3.2	12100	1.5	456.7	IE5	BG100Z-..S5E11MA6	0.32	1	2.1	3.2	3.9	12100	12100	12100	12100	12100	543	90000	-
26.5	4	2.9	13400	1.4	508.5	IE5	BG100Z-..S5E11MA6	0.29	0.95	1.9	2.9	3.5	13400	13400	13400	13400	13400	543	90000	-
26.5	4	2.5	15600	1.2	591.1	IE5	BG100Z-..S5E11MA6	0.25	0.8	1.6	2.5	3	15600	15600	15600	15600	15600	543	90000	-
26.5	4	2.2	17400	1.1	658.1	IE5	BG100Z-..S5E11MA6	0.22	0.75	1.5	2.2	2.7	17400	17400	17400	17400	17400	543	90000	-
26.5	4	1.9	20000	0.92	759	IE5	BG100Z-..S5E11MA6	0.19	0.65	1.3	1.9	2.3	20000	20000	20000	20000	20000	543	90000	-
26.5	4	1.7	22000	0.83	845.1	IE5	BG100Z-..S5E11MA6	0.17	0.55	1.1	1.7	2.1	22000	22000	22000	22000	22000	543	90000	-

MN = 35 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
35	5.5	560	93	1.4	2.67	IE4	BG30-..S4E11MA6	56	187	370	560	670	70	80	93	93	93	46	1450	-
35	5.5	560	93	1.4	2.67	IE5	BG30-..S5E11LA6	56	187	370	560	670	93	93	93	93	93	58	1450	-
35	5.5	440	119	1.2	3.4	IE4	BG30-..S4E11MA6	44	147	290	440	520	90	102	119	119	119	46	1580	-
35	5.5	440	119	1.2	3.4	IE5	BG30-..S5E11LA6	44	147	290	440	520	119	119	119	119	119	58	1580	-
35	5.5	355	147	1.2	4.21	IE4	BG30-..S4E11MA6	35.5	118	235	355	425	111	126	147	147	147	46	1630	-
35	5.5	355	147	1.2	4.21	IE5	BG30-..S5E11LA6	35.5	118	235	355	425	147	147	147	147	147	58	1630	-
35	5.5	275	190	1.1	5.44	IE4	BG30-..S4E11MA6	27.5	91	183	275	330	144	163	190	190	190	58	1670	-
35	5.5	275	190	1.1	5.44	IE4	BG30-..S4E11MA6	27.5	91	183	275	330	144	163	190	190	190	46	1670	-
35	5.5	220	235	0.91	6.75	IE4	BG30-..S4E11MA6	22	74	148	220	2								

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
35	5.5	196	265	1.1	7.62	IE4	BG40-..S4E11MA6	19.5	65	131	196	235	200	225	265	265	265	65	2650	-
35	5.5	180	290	1.2	8.31	IE4	BG40-..S4E11MA6	18	60	120	180	215	220	245	290	290	290	65	4100	-
35	5.5	180	290	1.2	8.31	IE5	BG40-..S5E11LA6	18	60	120	180	215	290	290	290	290	290	77	4100	-
35	5.5	166	315	0.94	9	IE5	BG40-..S5E11LA6	16.5	55	111	166	200	315	315	315	315	315	77	2650	-
35	5.5	166	315	0.94	9	IE4	BG40-..S4E11MA6	16.5	55	111	166	200	235	270	315	315	315	65	2650	-
35	5.5	162	320	1.1	9.23	IE5	BG40-..S5E11LA6	16	54	108	162	195	320	320	320	320	320	77	4350	-
35	5.5	162	320	1.1	9.23	IE4	BG40-..S4E11MA6	16	54	108	162	195	240	275	320	320	320	65	4350	-
35	5.5	144	360	1	10.35	IE4	BG40-..S4E11MA6	14	48	96	144	173	270	310	360	360	360	65	4350	-
35	5.5	144	360	1	10.35	IE5	BG40-..S5E11LA6	14	48	96	144	173	360	360	360	360	360	77	4350	-
35	5.5	130	400	0.96	11.49	IE5	BG40-..S5E11LA6	13	43.5	87	130	156	400	400	400	400	400	77	4600	-
35	5.5	130	400	0.96	11.49	IE4	BG40-..S4E11MA6	13	43.5	87	130	156	300	340	400	400	400	65	4600	-
35	5.5	116	450	0.91	12.86	IE4	BG40-..S4E11MA6	11.5	38.5	77	116	139	340	385	450	450	450	65	4500	-
35	5.5	116	450	0.91	12.86	IE5	BG40-..S5E11LA6	11.5	38.5	77	116	139	450	450	450	450	450	77	4500	-
35	5.5	105	495	0.84	14.28	IE4	BG40-..S4E11MA6	10.5	35	70	105	126	375	425	495	495	495	65	4900	-
35	5.5	105	495	0.84	14.28	IE5	BG40-..S5E11LA6	10.5	35	70	105	126	495	495	495	495	495	77	4900	-
35	5.5	420	124	2.8	3.55	IE4	BG50-..S4E11MA6	42	140	280	420	500	94	106	124	124	124	75	3300	-
35	5.5	420	124	2.8	3.55	IE5	BG50-..S5E11LA6	42	140	280	420	500	124	124	124	124	124	86	3300	-
35	5.5	305	171	2.3	4.91	IE4	BG50-..S4E11MA6	30.5	101	200	305	365	130	147	171	171	171	75	3500	-
35	5.5	305	171	2.3	4.91	IE5	BG50-..S5E11LA6	30.5	101	200	305	365	171	171	171	171	171	86	3500	-
35	5.5	245	210	2.1	6.07	IE4	BG50-..S4E11MA6	24.5	82	164	245	295	210	210	210	210	210	75	4700	-
35	5.5	245	210	2.1	6.07	IE5	BG50-..S5E11LA6	24.5	82	164	245	295	210	210	210	210	210	86	4700	-
35	5.5	220	235	1.9	6.74	IE4	BG50-..S4E11MA6	22	74	148	220	265	178	200	235	235	235	75	3750	-
35	5.5	220	235	1.9	6.74	IE5	BG50-..S5E11LA6	22	74	148	220	265	235	235	235	235	235	86	3750	-
35	5.5	172	300	1.6	8.7	IE5	BG50-..S5E11LA6	17	57	114	172	205	300	300	300	300	300	86	5300	-
35	5.5	172	300	1.6	8.7	IE4	BG50-..S4E11MA6	17	57	114	172	205	230	260	300	300	300	75	5300	-
35	5.5	155	335	1.5	9.65	IE5	BG50-..S5E11LA6	15.5	51	103	155	186	335	335	335	335	335	86	5600	-
35	5.5	155	335	1.5	9.65	IE4	BG50-..S4E11MA6	15.5	51	103	155	186	255	285	335	335	335	75	5600	-
35	5.5	124	420	1.4	12.06	IE5	BG50-..S5E11LA6	12	41	82	124	149	420	420	420	420	420	86	5700	-
35	5.5	124	420	1.4	12.06	IE4	BG50-..S4E11MA6	12	41	82	124	149	315	360	420	420	420	75	5700	-
35	5.5	112	465	1.3	13.36	IE4	BG50-..S4E11MA6	11	37	74	112	134	350	400	465	465	465	75	6100	-
35	5.5	112	465	1.3	13.36	IE5	BG50-..S5E11LA6	11	37	74	112	134	465	465	465	465	465	86	6100	-
35	5.5	90	570	1.1	16.53	IE4	BG50-..S4E11MA6	9	30	60	90	108	435	495	570	570	570	75	6500	-
35	5.5	90	570	1.1	16.53	IE5	BG50-..S5E11LA6	9	30	60	90	108	570	570	570	570	570	86	6500	-
35	5.5	81	640	0.98	18.33	IE4	BG50-..S4E11MA6	8.1	27	54	81	98	485	540	640	640	640	75	7200	-
35	5.5	81	640	0.98	18.33	IE5	BG50-..S5E11LA6	8.1	27	54	81	98	640	640	640	640	640	86	7200	-
35	5.5	68	760	0.82	21.96	IE4	BG50-..S4E11MA6	6.8	22.5	45.5	68	81	580	650	760	760	760	75	8000	-
35	5.5	68	760	0.82	21.96	IE5	BG50-..S5E11LA6	6.8	22.5	45.5	68	81	760	760	760	760	760	86	8000	-
35	5.5	164	315	2.8	9.13	IE4	BG60-..S4E11MA6	16	54	109	164	197	240	270	315	315	315	107	9800	-
35	5.5	164	315	2.8	9.13	IE5	BG60-..S5E11LA6	16	54	109	164	197	315	315	315	315	315	119	9800	-
35	5.5	148	350	2.6	10.12	IE4	BG60-..S4E11MA6	14.5	49	98	148	177	265	300	350	350	350	107	10200	-
35	5.5	148	350	2.6	10.12	IE5	BG60-..S5E11LA6	14.5	49	98	148	177	350	350	350	350	350	119	10200	-
35	5.5	123	425	2.3	12.16	IE5	BG60-..S5E11LA6	12	41	82	123	148	425	425	425	425	425	119	10800	-
35	5.5	123	425	2.3	12.16	IE4	BG60-..S4E11MA6	12	41	82	123	148	320	360	425	425	425	107	10800	-
35	5.5	111	470	2.2	13.47	IE5	BG60-..S5E11LA6	11	37	74	111	133	470	470	470	470	470	119	11200	-
35	5.5	89	580	1.9	16.8	IE4	BG60-..S4E11MA6	8.9	29.5	59	89	107	445	500	580	580	580	107	12000	-
35	5.5	89	580	1.9	16.8	IE5	BG60-..S5E11LA6	8.9	29.5	59	89	107	580	580	580	580	580	119	12000	-
35	5.5	80	650	1.7	18.62	IE4	BG60-..S4E11MA6	8	26.5	53	80	96	490	550	650	650	650	107	12400	-
35	5.5	80	650	1.7	18.62	IE5	BG60-..S5E11LA6	8	26.5	53	80	96	650	650	650	650	650	119	12400	-
35	5.5	66	780	1.5	22.4	IE4	BG60-..S5E11LA6	6.6	22	44.5	66	80	780	780	780	780	780	119	13300	-
35	5.5	66	780	1.5	22.4	IE4	BG60-..S4E11MA6	6.6	22	44.5	66	80	590	670	780	780	780	107	13300	-
35	5.5	60	860	1.4	24.82	IE4	BG60-..S4E11MA6	6	20	40	60	72	650	740	860	860	860	107	13800	-
35	5.5	60	860	1.4	24.82	IE5	BG60-..S5E11LA6	6	20	40	60	72	860	860	860	860	860	119	13800	-
35	5.5	51	1020	1.2	29.31	IE4	BG60-..S4E11MA6	5.1	17	34	51	61	770	870	1020	1020	1020	107	14800	-
35	5.5	46	1130	1.1	32.48	IE4	BG60-..S4E11MA6	4.6	15	30.5	46	55	860	970	1130	1130	1130	107	15400	-
35	5.5	46	1130	1.1	32.48	IE5	BG60-..S5E11LA6	4.6	15	30.5	46	55	1130	1130	1130	1130	1130	119	15400	-
35	5.5	38.5	1350	0.88	38.85	IE5	BG60-..S5E11LA6	3.8	12.											

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
35	5.5	23	2250	1	64.85	IE4	BG70Z-../S4E11MA6	2.3	7.7	15	23	27.5	1710	1940	2250	2250	2250	164	20000	-
35	5.5	23	2250	1	64.85	IE5	BG70Z-../S5E11LA6	2.3	7.7	15	23	27.5	2250	2250	2250	2250	2250	176	20000	-
35	5.5	20	2550	0.89	73.82	IE4	BG70Z-../S4E11MA6	2	6.7	13.5	20	24	1950	2200	2550	2550	2550	164	20000	-
35	5.5	20	2550	0.89	73.82	IE5	BG70Z-../S5E11LA6	2	6.7	13.5	20	24	2550	2550	2550	2550	2550	176	20000	-
35	5.5	34	1530	2.7	43.94	IE4	BG80-../S4E11MA6	3.4	11	22.5	34	40.5	1160	1310	1530	1530	1530	192	22600	-
35	5.5	34	1530	2.7	43.94	IE5	BG80-../S5E11LA6	3.4	11	22.5	34	40.5	1530	1530	1530	1530	1530	204	22600	-
35	5.5	30.5	1700	2.5	48.8	IE4	BG80-../S4E11MA6	3	10	20	30.5	36.5	1290	1460	1700	1700	1700	192	23800	-
35	5.5	30.5	1700	2.5	48.8	IE5	BG80-../S5E11LA6	3	10	20	30.5	36.5	1700	1700	1700	1700	1700	204	23800	-
35	5.5	26	2000	2.1	57.24	IE5	BG80-../S5E11LA6	2.6	8.7	17	26	31	2000	2000	2000	2000	2000	204	25400	-
35	5.5	26	2000	2.1	57.24	IE4	BG80-../S4E11MA6	2.6	8.7	17	26	31	1510	1710	2000	2000	2000	192	25400	-
35	5.5	23.5	2200	1.9	63.56	IE4	BG80-../S4E11MA6	2.3	7.8	15.5	23.5	28	1680	1900	2200	2200	2200	192	26000	-
35	5.5	22.5	2300	1.8	66.4	IE5	BG80Z-../S5E11LA6	2.2	7.5	15	22.5	27	2300	2300	2300	2300	2300	246	26000	-
35	5.5	22.5	2300	1.8	66.4	IE4	BG80Z-../S4E11MA6	2.2	7.5	15	22.5	27	1750	1990	2300	2300	2300	234	26000	-
35	5.5	20	2550	1.6	73.73	IE4	BG80Z-../S4E11MA6	2	6.7	13.5	20	24	1950	2200	2550	2550	2550	234	26000	-
35	5.5	20	2550	1.6	73.73	IE5	BG80Z-../S5E11LA6	2	6.7	13.5	20	24	2550	2550	2550	2550	2550	246	26000	-
35	5.5	17.5	2950	1.4	84.55	IE5	BG80Z-../S5E11LA6	1.7	5.9	11.5	17.5	21	2950	2950	2950	2950	2950	246	26000	-
35	5.5	17.5	2950	1.4	84.55	IE4	BG80Z-../S4E11MA6	1.7	5.9	11.5	17.5	21	2200	2500	2950	2950	2950	246	26000	-
35	5.5	15.5	3250	1.3	93.89	IE4	BG80Z-../S4E11MA6	1.5	5.3	10.5	15.5	19	2450	2800	3250	3250	3250	234	26000	-
35	5.5	15.5	3250	1.3	93.89	IE5	BG80Z-../S5E11LA6	1.5	5.3	10.5	15.5	19	3250	3250	3250	3250	3250	246	26000	-
35	5.5	13	3900	1.1	112.4	IE5	BG80Z-../S5E11LA6	1.3	4.4	8.8	13	16	3900	3900	3900	3900	3900	246	26000	-
35	5.5	13	3900	1.1	112.4	IE4	BG80Z-../S4E11MA6	1.3	4.4	8.8	13	16	2950	3350	3900	3900	3900	234	26000	-
35	5.5	12	4350	0.96	124.8	IE5	BG80Z-../S5E11LA6	1.2	4	8	12	14	4350	4350	4350	4350	4350	246	26000	-
35	5.5	12	4350	0.96	124.8	IE4	BG80Z-../S4E11MA6	1.2	4	8	12	14	3300	3700	4350	4350	4350	234	26000	-
35	5.5	10	5000	0.83	145.4	IE5	BG80Z-../S5E11LA6	1	3.4	6.8	10	12	5000	5000	5000	5000	5000	246	26000	-
35	5.5	10	5000	0.83	145.4	IE4	BG80Z-../S4E11MA6	1	3.4	6.8	10	12	3850	4350	5000	5000	5000	234	26000	-
35	5.5	17.5	2900	2.9	83.91	IE4	BG90Z-../S4E11MA6	1.7	5.9	11.5	17.5	21	2200	2500	2900	2900	2900	336	65000	-
35	5.5	17.5	2900	2.9	83.91	IE5	BG90Z-../S5E11LA6	1.7	5.9	11.5	17.5	21	2900	2900	2900	2900	2900	348	65000	-
35	5.5	15.5	3350	2.5	96.53	IE5	BG90Z-../S5E11LA6	1.5	5.1	10	15.5	18.5	3350	3350	3350	3350	3350	348	65000	-
35	5.5	15.5	3350	2.5	96.53	IE4	BG90Z-../S4E11MA6	1.5	5.1	10	15.5	18.5	2550	2850	3350	3350	3350	336	65000	-
35	5.5	14	3650	2.3	105.7	IE4	BG90Z-../S4E11MA6	1.4	4.7	9.4	14	17	2800	3150	3650	3650	3650	348	65000	-
35	5.5	14	3650	2.3	105.7	IE5	BG90Z-../S5E11LA6	1.4	4.7	9.4	14	17	3650	3650	3650	3650	3650	348	65000	-
35	5.5	11.5	4400	1.9	127.1	IE4	BG90Z-../S4E11MA6	1.1	3.9	7.8	11.5	14	3350	3800	4400	4400	4400	336	65000	-
35	5.5	11.5	4400	1.9	127.1	IE5	BG90Z-../S5E11LA6	1.1	3.9	7.8	11.5	14	4400	4400	4400	4400	4400	348	65000	-
35	5.5	10.5	4850	1.7	139.2	IE4	BG90Z-../S4E11MA6	1	3.5	7.1	10.5	12.5	3650	4150	4850	4850	4850	336	65000	-
35	5.5	10.5	4850	1.7	139.2	IE5	BG90Z-../S5E11LA6	1	3.5	7.1	10.5	12.5	4850	4850	4850	4850	4850	348	65000	-
35	5.5	9.2	5700	1.5	163	IE5	BG90Z-../S5E11LA6	0.9	3	6.1	9.2	11	5700	5700	5700	5700	5700	348	65000	-
35	5.5	9.2	5700	1.5	163	IE4	BG90Z-../S4E11MA6	0.9	3	6.1	9.2	11	4300	4850	5700	5700	5700	336	65000	-
35	5.5	8.4	6200	1.3	178.5	IE4	BG90Z-../S4E11MA6	0.8	2.8	5.6	8.4	10	4700	5300	6200	6200	6200	336	65000	-
35	5.5	8.4	6200	1.3	178.5	IE5	BG90Z-../S5E11LA6	0.8	2.8	5.6	8.4	10	6200	6200	6200	6200	6200	348	65000	-
35	5.5	7.2	7200	1.2	208.3	IE4	BG90Z-../S4E11MA6	0.7	2.4	4.8	7.2	8.6	5500	6200	7200	7200	7200	336	65000	-
35	5.5	7.2	7200	1.2	208.3	IE5	BG90Z-../S5E11LA6	0.7	2.4	4.8	7.2	8.6	7200	7200	7200	7200	7200	348	65000	-
35	5.5	6.5	7900	1.1	228.1	IE4	BG90Z-../S4E11MA6	0.65	2.1	4.3	6.5	7.8	6000	6800	7900	7900	7900	336	65000	-
35	5.5	6.5	7900	1.1	228.1	IE5	BG90Z-../S5E11LA6	0.65	2.1	4.3	6.5	7.8	7900	7900	7900	7900	7900	348	65000	-
35	5.5	6.8	7600	1.2	219.9	IE4	BG90G50-../S4E11MA6	0.65	2.2	4.5	6.8	8.1	5800	6500	7600	7600	7600	353	65000	-
35	5.5	6.8	7600	1.2	219.9	IE5	BG90G50-../S5E11LA6	0.65	2.2	4.5	6.8	8.1	7600	7600	7600	7600	7600	365	65000	-
35	5.5	5.7	9100	1	262.5	IE4	BG90G50-../S4E11MA6	0.55	1.9	3.8	5.7	6.8	6900	7800	9100	9100	9100	353	65000	-
35	5.5	5.7	9100	1	262.5	IE5	BG90G50-../S5E11LA6	0.55	1.9	3.8	5.7	6.8	9100	9100	9100	9100	9100	365	65000	-
35	5.5	5	10400	0.88	298.8	IE4	BG90G50-../S4E11MA6	0.5	1.6	3.3	5	6	7900	8900	10400	10400	10400	353	65000	-
35	5.5	5	10400	0.88	298.8	IE5	BG90G50-../S5E11LA6	0.5	1.6	3.3	5	6	10400	10400	10400	10400	10400	365	65000	-
35	5.5	8.3	6200	2.7	178.6	IE5	BG100-../S5E11LA6	0.8	2.7	5.5	8.3	10	6200	6200	6200	6200	6200	465	90000	-
35	5.5	8.3	6200	2.7	178.6															

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 48 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
48	7.5	560	128	1	2.67	IE3	BG30-./SPE11LA6	56	187	370	560	670	93	106	128	128	128	58	1450	-
48	7.5	440	163	0.85	3.4	IE3	BG30-./SPE11LA6	44	147	290	440	520	119	136	163	163	163	58	1580	-
48	7.5	355	200	0.85	4.21	IE3	BG30-./SPE11LA6	35.5	118	235	355	425	147	168	200	200	200	58	1630	-
48	7.5	600	118	1.7	2.46	IE3	BG40-./SPE11LA6	60	200	405	600	730	86	98	118	118	118	77	2150	-
48	7.5	470	153	1.4	3.19	IE3	BG40-./SPE11LA6	47	156	310	470	560	111	127	153	153	153	77	2350	-
48	7.5	375	190	1.3	3.97	IE3	BG40-./SPE11LA6	37.5	125	250	375	450	138	158	190	190	190	77	2400	-
48	7.5	300	235	1.1	4.94	IE3	BG40-./SPE11LA6	30	101	200	300	360	172	197	235	235	235	77	2450	-
48	7.5	235	300	0.98	6.29	IE3	BG40-./SPE11LA6	23.5	79	158	235	285	220	250	300	300	300	77	2600	-
48	7.5	230	305	1	6.4	IE3	BG40-./SPE11LA6	23	78	156	230	280	220	255	305	305	305	77	3750	-
48	7.5	210	340	0.95	7.11	IE3	BG40-./SPE11LA6	21	70	140	210	250	245	280	340	340	340	77	3950	-
48	7.5	196	365	0.81	7.62	IE3	BG40-./SPE11LA6	19.5	65	131	196	235	265	300	365	365	77	2650	-	
48	7.5	180	395	0.85	8.31	IE3	BG40-./SPE11LA6	18	60	120	180	215	290	330	395	395	395	77	4100	-
48	7.5	162	440	0.8	9.23	IE3	BG40-./SPE11LA6	16	54	108	162	195	320	365	440	440	440	77	4350	-
48	7.5	600	118	2.6	2.47	IE3	BG50-./SPE11LA6	60	200	400	600	720	86	98	118	118	118	86	2900	-
48	7.5	420	170	2	3.55	IE3	BG50-./SPE11LA6	42	140	280	420	500	124	142	170	170	170	86	3300	-
48	7.5	305	235	1.7	4.91	IE3	BG50-./SPE11LA6	30.5	101	200	305	365	171	196	235	235	235	86	3500	-
48	7.5	245	290	1.5	6.07	IE3	BG50-./SPE11LA6	24.5	82	164	245	295	210	240	290	290	290	86	4700	-
48	7.5	220	320	1.4	6.74	IE3	BG50-./SPE11LA6	22	74	148	220	265	235	265	320	320	320	86	3750	-
48	7.5	172	415	1.2	8.7	IE3	BG50-./SPE11LA6	17	57	114	172	205	300	345	415	415	415	86	5300	-
48	7.5	155	460	1.1	9.65	IE3	BG50-./SPE11LA6	15.5	51	103	155	186	335	385	460	460	460	86	5600	-
48	7.5	124	570	0.98	12.06	IE3	BG50-./SPE11LA6	12	41	82	124	149	420	480	570	570	570	86	5700	-
48	7.5	112	640	0.92	13.36	IE3	BG50-./SPE11LA6	11	37	74	112	134	465	530	640	640	640	86	6100	-
48	7.5	300	235	2.8	4.98	IE3	BG60-./SPE11LA6	30	100	200	300	360	174	199	235	235	235	119	7800	-
48	7.5	240	295	2.6	6.16	IE3	BG60-./SPE11LA6	24	81	162	240	290	215	245	295	295	295	119	8500	-
48	7.5	215	325	2.4	6.82	IE3	BG60-./SPE11LA6	21.5	73	146	215	260	235	270	325	325	325	119	8900	-
48	7.5	215	330	2.4	6.88	IE3	BG60-./SPE11LA6	21.5	72	145	215	260	240	275	330	330	330	119	8600	-
48	7.5	164	435	2	9.13	IE3	BG60-./SPE11LA6	16	54	109	164	197	315	365	435	435	435	119	9800	-
48	7.5	148	485	1.9	10.12	IE3	BG60-./SPE11LA6	14.5	49	98	148	177	350	400	485	485	485	119	10200	-
48	7.5	123	580	1.7	12.16	IE3	BG60-./SPE11LA6	12	41	82	123	148	425	485	580	580	580	119	10800	-
48	7.5	111	640	1.6	13.47	IE3	BG60-./SPE11LA6	11	37	74	111	133	470	530	640	640	640	119	11200	-
48	7.5	89	800	1.4	16.8	IE3	BG60-./SPE11LA6	8.9	29.5	59	89	107	580	670	800	800	800	119	12000	-
48	7.5	80	890	1.3	18.62	IE3	BG60-./SPE11LA6	8	26.5	53	80	96	650	740	890	890	890	119	12400	-
48	7.5	66	1070	1.1	22.4	IE3	BG60-./SPE11LA6	6.6	22	44.5	66	80	780	890	1070	1070	1070	119	13300	-
48	7.5	60	1190	1	24.82	IE3	BG60-./SPE11LA6	6	20	40	60	72	860	990	1190	1190	1190	119	13800	-
48	7.5	51	1400	0.85	29.31	IE3	BG60-./SPE11LA6	5.1	17	34	51	61	1020	1170	1400	1400	1400	119	14800	-
48	7.5	84	840	2.7	17.68	IE3	BG70-./SPE11LA6	8.4	28	56	84	101	610	700	840	840	840	149	13400	-
48	7.5	71	1000	2.3	20.98	IE3	BG70-./SPE11LA6	7.1	23.5	47.5	71	85	730	830	1000	1000	1000	149	14600	-
48	7.5	65	1100	2.1	22.92	IE3	BG70-./SPE11LA6	6.5	21.5	43.5	65	78	800	910	1100	1100	1100	149	15100	-
48	7.5	55	1300	1.8	27.21	IE3	BG70-./SPE11LA6	5.5	18	36.5	55	66	950	1080	1300	1300	1300	149	16400	-
48	7.5	50	1420	1.6	29.69	IE3	BG70-./SPE11LA6	5	16.5	33.5	50	60	1030	1180	1420	1420	1420	149	16900	-
48	7.5	42.5	1690	1.4	35.24	IE3	BG70-./SPE11LA6	4.2	14	28	42.5	51	1230	1400	1690	1690	1690	149	18300	-
48	7.5	38	1880	1.2	39.22	IE3	BG70-./SPE11LA6	3.8	12.5	25	38	45.5	1370	1560	1880	1880	1880	149	19100	-
48	7.5	32	2200	1	46.54	IE3	BG70-./SPE11LA6	3.2	10.5	21	32	38.5	1620	1860	2200	2200	2200	149	20000	-
48	7.5	29.5	2400	0.95	50.4	IE3	BG70-./SPE11LA6	2.9	9.9	19.5	29.5	35.5	1760	2000	2400	2400	2400	149	20000	-
48	7.5	25	2850	0.8	59.82	IE3	BG70-./SPE11LA6	2.5	8.3	16.5	25	30	2050	2350	2850	2850	2850	149	20000	-
48	7.5	51	1400	3	29.36	IE3	BG80-./SPE11LA6	5.1	17	34	51	61	1020	1170	1400	1400	1400	204	18900	-
48	7.5	43.5	1640	2.6	34.22	IE3	BG80-./SPE11LA6	4.3	14.5	29	43.5	52	1190	1360	1640	1640	1640	204	20200	-
48	7.5	39	1820	2.3	38	IE3	BG80-./SPE11LA6	3.9	13	26	39	47	1330	1520	1820	1820	1820	204	21300	-
48	7.5	34	2100	2	43.94	IE3	BG80-./SPE11LA6	3.4	11	22.5	34	40.5	1530	1750	2100	2100	2100	204	22600	-
48	7.5	30.5	2300	1.8	48.8	IE3	BG80-./SPE11LA6	3	10	20	30.5	36.5	1700	1950	2300	2300	2300	204	23800	-
48	7.5	26	2700	1.5	57.24	IE3	BG80-./SPE11LA6	2.6	8.7	17	26	31	2000	2250	2700	2700	2700	204	25400	-
48	7.5	23.5	3050	1.4	63.56	IE3	BG80-./SPE11LA6	2.3	7.8	15.5	23.5	28	2200	2500	3050	3050	3050	204	26000	-
48	7.5	22.5	3150	1.3	66.4	IE3	BG80Z-./SPE11LA6	2.2	7.5	15	22.5	27	2300	2650	3150	3150	3150	246	26000	-
48	7.5	20	3500	1.2	73.73	IE3	BG80Z-./SPE11LA6	2	6.7	13.5	20	24	2550	2900	3500	3500	3500	246	26000	-
48	7.5	17.5	4050	1	84.55	IE3	BG80Z-./SPE11LA6	1.7	5.9	11.5	17.5	21	2950	3350	4050	4050	4050	246	26000	-

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 48 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
48	7.5	5.5	12900	1.4	269.8	IE3	BG100Z-../SPE11LA6	0.55	1.8	3.7	5.5	6.6	9400	10700	12900	12900	12900	555	90000	-
48	7.5	4.9	14400	1.3	300.4	IE3	BG100Z-../SPE11LA6	0.49	1.6	3.3	4.9	5.9	10500	12000	14400	14400	14400	555	90000	-
48	7.5	4.3	16400	1.1	343.6	IE3	BG100Z-../SPE11LA6	0.43	1.4	2.9	4.3	5.2	12000	13700	16400	16400	16400	555	90000	-
48	7.5	3.9	18300	1	382.6	IE3	BG100Z-../SPE11LA6	0.39	1.3	2.6	3.9	4.7	13300	15300	18300	18300	18300	555	90000	-
48	7.5	3.2	21500	0.84	456.7	IE3	BG100Z-../SPE11LA6	0.32	1	2.1	3.2	3.9	15900	18200	21500	21500	21500	555	90000	-

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 0.65 Nm (PN = 0.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
0.65	0.2	1190	1.63	2.5	2.51	IE5	BG04-./S5E04SA4-1	59	199	395	1190	1430	1.63	1.63	1.63	1.63	1.63	4.4	340	-
0.65	0.2	820	2.35	2.1	3.65	IE5	BG04-./S5E04SA4-1	41	136	270	820	980	2.35	2.35	2.35	2.35	2.35	4.4	390	-
0.65	0.2	680	2.85	2.5	4.39	IE5	BG04-./S5E04SA4-1	34	113	225	680	820	2.85	2.85	2.85	2.85	2.85	4.4	380	-
0.65	0.2	550	3.45	2.6	5.36	IE5	BG04-./S5E04SA4-1	27.5	93	186	550	670	3.45	3.45	3.45	3.45	3.45	4.4	380	-
0.65	0.2	485	4	2.7	6.18	IE5	BG04-./S5E04SA4-1	24	80	161	485	580	4	4	4	4	4	4.4	415	-
0.65	0.2	445	4.3	2.3	6.67	IE5	BG04-./S5E04SA4-1	22	74	149	445	530	4.3	4.3	4.3	4.3	4.3	4.4	410	-
0.65	0.2	440	4.4	2.5	6.8	IE5	BG04-./S5E04SA4-1	22	73	147	440	520	4.4	4.4	4.4	4.4	4.4	4.4	420	-
0.65	0.2	345	5.5	2	8.58	IE5	BG04-./S5E04SA4-1	17	58	116	345	415	5.5	5.5	5.5	5.5	5.5	4.4	410	-
0.65	0.2	330	5.8	2.1	9	IE5	BG04-./S5E04SA4-1	16.5	55	111	330	400	5.8	5.8	5.8	5.8	5.8	4.4	470	-
0.65	0.2	300	6.4	2	9.9	IE5	BG04-./S5E04SA4-1	15	50	101	300	360	6.4	6.4	6.4	6.4	6.4	4.4	480	-
0.65	0.2	275	7	2	10.82	IE5	BG04-./S5E04SA4-1	13.5	46	92	275	330	7	7	7	7	7	4.4	480	-
0.65	0.2	250	7.7	1.9	11.9	IE5	BG04-./S5E04SA4-1	12.5	42	84	250	300	7.7	7.7	7.7	7.7	7.7	4.4	490	-
0.65	0.2	235	8.1	1.8	12.55	IE5	BG04-./S5E04SA4-1	11.5	39.5	79	235	285	8.1	8.1	8.1	8.1	8.1	4.4	490	-
0.65	0.2	225	8.5	1.9	13.2	IE5	BG04-./S5E04SA4-1	11	37.5	75	225	270	8.5	8.5	8.5	8.5	8.5	4.4	500	-
0.65	0.2	205	9.4	1.8	14.52	IE5	BG04-./S5E04SA4-1	10	34	68	205	245	9.4	9.4	9.4	9.4	9.4	4.4	510	-
0.65	0.2	182	10.6	1.7	16.44	IE5	BG04-./S5E04SA4-1	9.1	30	60	182	215	10.6	10.6	10.6	10.6	10.6	4.4	530	-
0.65	0.2	165	11.7	1.5	18.08	IE5	BG04-./S5E04SA4-1	8.2	27.5	55	165	199	11.7	11.7	11.7	11.7	11.7	4.4	540	-
0.65	0.2	142	13.7	1.4	21.12	IE5	BG04-./S5E04SA4-1	7.1	23.5	47	142	170	13.7	13.7	13.7	13.7	13.7	4.4	560	-
0.65	0.2	129	15	1.3	23.23	IE5	BG04-./S5E04SA4-1	6.4	21.5	43	129	154	15	15	15	15	15	4.4	600	-
0.65	0.2	122	15.8	1.3	24.45	IE5	BG04-./S5E04SA4-1	6.1	20	40.5	122	147	15.8	15.8	15.8	15.8	15.8	4.4	610	-
0.65	0.2	111	17.4	1.1	26.89	IE5	BG04-./S5E04SA4-1	5.5	18.5	37	111	133	17.4	17.4	17.4	17.4	17.4	4.4	650	-
0.65	0.2	97	20	1	30.91	IE5	BG04-./S5E04SA4-1	4.8	16	32	97	116	20	20	20	20	20	4.4	690	-
0.65	0.2	88	22	0.9	34	IE5	BG04-./S5E04SA4-1	4.4	14.5	29	88	105	22	22	22	22	22	4.4	720	-
0.65	0.2	84	22.5	0.87	35.35	IE5	BG04-./S5E04SA4-1	4.2	14	28	84	101	22.5	22.5	22.5	22.5	22.5	4.4	730	-
0.65	0.2	285	6.7	2.8	10.4	IE5	BG05-./S5E04SA4-1	14	48	96	285	345	6.7	6.7	6.7	6.7	6.7	5.1	510	-
0.65	0.2	280	6.8	2.9	10.59	IE5	BG05-./S5E04SA4-1	14	47	94	280	335	6.8	6.8	6.8	6.8	6.8	5.1	590	-
0.65	0.2	255	7.5	2.8	11.55	IE5	BG05-./S5E04SA4-1	12.5	43	86	255	310	7.5	7.5	7.5	7.5	7.5	5.1	600	-
0.65	0.2	245	7.8	2.7	12.05	IE5	BG05-./S5E04SA4-1	12	41	82	245	295	7.8	7.8	7.8	7.8	7.8	5.1	510	-
0.65	0.2	235	8.1	2.7	12.6	IE5	BG05-./S5E04SA4-1	11.5	39.5	79	235	285	8.1	8.1	8.1	8.1	8.1	5.1	610	-
0.65	0.2	215	8.9	2.6	13.75	IE5	BG05-./S5E04SA4-1	10.5	36	72	215	260	8.9	8.9	8.9	8.9	8.9	5.1	630	-
0.65	0.2	196	9.8	2.4	15.23	IE5	BG05-./S5E04SA4-1	9.8	32.5	65	196	235	9.8	9.8	9.8	9.8	9.8	5.1	640	-
0.65	0.2	180	10.8	2.3	16.62	IE5	BG05-./S5E04SA4-1	9	30	60	180	215	10.8	10.8	10.8	10.8	10.8	5.1	660	-
0.65	0.2	159	12.2	2.1	18.82	IE5	BG05-./S5E04SA4-1	7.9	26.5	53	159	191	12.2	12.2	12.2	12.2	12.2	5.1	680	-
0.65	0.2	146	13.3	2	20.53	IE5	BG05-./S5E04SA4-1	7.3	24	48.5	146	175	13.3	13.3	13.3	13.3	13.3	5.1	700	-
0.65	0.2	125	15.6	1.8	24	IE5	BG05-./S5E04SA4-1	6.2	20.5	41.5	125	150	15.6	15.6	15.6	15.6	15.6	5.1	740	-
0.65	0.2	114	17	1.7	26.18	IE5	BG05-./S5E04SA4-1	5.7	19	38	114	137	17	17	17	17	17	5.1	760	-
0.65	0.2	107	18	1.7	27.82	IE5	BG05-./S5E04SA4-1	5.3	17.5	35.5	107	129	18	18	18	18	18	5.1	770	-
0.65	0.2	98	19.7	1.5	30.35	IE5	BG05-./S5E04SA4-1	4.9	16	32.5	98	118	19.7	19.7	19.7	19.7	19.7	5.1	760	-
0.65	0.2	85	22.5	1.3	35	IE5	BG05-./S5E04SA4-1	4.2	14	28.5	85	102	22.5	22.5	22.5	22.5	22.5	5.1	810	-
0.65	0.2	78	24.5	1.2	38.18	IE5	BG05-./S5E04SA4-1	3.9	13	26	78	94	24.5	24.5	24.5	24.5	24.5	5.1	850	-
0.65	0.2	75	25.5	1.2	39.94	IE5	BG05-./S5E04SA4-1	3.7	12.5	25	75	90	25.5	25.5	25.5	25.5	25.5	5.1	860	-
0.65	0.2	68	28	1.1	43.57	IE5	BG05-./S5E04SA4-1	3.4	11	22.5	68	82	28	28	28	28	28	5.1	900	-
0.65	0.2	63	30.5	0.98	47	IE5	BG05-./S5E04SA4-1	3.1	10.5	21	63	76	30.5	30.5	30.5	30.5	30.5	5.1	930	-
0.65	0.2	58	33	0.9	51.27	IE5	BG05-./S5E04SA4-1	2.9	9.7	19.5	58	70	33	33	33	33	33	5.1	970	-
0.65	0.2	56	34.5	0.86	53.44	IE5	BG05-./S5E04SA4-1	2.8	9.3	18.5	56	67	34.5	34.5	34.5	34.5	34.5	5.1	980	-
0.65	0.2	144	13.5	3	20.82	IE5	BG06-./S5E04SA4-1	7.2	24	48	144	172	13.5	13.5	13.5	13.5	13.5	6.1	800	-
0.65	0.2	132	14.7	2.9	22.71	IE5	BG06-./S5E04SA4-1	6.6	22	44	132	158	14.7	14.7	14.7	14.7	14.7	6.1	810	-
0.65	0.2	117	16.5	2.7	25.48	IE5	BG06-./S5E04SA4-1	5.8	19.5	39	117	141	16.5	16.5	16.5	16.5	16.5	6.1	850	-
0.65	0.2	107	18	2.5	27.8	IE5	BG06-./S5E04SA4-1	5.3	17.5	35.5	107	129	18	18	18	18	18	6.1	840	-
0.65	0.2	93	20.5	2.1	32.22	IE5	BG06-./S5E04SA4-1	4.6	15.5	31	93	111	20.5	20.5	20.5	20.5	20.5	6.1	890	-
0.65	0.2	85	22.5	2	35.15	IE5	BG06-./S5E04SA4-1	4.2	14	28	85	102	22.5	22.5	22.5	22.5	22.5	6.1	880	-
0.65	0.2	81	23.5	1.9	36.91	IE5	BG06-./S5E04SA4-1	4	13.5	27	81	97	23.5	23.5	23.5					

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 0.65 Nm (PN = 0.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
0.65	0.2	28.5	68	2.9	104.7	IE5	BG20Z-..S5E04SA4-1	1.4	4.7	9.5	28.5	34	68	68	68	68	68	13	5000	-
0.65	0.2	26.5	73	2.7	112.8	IE5	BG20Z-..S5E04SA4-1	1.3	4.4	8.8	26.5	31.5	73	73	73	73	73	13	5000	-
0.65	0.2	23.5	81	2.5	125.3	IE5	BG20Z-..S5E04SA4-1	1.1	3.9	7.9	23.5	28.5	81	81	81	81	81	13	5000	-
0.65	0.2	21	91	2.2	141.3	IE5	BG20Z-..S5E04SA4-1	1	3.5	7	21	25	91	91	91	91	91	13	5000	-
0.65	0.2	19	102	2	157	IE5	BG20Z-..S5E04SA4-1	0.95	3.1	6.3	19	22.5	102	102	102	102	102	13	5000	-
0.65	0.2	18	105	1.9	162.2	IE5	BG20Z-..S5E04SA4-1	0.9	3	6.1	18	22	105	105	105	105	105	13	5000	-
0.65	0.2	16.5	117	1.7	180.1	IE5	BG20Z-..S5E04SA4-1	0.8	2.7	5.5	16.5	19.5	117	117	117	117	117	13	5000	-
0.65	0.2	15	129	1.5	199.9	IE5	BG20Z-..S5E04SA4-1	0.75	2.5	5	15	18	129	129	129	129	129	13	5000	-
0.65	0.2	13.5	144	1.4	222.1	IE5	BG20Z-..S5E04SA4-1	0.65	2.2	4.5	13.5	16	144	144	144	144	144	13	5000	-
0.65	0.2	12	161	1.4	248	IE5	BG20G06-..S5E04SA4-1	0.6	2	4	12	14.5	161	161	161	161	161	17	5000	2100
0.65	0.2	10	193	1.1	297.9	IE5	BG20G06-..S5E04SA4-1	0.5	1.6	3.3	10	12	193	193	193	193	193	17	5000	2100
0.65	0.2	8.5	225	0.96	352.1	IE5	BG20G06-..S5E04SA4-1	0.42	1.4	2.8	8.5	10	225	225	225	225	225	17	5000	2100
0.65	0.2	7.6	250	0.87	391.1	IE5	BG20G06-..S5E04SA4-1	0.38	1.2	2.5	7.6	9.2	250	250	250	250	250	17	5000	2100
0.65	0.2	11.5	165	2	254.9	IE5	BG30G06-..S5E04SA4-1	0.55	1.9	3.9	11.5	14	165	165	165	165	165	21	6000	-
0.65	0.2	9.7	199	1.6	306.2	IE5	BG30G06-..S5E04SA4-1	0.48	1.6	3.2	9.7	11.5	199	199	199	199	199	21	6000	-
0.65	0.2	8.6	225	1.4	346.8	IE5	BG30G06-..S5E04SA4-1	0.43	1.4	2.8	8.6	10	225	225	225	225	225	21	6000	-
0.65	0.2	7.4	260	1.2	401.9	IE5	BG30G06-..S5E04SA4-1	0.37	1.2	2.4	7.4	8.9	260	260	260	260	260	21	6000	-
0.65	0.2	6.3	305	1.1	472.8	IE5	BG30G06-..S5E04SA4-1	0.31	1	2.1	6.3	7.6	305	305	305	305	305	21	6000	-
0.65	0.2	5.3	365	0.88	565.8	IE5	BG30G06-..S5E04SA4-1	0.26	0.85	1.7	5.3	6.3	365	365	365	365	365	21	6000	-

MN = 0.8 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
0.8	0.25	1190	2	2	2.51	IE5	BG04-..S5E04SA4-1	59	199	395	1190	1430	1.9	2	2	2	2	4.4	340	-
0.8	0.25	820	2.9	1.7	3.65	IE5	BG04-..S5E04SA4-1	41	136	270	820	980	2.75	2.9	2.9	2.9	2.9	4.4	390	-
0.8	0.25	680	3.5	2	4.39	IE5	BG04-..S5E04SA4-1	34	113	225	680	820	3.3	3.5	3.5	3.5	3.5	4.4	380	-
0.8	0.25	550	4.25	2.1	5.36	IE5	BG04-..S5E04SA4-1	27.5	93	186	550	670	4.05	4.25	4.25	4.25	4.25	4.4	380	-
0.8	0.25	485	4.9	2.2	6.18	IE5	BG04-..S5E04SA4-1	24	80	161	485	580	4.65	4.9	4.9	4.9	4.9	4.4	415	-
0.8	0.25	445	5.3	1.9	6.67	IE5	BG04-..S5E04SA4-1	22	74	149	445	530	5	5.3	5.3	5.3	5.3	4.4	410	-
0.8	0.25	440	5.4	2	6.8	IE5	BG04-..S5E04SA4-1	22	73	147	440	520	5.1	5.4	5.4	5.4	5.4	4.4	420	-
0.8	0.25	345	6.8	1.6	8.58	IE5	BG04-..S5E04SA4-1	17	58	116	345	415	6.5	6.8	6.8	6.8	6.8	4.4	410	-
0.8	0.25	330	7.2	1.7	9	IE5	BG04-..S5E04SA4-1	16.5	55	111	330	400	6.8	7.2	7.2	7.2	7.2	4.4	470	-
0.8	0.25	300	7.9	1.6	9.9	IE5	BG04-..S5E04SA4-1	15	50	101	300	360	7.5	7.9	7.9	7.9	7.9	4.4	480	-
0.8	0.25	275	8.6	1.6	10.82	IE5	BG04-..S5E04SA4-1	13.5	46	92	275	330	8.2	8.6	8.6	8.6	8.6	4.4	480	-
0.8	0.25	250	9.5	1.6	11.9	IE5	BG04-..S5E04SA4-1	12.5	42	84	250	300	9	9.5	9.5	9.5	9.5	4.4	490	-
0.8	0.25	235	10	1.5	12.55	IE5	BG04-..S5E04SA4-1	11.5	39.5	79	235	285	9.5	10	10	10	10	4.4	490	-
0.8	0.25	225	10.5	1.5	13.2	IE5	BG04-..S5E04SA4-1	11	37.5	75	225	270	10	10.5	10.5	10.5	10.5	4.4	500	-
0.8	0.25	205	11.6	1.5	14.52	IE5	BG04-..S5E04SA4-1	10	34	68	205	245	11	11.6	11.6	11.6	11.6	4.4	510	-
0.8	0.25	182	13.1	1.4	16.44	IE5	BG04-..S5E04SA4-1	9.1	30	60	182	215	12.4	13.1	13.1	13.1	13.1	4.4	530	-
0.8	0.25	165	14.4	1.2	18.08	IE5	BG04-..S5E04SA4-1	8.2	27.5	55	165	199	13.7	14.4	14.4	14.4	14.4	4.4	540	-
0.8	0.25	142	16.8	1.1	21.12	IE5	BG04-..S5E04SA4-1	7.1	23.5	47	142	170	16	16.8	16.8	16.8	16.8	4.4	560	-
0.8	0.25	129	18.5	1.1	23.23	IE5	BG04-..S5E04SA4-1	6.4	21.5	43	129	154	17.6	18.5	18.5	18.5	18.5	4.4	600	-
0.8	0.25	122	19.5	1	24.45	IE5	BG04-..S5E04SA4-1	6.1	20	40.5	122	147	18.5	19.5	19.5	19.5	19.5	4.4	610	-
0.8	0.25	111	21.5	0.93	26.89	IE5	BG04-..S5E04SA4-1	5.5	18.5	37	111	133	20	21.5	21.5	21.5	21.5	4.4	650	-
0.8	0.25	97	24.5	0.81	30.91	IE5	BG04-..S5E04SA4-1	4.8	16	32	97	116	23	24.5	24.5	24.5	24.5	4.4	690	-
0.8	0.25	450	5.2	3	6.6	IE5	BG05-..S5E04SA4-1	22.5	75	151	450	540	5	5.2	5.2	5.2	5.2	5.1	510	-
0.8	0.25	380	6.2	2.9	7.8	IE5	BG05-..S5E04SA4-1	19	64	128	380	460	5.9	6.2	6.2	6.2	6.2	5.1	530	-
0.8	0.25	365	6.5	2.8	8.15	IE5	BG05-..S5E04SA4-1	18	61	122	365	440	6.1	6.5	6.5	6.5	6.5	5.1	510	-
0.8	0.25	350	6.8	2.8	8.51	IE5	BG05-..S5E04SA4-1	17.5	58	117	350	420	6.4	6.8	6.8	6.8	6.8	5.1	550	-
0.8	0.25	285	8.3	2.3	10.4	IE5	BG05-..S5E04SA4-1	14	48	96	285	345	7.9	8.3	8.3	8.3	8.3	5.1	510	-
0.8	0.25	280	8.4	2.4	10.59	IE5	BG05-..S5E04SA4-1	14	47	94	280									

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 0.8 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
0.8	0.25	144	16.6	2.4	20.82	IE5	BG06-..S5E04SA4-1	7.2	24	48	144	172	15.8	16.6	16.6	16.6	16.6	6.1	800	-	
0.8	0.25	132	18.1	2.4	22.71	IE5	BG06-..S5E04SA4-1	6.6	22	44	132	158	17.2	18.1	18.1	18.1	18.1	6.1	810	-	
0.8	0.25	117	20	2.2	25.48	IE5	BG06-..S5E04SA4-1	5.8	19.5	39	117	141	19.3	20	20	20	20	6.1	850	-	
0.8	0.25	107	22	2	27.8	IE5	BG06-..S5E04SA4-1	5.3	17.5	35.5	107	129	21	22	22	22	22	6.1	840	-	
0.8	0.25	93	25.5	1.7	32.22	IE5	BG06-..S5E04SA4-1	4.6	15.5	31	93	111	24	25.5	25.5	25.5	25.5	25.5	6.1	890	-
0.8	0.25	85	28	1.6	35.15	IE5	BG06-..S5E04SA4-1	4.2	14	28	85	102	26.5	28	28	28	28	6.1	880	-	
0.8	0.25	81	29.5	1.5	36.91	IE5	BG06-..S5E04SA4-1	4	13.5	27	81	97	28	29.5	29.5	29.5	29.5	29.5	6.1	890	-
0.8	0.25	74	32	1.4	40.26	IE5	BG06-..S5E04SA4-1	3.7	12	24.5	74	89	30.5	32	32	32	32	6.1	890	-	
0.8	0.25	64	36.5	1.2	46.19	IE5	BG06-..S5E04SA4-1	3.2	10.5	21.5	64	77	35	36.5	36.5	36.5	36.5	36.5	6.1	890	-
0.8	0.25	59	40	1.1	50.38	IE5	BG06-..S5E04SA4-1	2.9	9.9	19.5	59	71	38	40	40	40	40	6.1	940	-	
0.8	0.25	57	42	1.1	52.56	IE5	BG06-..S5E04SA4-1	2.8	9.5	19	57	68	39.5	42	42	42	42	6.1	950	-	
0.8	0.25	52	45.5	0.98	57.34	IE5	BG06-..S5E04SA4-1	2.6	8.7	17	52	62	43.5	45.5	45.5	45.5	45.5	6.1	1000	-	
0.8	0.25	49	48.5	0.92	61.22	IE5	BG06-..S5E04SA4-1	2.4	8.1	16	49	58	46.5	48.5	48.5	48.5	48.5	6.1	1020	-	
0.8	0.25	44.5	53	0.84	66.79	IE5	BG06-..S5E04SA4-1	2.2	7.4	14.5	44.5	53	50	53	53	53	53	6.1	1070	-	
0.8	0.25	44	54	1.9	67.54	IE5	BG10Z-..S5E04SA4-1	2.2	7.4	14.5	44	53	51	54	54	54	54	11	2000	2800	
0.8	0.25	38.5	61	1.9	77.4	IE5	BG10Z-..S5E04SA4-1	1.9	6.4	12.5	38.5	46.5	58	61	61	61	61	11	2000	2800	
0.8	0.25	34.5	68	1.7	85.76	IE5	BG10Z-..S5E04SA4-1	1.7	5.8	11.5	34.5	41.5	65	68	68	68	68	11	2000	2800	
0.8	0.25	32.5	73	1.6	92.19	IE5	BG10Z-..S5E04SA4-1	1.6	5.4	10.5	32.5	39	70	73	73	73	73	11	2000	2800	
0.8	0.25	29	81	1.5	102.1	IE5	BG10Z-..S5E04SA4-1	1.4	4.8	9.7	29	35	77	81	81	81	81	11	2000	2800	
0.8	0.25	27	87	1.4	109.8	IE5	BG10Z-..S5E04SA4-1	1.3	4.5	9.1	27	32.5	83	87	87	87	87	11	2000	2800	
0.8	0.25	24.5	97	1.2	121.7	IE5	BG10Z-..S5E04SA4-1	1.2	4.1	8.2	24.5	29.5	92	97	97	97	97	11	2000	2800	
0.8	0.25	22.5	105	1.1	131.8	IE5	BG10Z-..S5E04SA4-1	1.1	3.7	7.5	22.5	27	100	105	105	105	105	11	2000	2800	
0.8	0.25	20.5	116	1	146	IE5	BG10Z-..S5E04SA4-1	1	3.4	6.8	20.5	24.5	110	116	116	116	116	11	2000	2800	
0.8	0.25	18	132	0.9	166	IE5	BG10Z-..S5E04SA4-1	0.9	3	6	18	21.5	126	132	132	132	132	11	2000	2800	
0.8	0.25	16	147	0.82	184	IE5	BG10Z-..S5E04SA4-1	0.8	2.7	5.4	16	19.5	139	147	147	147	147	11	2000	2800	
0.8	0.25	19.5	120	1.1	150.1	IE5	BG10G06-..S5E04SA4-1	0.95	3.3	6.6	19.5	23.5	114	120	120	120	120	14	2000	2800	
0.8	0.25	18	133	0.98	166.3	IE5	BG10G06-..S5E04SA4-1	0.9	3	6	18	21.5	126	133	133	133	133	14	2000	2800	
0.8	0.25	15	155	0.83	194.9	IE5	BG10G06-..S5E04SA4-1	0.75	2.5	5.1	15	18	148	155	155	155	155	14	2000	2800	
0.8	0.25	34	69	2.9	87.3	IE5	BG20Z-..S5E04SA4-1	1.7	5.7	11	34	41	66	69	69	69	69	13	5000	-	
0.8	0.25	31.5	75	2.7	94.27	IE5	BG20Z-..S5E04SA4-1	1.5	5.3	10.5	31.5	38	71	75	75	75	75	13	5000	-	
0.8	0.25	28.5	83	2.4	104.7	IE5	BG20Z-..S5E04SA4-1	1.4	4.7	9.5	28.5	34	79	83	83	83	83	13	5000	-	
0.8	0.25	26.5	90	2.2	112.8	IE5	BG20Z-..S5E04SA4-1	1.3	4.4	8.8	26.5	31.5	85	90	90	90	90	13	5000	-	
0.8	0.25	23.5	100	2	125.3	IE5	BG20Z-..S5E04SA4-1	1.1	3.9	7.9	23.5	28.5	95	100	100	100	100	13	5000	-	
0.8	0.25	21	113	1.8	141.3	IE5	BG20Z-..S5E04SA4-1	1	3.5	7	21	25	107	113	113	113	113	13	5000	-	
0.8	0.25	19	125	1.6	157	IE5	BG20Z-..S5E04SA4-1	0.95	3.1	6.3	19	22.5	119	125	125	125	125	13	5000	-	
0.8	0.25	18	129	1.5	162.2	IE5	BG20Z-..S5E04SA4-1	0.9	3	6.1	18	22	123	129	129	129	129	13	5000	-	
0.8	0.25	16.5	144	1.4	180.1	IE5	BG20Z-..S5E04SA4-1	0.8	2.7	5.5	16.5	19.5	136	144	144	144	144	13	5000	-	
0.8	0.25	15	159	1.3	199.9	IE5	BG20Z-..S5E04SA4-1	0.75	2.5	5	15	18	151	159	159	159	159	13	5000	-	
0.8	0.25	13.5	177	1.1	222.1	IE5	BG20Z-..S5E04SA4-1	0.65	2.2	4.5	13.5	16	168	177	177	177	177	13	5000	-	
0.8	0.25	12	198	1.1	248	IE5	BG20G06-..S5E04SA4-1	0.6	2	4	12	14.5	188	198	198	198	198	17	5000	2100	
0.8	0.25	10	235	0.92	297.9	IE5	BG20G06-..S5E04SA4-1	0.5	1.6	3.3	10	12	225	235	235	235	235	17	5000	2100	
0.8	0.25	11.5	200	1.6	254.9	IE5	BG30G06-..S5E04SA4-1	0.55	1.9	3.9	11.5	14	193	200	200	200	200	21	6000	-	
0.8	0.25	9.7	240	1.3	306.2	IE5	BG30G06-..S5E04SA4-1	0.48	1.6	3.2	9.7	11.5	230	240	240	240	240	21	6000	-	
0.8	0.25	8.6	275	1.2	346.8	IE5	BG30G06-..S5E04SA4-1	0.43	1.4	2.8	8.6	10	260	275	275	275	275	21	6000	-	
0.8	0.25	7.4	320	1	401.9	IE5	BG30G06-..S5E04SA4-1	0.37	1.2	2.4	7.4	8.9	305	320	320	320	320	21	6000	-	
0.8	0.25	6.3	375	0.86	472.8	IE5	BG30G06-..S5E04SA4-1	0.31	1	2.1	6.3	7.6	355	375	375	375	375	21	6000	-	
0.8	0.25	880	3.35	3	3.38	IE4	BG05-..S4E04SA4-1	44	147	295	880	1060	2.55	2.85	3.35	3.35	3.35	5.1	460	-	
0.8	0.25	650	4.55	2.6	4.59	IE4	BG05-..S4E04SA4-1	32.5	108	215	650	780	3.45	3.9	4.55	4.55	4.55	5.1	490	-	

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1 Nm (PN = 0.315 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1	0.315	540	5.4	2.6	5.46	IE4	BG05-..S4E04SA4-1	27	91	183	540	650	4.1	4.6	5.4	5.4	5.4	5.1	490	-
1	0.315	490	6	2.8	6.09	IE4	BG05-..S4E04SA4-1	24.5	82	164	490	590	4.6	5.1	6	6	6	5.1	480	-
1	0.315	450	6.5	2.4	6.6	IE4	BG05-..S4E04SA4-1	22.5	75	151	450	540	5	5.6	6.5	6.5	6.5	5.1	510	-
1	0.315	450	6.6	2.6	6.64	IE4	BG05-..S4E04SA4-1	22.5	75	150	450	540	5	5.6	6.6	6.6	6.6	5.1	500	-
1	0.315	380	7.8	2.3	7.8	IE4	BG05-..S4E04SA4-1	19	64	128	380	460	5.9	6.6	7.8	7.8	7.8	5.1	530	-
1	0.315	365	8.1	2.2	8.15	IE4	BG05-..S4E04SA4-1	18	61	122	365	440	6.1	6.9	8.1	8.1	8.1	5.1	510	-
1	0.315	350	8.5	2.2	8.51	IE4	BG05-..S4E04SA4-1	17.5	58	117	350	420	6.4	7.2	8.5	8.5	8.5	5.1	550	-
1	0.315	285	10.4	1.8	10.4	IE4	BG05-..S4E04SA4-1	14	48	96	285	345	7.9	8.8	10.4	10.4	10.4	5.1	510	-
1	0.315	280	10.5	1.9	10.59	IE4	BG05-..S4E04SA4-1	14	47	94	280	335	8	9	10.5	10.5	10.5	5.1	590	-
1	0.315	255	11.5	1.8	11.55	IE4	BG05-..S4E04SA4-1	12.5	43	86	255	310	8.7	9.8	11.5	11.5	11.5	5.1	600	-
1	0.315	245	12	1.7	12.05	IE4	BG05-..S4E04SA4-1	12	41	82	245	295	9.1	10.2	12	12	12	5.1	510	-
1	0.315	235	12.5	1.7	12.6	IE4	BG05-..S4E04SA4-1	11.5	39.5	79	235	285	9.5	10.7	12.5	12.5	12.5	5.1	610	-
1	0.315	215	13.7	1.7	13.75	IE4	BG05-..S4E04SA4-1	10.5	36	72	215	260	10.4	11.6	13.7	13.7	13.7	5.1	630	-
1	0.315	196	15.2	1.6	15.23	IE4	BG05-..S4E04SA4-1	9.8	32.5	65	196	235	11.5	12.9	15.2	15.2	15.2	5.1	640	-
1	0.315	180	16.6	1.5	16.62	IE4	BG05-..S4E04SA4-1	9	30	60	180	215	12.6	14.1	16.6	16.6	16.6	5.1	660	-
1	0.315	159	18.8	1.4	18.82	IE4	BG05-..S4E04SA4-1	7.9	26.5	53	159	191	14.3	15.9	18.8	18.8	18.8	5.1	680	-
1	0.315	146	20.5	1.3	20.53	IE4	BG05-..S4E04SA4-1	7.3	24	48.5	146	175	15.6	17.4	20.5	20.5	20.5	5.1	700	-
1	0.315	125	24	1.2	24	IE4	BG05-..S4E04SA4-1	6.2	20.5	41.5	125	150	18.2	20	24	24	24	5.1	740	-
1	0.315	114	26	1.1	26.18	IE4	BG05-..S4E04SA4-1	5.7	19	38	114	137	19.8	22	26	26	26	5.1	760	-
1	0.315	107	27.5	1.1	27.82	IE4	BG05-..S4E04SA4-1	5.3	17.5	35.5	107	129	21	23.5	27.5	27.5	27.5	5.1	770	-
1	0.315	98	30	0.99	30.35	IE4	BG05-..S4E04SA4-1	4.9	16	32.5	98	118	23	25.5	30	30	30	5.1	760	-
1	0.315	85	35	0.86	35	IE4	BG05-..S4E04SA4-1	4.2	14	28.5	85	102	26.5	29.5	35	35	35	5.1	810	-
1	0.315	290	10.2	3	10.24	IE4	BG06-..S4E04SA4-1	14.5	48.5	97	290	350	7.7	8.7	10.2	10.2	10.2	6.1	640	-
1	0.315	265	11.2	2.8	11.28	IE4	BG06-..S4E04SA4-1	13	44	88	265	315	8.5	9.5	11.2	11.2	11.2	6.1	670	-
1	0.315	240	12.3	2.7	12.3	IE4	BG06-..S4E04SA4-1	12	40.5	81	240	290	9.3	10.4	12.3	12.3	12.3	6.1	670	-
1	0.315	230	12.9	2.5	12.98	IE4	BG06-..S4E04SA4-1	11.5	38.5	77	230	275	9.8	11	12.9	12.9	12.9	6.1	600	-
1	0.315	200	14.7	2.3	14.78	IE4	BG06-..S4E04SA4-1	10	33.5	67	200	240	11.2	12.5	14.7	14.7	14.7	6.1	730	-
1	0.315	185	16.1	2.2	16.13	IE4	BG06-..S4E04SA4-1	9.2	30.5	61	185	220	12.2	13.7	16.1	16.1	16.1	6.1	740	-
1	0.315	172	17.3	2.2	17.4	IE4	BG06-..S4E04SA4-1	8.6	28.5	57	172	205	13.2	14.7	17.3	17.3	17.3	6.1	760	-
1	0.315	158	18.9	2.1	18.98	IE4	BG06-..S4E04SA4-1	7.9	26	52	158	189	14.4	16.1	18.9	18.9	18.9	6.1	770	-
1	0.315	144	20.5	1.9	20.82	IE4	BG06-..S4E04SA4-1	7.2	24	48	144	172	15.8	17.6	20.5	20.5	20.5	6.1	800	-
1	0.315	132	22.5	1.9	22.71	IE4	BG06-..S4E04SA4-1	6.6	22	44	132	158	17.2	19.3	22.5	22.5	22.5	6.1	810	-
1	0.315	117	25	1.8	25.48	IE4	BG06-..S4E04SA4-1	5.8	19.5	39	117	141	19.3	21.5	25	25	25	6.1	850	-
1	0.315	107	27.5	1.6	27.8	IE4	BG06-..S4E04SA4-1	5.3	17.5	35.5	107	129	21	23.5	27.5	27.5	27.5	6.1	840	-
1	0.315	93	32	1.4	32.22	IE4	BG06-..S4E04SA4-1	4.6	15.5	31	93	111	24	27	32	32	32	6.1	890	-
1	0.315	85	35	1.3	35.15	IE4	BG06-..S4E04SA4-1	4.2	14	28	85	102	26.5	29.5	35	35	35	6.1	880	-
1	0.315	81	36.5	1.2	36.91	IE4	BG06-..S4E04SA4-1	4	13.5	27	81	97	28	31	36.5	36.5	36.5	6.1	890	-
1	0.315	74	40	1.1	40.26	IE4	BG06-..S4E04SA4-1	3.7	12	24.5	74	89	30.5	34	40	40	40	6.1	890	-
1	0.315	64	46	0.97	46.19	IE4	BG06-..S4E04SA4-1	3.2	10.5	21.5	64	77	35	39	46	46	46	6.1	890	-
1	0.315	59	50	0.89	50.38	IE4	BG06-..S4E04SA4-1	2.9	9.9	19.5	59	71	38	42.5	50	50	50	6.1	940	-
1	0.315	57	52	0.86	52.56	IE4	BG06-..S4E04SA4-1	2.8	9.5	19	57	68	39.5	44.5	52	52	52	6.1	950	-
1	0.315	44	67	1.5	67.54	IE4	BG10Z-..S4E04SA4-1	2.2	7.4	14.5	44	53	51	57	67	67	67	11	2000	2800
1	0.315	38.5	77	1.6	77.4	IE4	BG10Z-..S4E04SA4-1	1.9	6.4	12.5	38.5	46.5	58	65	77	77	77	11	2000	2800
1	0.315	34.5	85	1.4	85.76	IE4	BG10Z-..S4E04SA4-1	1.7	5.8	11.5	34.5	41.5	65	72	85	85	85	11	2000	2800
1	0.315	32.5	92	1.3	92.19	IE4	BG10Z-..S4E04SA4-1	1.6	5.4	10.5	32.5	39	70	78	92	92	92	11	2000	2800
1	0.315	29	102	1.2	102.1	IE4	BG10Z-..S4E04SA4-1	1.4	4.8	9.7	29	35	77	86	102	102	102	11	2000	2800
1	0.315	27	109	1.1	109.8	IE4	BG10Z-..S4E04SA4-1	1.3	4.5	9.1	27	32.5	83	93	109	109	109	11	2000	2800
1	0.315	24.5	121	0.99	121.7	IE4	BG10Z-..S4E04SA4-1	1.2	4.1	8.2	24.5	29.5	92	103	121	121	121	11	2000	2800
1	0.315	22.5	131	0.91	131.8	IE4	BG10Z-..S4E04SA4-1	1.1	3.7	7.5	22.5	27	100	112	131	131	131	11	2000	2800
1	0.315	20.5	146	0.82	146	IE4	BG10Z-..S4E04SA4-1	1	3.4	6.8	20.5	24.5	110	124	146	146	146	11	2000	2800
1	0.315	19.5	150	0.87	150.1	IE4	BG10G06-..S4E04SA4-1	0.95	3.3	6.6	19.5	23.5	114	127	150	150	150	14	2000	2800
1	0.315	51	58	2.9	58.58	IE4	BG20Z-..S4E04SA4-1	2.5	8.5	17	51	61	44.5	49.5	58	5				

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.3	0.4	1130	3.4	2.6	2.64	IE5	BG05-./S5E06MA4	56	189	375	1130	1360	3.4	3.4	3.4	3.4	3.4	8.5	420	-
1.3	0.4	880	4.35	2.3	3.38	IE5	BG05-./S5E06MA4	44	147	295	880	1060	4.35	4.35	4.35	4.35	4.35	8.5	460	-
1.3	0.4	650	5.9	2	4.59	IE5	BG05-./S5E06MA4	32.5	108	215	650	780	5.9	5.9	5.9	5.9	5.9	8.5	490	-
1.3	0.4	540	7	2	5.46	IE5	BG05-./S5E06MA4	27	91	183	540	650	7	7	7	7	7	8.5	490	-
1.3	0.4	490	7.9	2.1	6.09	IE5	BG05-./S5E06MA4	24.5	82	164	490	590	7.9	7.9	7.9	7.9	7.9	8.5	480	-
1.3	0.4	450	8.5	1.9	6.6	IE5	BG05-./S5E06MA4	22.5	75	151	450	540	8.5	8.5	8.5	8.5	8.5	8.5	510	-
1.3	0.4	450	8.6	2	6.64	IE5	BG05-./S5E06MA4	22.5	75	150	450	540	8.6	8.6	8.6	8.6	8.6	8.5	500	-
1.3	0.4	380	10.1	1.8	7.8	IE5	BG05-./S5E06MA4	19	64	128	380	460	10.1	10.1	10.1	10.1	10.1	8.5	530	-
1.3	0.4	365	10.5	1.7	8.15	IE5	BG05-./S5E06MA4	18	61	122	365	440	10.5	10.5	10.5	10.5	10.5	8.5	510	-
1.3	0.4	350	11	1.7	8.51	IE5	BG05-./S5E06MA4	17.5	58	117	350	420	11	11	11	11	11	8.5	550	-
1.3	0.4	285	13.5	1.4	10.4	IE5	BG05-./S5E06MA4	14	48	96	285	345	13.5	13.5	13.5	13.5	13.5	8.5	510	-
1.3	0.4	280	13.7	1.5	10.59	IE5	BG05-./S5E06MA4	14	47	94	280	335	13.7	13.7	13.7	13.7	13.7	8.5	590	-
1.3	0.4	255	15	1.4	11.55	IE5	BG05-./S5E06MA4	12.5	43	86	255	310	15	15	15	15	15	8.5	600	-
1.3	0.4	245	15.6	1.3	12.05	IE5	BG05-./S5E06MA4	12	41	82	245	295	15.6	15.6	15.6	15.6	15.6	8.5	510	-
1.3	0.4	235	16.3	1.3	12.6	IE5	BG05-./S5E06MA4	11.5	39.5	79	235	285	16.3	16.3	16.3	16.3	16.3	8.5	610	-
1.3	0.4	215	17.8	1.3	13.75	IE5	BG05-./S5E06MA4	10.5	36	72	215	260	17.8	17.8	17.8	17.8	17.8	8.5	630	-
1.3	0.4	196	19.7	1.2	15.23	IE5	BG05-./S5E06MA4	9.8	32.5	65	196	235	19.7	19.7	19.7	19.7	19.7	8.5	640	-
1.3	0.4	180	21.5	1.2	16.62	IE5	BG05-./S5E06MA4	9	30	60	180	215	21.5	21.5	21.5	21.5	21.5	8.5	660	-
1.3	0.4	159	24	1.1	18.82	IE5	BG05-./S5E06MA4	7.9	26.5	53	159	191	24	24	24	24	24	8.5	680	-
1.3	0.4	146	26.5	1	20.53	IE5	BG05-./S5E06MA4	7.3	24	48.5	146	175	26.5	26.5	26.5	26.5	26.5	8.5	700	-
1.3	0.4	125	31	0.9	24	IE5	BG05-./S5E06MA4	6.2	20.5	41.5	125	150	31	31	31	31	31	8.5	740	-
1.3	0.4	114	34	0.85	26.18	IE5	BG05-./S5E06MA4	5.7	19	38	114	137	34	34	34	34	34	8.5	760	-
1.3	0.4	107	36	0.83	27.82	IE5	BG05-./S5E06MA4	5.3	17.5	35.5	107	129	36	36	36	36	36	8.5	770	-
1.3	0.4	425	9.1	2.9	7.01	IE5	BG06-./S5E06MA4	21	71	142	425	510	9.1	9.1	9.1	9.1	9.1	9.5	580	-
1.3	0.4	355	10.9	2.6	8.39	IE5	BG06-./S5E06MA4	17.5	59	119	355	425	10.9	10.9	10.9	10.9	10.9	9.5	600	-
1.3	0.4	315	12.1	2.5	9.38	IE5	BG06-./S5E06MA4	15.5	53	106	315	380	12.1	12.1	12.1	12.1	12.1	9.5	640	-
1.3	0.4	290	13.3	2.3	10.24	IE5	BG06-./S5E06MA4	14.5	48.5	97	290	350	13.3	13.3	13.3	13.3	13.3	9.5	640	-
1.3	0.4	265	14.6	2.2	11.28	IE5	BG06-./S5E06MA4	13	44	88	265	315	14.6	14.6	14.6	14.6	14.6	9.5	670	-
1.3	0.4	240	15.9	2.1	12.3	IE5	BG06-./S5E06MA4	12	40.5	81	240	290	15.9	15.9	15.9	15.9	15.9	9.5	670	-
1.3	0.4	230	16.8	2	12.98	IE5	BG06-./S5E06MA4	11.5	38.5	77	230	275	16.8	16.8	16.8	16.8	16.8	9.5	600	-
1.3	0.4	200	19.2	1.8	14.78	IE5	BG06-./S5E06MA4	10	33.5	67	200	240	19.2	19.2	19.2	19.2	19.2	9.5	730	-
1.3	0.4	185	20.5	1.7	16.13	IE5	BG06-./S5E06MA4	9.2	30.5	61	185	220	20.5	20.5	20.5	20.5	20.5	9.5	740	-
1.3	0.4	172	22.5	1.7	17.4	IE5	BG06-./S5E06MA4	8.6	28.5	57	172	205	22.5	22.5	22.5	22.5	22.5	9.5	760	-
1.3	0.4	158	24.5	1.6	18.98	IE5	BG06-./S5E06MA4	7.9	26	52	158	189	24.5	24.5	24.5	24.5	24.5	9.5	770	-
1.3	0.4	144	27	1.5	20.82	IE5	BG06-./S5E06MA4	7.2	24	48	144	172	27	27	27	27	27	9.5	800	-
1.3	0.4	132	29.5	1.5	22.71	IE5	BG06-./S5E06MA4	6.6	22	44	132	158	29.5	29.5	29.5	29.5	29.5	9.5	810	-
1.3	0.4	117	33	1.4	25.48	IE5	BG06-./S5E06MA4	5.8	19.5	39	117	141	33	33	33	33	33	9.5	850	-
1.3	0.4	107	36	1.2	27.8	IE5	BG06-./S5E06MA4	5.3	17.5	35.5	107	129	36	36	36	36	36	9.5	840	-
1.3	0.4	93	41.5	1.1	32.22	IE5	BG06-./S5E06MA4	4.6	15.5	31	93	111	41.5	41.5	41.5	41.5	41.5	9.5	890	-
1.3	0.4	85	45.5	0.98	35.15	IE5	BG06-./S5E06MA4	4.2	14	28	85	102	45.5	45.5	45.5	45.5	45.5	9.5	880	-
1.3	0.4	81	47.5	0.94	36.91	IE5	BG06-./S5E06MA4	4	13.5	27	81	97	47.5	47.5	47.5	47.5	47.5	9.5	890	-
1.3	0.4	74	52	0.86	40.26	IE5	BG06-./S5E06MA4	3.7	12	24.5	74	89	52	52	52	52	52	9.5	890	-
1.3	0.4	95	40.5	2.9	31.52	IE5	BG10-./S5E06MA4	4.7	15.5	31.5	95	114	40.5	40.5	40.5	40.5	40.5	13	1600	2200
1.3	0.4	85	45	2.6	34.92	IE5	BG10-./S5E06MA4	4.2	14	28.5	85	103	45	45	45	45	45	13	1690	2350
1.3	0.4	75	51	2.3	39.7	IE5	BG10-./S5E06MA4	3.7	12.5	25	75	90	51	51	51	51	51	13	1780	2450
1.3	0.4	68	57	2.1	43.99	IE5	BG10-./S5E06MA4	3.4	11	22.5	68	81	57	57	57	57	57	13	1880	2600
1.3	0.4	64	60	2	46.55	IE5	BG10-./S5E06MA4	3.2	10.5	21	64	77	60	60	60	60	60	13	1920	2650
1.3	0.4	58	67	1.8	51.57	IE5	BG10-./S5E06MA4	2.9	9.6	19	58	69	67	67	67	67	67	13	2000	2800
1.3	0.4	52	74	1.6	57.48	IE5	BG10-./S5E06MA4	2.6	8.6	17	52	62	74	74	74	74	74	13	2000	2800
1.3	0.4	47	82	1.4	63.69	IE5	BG10-./S5E06MA4	2.3	7.8	15.5	47	56	82	82	82	82	82	13	2000	2800
1.3	0.4	45	85	1.4	66	IE5	BG10-./S5E06MA4	2.2	7.5	15	45	54	85	85	85	85	85	13	2000	2800
1.3	0.4	41	95	1.3	73.13	IE5	BG10-./S5E06MA4	2	6.8	13.5	41	49	95	95	95	95	95	13	2000	2800
1.3	0.4	44	87	1.2	67.54	IE5	BG10Z-./S5E06MA4	2.2	7.4	14.5	44	53	87	87	87	87	87	14	2000	2800
1.3	0.4	38.5	100	1.2	77.4	IE5	BG10Z-./S5E06MA4	1.9	6.4	12.5	38.5	46.5	100	100	100	100	100	14	2000	2800
1.3	0.4	34.5	111	1.1	85.76	IE5	BG10Z-./S5E06MA4	1.7	5.8	11.5	34.5	41.5	111	111	1					

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.3	0.4	31	124	2.4	95.55	IE5	BG30Z-..S5E06MA4	1.5	5.2	10	31	37.5	124	124	124	124	124	22	6000	-
1.3	0.4	27	142	2.1	109.6	IE5	BG30Z-..S5E06MA4	1.3	4.5	9.1	27	32.5	142	142	142	142	142	22	6000	-
1.3	0.4	24.5	158	1.9	121.6	IE5	BG30Z-..S5E06MA4	1.2	4.1	8.2	24.5	29.5	158	158	158	158	158	22	6000	-
1.3	0.4	23	167	1.8	128.5	IE5	BG30Z-..S5E06MA4	1.1	3.8	7.7	23	28	167	167	167	167	167	22	6000	-
1.3	0.4	21	185	1.6	142.5	IE5	BG30Z-..S5E06MA4	1	3.5	7	21	25	185	185	185	185	185	22	6000	-
1.3	0.4	19.5	196	1.5	151.5	IE5	BG30Z-..S5E06MA4	0.95	3.3	6.6	19.5	23.5	196	196	196	196	196	22	6000	-
1.3	0.4	17.5	215	1.4	168.1	IE5	BG30Z-..S5E06MA4	0.85	2.9	5.9	17.5	21	215	215	215	215	215	22	6000	-
1.3	0.4	16	235	1.3	182.9	IE5	BG30Z-..S5E06MA4	0.8	2.7	5.4	16	19.5	235	235	235	235	235	22	6000	-
1.3	0.4	14.5	260	1.1	202.9	IE5	BG30Z-..S5E06MA4	0.7	2.4	4.9	14.5	17.5	260	260	260	260	260	22	6000	-
1.3	0.4	13	290	1	225.9	IE5	BG30Z-..S5E06MA4	0.65	2.2	4.4	13	15.5	290	290	290	290	290	22	6000	-
1.3	0.4	11.5	325	0.92	250.6	IE5	BG30Z-..S5E06MA4	0.55	1.9	3.9	11.5	14	325	325	325	325	325	22	6000	-
1.3	0.4	11	340	0.88	261.9	IE5	BG30Z-..S5E06MA4	0.55	1.9	3.8	11	13.5	340	340	340	340	340	22	6000	-
1.3	0.4	11.5	330	0.98	254.9	IE5	BG30G06-..S5E06MA4	0.55	1.9	3.9	11.5	14	330	330	330	330	330	25	6000	-
1.3	0.4	9.7	395	0.82	306.2	IE5	BG30G06-..S5E06MA4	0.48	1.6	3.2	9.7	11.5	395	395	395	395	395	25	6000	-
1.3	0.4	27.5	139	3	107.5	IE5	BG40Z-..S5E06MA4	1.3	4.6	9.3	27.5	33	139	139	139	139	139	38	7000	-
1.3	0.4	24.5	157	2.7	121.3	IE5	BG40Z-..S5E06MA4	1.2	4.1	8.2	24.5	29.5	157	157	157	157	157	38	7000	-
1.3	0.4	22	174	2.4	134.6	IE5	BG40Z-..S5E06MA4	1.1	3.7	7.4	22	26.5	174	174	174	174	174	38	7000	-
1.3	0.4	21	183	2.3	141.4	IE5	BG40Z-..S5E06MA4	1	3.5	7	21	25	183	183	183	183	183	38	7000	-
1.3	0.4	19	200	2.1	156.9	IE5	BG40Z-..S5E06MA4	0.95	3.1	6.3	19	22.5	200	200	200	200	200	38	7000	-
1.3	0.4	18	215	2	166.1	IE5	BG40Z-..S5E06MA4	0.9	3	6	18	21.5	215	215	215	215	215	38	7000	-
1.3	0.4	16	235	1.8	184.4	IE5	BG40Z-..S5E06MA4	0.8	2.7	5.4	16	19.5	235	235	235	235	235	38	7000	-
1.3	0.4	15	255	1.6	199.9	IE5	BG40Z-..S5E06MA4	0.75	2.5	5	15	18	255	255	255	255	255	38	7000	-
1.3	0.4	13.5	285	1.5	221.9	IE5	BG40Z-..S5E06MA4	0.65	2.2	4.5	13.5	16	285	285	285	285	285	38	7000	-
1.3	0.4	12	320	1.3	246.5	IE5	BG40Z-..S5E06MA4	0.6	2	4	12	14.5	320	320	320	320	320	38	7000	-
1.3	0.4	10.5	355	1.2	273.6	IE5	BG40Z-..S5E06MA4	0.5	1.8	3.6	10.5	13	355	355	355	355	355	38	7000	-
1.3	0.4	10	375	1.2	288.6	IE5	BG40G10-..S5E06MA4	0.5	1.7	3.4	10	12	375	375	375	375	375	43	7000	-
1.3	0.4	8.4	455	1	353.5	IE5	BG40G10-..S5E06MA4	0.42	1.4	2.8	8.4	10	455	455	455	455	455	43	7000	-
1.3	0.4	6.6	580	0.8	448.8	IE5	BG40G10-..S5E06MA4	0.33	1.1	2.2	6.6	8	580	580	580	580	580	43	7000	-
1.3	0.4	18	210	2.9	164.9	IE5	BG50Z-..S5E06MA4	0.9	3	6	18	21.5	210	210	210	210	210	47	10000	-
1.3	0.4	16	235	2.7	182.8	IE5	BG50Z-..S5E06MA4	0.8	2.7	5.4	16	19.5	235	235	235	235	235	47	10000	-
1.3	0.4	14.5	265	2.4	204.7	IE5	BG50Z-..S5E06MA4	0.7	2.4	4.8	14.5	17.5	265	265	265	265	265	47	10000	-
1.3	0.4	13	290	2.1	226.9	IE5	BG50Z-..S5E06MA4	0.65	2.2	4.4	13	15.5	290	290	290	290	290	47	10000	-
1.3	0.4	11.5	335	1.9	258.6	IE5	BG50Z-..S5E06MA4	0.55	1.9	3.8	11.5	13.5	335	335	335	335	335	47	10000	-
1.3	0.4	10	370	1.7	286.7	IE5	BG50Z-..S5E06MA4	0.5	1.7	3.4	10	12.5	370	370	370	370	370	47	10000	-
1.3	0.4	10	370	1.8	287.1	IE5	BG50G10-..S5E06MA4	0.5	1.7	3.4	10	12.5	370	370	370	370	370	51	10000	-
1.3	0.4	8.5	455	1.5	351.7	IE5	BG50G10-..S5E06MA4	0.42	1.4	2.8	8.5	10	455	455	455	455	455	51	10000	-
1.3	0.4	6.7	580	1.2	446.5	IE5	BG50G10-..S5E06MA4	0.33	1.1	2.2	6.7	8	580	580	580	580	580	51	10000	-
1.3	0.4	5.6	690	1	531.5	IE5	BG50G10-..S5E06MA4	0.28	0.9	1.8	5.6	6.7	690	690	690	690	690	51	10000	-
1.3	0.4	4.8	800	0.85	621.3	IE5	BG50G10-..S5E06MA4	0.24	0.8	1.6	4.8	5.7	800	800	800	800	800	51	10000	-
1.3	0.4	8.9	430	3	334.3	IE5	BG60G20-..S5E06MA4	0.44	1.4	2.9	8.9	10.5	430	430	430	430	430	100	16000	-
1.3	0.4	8	480	2.7	370.5	IE5	BG60G20-..S5E06MA4	0.4	1.3	2.6	8	9.7	480	480	480	480	480	100	16000	-
1.3	0.4	6.8	560	2.3	437.3	IE5	BG60G20-..S5E06MA4	0.34	1.1	2.2	6.8	8.2	560	560	560	560	560	100	16000	-
1.3	0.4	5.9	650	2	504.9	IE5	BG60G20-..S5E06MA4	0.29	0.95	1.9	5.9	7.1	650	650	650	650	650	100	16000	-
1.3	0.4	5.3	720	1.8	559.5	IE5	BG60G20-..S5E06MA4	0.26	0.85	1.7	5.3	6.4	720	720	720	720	720	100	16000	-
1.3	0.4	4.6	840	1.5	651.3	IE5	BG60G20-..S5E06MA4	0.23	0.75	1.5	4.6	5.5	840	840	840	840	840	100	16000	-
1.3	0.4	3.7	1040	1.2	804.5	IE5	BG60G20-..S5E06MA4	0.18	0.6	1.2	3.7	4.4	1040	1040	1040	1040	1040	100	16000	-
1.3	0.4	3.3	1150	1.1	891.5	IE5	BG60G20-..S5E06MA4	0.16	0.55	1.1	3.3	4	1150	1150	1150	1150	1150	100	16000	-
1.3	0.4	2.8	1360	0.95	1051	IE5	BG60G20-..S5E06MA4	0.14	0.47	0.95	2.8	3.4	1360	1360	1360	1360	1360	100	16000	-
1.3	0.4	2.5	1510	0.86	1168	IE5	BG60G20-..S5E06MA4	0.12	0.42	0.85	2.5	3	1510	1510	1510	1510	1510	100	16000	-
1.3	0.4	4.5	860	2.9	665.8	IE5	BG70G20-..S5E06MA4	0.22	0.75	1.5	4.5	5.4	860	860	860	860	860	130	20000	-
1.3	0.4	3.7	1020	2.4	790.2	IE5	BG70G20-..S5E06MA4	0.18	0.6	1.2	3.7	4.5	1020	1020	1020	1020	1020	130	20000	-
1.3	0.4	3.4	1140	2.2	877.6	IE5	BG70G20-..S5E06MA4	0.17	0.55	1.1	3.4	4.1	1140	1140	1140	1140	1140	130	20000	-
1.3	0.4	2.8	1340	1.9	1035	IE5	BG70G20-..S5E06MA4	0.14	0.48	0.95	2.8	3.4	1340	1340	1340	1340	1340	130	20000	-
1.3	0.4	2.5	1550	1.6	1193	IE5	BG70G20-..S5E06MA4	0.12	0.41	0.8	2.5	3</								

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.75 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.75	0.55	350	14.8	1.3	8.51	IE5	BG05-..S5E06MA4	17.5	58	117	350	420	14.8	14.8	14.8	14.8	14.8	8.5	550	-
1.75	0.55	285	18.1	1	10.4	IE5	BG05-..S5E06MA4	14	48	96	285	345	18.1	18.1	18.1	18.1	18.1	8.5	510	-
1.75	0.55	280	18.5	1.1	10.59	IE5	BG05-..S5E06MA4	14	47	94	280	335	18.5	18.5	18.5	18.5	18.5	8.5	590	-
1.75	0.55	255	20	1	11.55	IE5	BG05-..S5E06MA4	12.5	43	86	255	310	20	20	20	20	20	8.5	600	-
1.75	0.55	245	21	1	12.05	IE5	BG05-..S5E06MA4	12	41	82	245	295	21	21	21	21	21	8.5	510	-
1.75	0.55	235	22	1	12.6	IE5	BG05-..S5E06MA4	11.5	39.5	79	235	285	22	22	22	22	22	8.5	610	-
1.75	0.55	215	24	0.96	13.75	IE5	BG05-..S5E06MA4	10.5	36	72	215	260	24	24	24	24	24	8.5	630	-
1.75	0.55	196	26.5	0.9	15.23	IE5	BG05-..S5E06MA4	9.8	32.5	65	196	235	26.5	26.5	26.5	26.5	26.5	8.5	640	-
1.75	0.55	180	29	0.86	16.62	IE5	BG05-..S5E06MA4	9	30	60	180	215	29	29	29	29	29	8.5	660	-
1.75	0.55	790	6.6	3	3.78	IE5	BG06-..S5E06MA4	39.5	132	260	790	950	6.6	6.6	6.6	6.6	6.6	9.5	520	-
1.75	0.55	660	7.9	2.8	4.54	IE5	BG06-..S5E06MA4	33	110	220	660	790	7.9	7.9	7.9	7.9	7.9	9.5	530	-
1.75	0.55	500	10.4	2.3	5.96	IE5	BG06-..S5E06MA4	25	83	167	500	600	10.4	10.4	10.4	10.4	10.4	9.5	570	-
1.75	0.55	425	12.2	2.1	7.01	IE5	BG06-..S5E06MA4	21	71	142	425	510	12.2	12.2	12.2	12.2	12.2	9.5	580	-
1.75	0.55	355	14.6	1.9	8.39	IE5	BG06-..S5E06MA4	17.5	59	119	355	425	14.6	14.6	14.6	14.6	14.6	9.5	600	-
1.75	0.55	315	16.4	1.8	9.38	IE5	BG06-..S5E06MA4	15.5	53	106	315	380	16.4	16.4	16.4	16.4	16.4	9.5	640	-
1.75	0.55	290	17.9	1.7	10.24	IE5	BG06-..S5E06MA4	14.5	48.5	97	290	350	17.9	17.9	17.9	17.9	17.9	9.5	640	-
1.75	0.55	265	19.7	1.6	11.28	IE5	BG06-..S5E06MA4	13	44	88	265	315	19.7	19.7	19.7	19.7	19.7	9.5	670	-
1.75	0.55	240	21.5	1.5	12.3	IE5	BG06-..S5E06MA4	12	40.5	81	240	290	21.5	21.5	21.5	21.5	21.5	9.5	670	-
1.75	0.55	230	22.5	1.5	12.98	IE5	BG06-..S5E06MA4	11.5	38.5	77	230	275	22.5	22.5	22.5	22.5	22.5	9.5	600	-
1.75	0.55	200	25.5	1.3	14.78	IE5	BG06-..S5E06MA4	10	33.5	67	200	240	25.5	25.5	25.5	25.5	25.5	9.5	730	-
1.75	0.55	185	28	1.2	16.13	IE5	BG06-..S5E06MA4	9.2	30.5	61	185	220	28	28	28	28	28	9.5	740	-
1.75	0.55	172	30	1.2	17.4	IE5	BG06-..S5E06MA4	8.6	28.5	57	172	205	30	30	30	30	30	9.5	760	-
1.75	0.55	158	33	1.2	18.98	IE5	BG06-..S5E06MA4	7.9	26	52	158	189	33	33	33	33	33	9.5	770	-
1.75	0.55	144	36	1.1	20.82	IE5	BG06-..S5E06MA4	7.2	24	48	144	172	36	36	36	36	36	9.5	800	-
1.75	0.55	132	39.5	1.1	22.71	IE5	BG06-..S5E06MA4	6.6	22	44	132	158	39.5	39.5	39.5	39.5	39.5	9.5	810	-
1.75	0.55	117	44.5	1	25.48	IE5	BG06-..S5E06MA4	5.8	19.5	39	117	141	44.5	44.5	44.5	44.5	44.5	9.5	850	-
1.75	0.55	107	48.5	0.92	27.8	IE5	BG06-..S5E06MA4	5.3	17.5	35.5	107	129	48.5	48.5	48.5	48.5	48.5	9.5	840	-
1.75	0.55	93	56	0.8	32.22	IE5	BG06-..S5E06MA4	4.6	15.5	31	93	111	56	56	56	56	56	9.5	890	-
1.75	0.55	122	42.5	2.8	24.42	IE5	BG10-..S5E06MA4	6.1	20	40.5	122	147	42.5	42.5	42.5	42.5	42.5	13	1410	1970
1.75	0.55	114	45.5	2.6	26.26	IE5	BG10-..S5E06MA4	5.7	19	38	114	137	45.5	45.5	45.5	45.5	45.5	13	1460	2000
1.75	0.55	103	50	2.4	29.09	IE5	BG10-..S5E06MA4	5.1	17	34	103	123	50	50	50	50	50	13	1540	2150
1.75	0.55	95	55	2.2	31.52	IE5	BG10-..S5E06MA4	4.7	15.5	31.5	95	114	55	55	55	55	55	13	1600	2200
1.75	0.55	85	61	2	34.92	IE5	BG10-..S5E06MA4	4.2	14	28.5	85	103	61	61	61	61	61	13	1690	2350
1.75	0.55	75	69	1.7	39.7	IE5	BG10-..S5E06MA4	3.7	12.5	25	75	90	69	69	69	69	69	13	1780	2450
1.75	0.55	68	76	1.6	43.99	IE5	BG10-..S5E06MA4	3.4	11	22.5	68	81	76	76	76	76	76	13	1880	2600
1.75	0.55	64	81	1.5	46.55	IE5	BG10-..S5E06MA4	3.2	10.5	21	64	77	81	81	81	81	81	13	1920	2650
1.75	0.55	58	90	1.3	51.57	IE5	BG10-..S5E06MA4	2.9	9.6	19	58	69	90	90	90	90	90	13	2000	2800
1.75	0.55	52	100	1.2	57.48	IE5	BG10-..S5E06MA4	2.6	8.6	17	52	62	100	100	100	100	100	13	2000	2800
1.75	0.55	47	111	1.1	63.69	IE5	BG10-..S5E06MA4	2.3	7.8	15.5	47	56	111	111	111	111	111	13	2000	2800
1.75	0.55	45	115	1	66	IE5	BG10-..S5E06MA4	2.2	7.5	15	45	54	115	115	115	115	115	13	2000	2800
1.75	0.55	41	127	0.94	73.13	IE5	BG10-..S5E06MA4	2	6.8	13.5	41	49	127	127	127	127	127	13	2000	2800
1.75	0.55	44	118	0.87	67.54	IE5	BG10Z-..S5E06MA4	2.2	7.4	14.5	44	53	118	118	118	118	118	14	2000	2800
1.75	0.55	38.5	135	0.89	77.4	IE5	BG10Z-..S5E06MA4	1.9	6.4	12.5	38.5	46.5	135	135	135	135	135	14	2000	2800
1.75	0.55	34.5	150	0.8	85.76	IE5	BG10Z-..S5E06MA4	1.7	5.8	11.5	34.5	41.5	150	150	150	150	150	14	2000	2800
1.75	0.55	99	52	2.8	30.08	IE5	BG15-..S5E06MA4	4.9	16.5	33	99	119	52	52	52	52	52	13	3000	6000
1.75	0.55	87	59	2.5	34.2	IE5	BG15-..S5E06MA4	4.3	14.5	29	87	105	59	59	59	59	59	13	3000	6000
1.75	0.55	79	66	2.3	37.9	IE5	BG15-..S5E06MA4	3.9	13	26	79	94	66	66	66	66	66	13	3000	6000
1.75	0.55	71	73	2.7	41.76	IE5	BG20-..S5E06MA4	3.5	11.5	23.5	71	86	73	73	73	73	73	16	4500	-
1.75	0.55	64	81	2.5	46.38	IE5	BG20-..S5E06MA4	3.2	10.5	21.5	64	77	81	81	81	81	81	16	4700	-
1.75	0.55	62	83	2.4	47.92	IE5	BG20-..S5E06MA4	3.1	10	20.5	62	75	83	83	83	83	83	16	4750	-
1.75	0.55	56	93	2.1	53.22	IE5	BG20-..S5E06MA4	2.8	9.3	18.5	56	67	93	93	93	93	93	16	4950	-
1.75	0.55	50	103	1.9	59.07	IE5	BG20-..S5E06MA4	2.5	8.4	16.5	50	60	103	103	103	103	103	16	5000	-
1.75	0.55	45.5	114	1.7	65.62	IE5	BG20-..S5E06MA4	2.2	7.6	15	45.5	54	114	114	114	114	114	16	5000	-
1.75	0.55	51	102	1.7	58.58	IE5	B													

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.75 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.75	0.55	16	320	0.94	182.9	IE5	BG30Z-./S5E06MA4	0.8	2.7	5.4	16	19.5	320	320	320	320	320	22	6000	-
1.75	0.55	14.5	355	0.84	202.9	IE5	BG30Z-./S5E06MA4	0.7	2.4	4.9	14.5	17.5	355	355	355	355	355	22	6000	-
1.75	0.55	36.5	143	3	82	IE5	BG40Z-./S5E06MA4	1.8	6	12	36.5	43.5	143	143	143	143	143	38	7000	-
1.75	0.55	32.5	159	2.7	91.02	IE5	BG40Z-./S5E06MA4	1.6	5.4	10.5	32.5	39.5	159	159	159	159	159	38	7000	-
1.75	0.55	30.5	169	2.5	96.86	IE5	BG40Z-./S5E06MA4	1.5	5.1	10	30.5	37	169	169	169	169	169	38	7000	-
1.75	0.55	27.5	188	2.3	107.5	IE5	BG40Z-./S5E06MA4	1.3	4.6	9.3	27.5	33	188	188	188	188	188	38	7000	-
1.75	0.55	24.5	210	2	121.3	IE5	BG40Z-./S5E06MA4	1.2	4.1	8.2	24.5	29.5	210	210	210	210	210	38	7000	-
1.75	0.55	22	235	1.8	134.6	IE5	BG40Z-./S5E06MA4	1.1	3.7	7.4	22	26.5	235	235	235	235	235	38	7000	-
1.75	0.55	21	245	1.7	141.4	IE5	BG40Z-./S5E06MA4	1	3.5	7	21	25	245	245	245	245	245	38	7000	-
1.75	0.55	19	270	1.5	156.9	IE5	BG40Z-./S5E06MA4	0.95	3.1	6.3	19	22.5	270	270	270	270	270	38	7000	-
1.75	0.55	18	290	1.5	166.1	IE5	BG40Z-./S5E06MA4	0.9	3	6	18	21.5	290	290	290	290	290	38	7000	-
1.75	0.55	16	320	1.3	184.4	IE5	BG40Z-./S5E06MA4	0.8	2.7	5.4	16	19.5	320	320	320	320	320	38	7000	-
1.75	0.55	15	345	1.2	199.9	IE5	BG40Z-./S5E06MA4	0.75	2.5	5	15	18	345	345	345	345	345	38	7000	-
1.75	0.55	13.5	385	1.1	221.9	IE5	BG40Z-./S5E06MA4	0.65	2.2	4.5	13.5	16	385	385	385	385	385	38	7000	-
1.75	0.55	12	430	0.99	246.5	IE5	BG40Z-./S5E06MA4	0.6	2	4	12	14.5	430	430	430	430	430	38	7000	-
1.75	0.55	10.5	475	0.89	273.6	IE5	BG40Z-./S5E06MA4	0.5	1.8	3.6	10.5	13	475	475	475	475	475	38	7000	-
1.75	0.55	10	500	0.92	288.6	IE5	BG40G10-./S5E06MA4	0.5	1.7	3.4	10	12	500	500	500	500	500	43	7000	-
1.75	0.55	23	225	2.8	128.9	IE5	BG50Z-./S5E06MA4	1.1	3.8	7.7	23	27.5	225	225	225	225	225	47	10000	-
1.75	0.55	20.5	250	2.5	142.9	IE5	BG50Z-./S5E06MA4	1	3.4	6.9	20.5	25	250	250	250	250	250	47	10000	-
1.75	0.55	18	285	2.2	164.9	IE5	BG50Z-./S5E06MA4	0.9	3	6	18	21.5	285	285	285	285	285	47	10000	-
1.75	0.55	16	315	2	182.8	IE5	BG50Z-./S5E06MA4	0.8	2.7	5.4	16	19.5	315	315	315	315	315	47	10000	-
1.75	0.55	14.5	355	1.8	204.7	IE5	BG50Z-./S5E06MA4	0.7	2.4	4.8	14.5	17.5	355	355	355	355	355	47	10000	-
1.75	0.55	13	395	1.6	226.9	IE5	BG50Z-./S5E06MA4	0.65	2.2	4.4	13	15.5	395	395	395	395	395	47	10000	-
1.75	0.55	11.5	450	1.4	258.6	IE5	BG50Z-./S5E06MA4	0.55	1.9	3.8	11.5	13.5	450	450	450	450	450	47	10000	-
1.75	0.55	10	500	1.3	286.7	IE5	BG50Z-./S5E06MA4	0.5	1.7	3.4	10	12.5	500	500	500	500	500	47	10000	-
1.75	0.55	10	500	1.4	287.1	IE5	BG50G10-./S5E06MA4	0.5	1.7	3.4	10	12.5	500	500	500	500	500	51	10000	-
1.75	0.55	8.5	610	1.1	351.7	IE5	BG50G10-./S5E06MA4	0.42	1.4	2.8	8.5	10	610	610	610	610	610	51	10000	-
1.75	0.55	6.7	780	0.88	446.5	IE5	BG50G10-./S5E06MA4	0.33	1.1	2.2	6.7	8	780	780	780	780	780	51	10000	-
1.75	0.55	10.5	480	2.7	276.2	IE5	BG60G20-./S5E06MA4	0.5	1.8	3.6	10.5	13	480	480	480	480	480	100	16000	-
1.75	0.55	9.8	530	2.4	306.1	IE5	BG60G20-./S5E06MA4	0.49	1.6	3.2	9.8	11.5	530	530	530	530	530	100	16000	-
1.75	0.55	8.9	580	2.2	334.3	IE5	BG60G20-./S5E06MA4	0.44	1.4	2.9	8.9	10.5	580	580	580	580	580	100	16000	-
1.75	0.55	8	640	2	370.5	IE5	BG60G20-./S5E06MA4	0.4	1.3	2.6	8	9.7	640	640	640	640	640	100	16000	-
1.75	0.55	6.8	760	1.7	437.3	IE5	BG60G20-./S5E06MA4	0.34	1.1	2.2	6.8	8.2	760	760	760	760	760	100	16000	-
1.75	0.55	5.9	880	1.5	504.9	IE5	BG60G20-./S5E06MA4	0.29	0.95	1.9	5.9	7.1	880	880	880	880	880	100	16000	-
1.75	0.55	5.3	970	1.3	559.5	IE5	BG60G20-./S5E06MA4	0.26	0.85	1.7	5.3	6.4	970	970	970	970	970	100	16000	-
1.75	0.55	4.6	1130	1.1	651.3	IE5	BG60G20-./S5E06MA4	0.23	0.75	1.5	4.6	5.5	1130	1130	1130	1130	1130	100	16000	-
1.75	0.55	3.7	1400	0.92	804.5	IE5	BG60G20-./S5E06MA4	0.18	0.6	1.2	3.7	4.4	1400	1400	1400	1400	1400	100	16000	-
1.75	0.55	3.3	1560	0.83	891.5	IE5	BG60G20-./S5E06MA4	0.16	0.55	1.1	3.3	4	1560	1560	1560	1560	1560	100	16000	-
1.75	0.55	6	860	2.9	495.9	IE5	BG70G20-./S5E06MA4	0.3	1	2	6	7.2	860	860	860	860	860	130	20000	-
1.75	0.55	5.1	1010	2.5	577.3	IE5	BG70G20-./S5E06MA4	0.25	0.85	1.7	5.1	6.2	1010	1010	1010	1010	1010	130	20000	-
1.75	0.55	4.5	1160	2.1	665.8	IE5	BG70G20-./S5E06MA4	0.22	0.75	1.5	4.5	5.4	1160	1160	1160	1160	1160	130	20000	-
1.75	0.55	3.7	1380	1.8	790.2	IE5	BG70G20-./S5E06MA4	0.18	0.6	1.2	3.7	4.5	1380	1380	1380	1380	1380	130	20000	-
1.75	0.55	3.4	1530	1.6	877.6	IE5	BG70G20-./S5E06MA4	0.17	0.55	1.1	3.4	4.1	1530	1530	1530	1530	1530	130	20000	-
1.75	0.55	2.8	1810	1.4	1035	IE5	BG70G20-./S5E06MA4	0.14	0.48	0.95	2.8	3.4	1810	1810	1810	1810	1810	130	20000	-
1.75	0.55	2.5	2050	1.2	1193	IE5	BG70G20-./S5E06MA4	0.12	0.41	0.8	2.5	3	2050	2050	2050	2050	2050	130	20000	-
1.75	0.55	2.1	2400	1	1389	IE5	BG70G20-./S5E06MA4	0.1	0.35	0.7	2.1	2.5	2400	2400	2400	2400	2400	130	20000	-
1.75	0.55	1.9	2700	0.93	1543	IE5	BG70G20-./S5E06MA4	0.095	0.32	0.6	1.9	2.3	2700	2700	2700	2700	2700	130	20000	-
1.75	0.55	1.8	2900	0.86	1666	IE5	BG70G20-./S5E06MA4	0.09	0.3	0.6	1.8	2.1	2900	2900	2900	2900	2900	130	20000	-

MN = 2.4 Nm (PN = 0.75 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe
------------------------	------------------------	---------------------------	------------------------	-----------------------	-----------	---------------

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.75 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	790	9	2.2	3.78	IE5	BG06-../S5E06LA4	39.5	132	260	790	950	9	9	9	9	9	9.5	520	-
2.4	0.75	790	9	2.2	3.78	IE3	BG06-../SPE06MA4	39.5	132	260	790	950	6.8	7.5	8.3	9	9	9.5	520	-
2.4	0.75	660	10.8	2	4.54	IE5	BG06-../S5E06LA4	33	110	220	660	790	10.8	10.8	10.8	10.8	10.8	9.5	530	-
2.4	0.75	660	10.8	2	4.54	IE3	BG06-../SPE06MA4	33	110	220	660	790	8.1	9	9.9	10.8	10.8	9.5	530	-
2.4	0.75	500	14.3	1.7	5.96	IE5	BG06-../S5E06LA4	25	83	167	500	600	14.3	14.3	14.3	14.3	14.3	9.5	570	-
2.4	0.75	500	14.3	1.7	5.96	IE3	BG06-../SPE06MA4	25	83	167	500	600	10.7	11.9	13.1	14.3	14.3	9.5	570	-
2.4	0.75	425	16.8	1.5	7.01	IE5	BG06-../S5E06LA4	21	71	142	425	510	16.8	16.8	16.8	16.8	16.8	9.5	580	-
2.4	0.75	425	16.8	1.5	7.01	IE3	BG06-../SPE06MA4	21	71	142	425	510	12.6	14	15.4	16.8	16.8	9.5	580	-
2.4	0.75	355	20	1.4	8.39	IE5	BG06-../S5E06LA4	17.5	59	119	355	425	20	20	20	20	20	9.5	600	-
2.4	0.75	355	20	1.4	8.39	IE3	BG06-../SPE06MA4	17.5	59	119	355	425	15.1	16.7	18.4	20	20	9.5	600	-
2.4	0.75	315	22.5	1.3	9.38	IE5	BG06-../S5E06LA4	15.5	53	106	315	380	22.5	22.5	22.5	22.5	22.5	9.5	640	-
2.4	0.75	315	22.5	1.3	9.38	IE3	BG06-../SPE06MA4	15.5	53	106	315	380	16.8	18.7	20.5	22.5	22.5	9.5	640	-
2.4	0.75	290	24.5	1.3	10.24	IE5	BG06-../S5E06LA4	14.5	48.5	97	290	350	24.5	24.5	24.5	24.5	24.5	9.5	640	-
2.4	0.75	290	24.5	1.3	10.24	IE3	BG06-../SPE06MA4	14.5	48.5	97	290	350	18.4	20	22.5	24.5	24.5	9.5	640	-
2.4	0.75	265	27	1.2	11.28	IE5	BG06-../S5E06LA4	13	44	88	265	315	27	27	27	27	27	9.5	670	-
2.4	0.75	265	27	1.2	11.28	IE3	BG06-../SPE06MA4	13	44	88	265	315	22.5	24.5	27	27	27	9.5	670	-
2.4	0.75	240	29.5	1.1	12.3	IE5	BG06-../S5E06LA4	12	40.5	81	240	290	29.5	29.5	29.5	29.5	29.5	9.5	670	-
2.4	0.75	240	29.5	1.1	12.3	IE3	BG06-../SPE06MA4	12	40.5	81	240	290	22	24.5	27	29.5	29.5	9.5	670	-
2.4	0.75	230	31	1.1	12.98	IE5	BG06-../S5E06LA4	11.5	38.5	77	230	275	31	31	31	31	31	9.5	600	-
2.4	0.75	230	31	1.1	12.98	IE3	BG06-../SPE06MA4	11.5	38.5	77	230	275	23	25.5	28.5	31	31	9.5	600	-
2.4	0.75	200	35	0.96	14.78	IE5	BG06-../S5E06LA4	10	33.5	67	200	240	35	35	35	35	35	9.5	730	-
2.4	0.75	200	35	0.96	14.78	IE3	BG06-../SPE06MA4	10	33.5	67	200	240	26.5	29.5	32.5	35	35	9.5	730	-
2.4	0.75	185	38.5	0.9	16.13	IE5	BG06-../S5E06LA4	9.2	30.5	61	185	220	38.5	38.5	38.5	38.5	38.5	9.5	740	-
2.4	0.75	185	38.5	0.9	16.13	IE3	BG06-../SPE06MA4	9.2	30.5	61	185	220	29	32	35	38.5	38.5	9.5	740	-
2.4	0.75	172	41.5	0.91	17.4	IE5	BG06-../S5E06LA4	8.6	28.5	57	172	205	41.5	41.5	41.5	41.5	41.5	9.5	760	-
2.4	0.75	172	41.5	0.91	17.4	IE3	BG06-../SPE06MA4	8.6	28.5	57	172	205	31	34.5	38	41.5	41.5	9.5	760	-
2.4	0.75	158	45.5	0.88	18.98	IE5	BG06-../S5E06LA4	7.9	26	52	158	189	45.5	45.5	45.5	45.5	45.5	9.5	770	-
2.4	0.75	158	45.5	0.88	18.98	IE3	BG06-../SPE06MA4	7.9	26	52	158	189	34	37.5	41.5	45.5	45.5	9.5	770	-
2.4	0.75	144	49.5	0.8	20.82	IE5	BG06-../S5E06LA4	7.2	24	48	144	172	49.5	49.5	49.5	49.5	49.5	9.5	800	-
2.4	0.75	144	49.5	0.8	20.82	IE3	BG06-../SPE06MA4	7.2	24	48	144	172	37	41.5	45.5	49.5	49.5	9.5	800	-
2.4	0.75	185	38.5	3	16.15	IE5	BG10-../S5E06LA4	9.2	30.5	61	185	220	38.5	38.5	38.5	38.5	38.5	13	1140	1590
2.4	0.75	185	38.5	3	16.15	IE3	BG10-../SPE06MA4	9.2	30.5	61	185	220	29	32	35.5	38.5	38.5	13	1140	1590
2.4	0.75	162	44	2.7	18.51	IE5	BG10-../S5E06LA4	8.1	27	54	162	194	44	44	44	44	44	13	1210	1690
2.4	0.75	162	44	2.7	18.51	IE3	BG10-../SPE06MA4	8.1	27	54	162	194	33	37	40.5	44	44	13	1210	1690
2.4	0.75	146	49	2.4	20.51	IE5	BG10-../S5E06LA4	7.3	24	48.5	146	175	49	49	49	49	49	13	1290	1800
2.4	0.75	146	49	2.4	20.51	IE3	BG10-../SPE06MA4	7.3	24	48.5	146	175	36.5	41	45	49	49	13	1290	1800
2.4	0.75	136	52	2.3	22.04	IE5	BG10-../S5E06LA4	6.8	22.5	45	136	163	52	52	52	52	52	13	1330	1860
2.4	0.75	136	52	2.3	22.04	IE3	BG10-../SPE06MA4	6.8	22.5	45	136	163	39.5	44	48	52	52	13	1330	1860
2.4	0.75	122	58	2	24.42	IE5	BG10-../S5E06LA4	6.1	20	40.5	122	147	58	58	58	58	58	13	1410	1970
2.4	0.75	114	63	1.9	26.26	IE5	BG10-../S5E06LA4	5.7	19	38	114	137	63	63	63	63	63	13	1460	2000
2.4	0.75	114	63	1.9	26.26	IE3	BG10-../SPE06MA4	5.7	19	38	114	137	47	52	57	63	63	13	1460	2000
2.4	0.75	103	69	1.7	29.09	IE5	BG10-../S5E06LA4	5.1	17	34	103	123	69	69	69	69	69	13	1540	2150
2.4	0.75	103	69	1.7	29.09	IE3	BG10-../SPE06MA4	5.1	17	34	103	123	52	58	63	69	69	13	1540	2150
2.4	0.75	95	75	1.6	31.52	IE5	BG10-../S5E06LA4	4.7	15.5	31.5	95	114	75	75	75	75	75	13	1600	2200
2.4	0.75	95	75	1.6	31.52	IE3	BG10-../SPE06MA4	4.7	15.5	31.5	95	114	56	63	69	75	75	13	1600	2200
2.4	0.75	85	83	1.4	34.92	IE5	BG10-../S5E06LA4	4.2	14	28.5	85	103	83	83	83	83	83	13	1690	2350
2.4	0.75	85	83	1.4	34.92	IE3	BG10-../SPE06MA4	4.2	14	28.5	85	103	62	69	76	83	83	13	1690	2350
2.4	0.75	75	95	1.3	39.7	IE5	BG10-../S5E06LA4	3.7	12.5	25	75	90	95	95	95	95	95	13	1780	2450
2.4	0.75	75	95	1.3	39.7	IE3	BG10-../SPE06MA4	3.7	12.5	25	75	90	71	79	87	95	95	13	1780	2450
2.4	0.75	68	105	1.1	43.99	IE5	BG10-../S5E06LA4	3.4	11	22.5	68	81	105	105	105	105	105	13	1880	2600
2.4	0.75	68	105	1.1	43.99	IE3	BG10-../SPE06MA4	3.4	11	22.5	68	81	79	87	96	105	105	13	1880	2600
2.4	0.75	64	111	1.1	46.55	IE5	BG10-../S5E06LA4	3.2	10.5	21	64	77	111	111	111	111	111	13	1920	2650
2.4	0.75	64	111	1.1	46.55	IE3	BG10-../SPE06MA4	3.2	10.5	21	64	77	83	93	102	111	111	13	1920	2650
2.4	0.75	58	12																	

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.75 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	62	115	1.7	47.92	IE3	BG20-./SPE06MA4	3.1	10	20.5	62	75	86	95	105	115	115	16	4750	-
2.4	0.75	56	127	1.6	53.22	IE5	BG20-./S5E06LA4	2.8	9.3	18.5	56	67	127	127	127	127	127	16	4950	-
2.4	0.75	56	127	1.6	53.22	IE3	BG20-./SPE06MA4	2.8	9.3	18.5	56	67	95	106	117	127	127	16	4950	-
2.4	0.75	50	141	1.4	59.07	IE5	BG20-./S5E06LA4	2.5	8.4	16.5	50	60	141	141	141	141	141	16	5000	-
2.4	0.75	50	141	1.4	59.07	IE3	BG20-./SPE06MA4	2.5	8.4	16.5	50	60	106	118	129	141	141	16	5000	-
2.4	0.75	45.5	157	1.3	65.62	IE5	BG20-./S5E06LA4	2.2	7.6	15	45.5	54	157	157	157	157	157	16	5000	-
2.4	0.75	45.5	157	1.3	65.62	IE3	BG20-./SPE06MA4	2.2	7.6	15	45.5	54	118	131	144	157	157	16	5000	-
2.4	0.75	51	140	1.2	58.58	IE5	BG20Z-./S5E06LA4	2.5	8.5	17	51	61	140	140	140	140	140	16	5000	-
2.4	0.75	51	140	1.2	58.58	IE3	BG20Z-./SPE06MA4	2.5	8.5	17	51	61	105	117	128	140	140	16	5000	-
2.4	0.75	44	162	1.2	67.53	IE5	BG20Z-./S5E06LA4	2.2	7.4	14.5	44	53	162	162	162	162	162	16	5000	-
2.4	0.75	44	162	1.2	67.53	IE3	BG20Z-./SPE06MA4	2.2	7.4	14.5	44	53	121	135	148	162	162	16	5000	-
2.4	0.75	40	180	1.1	75	IE5	BG20Z-./S5E06LA4	2	6.6	13	40	48	180	180	180	180	180	16	5000	-
2.4	0.75	40	180	1.1	75	IE3	BG20Z-./SPE06MA4	2	6.6	13	40	48	135	150	165	180	180	16	5000	-
2.4	0.75	38	188	1.1	78.6	IE5	BG20Z-./S5E06LA4	1.9	6.3	12.5	38	45.5	188	188	188	188	188	16	5000	-
2.4	0.75	38	188	1.1	78.6	IE3	BG20Z-./SPE06MA4	1.9	6.3	12.5	38	45.5	141	157	172	188	188	16	5000	-
2.4	0.75	34	205	0.95	87.3	IE5	BG20Z-./S5E06LA4	1.7	5.7	11	34	41	205	205	205	205	205	16	5000	-
2.4	0.75	34	205	0.95	87.3	IE3	BG20Z-./SPE06MA4	1.7	5.7	11	34	41	157	174	192	205	205	16	5000	-
2.4	0.75	31.5	225	0.88	94.27	IE5	BG20Z-./S5E06LA4	1.5	5.3	10.5	31.5	38	225	225	225	225	225	16	5000	-
2.4	0.75	31.5	225	0.88	94.27	IE3	BG20Z-./SPE06MA4	1.5	5.3	10.5	31.5	38	169	188	205	225	225	16	5000	-
2.4	0.75	28.5	250	0.8	104.7	IE5	BG20Z-./S5E06LA4	1.4	4.7	9.5	28.5	34	250	250	250	250	250	16	5000	-
2.4	0.75	28.5	250	0.8	104.7	IE3	BG20Z-./SPE06MA4	1.4	4.7	9.5	28.5	34	188	205	230	250	250	16	5000	-
2.4	0.75	70	101	2.9	42.46	IE5	BG30-./S5E06LA4	3.5	11.5	23.5	70	84	101	101	101	101	101	20	5900	-
2.4	0.75	70	101	2.9	42.46	IE3	BG30-./SPE06MA4	3.5	11.5	23.5	70	84	76	84	93	101	101	20	5900	-
2.4	0.75	63	113	2.7	47.11	IE5	BG30-./S5E06LA4	3.1	10.5	21	63	76	113	113	113	113	113	20	6000	-
2.4	0.75	63	113	2.7	47.11	IE3	BG30-./SPE06MA4	3.1	10.5	21	63	76	84	94	103	113	113	20	6000	-
2.4	0.75	57	125	2.4	52.44	IE5	BG30-./S5E06LA4	2.8	9.5	19	57	68	125	125	125	125	125	20	6000	-
2.4	0.75	57	125	2.4	52.44	IE3	BG30-./SPE06MA4	2.8	9.5	19	57	68	94	104	115	125	125	20	6000	-
2.4	0.75	51	139	2.1	58.18	IE5	BG30-./S5E06LA4	2.5	8.5	17	51	61	139	139	139	139	139	20	6000	-
2.4	0.75	51	139	2.1	58.18	IE3	BG30-./SPE06MA4	2.5	8.5	17	51	61	104	116	127	139	139	20	6000	-
2.4	0.75	49	145	2.1	60.79	IE5	BG30-./S5E06LA4	2.4	8.2	16	49	59	145	145	145	145	145	20	6000	-
2.4	0.75	49	145	2.1	60.79	IE3	BG30-./SPE06MA4	2.4	8.2	16	49	59	109	121	133	145	145	20	6000	-
2.4	0.75	44	161	1.9	67.44	IE5	BG30-./S5E06LA4	2.2	7.4	14.5	44	53	161	161	161	161	161	20	6000	-
2.4	0.75	44	161	1.9	67.44	IE3	BG30-./SPE06MA4	2.2	7.4	14.5	44	53	121	134	148	161	161	20	6000	-
2.4	0.75	45.5	157	1.7	65.79	IE5	BG30Z-./S5E06LA4	2.2	7.5	15	45.5	54	157	157	157	157	157	22	6000	-
2.4	0.75	45.5	157	1.7	65.79	IE3	BG30Z-./SPE06MA4	2.2	7.5	15	45.5	54	118	131	144	157	157	22	6000	-
2.4	0.75	40.5	176	1.7	73.51	IE5	BG30Z-./S5E06LA4	2	6.8	13.5	40.5	48.5	176	176	176	176	176	22	6000	-
2.4	0.75	40.5	176	1.7	73.51	IE3	BG30Z-./SPE06MA4	2	6.8	13.5	40.5	48.5	132	147	161	176	176	22	6000	-
2.4	0.75	36.5	195	1.5	81.55	IE5	BG30Z-./S5E06LA4	1.8	6.1	12	36.5	44	195	195	195	195	195	22	6000	-
2.4	0.75	36.5	195	1.5	81.55	IE3	BG30Z-./SPE06MA4	1.8	6.1	12	36.5	44	146	163	179	195	195	22	6000	-
2.4	0.75	34.5	205	1.5	86.13	IE5	BG30Z-./S5E06LA4	1.7	5.8	11.5	34.5	41.5	205	205	205	205	205	22	6000	-
2.4	0.75	34.5	205	1.5	86.13	IE3	BG30Z-./SPE06MA4	1.7	5.8	11.5	34.5	41.5	155	172	189	205	205	22	6000	-
2.4	0.75	31	225	1.3	95.55	IE5	BG30Z-./S5E06LA4	1.5	5.2	10	31	37.5	225	225	225	225	225	22	6000	-
2.4	0.75	31	225	1.3	95.55	IE3	BG30Z-./SPE06MA4	1.5	5.2	10	31	37.5	171	191	210	225	225	22	6000	-
2.4	0.75	27	260	1.1	109.6	IE5	BG30Z-./S5E06LA4	1.3	4.5	9.1	27	32.5	260	260	260	260	260	22	6000	-
2.4	0.75	27	260	1.1	109.6	IE3	BG30Z-./SPE06MA4	1.3	4.5	9.1	27	32.5	197	215	240	260	260	22	6000	-
2.4	0.75	24.5	290	1	121.6	IE5	BG30Z-./S5E06LA4	1.2	4.1	8.2	24.5	29.5	290	290	290	290	290	22	6000	-
2.4	0.75	24.5	290	1	121.6	IE3	BG30Z-./SPE06MA4	1.2	4.1	8.2	24.5	29.5	215	240	265	290	290	22	6000	-
2.4	0.75	23	305	0.97	128.5	IE5	BG30Z-./S5E06LA4	1.1	3.8	7.7	23	28	305	305	305	305	305	22	6000	-
2.4	0.75	23	305	0.97	128.5	IE3	BG30Z-./SPE06MA4	1.1	3.8	7.7	23	28	230	255	280	305	305	22	6000	-
2.4	0.75	21	340	0.88	142.5	IE5	BG30Z-./S5E06LA4	1	3.5	7	21	25	255	285	310	340	340	22	6000	-
2.4	0.75	21	340	0.88	142.5	IE3	BG30Z-./SPE06MA4	1	3.5	7	21	25	255	285	310	340	340	22	6000	-
2.4	0.75	19.5	360	0.83	151.5	IE5	BG30Z-./S5E06LA4	0.95	3.3	6.6	19.5	23.5	360	360	360	360	360	22	6000	-
2.4	0.75	19.5	360	0.83	151.5	IE3	BG30Z-./SPE06MA4	0.95	3.3	6.6	19.5	23.5	270	300	330	360	360	22	6000	-
2.4	0.75	44	162	2.6	67.74	IE5	BG40Z-./S5E06LA4	2.2	7.3	14.5	44	53	162	162	162	162	162	38	7000	-
2.4	0.75	44	162	2.6	67.74	IE3	BG40Z-./SPE06MA4	2.2	7.3	14.5	44	53	121	135	149					

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.75 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	31	225	2.7	95.58	IE5	BG50Z-..S5E06LA4	1.5	5.2	10	31	37.5	225	225	225	225	225	47	10000	-
2.4	0.75	31	225	2.7	95.58	IE3	BG50Z-..SPE06MA4	1.5	5.2	10	31	37.5	172	191	210	225	225	47	10000	-
2.4	0.75	28	250	2.5	106	IE5	BG50Z-..S5E06LA4	1.4	4.7	9.4	28	33.5	250	250	250	250	250	47	10000	-
2.4	0.75	28	250	2.5	106	IE3	BG50Z-..SPE06MA4	1.4	4.7	9.4	28	33.5	190	210	230	250	250	47	10000	-
2.4	0.75	23	305	2	128.9	IE5	BG50Z-..S5E06LA4	1.1	3.8	7.7	23	27.5	305	305	305	305	305	47	10000	-
2.4	0.75	23	305	2	128.9	IE3	BG50Z-..SPE06MA4	1.1	3.8	7.7	23	27.5	230	255	280	305	305	47	10000	-
2.4	0.75	20.5	340	1.8	142.9	IE5	BG50Z-..S5E06LA4	1	3.4	6.9	20.5	25	340	340	340	340	340	47	10000	-
2.4	0.75	20.5	340	1.8	142.9	IE3	BG50Z-..SPE06MA4	1	3.4	6.9	20.5	25	255	285	310	340	340	47	10000	-
2.4	0.75	18	395	1.6	164.9	IE5	BG50Z-..S5E06LA4	0.9	3	6	18	21.5	395	395	395	395	395	47	10000	-
2.4	0.75	18	395	1.6	164.9	IE3	BG50Z-..SPE06MA4	0.9	3	6	18	21.5	295	325	360	395	395	47	10000	-
2.4	0.75	16	435	1.4	182.8	IE5	BG50Z-..S5E06LA4	0.8	2.7	5.4	16	19.5	435	435	435	435	435	47	10000	-
2.4	0.75	16	435	1.4	182.8	IE3	BG50Z-..SPE06MA4	0.8	2.7	5.4	16	19.5	325	365	400	435	435	47	10000	-
2.4	0.75	14.5	490	1.3	204.7	IE5	BG50Z-..S5E06LA4	0.7	2.4	4.8	14.5	17.5	490	490	490	490	490	47	10000	-
2.4	0.75	14.5	490	1.3	204.7	IE3	BG50Z-..SPE06MA4	0.7	2.4	4.8	14.5	17.5	365	405	450	490	490	47	10000	-
2.4	0.75	13	540	1.2	226.9	IE5	BG50Z-..S5E06LA4	0.65	2.2	4.4	13	15.5	540	540	540	540	540	47	10000	-
2.4	0.75	13	540	1.2	226.9	IE3	BG50Z-..SPE06MA4	0.65	2.2	4.4	13	15.5	405	450	495	540	540	47	10000	-
2.4	0.75	11.5	620	1	258.6	IE5	BG50Z-..S5E06LA4	0.55	1.9	3.8	11.5	13.5	620	620	620	620	620	47	10000	-
2.4	0.75	11.5	620	1	258.6	IE3	BG50Z-..SPE06MA4	0.55	1.9	3.8	11.5	13.5	465	510	560	620	620	47	10000	-
2.4	0.75	10	680	0.92	286.7	IE5	BG50Z-..S5E06LA4	0.5	1.7	3.4	10	12.5	680	680	680	680	680	47	10000	-
2.4	0.75	10	680	0.92	286.7	IE3	BG50Z-..SPE06MA4	0.5	1.7	3.4	10	12.5	510	570	630	680	680	47	10000	-
2.4	0.75	10	680	1	287.1	IE5	BG50G10-..S5E06LA4	0.5	1.7	3.4	10	12.5	680	680	680	680	680	51	10000	-
2.4	0.75	8.5	840	0.82	351.7	IE5	BG50G10-..S5E06LA4	0.42	1.4	2.8	8.5	10	840	840	840	840	840	51	10000	-
2.4	0.75	8.5	840	0.82	351.7	IE3	BG50G10-..SPE06MA4	0.42	1.4	2.8	8.5	10	630	700	770	840	840	51	10000	-
2.4	0.75	10.5	660	2	276.2	IE5	BG60G20-..S5E06LA4	0.5	1.8	3.6	10.5	13	660	660	660	660	660	100	16000	-
2.4	0.75	10.5	660	2	276.2	IE3	BG60G20-..SPE06MA4	0.5	1.8	3.6	10.5	13	495	550	600	660	660	100	16000	-
2.4	0.75	9.8	730	1.8	306.1	IE5	BG60G20-..S5E06LA4	0.49	1.6	3.2	9.8	11.5	730	730	730	730	730	100	16000	-
2.4	0.75	9.8	730	1.8	306.1	IE3	BG60G20-..SPE06MA4	0.49	1.6	3.2	9.8	11.5	550	610	670	730	730	100	16000	-
2.4	0.75	8.9	800	1.6	334.3	IE5	BG60G20-..S5E06LA4	0.44	1.4	2.9	8.9	10.5	800	800	800	800	800	100	16000	-
2.4	0.75	8.9	800	1.6	334.3	IE3	BG60G20-..SPE06MA4	0.44	1.4	2.9	8.9	10.5	600	660	730	800	800	100	16000	-
2.4	0.75	8	880	1.5	370.5	IE5	BG60G20-..S5E06LA4	0.4	1.3	2.6	8	9.7	880	880	880	880	880	100	16000	-
2.4	0.75	8	880	1.5	370.5	IE3	BG60G20-..SPE06MA4	0.4	1.3	2.6	8	9.7	660	740	810	880	880	100	16000	-
2.4	0.75	6.8	1040	1.2	437.3	IE5	BG60G20-..S5E06LA4	0.34	1.1	2.2	6.8	8.2	1040	1040	1040	1040	1040	100	16000	-
2.4	0.75	6.8	1040	1.2	437.3	IE3	BG60G20-..SPE06MA4	0.34	1.1	2.2	6.8	8.2	780	870	960	1040	1040	100	16000	-
2.4	0.75	5.9	1210	1.1	504.9	IE5	BG60G20-..S5E06LA4	0.29	0.95	1.9	5.9	7.1	1210	1210	1210	1210	1210	100	16000	-
2.4	0.75	5.9	1210	1.1	504.9	IE3	BG60G20-..SPE06MA4	0.29	0.95	1.9	5.9	7.1	900	1000	1110	1210	1210	100	16000	-
2.4	0.75	5.3	1340	0.97	559.5	IE5	BG60G20-..S5E06LA4	0.26	0.85	1.7	5.3	6.4	1340	1340	1340	1340	1340	100	16000	-
2.4	0.75	5.3	1340	0.97	559.5	IE3	BG60G20-..SPE06MA4	0.26	0.85	1.7	5.3	6.4	1000	1110	1230	1340	1340	100	16000	-
2.4	0.75	4.6	1560	0.83	651.3	IE5	BG60G20-..S5E06LA4	0.23	0.75	1.5	4.6	5.5	1560	1560	1560	1560	1560	100	16000	-
2.4	0.75	4.6	1560	0.83	651.3	IE3	BG60G20-..SPE06MA4	0.23	0.75	1.5	4.6	5.5	1170	1300	1430	1560	1560	100	16000	-
2.4	0.75	7.7	930	2.7	387.6	IE5	BG70G20-..S5E06LA4	0.38	1.2	2.5	7.7	9.2	930	930	930	930	930	130	20000	-
2.4	0.75	7.7	930	2.7	387.6	IE3	BG70G20-..SPE06MA4	0.38	1.2	2.5	7.7	9.2	690	770	850	930	930	130	20000	-
2.4	0.75	7.1	1000	2.5	417.8	IE5	BG70G20-..S5E06LA4	0.35	1.1	2.3	7.1	8.6	1000	1000	1000	1000	1000	130	20000	-
2.4	0.75	7.1	1000	2.5	417.8	IE3	BG70G20-..SPE06MA4	0.35	1.1	2.3	7.1	8.6	750	830	910	1000	1000	130	20000	-
2.4	0.75	6	1190	2.1	495.9	IE5	BG70G20-..S5E06LA4	0.3	1	2	6	7.2	1190	1190	1190	1190	1190	130	20000	-
2.4	0.75	6	1190	2.1	495.9	IE3	BG70G20-..SPE06MA4	0.3	1	2	6	7.2	890	990	1090	1190	1190	130	20000	-
2.4	0.75	5.1	1380	1.8	577.3	IE5	BG70G20-..S5E06LA4	0.25	0.85	1.7	5.1	6.2	1380	1380	1380	1380	1380	130	20000	-
2.4	0.75	5.1	1380	1.8	577.3	IE3	BG70G20-..SPE06MA4	0.25	0.85	1.7	5.1	6.2	1030	1150	1270	1380	1380	130	20000	-
2.4	0.75	4.5	1590	1.6	665.8	IE5	BG70G20-..S5E06LA4	0.22	0.75	1.5	4.5	5.4	1590	1590	1590	1590	1590	130	20000	-
2.4	0.75	3.7	1890	1.3	790.2	IE5	BG70G20-..S5E06LA4	0.18	0.6	1.2	3.7	4.5	1890	1890	1890	1890	1890	130	20000	-
2.4	0.75	3.7	1890	1.3	790.2	IE3	BG70G20-..SPE06MA4	0.18	0.6	1.2	3.7	4.5	1420	1580	1730	1890	1890	130	20000	-
2.4	0.75	3.4	2100	1.2	877.6	IE5	BG70G20-..S5E06LA4	0.17	0.55	1.1	3.4	4.1	2100	2100	2100	2100	2100	130	20000	-
2.4	0.75	3.4	2100	1.2	877.6	IE3	BG70G20-..SPE06MA4	0.17	0.55	1.1	3.4	4.1	1570	1750	1930	2100	2100	130	20000	-
2.4	0.75	2.8	2450	1	1035	IE5	BG70G20-..S5E06LA4	0.14	0.48	0.95	2.8	3.4	2450	2450	2450					

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 3.5 Nm (PN = 1.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
3.5	1.1	250	41.5	2.5	11.92	IE4	BG10-..S4E06LA4	12.5	41.5	83	250	300	29.5	34.5	41.5	41.5	41.5	13	1030	1440
3.5	1.1	225	46	2.4	13.21	IE4	BG10-..S4E06LA4	11	37.5	75	225	270	33	38	46	46	46	13	1070	1490
3.5	1.1	205	51	2.2	14.58	IE4	BG10-..S4E06LA4	10	34	68	205	245	36	42	51	51	51	13	1100	1540
3.5	1.1	185	56	2.1	16.15	IE4	BG10-..S4E06LA4	9.2	30.5	61	185	220	40	46.5	56	56	56	13	1140	1590
3.5	1.1	162	64	1.9	18.51	IE4	BG10-..S4E06LA4	8.1	27	54	162	194	46	53	64	64	64	13	1210	1690
3.5	1.1	146	71	1.7	20.51	IE4	BG10-..S4E06LA4	7.3	24	48.5	146	175	51	59	71	71	71	13	1290	1800
3.5	1.1	136	77	1.6	22.04	IE4	BG10-..S4E06LA4	6.8	22.5	45	136	163	55	63	77	77	77	13	1330	1860
3.5	1.1	122	85	1.4	24.42	IE4	BG10-..S4E06LA4	6.1	20	40.5	122	147	61	70	85	85	85	13	1410	1970
3.5	1.1	114	91	1.3	26.26	IE4	BG10-..S4E06LA4	5.7	19	38	114	137	65	76	91	91	91	13	1460	2000
3.5	1.1	103	101	1.2	29.09	IE4	BG10-..S4E06LA4	5.1	17	34	103	123	72	84	101	101	101	13	1540	2150
3.5	1.1	95	110	1.1	31.52	IE4	BG10-..S4E06LA4	4.7	15.5	31.5	95	114	78	91	110	110	110	13	1600	2200
3.5	1.1	85	122	0.98	34.92	IE4	BG10-..S4E06LA4	4.2	14	28.5	85	103	87	101	122	122	122	13	1690	2350
3.5	1.1	75	138	0.86	39.7	IE4	BG10-..S4E06LA4	3.7	12.5	25	75	90	99	115	138	138	138	13	1780	2450
3.5	1.1	110	94	1.6	27.08	IE4	BG15-..S4E06LA4	5.5	18	36.5	110	132	67	78	94	94	94	13	3000	6000
3.5	1.1	99	105	1.4	30.08	IE4	BG15-..S4E06LA4	4.9	16.5	33	99	119	75	87	105	105	105	13	3000	6000
3.5	1.1	87	119	1.3	34.2	IE4	BG15-..S4E06LA4	4.3	14.5	29	87	105	85	99	119	119	119	13	3000	6000
3.5	1.1	79	132	1.1	37.9	IE4	BG15-..S4E06LA4	3.9	13	26	79	94	94	109	132	132	132	13	3000	6000
3.5	1.1	173	60	3	17.31	IE4	BG20-..S4E06LA4	8.6	28.5	57	173	205	43	50	60	60	60	16	3200	-
3.5	1.1	150	69	2.8	19.95	IE4	BG20-..S4E06LA4	7.5	25	50	150	180	49.5	57	69	69	69	16	3350	-
3.5	1.1	135	77	2.6	22.16	IE4	BG20-..S4E06LA4	6.7	22.5	45	135	162	55	64	77	77	77	16	3500	-
3.5	1.1	129	81	2.5	23.22	IE4	BG20-..S4E06LA4	6.4	21.5	43	129	155	58	67	81	81	81	16	3550	-
3.5	1.1	116	90	2.2	25.79	IE4	BG20-..S4E06LA4	5.8	19	38.5	116	139	64	74	90	90	90	16	3700	-
3.5	1.1	107	97	2.1	27.85	IE4	BG20-..S4E06LA4	5.3	17.5	35.5	107	129	69	80	97	97	97	16	3800	-
3.5	1.1	96	108	1.8	30.94	IE4	BG20-..S4E06LA4	4.8	16	32	96	116	77	89	108	108	108	16	4000	-
3.5	1.1	90	116	1.7	33.33	IE4	BG20-..S4E06LA4	4.5	15	30	90	108	83	96	116	116	116	16	4100	-
3.5	1.1	81	129	1.5	37.02	IE4	BG20-..S4E06LA4	4	13.5	27	81	97	92	107	129	129	129	16	4300	-
3.5	1.1	71	146	1.4	41.76	IE4	BG20-..S4E06LA4	3.5	11.5	23.5	71	86	104	121	146	146	146	16	4500	-
3.5	1.1	64	162	1.2	46.38	IE4	BG20-..S4E06LA4	3.2	10.5	21.5	64	77	115	134	162	162	162	16	4700	-
3.5	1.1	62	167	1.2	47.92	IE4	BG20-..S4E06LA4	3.1	10	20.5	62	75	119	138	167	167	167	16	4750	-
3.5	1.1	56	186	1.1	53.22	IE4	BG20-..S4E06LA4	2.8	9.3	18.5	56	67	133	154	186	186	186	16	4950	-
3.5	1.1	50	205	0.97	59.07	IE4	BG20-..S4E06LA4	2.5	8.4	16.5	50	60	147	171	205	205	205	16	5000	-
3.5	1.1	45.5	225	0.87	65.62	IE4	BG20-..S4E06LA4	2.2	7.6	15	45.5	54	164	190	225	225	225	16	5000	-
3.5	1.1	51	205	0.84	58.58	IE4	BG20Z-..S4E06LA4	2.5	8.5	17	51	61	146	169	205	205	205	16	5000	-
3.5	1.1	44	235	0.85	67.53	IE4	BG20Z-..S4E06LA4	2.2	7.4	14.5	44	53	168	195	235	235	235	16	5000	-
3.5	1.1	106	98	3	28.24	IE4	BG30-..S4E06LA4	5.3	17.5	35	106	127	70	81	98	98	98	20	5100	-
3.5	1.1	100	104	2.9	29.83	IE4	BG30-..S4E06LA4	5	16.5	33.5	100	120	74	86	104	104	104	20	5200	-
3.5	1.1	90	115	2.6	33.09	IE4	BG30-..S4E06LA4	4.5	15	30	90	108	82	95	115	115	115	20	5400	-
3.5	1.1	85	123	2.4	35.17	IE4	BG30-..S4E06LA4	4.2	14	28	85	102	87	101	123	123	123	20	5500	-
3.5	1.1	76	136	2.2	39.02	IE4	BG30-..S4E06LA4	3.8	12.5	25.5	76	92	97	113	136	136	136	20	5800	-
3.5	1.1	70	148	2	42.46	IE4	BG30-..S4E06LA4	3.5	11.5	23.5	70	84	106	123	148	148	148	20	5900	-
3.5	1.1	63	164	1.8	47.11	IE4	BG30-..S4E06LA4	3.1	10.5	21	63	76	117	136	164	164	164	20	6000	-
3.5	1.1	57	183	1.6	52.44	IE4	BG30-..S4E06LA4	2.8	9.5	19	57	68	131	152	183	183	183	20	6000	-
3.5	1.1	51	200	1.5	58.18	IE4	BG30-..S4E06LA4	2.5	8.5	17	51	61	145	168	200	200	200	20	6000	-
3.5	1.1	49	210	1.4	60.79	IE4	BG30-..S4E06LA4	2.4	8.2	16	49	59	151	176	210	210	210	20	6000	-
3.5	1.1	44	235	1.3	67.44	IE4	BG30-..S4E06LA4	2.2	7.4	14.5	44	53	168	195	235	235	235	20	6000	-
3.5	1.1	45.5	230	1.2	65.79	IE4	BG30Z-..S4E06LA4	2.2	7.5	15	45.5	54	164	190	230	230	230	22	6000	-
3.5	1.1	40.5	255	1.2	73.51	IE4	BG30Z-..S4E06LA4	2	6.8	13.5	40.5	48.5	183	210	255	255	255	22	6000	-
3.5	1.1	36.5	285	1.1	81.55	IE4	BG30Z-..S4E06LA4	1.8	6.1	12	36.5	44	200	235	285	285	285	22	6000	-
3.5	1.1	34.5	300	1	86.13	IE4	BG30Z-..S4E06LA4	1.7	5.8	11.5	34.5	41.5	215	245	300	300	300	22	6000	-
3.5	1.1	31	330	0.9	95.55	IE4	BG30Z-..S4E06LA4	1.5	5.2	10	31	37.5	235	275	330	330	330	22	6000	-
3.5	1.1	44	235	1.8	67.74	IE4	BG40Z-..S4E06LA4	2.2	7.3	14.5	44	53	169	196	235	235	235	38	7000	-
3.5	1.1	39.5	260	1.6	75.19	IE4	BG40Z-..S4E06LA4	1.9	6.6	13	39.5	47.5	187	215	260	260	260	38	7000	-
3.5	1.1	36.5	285	1.5	82	IE4	BG40Z-..S4E06LA4	1.8	6	12	36.5	43.5	205	235	285	285	285	38	7000	-
3.5	1.1	32.5	315	1.3	91.02	IE4	BG40Z-..S4E06LA4	1.6	5.4	10.5	32.5	39.5	225	260	315	315	315	38	7000	-
3.5	1.1	30.5	335	1.3	96.86	IE4	BG40Z-..S4E06LA4	1.5	5.1	10	30.5	37	240	280	335	335	335	38	7000	-
3.5	1.1	27.5	375	1.1																

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 3.5 Nm (PN = 1.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
3.5	1.1	9.1	1140	2.2	328.4	IE4	BG70G20-..S4E06LA4	0.45	1.5	3	9.1	10.5	820	950	1140	1140	1140	130	20000	-
3.5	1.1	7.7	1350	1.8	387.6	IE4	BG70G20-..S4E06LA4	0.38	1.2	2.5	7.7	9.2	960	1120	1350	1350	1350	130	20000	-
3.5	1.1	7.1	1460	1.7	417.8	IE4	BG70G20-..S4E06LA4	0.35	1.1	2.3	7.1	8.6	1040	1210	1460	1460	1460	130	20000	-
3.5	1.1	6	1730	1.4	495.9	IE4	BG70G20-..S4E06LA4	0.3	1	2	6	7.2	1230	1430	1730	1730	1730	130	20000	-
3.5	1.1	5.1	2000	1.2	577.3	IE4	BG70G20-..S4E06LA4	0.25	0.85	1.7	5.1	6.2	1440	1670	2000	2000	2000	130	20000	-
3.5	1.1	4.5	2300	1.1	665.8	IE4	BG70G20-..S4E06LA4	0.22	0.75	1.5	4.5	5.4	1660	1930	2300	2300	2300	130	20000	-
3.5	1.1	3.7	2750	0.9	790.2	IE4	BG70G20-..S4E06LA4	0.18	0.6	1.2	3.7	4.5	1970	2250	2750	2750	2750	130	20000	-
3.5	1.1	3.4	3050	0.81	877.6	IE4	BG70G20-..S4E06LA4	0.17	0.55	1.1	3.4	4.1	2150	2500	3050	3050	3050	130	20000	-

MN = 5 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
5	1.55	1060	14.1	1.3	2.82	IE5	BG06-..S5E08MA4	53	177	350	1060	1270	14.1	14.1	14.1	14.1	14.1	16	470	-
5	1.55	790	18.8	1.1	3.78	IE5	BG06-..S5E08MA4	39.5	132	260	790	950	18.8	18.8	18.8	18.8	18.8	16	520	-
5	1.55	660	22.5	0.97	4.54	IE5	BG06-..S5E08MA4	33	110	220	660	790	22.5	22.5	22.5	22.5	22.5	16	530	-
5	1.55	500	29.5	0.81	5.96	IE5	BG06-..S5E08MA4	25	83	167	500	600	29.5	29.5	29.5	29.5	29.5	16	570	-
5	1.55	560	26.5	2.8	5.34	IE5	BG10-..S5E08MA4	28	93	187	560	670	26.5	26.5	26.5	26.5	26.5	16	620	910
5	1.55	440	33.5	2.4	6.78	IE5	BG10-..S5E08MA4	22	73	147	440	530	33.5	33.5	33.5	33.5	33.5	16	660	920
5	1.55	435	34	2.6	6.89	IE5	BG10-..S5E08MA4	21.5	72	145	435	520	34	34	34	34	34	16	850	1200
5	1.55	390	38	2.3	7.63	IE5	BG10-..S5E08MA4	19.5	65	131	390	470	38	38	38	38	38	16	900	1250
5	1.55	370	40	2.2	8.07	IE5	BG10-..S5E08MA4	18.5	61	123	370	445	40	40	40	40	40	16	660	920
5	1.55	320	46.5	2.1	9.33	IE5	BG10-..S5E08MA4	16	53	107	320	385	46.5	46.5	46.5	46.5	46.5	16	950	1330
5	1.55	290	51	1.9	10.34	IE5	BG10-..S5E08MA4	14.5	48	96	290	345	51	51	51	51	51	16	1000	1400
5	1.55	250	59	1.8	11.92	IE5	BG10-..S5E08MA4	12.5	41.5	83	250	300	59	59	59	59	59	16	1030	1440
5	1.55	225	66	1.7	13.21	IE5	BG10-..S5E08MA4	11	37.5	75	225	270	66	66	66	66	66	16	1070	1490
5	1.55	205	72	1.6	14.58	IE5	BG10-..S5E08MA4	10	34	68	205	245	72	72	72	72	72	16	1100	1540
5	1.55	185	80	1.4	16.15	IE5	BG10-..S5E08MA4	9.2	30.5	61	185	220	80	80	80	80	80	16	1140	1590
5	1.55	162	92	1.3	18.51	IE5	BG10-..S5E08MA4	8.1	27	54	162	194	92	92	92	92	92	16	1210	1690
5	1.55	146	102	1.2	20.51	IE5	BG10-..S5E08MA4	7.3	24	48.5	146	175	102	102	102	102	102	16	1290	1800
5	1.55	136	110	1.1	22.04	IE5	BG10-..S5E08MA4	6.8	22.5	45	136	163	110	110	110	110	110	16	1330	1860
5	1.55	122	122	0.98	24.42	IE5	BG10-..S5E08MA4	6.1	20	40.5	122	147	122	122	122	122	122	16	1410	1970
5	1.55	114	131	0.91	26.26	IE5	BG10-..S5E08MA4	5.7	19	38	114	137	131	131	131	131	131	16	1460	2000
5	1.55	103	145	0.83	29.09	IE5	BG10-..S5E08MA4	5.1	17	34	103	123	145	145	145	145	145	16	1540	2150
5	1.55	110	135	1.1	27.08	IE5	BG15-..S5E08MA4	5.5	18	36.5	110	132	135	135	135	135	135	16	3000	6000
5	1.55	99	150	1	30.08	IE5	BG15-..S5E08MA4	4.9	16.5	33	99	119	150	150	150	150	150	16	3000	6000
5	1.55	87	171	0.88	34.2	IE5	BG15-..S5E08MA4	4.3	14.5	29	87	105	171	171	171	171	171	16	3000	6000
5	1.55	360	41	2.9	8.29	IE5	BG20-..S5E08MA4	18	60	120	360	430	41	41	41	41	41	19	2250	-
5	1.55	310	48	2.5	9.65	IE5	BG20-..S5E08MA4	15.5	51	103	310	370	48	48	48	48	48	19	2250	-
5	1.55	280	52	2.9	10.54	IE5	BG20-..S5E08MA4	14	47	94	280	340	52	52	52	52	52	19	2700	-
5	1.55	255	58	2.7	11.71	IE5	BG20-..S5E08MA4	12.5	42.5	85	255	305	58	58	58	58	58	19	2800	-
5	1.55	225	66	2.5	13.21	IE5	BG20-..S5E08MA4	11	37.5	75	225	270	66	66	66	66	66	19	2900	-
5	1.55	200	73	2.3	14.67	IE5	BG20-..S5E08MA4	10	34	68	200	245	73	73	73	73	73	19	3050	-
5	1.55	192	77	2.3	15.58	IE5	BG20-..S5E08MA4	9.6	32	64	192	230	77	77	77	77	77	19	3100	-
5	1.55	173	86	2.1	17.31	IE5	BG20-..S5E08MA4	8.6	28.5	57	173	205	86	86	86	86	86	19	3200	-
5	1.55	150	99	2	19.95	IE5	BG20-..S5E08MA4	7.5	25	50	150	180	99	99	99	99	99	19	3350	-
5	1.55	135	110	1.8	22.16	IE5	BG20-..S5E08MA4	6.7	22.5	45	135	162	110	110	110	110	110	19	3500	-
5	1.55	129	116	1.7	23.22	IE5	BG20-..S5E08MA4	6.4	21.5	43	129	155	116	116	116	116	116	19	3550	-
5	1.55	116	128	1.6	25.79	IE5	BG20-..S5E08MA4	5.8	19	38.5	116	139	128	128	128	128	128	19	3700	-
5	1.55	107	139	1.4	27.85	IE5	BG20-..S5E08MA4	5.3	17.5	35.5	107	129	139	139	139	139	139	19	3800	-
5	1.55	96	154	1.3	30.94	IE5	BG20-..S5E08MA4	4.8	16	32	96	116	154	154	154	154	154	19	4000	-
5	1.55	90	166	1.2	33.33	IE5	BG20-..S5E08MA4	4.5	15	30	90	108	166	166	166	166	166	19	4100	-
5	1.55	81	185	1.1	37.02	IE5	BG20-..S													

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
5	1.55	102	146	2.9	29.34	IE5	BG40-..S5E08MA4	5.1	17	34	102	122	146	146	146	146	146	38	6800	-
5	1.55	92	162	2.6	32.57	IE5	BG40-..S5E08MA4	4.6	15	30.5	92	110	162	162	162	162	162	38	7000	-
5	1.55	87	171	2.5	34.2	IE5	BG40-..S5E08MA4	4.3	14.5	29	87	105	171	171	171	171	171	38	7000	-
5	1.55	79	189	2.2	37.96	IE5	BG40-..S5E08MA4	3.9	13	26	79	94	189	189	189	189	189	38	7000	-
5	1.55	74	200	2.1	40.19	IE5	BG40-..S5E08MA4	3.7	12	24.5	74	89	200	200	200	200	200	38	7000	-
5	1.55	67	220	1.9	44.62	IE5	BG40-..S5E08MA4	3.3	11	22	67	80	220	220	220	220	220	38	7000	-
5	1.55	62	240	1.8	48.36	IE5	BG40-..S5E08MA4	3.1	10	20.5	62	74	240	240	240	240	240	38	7000	-
5	1.55	55	265	1.6	53.69	IE5	BG40-..S5E08MA4	2.7	9.3	18.5	55	67	265	265	265	265	265	38	7000	-
5	1.55	50	295	1.4	59.64	IE5	BG40-..S5E08MA4	2.5	8.3	16.5	50	60	295	295	295	295	295	38	7000	-
5	1.55	45	330	1.3	66.2	IE5	BG40-..S5E08MA4	2.2	7.5	15	45	54	330	330	330	330	330	38	7000	-
5	1.55	44	335	1.3	67.74	IE5	BG40Z-..S5E08MA4	2.2	7.3	14.5	44	53	335	335	335	335	335	42	7000	-
5	1.55	39.5	375	1.1	75.19	IE5	BG40Z-..S5E08MA4	1.9	6.6	13	39.5	47.5	375	375	375	375	375	42	7000	-
5	1.55	36.5	410	1	82	IE5	BG40Z-..S5E08MA4	1.8	6	12	36.5	43.5	410	410	410	410	410	42	7000	-
5	1.55	32.5	455	0.93	91.02	IE5	BG40Z-..S5E08MA4	1.6	5.4	10.5	32.5	39.5	455	455	455	455	455	42	7000	-
5	1.55	30.5	480	0.88	96.86	IE5	BG40Z-..S5E08MA4	1.5	5.1	10	30.5	37	480	480	480	480	480	42	7000	-
5	1.55	71	210	3	42	IE5	BG50-..S5E08MA4	3.5	11.5	23.5	71	85	210	210	210	210	210	46	10000	-
5	1.55	63	235	2.7	47.02	IE5	BG50-..S5E08MA4	3.1	10.5	21	63	76	235	235	235	235	235	46	10000	-
5	1.55	57	260	2.4	52.12	IE5	BG50-..S5E08MA4	2.8	9.5	19	57	69	260	260	260	260	260	46	10000	-
5	1.55	50	295	2.1	59.42	IE5	BG50-..S5E08MA4	2.5	8.4	16.5	50	60	295	295	295	295	295	46	10000	-
5	1.55	45.5	325	1.9	65.86	IE5	BG50-..S5E08MA4	2.2	7.5	15	45.5	54	325	325	325	325	325	46	10000	-
5	1.55	41.5	355	1.8	71.97	IE5	BG50Z-..S5E08MA4	2	6.9	13.5	41.5	50	355	355	355	355	355	51	10000	-
5	1.55	37.5	395	1.6	79.78	IE5	BG50Z-..S5E08MA4	1.8	6.2	12.5	37.5	45	395	395	395	395	395	51	10000	-
5	1.55	31	475	1.3	95.58	IE5	BG50Z-..S5E08MA4	1.5	5.2	10	31	37.5	475	475	475	475	475	51	10000	-
5	1.55	28	530	1.2	106	IE5	BG50Z-..S5E08MA4	1.4	4.7	9.4	28	33.5	530	530	530	530	530	51	10000	-
5	1.55	23	640	0.98	128.9	IE5	BG50Z-..S5E08MA4	1.1	3.8	7.7	23	27.5	640	640	640	640	640	51	10000	-
5	1.55	20.5	710	0.88	142.9	IE5	BG50Z-..S5E08MA4	1	3.4	6.9	20.5	25	710	710	710	710	710	51	10000	-
5	1.55	32.5	455	2.6	91.09	IE5	BG60Z-..S5E08MA4	1.6	5.4	10.5	32.5	39.5	455	455	455	455	455	96	16000	-
5	1.55	29.5	500	2.4	101	IE5	BG60Z-..S5E08MA4	1.4	4.9	9.9	29.5	35.5	500	500	500	500	500	96	16000	-
5	1.55	25	590	2	119.2	IE5	BG60Z-..S5E08MA4	1.2	4.1	8.3	25	30	590	590	590	590	590	96	16000	-
5	1.55	22.5	660	1.8	132.1	IE5	BG60Z-..S5E08MA4	1.1	3.7	7.5	22.5	27	660	660	660	660	660	96	16000	-
5	1.55	18.5	790	1.5	158	IE5	BG60Z-..S5E08MA4	0.9	3.1	6.3	18.5	22.5	790	790	790	790	790	96	16000	-
5	1.55	17	870	1.4	175.1	IE5	BG60Z-..S5E08MA4	0.85	2.8	5.7	17	20.5	870	870	870	870	870	96	16000	-
5	1.55	14.5	1020	1.2	204.6	IE5	BG60Z-..S5E08MA4	0.7	2.4	4.8	14.5	17.5	1020	1020	1020	1020	1020	96	16000	-
5	1.55	13	1130	1.1	226.7	IE5	BG60Z-..S5E08MA4	0.65	2.2	4.4	13	15.5	1130	1130	1130	1130	1130	96	16000	-
5	1.55	12	1230	0.97	247.7	IE5	BG60Z-..S5E08MA4	0.6	2	4	12	14.5	1230	1230	1230	1230	1230	96	16000	-
5	1.55	10.5	1370	0.87	274.5	IE5	BG60Z-..S5E08MA4	0.5	1.8	3.6	10.5	13	1370	1370	1370	1370	1370	96	16000	-
5	1.55	10.5	1380	0.94	276.2	IE5	BG60G20-..S5E08MA4	0.5	1.8	3.6	10.5	13	1380	1380	1380	1380	1380	103	16000	-
5	1.55	9.8	1530	0.85	306.1	IE5	BG60G20-..S5E08MA4	0.49	1.6	3.2	9.8	11.5	1530	1530	1530	1530	1530	103	16000	-
5	1.55	18	810	2.8	163.8	IE5	BG70Z-..S5E08MA4	0.9	3	6.1	18	21.5	810	810	810	810	810	136	20000	-
5	1.55	15	970	2.4	194.4	IE5	BG70Z-..S5E08MA4	0.75	2.5	5.1	15	18.5	970	970	970	970	970	136	20000	-
5	1.55	14	1050	2.2	210.5	IE5	BG70Z-..S5E08MA4	0.7	2.3	4.7	14	17	1050	1050	1050	1050	1050	136	20000	-
5	1.55	12	1240	1.8	249.8	IE5	BG70Z-..S5E08MA4	0.6	2	4	12	14	1240	1240	1240	1240	1240	136	20000	-
5	1.55	11.5	1270	2	255.5	IE5	BG70G20-..S5E08MA4	0.55	1.9	3.9	11.5	14	1270	1270	1270	1270	1270	133	20000	-
5	1.55	10.5	1380	1.8	276.7	IE5	BG70G20-..S5E08MA4	0.5	1.8	3.6	10.5	13	1380	1380	1380	1380	1380	133	20000	-
5	1.55	9.1	1640	1.5	328.4	IE5	BG70G20-..S5E08MA4	0.45	1.5	3	9.1	10.5	1640	1640	1640	1640	1640	133	20000	-
5	1.55	7.7	1930	1.3	387.6	IE5	BG70G20-..S5E08MA4	0.38	1.2	2.5	7.7	9.2	1930	1930	1930	1930	1930	133	20000	-
5	1.55	7.1	2050	1.2	417.8	IE5	BG70G20-..S5E08MA4	0.35	1.1	2.3	7.1	8.6	2050	2050	2050	2050	2050	133	20000	-
5	1.55	6	2450	1	495.9	IE5	BG70G20-..S5E08MA4	0.3	1	2	6	7.2	2450	2450	2450	2450	2450	133	20000	-
5	1.55	5.1	2850	0.87	577.3	IE5	BG70G20-..S5E08MA4	0.25	0.85	1.7	5.1	6.2	2850	2850	2850	2850	2850	133	20000	-
5	1.55	9.5	1570	2.9	314	IE5	BG80G40-..S5E08MA4	0.47	1.5	3.1	9.5	11	1570	1570	1570	1570	1570	215	26000	-
5	1.55	8.3	1800	2.6	360	IE5	BG80G40-..S5E08MA4	0.41	1.3	2.7	8.3	10	1800	1800	1800	1800	1800	215	26000	-
5	1.55	7.5	1990	2.3	399.8	IE5	BG80G40-..S5E08MA4	0.37	1.2	2.5	7.5	9	1990	1990	1990	1990	1990	215	26000	-
5	1.55	6.8	2150	2.1	436.2	IE5	BG80G40-..S5E08MA4	0.34	1.1	2.2	6.8	8.2	2150	2150	2150	2150	2150	215	26000	-

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
7	2.2	1060	19.7	0.91	2.82	IE4	BG06-..S4E08MA4	53	177	350	1060	1270	14.1	16.6	19.7	19.7	19.7	16	470	-	
7	2.2	1060	19.7	0.91	2.82	IE5	BG06-..S5E08LA4	53	177	350	1060	1270	18.3	19.7	19.7	19.7	19.7	18	470	-	
7	2.2	870	23.5	2.6	3.42	IE4	BG10-..S4E08MA4	43.5	146	290	870	1050	17.1	20	23.5	23.5	23.5	16	630	880	
7	2.2	870	23.5	2.6	3.42	IE5	BG10-..S5E08LA4	43.5	146	290	870	1050	22	23.5	23.5	23.5	23.5	18	630	880	
7	2.2	680	30.5	2.2	4.36	IE4	BG10-..S4E08MA4	34	114	225	680	820	21.5	25.5	30.5	30.5	30.5	16	650	910	
7	2.2	680	30.5	2.2	4.36	IE5	BG10-..S5E08LA4	34	114	225	680	820	28	30.5	30.5	30.5	30.5	18	650	910	
7	2.2	560	37	2	5.34	IE4	BG10-..S4E08MA4	28	93	187	560	670	26.5	31.5	37	37	37	16	620	910	
7	2.2	560	37	2	5.34	IE5	BG10-..S5E08LA4	28	93	187	560	670	34.5	37	37	37	37	18	620	910	
7	2.2	440	47	1.7	6.78	IE4	BG10-..S4E08MA4	22	73	147	440	530	33.5	40	47	47	47	16	660	920	
7	2.2	440	47	1.7	6.78	IE5	BG10-..S5E08LA4	22	73	147	440	530	44	47	47	47	47	18	660	920	
7	2.2	435	48	1.8	6.89	IE4	BG10-..S4E08MA4	21.5	72	145	435	520	34	40.5	48	48	48	48	16	850	1200
7	2.2	435	48	1.8	6.89	IE5	BG10-..S5E08LA4	21.5	72	145	435	520	44.5	48	48	48	48	18	850	1200	
7	2.2	390	53	1.7	7.63	IE4	BG10-..S4E08MA4	19.5	65	131	390	470	38	45	53	53	53	16	900	1250	
7	2.2	390	53	1.7	7.63	IE5	BG10-..S5E08LA4	19.5	65	131	390	470	49.5	53	53	53	53	18	900	1250	
7	2.2	370	56	1.6	8.07	IE4	BG10-..S4E08MA4	18.5	61	123	370	445	40	47.5	56	56	56	56	16	660	920
7	2.2	370	56	1.6	8.07	IE5	BG10-..S5E08LA4	18.5	61	123	370	445	52	56	56	56	56	18	660	920	
7	2.2	320	65	1.5	9.33	IE4	BG10-..S4E08MA4	16	53	107	320	385	46.5	55	65	65	65	16	950	1330	
7	2.2	320	65	1.5	9.33	IE5	BG10-..S5E08LA4	16	53	107	320	385	60	65	65	65	65	18	950	1330	
7	2.2	290	72	1.4	10.34	IE4	BG10-..S4E08MA4	14.5	48	96	290	345	51	61	72	72	72	16	1000	1400	
7	2.2	290	72	1.4	10.34	IE5	BG10-..S5E08LA4	14.5	48	96	290	345	67	72	72	72	72	18	1000	1400	
7	2.2	250	83	1.3	11.92	IE4	BG10-..S4E08MA4	12.5	41.5	83	250	300	59	70	83	83	83	16	1030	1440	
7	2.2	250	83	1.3	11.92	IE5	BG10-..S5E08LA4	12.5	41.5	83	250	300	77	83	83	83	83	18	1030	1440	
7	2.2	225	92	1.2	13.21	IE4	BG10-..S4E08MA4	11	37.5	75	225	270	66	77	92	92	92	16	1070	1490	
7	2.2	225	92	1.2	13.21	IE5	BG10-..S5E08LA4	11	37.5	75	225	270	85	92	92	92	92	18	1070	1490	
7	2.2	205	102	1.1	14.58	IE4	BG10-..S4E08MA4	10	34	68	205	245	72	86	102	102	102	16	1100	1540	
7	2.2	205	102	1.1	14.58	IE5	BG10-..S5E08LA4	10	34	68	205	245	94	102	102	102	102	18	1100	1540	
7	2.2	185	113	1	16.15	IE4	BG10-..S4E08MA4	9.2	30.5	61	185	220	80	95	113	113	113	16	1140	1590	
7	2.2	185	113	1	16.15	IE5	BG10-..S5E08LA4	9.2	30.5	61	185	220	104	113	113	113	113	18	1140	1590	
7	2.2	162	129	0.93	18.51	IE4	BG10-..S4E08MA4	8.1	27	54	162	194	92	109	129	129	129	16	1210	1690	
7	2.2	162	129	0.93	18.51	IE5	BG10-..S5E08LA4	8.1	27	54	162	194	120	129	129	129	129	18	1210	1690	
7	2.2	146	143	0.84	20.51	IE4	BG10-..S4E08MA4	7.3	24	48.5	146	175	102	121	143	143	143	16	1290	1800	
7	2.2	146	143	0.84	20.51	IE5	BG10-..S5E08LA4	7.3	24	48.5	146	175	133	143	143	143	143	18	1290	1800	
7	2.2	540	38	3	5.49	IE4	BG20-..S4E08MA4	27	91	182	540	650	27	32	38	38	38	19	2100	-	
7	2.2	540	38	3	5.49	IE5	BG20-..S5E08LA4	27	91	182	540	650	35.5	38	38	38	38	20	2100	-	
7	2.2	495	42	2.9	6.06	IE4	BG20-..S4E08MA4	24.5	82	165	495	590	30	35.5	42	42	42	19	2250	-	
7	2.2	495	42	2.9	6.06	IE5	BG20-..S5E08LA4	24.5	82	165	495	590	39	42	42	42	42	20	2250	-	
7	2.2	460	45	2.7	6.48	IE4	BG20-..S4E08MA4	23	77	154	460	550	32	38	45	45	45	19	2250	-	
7	2.2	460	45	2.7	6.48	IE5	BG20-..S5E08LA4	23	77	154	460	550	42	45	45	45	45	20	2250	-	
7	2.2	445	47	2.8	6.73	IE4	BG20-..S4E08MA4	22	74	148	445	530	33.5	39.5	47	47	47	19	2350	2100	
7	2.2	445	47	2.8	6.73	IE5	BG20-..S5E08LA4	22	74	148	445	530	43.5	47	47	47	47	20	2350	2100	
7	2.2	370	56	2.4	8.02	IE4	BG20-..S4E08MA4	18.5	62	124	370	445	40	47	56	56	56	19	2500	-	
7	2.2	370	56	2.4	8.02	IE5	BG20-..S5E08LA4	18.5	62	124	370	445	52	56	56	56	56	20	2500	-	
7	2.2	360	58	2.1	8.29	IE4	BG20-..S4E08MA4	18	60	120	360	430	41	48.5	58	58	58	58	19	2250	-
7	2.2	360	58	2.1	8.29	IE5	BG20-..S5E08LA4	18	60	120	360	430	53	58	58	58	58	20	2250	-	
7	2.2	335	62	2.3	8.91	IE4	BG20-..S4E08MA4	16.5	56	112	335	400	44.5	52	62	62	62	19	2600	-	
7	2.2	335	62	2.3	8.91	IE5	BG20-..S5E08LA4	16.5	56	112	335	400	57	62	62	62	62	20	2600	-	
7	2.2	310	67	1.8	9.65	IE4	BG20-..S4E08MA4	15.5	51	103	310	370	48	56	67	67	67	19	2250	-	
7	2.2	310	67	1.8	9.65	IE5	BG20-..S5E08LA4	15.5	51	103	310	370	62	67	67	67	67	20	2250	-	
7	2.2	280	73	2.1	10.54	IE4	BG20-..S4E08MA4	14	47	94	280	340	52	62	73	73	73	19	2700	-	
7	2.2	280	73	2.1	10.54	IE5	BG20-..S5E08LA4	14	47	94	280	340	68	73	73	73	73	20	2700	-	
7	2.2	255	81	1.9	11.71	IE4	BG20-..S4E08MA4	12.5	42.5	85	255	305	58	69	81	81	81	19	2800	-	
7	2.2	255	81	1.9	11.71	IE5	BG20-..S5E08LA4	12.5	42.5	85	255	305	76	81	81	81	81	20	2800	-	
7	2.2	225	92	1.8	13.21	IE4	BG20-..S4E08MA4	11	37.5	75	225	270	66	77	92	92	92	19	2900	-	
7	2.2	225	92	1.8	13.21	IE5	BG20-..S5E08LA4	11	37.5	75	225	270	85	92	92	92	92	20	2900	-	
7	2.2	200	102	1.7	14.67	IE4	BG20-..S4E08MA4	10	34	68	200	245	73	86	102	102	102				

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	175	119	2.5	17.06	IE5	BG30-..S5E08LA4	8.7	29	58	175	210	110	119	119	119	119	25	3700	-
7	2.2	158	132	2.3	18.93	IE4	BG30-..S4E08MA4	7.9	26	52	158	190	94	111	132	132	132	23	4100	-
7	2.2	158	132	2.3	18.93	IE5	BG30-..S5E08LA4	7.9	26	52	158	190	123	132	132	132	25	4100	-	
7	2.2	150	139	2.1	19.99	IE4	BG30-..S4E08MA4	7.5	25	50	150	180	99	117	139	139	139	23	4200	-
7	2.2	150	139	2.1	19.99	IE5	BG30-..S5E08LA4	7.5	25	50	150	180	129	139	139	139	139	25	4200	-
7	2.2	135	155	1.9	22.18	IE4	BG30-..S4E08MA4	6.7	22.5	45	135	162	110	130	155	155	155	23	4600	-
7	2.2	135	155	1.9	22.18	IE5	BG30-..S5E08LA4	6.7	22.5	45	135	162	144	155	155	155	155	25	4600	-
7	2.2	117	178	1.7	25.45	IE4	BG30-..S4E08MA4	5.8	19.5	39	117	141	127	150	178	178	178	23	4850	-
7	2.2	117	178	1.7	25.45	IE5	BG30-..S5E08LA4	5.8	19.5	39	117	141	165	178	178	178	178	25	4850	-
7	2.2	106	197	1.5	28.24	IE4	BG30-..S4E08MA4	5.3	17.5	35	106	127	141	166	197	197	197	23	5100	-
7	2.2	106	197	1.5	28.24	IE5	BG30-..S5E08LA4	5.3	17.5	35	106	127	183	197	197	197	197	25	5100	-
7	2.2	100	205	1.4	29.83	IE4	BG30-..S4E08MA4	5	16.5	33.5	100	120	149	175	205	205	205	23	5200	-
7	2.2	90	230	1.3	33.09	IE4	BG30-..S4E08MA4	4.5	15	30	90	108	165	195	230	230	230	23	5400	-
7	2.2	90	230	1.3	33.09	IE5	BG30-..S5E08LA4	4.5	15	30	90	108	215	230	230	230	230	25	5400	-
7	2.2	85	245	1.2	35.17	IE4	BG30-..S4E08MA4	4.2	14	28	85	102	175	205	245	245	245	23	5500	-
7	2.2	85	245	1.2	35.17	IE5	BG30-..S5E08LA4	4.2	14	28	85	102	225	245	245	245	245	25	5500	-
7	2.2	76	270	1.1	39.02	IE4	BG30-..S4E08MA4	3.8	12.5	25.5	76	92	195	230	270	270	270	23	5800	-
7	2.2	76	270	1.1	39.02	IE5	BG30-..S5E08LA4	3.8	12.5	25.5	76	92	250	270	270	270	270	25	5800	-
7	2.2	70	295	1	42.46	IE4	BG30-..S4E08MA4	3.5	11.5	23.5	70	84	210	250	295	295	295	23	5900	-
7	2.2	70	295	1	42.46	IE5	BG30-..S5E08LA4	3.5	11.5	23.5	70	84	275	295	295	295	295	25	5900	-
7	2.2	63	325	0.91	47.11	IE4	BG30-..S4E08MA4	3.1	10.5	21	63	76	235	275	325	325	325	23	6000	-
7	2.2	63	325	0.91	47.11	IE5	BG30-..S5E08LA4	3.1	10.5	21	63	76	305	325	325	325	325	25	6000	-
7	2.2	57	365	0.82	52.44	IE4	BG30-..S4E08MA4	2.8	9.5	19	57	68	260	305	365	365	365	23	6000	-
7	2.2	57	365	0.82	52.44	IE5	BG30-..S5E08LA4	2.8	9.5	19	57	68	340	365	365	365	365	25	6000	-
7	2.2	136	154	2.8	22.02	IE4	BG40-..S4E08MA4	6.8	22.5	45	136	163	110	129	154	154	154	38	6000	-
7	2.2	136	154	2.8	22.02	IE5	BG40-..S5E08LA4	6.8	22.5	45	136	163	143	154	154	154	154	40	6000	-
7	2.2	128	164	2.6	23.43	IE4	BG40-..S4E08MA4	6.4	21	42.5	128	153	117	138	164	164	164	38	6200	-
7	2.2	128	164	2.6	23.43	IE5	BG40-..S5E08LA4	6.4	21	42.5	128	153	152	164	164	164	164	40	6200	-
7	2.2	115	182	2.3	26.01	IE4	BG40-..S4E08MA4	5.7	19	38	115	138	130	153	182	182	182	38	6500	-
7	2.2	115	182	2.3	26.01	IE5	BG40-..S5E08LA4	5.7	19	38	115	138	169	182	182	182	182	40	6500	-
7	2.2	102	205	2.1	29.34	IE4	BG40-..S4E08MA4	5.1	17	34	102	122	146	173	205	205	205	38	6800	-
7	2.2	102	205	2.1	29.34	IE5	BG40-..S5E08LA4	5.1	17	34	102	122	190	205	205	205	205	40	6800	-
7	2.2	92	225	1.9	32.57	IE4	BG40-..S4E08MA4	4.6	15	30.5	92	110	162	192	225	225	225	38	7000	-
7	2.2	92	225	1.9	32.57	IE5	BG40-..S5E08LA4	4.6	15	30.5	92	110	210	225	225	225	225	40	7000	-
7	2.2	87	235	1.8	34.2	IE4	BG40-..S4E08MA4	4.3	14.5	29	87	105	171	200	235	235	235	38	7000	-
7	2.2	87	235	1.8	34.2	IE5	BG40-..S5E08LA4	4.3	14.5	29	87	105	220	235	235	235	235	40	7000	-
7	2.2	79	265	1.6	37.96	IE4	BG40-..S4E08MA4	3.9	13	26	79	94	189	220	265	265	265	38	7000	-
7	2.2	79	265	1.6	37.96	IE5	BG40-..S5E08LA4	3.9	13	26	79	94	245	265	265	265	265	40	7000	-
7	2.2	74	280	1.5	40.19	IE4	BG40-..S4E08MA4	3.7	12	24.5	74	89	200	235	280	280	280	38	7000	-
7	2.2	74	280	1.5	40.19	IE5	BG40-..S5E08LA4	3.7	12	24.5	74	89	260	280	280	280	280	40	7000	-
7	2.2	67	310	1.4	44.62	IE4	BG40-..S4E08MA4	3.3	11	22	67	80	220	260	310	310	310	38	7000	-
7	2.2	67	310	1.4	44.62	IE5	BG40-..S5E08LA4	3.3	11	22	67	80	290	310	310	310	310	40	7000	-
7	2.2	62	335	1.3	48.36	IE4	BG40-..S4E08MA4	3.1	10	20.5	62	74	240	285	335	335	335	38	7000	-
7	2.2	62	335	1.3	48.36	IE5	BG40-..S5E08LA4	3.1	10	20.5	62	74	310	335	335	335	335	40	7000	-
7	2.2	55	375	1.1	53.69	IE4	BG40-..S4E08MA4	2.7	9.3	18.5	55	67	265	315	375	375	375	38	7000	-
7	2.2	55	375	1.1	53.69	IE5	BG40-..S5E08LA4	2.7	9.3	18.5	55	67	345	375	375	375	375	40	7000	-
7	2.2	50	415	1	59.64	IE4	BG40-..S4E08MA4	2.5	8.3	16.5	50	60	295	350	415	415	415	38	7000	-
7	2.2	50	415	1	59.64	IE5	BG40-..S5E08LA4	2.5	8.3	16.5	50	60	385	415	415	415	415	40	7000	-
7	2.2	45	460	0.92	66.2	IE4	BG40-..S5E08LA4	2.2	7.5	15	45	54	330	390	460	460	460	38	7000	-
7	2.2	44	470	0.9	67.74	IE4	BG40Z-..S4E08MA4	2.2	7.3	14.5	44	53	335	395	470	470	470	42	7000	-
7	2.2	44	470	0.9	67.74	IE5	BG40Z-..S5E08LA4	2.2	7.3	14.5	44	53	440	470	470	470	470	43	7000	-
7	2.2	39.5	520	0.81	75.19	IE4	BG40Z-..S4E08MA4	1.9	6.6	13	39.5	47.5	375	440	520	520	520	42	7000	-
7	2.2	39.5	520	0.81	75.19	IE5	BG40Z-..S5E08LA4	1.9	6.6	13	39.5	47.5	485	520	520	520	520	43	7000	-
7	2.2	101	205	3	29.62	IE4	BG50-..S4E08MA4	5	16.5	33.5	101	121	148	174	205	205	205	46	8000	-
7	2.2	101	205	3	29.62	IE5	BG50-..S5E08LA4	5	16.5	33.5	101	121	192	205	205	205	205	48	8000	-
7	2.2	91	225	2.7	32.84	IE4	BG50-..S4E08MA4	4.5	15	30	91	109	164	193	225	225	225	46	8700</td	

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	43.5	475	2.5	68.32	IE4	BG60Z-../S4E08MA4	2.1	7.3	14.5	43.5	52	340	400	475	475	475	96	16000	-
7	2.2	43.5	475	2.5	68.32	IE5	BG60Z-../S5E08LA4	2.1	7.3	14.5	43.5	52	440	475	475	475	475	97	16000	-
7	2.2	39.5	520	2.3	75.71	IE4	BG60Z-../S4E08MA4	1.9	6.6	13	39.5	47.5	375	445	520	520	520	96	16000	-
7	2.2	39.5	520	2.3	75.71	IE5	BG60Z-../S5E08LA4	1.9	6.6	13	39.5	47.5	490	520	520	520	520	97	16000	-
7	2.2	32.5	630	1.9	91.09	IE4	BG60Z-../S4E08MA4	1.6	5.4	10.5	32.5	39.5	455	530	630	630	630	96	16000	-
7	2.2	32.5	630	1.9	91.09	IE5	BG60Z-../S5E08LA4	1.6	5.4	10.5	32.5	39.5	590	630	630	630	630	97	16000	-
7	2.2	29.5	700	1.7	101	IE4	BG60Z-../S4E08MA4	1.4	4.9	9.9	29.5	35.5	500	590	700	700	700	96	16000	-
7	2.2	29.5	700	1.7	101	IE5	BG60Z-../S5E08LA4	1.4	4.9	9.9	29.5	35.5	650	700	700	700	700	97	16000	-
7	2.2	25	830	1.4	119.2	IE4	BG60Z-../S4E08MA4	1.2	4.1	8.3	25	30	590	700	830	830	830	96	16000	-
7	2.2	25	830	1.4	119.2	IE5	BG60Z-../S5E08LA4	1.2	4.1	8.3	25	30	770	830	830	830	830	97	16000	-
7	2.2	22.5	920	1.3	132.1	IE4	BG60Z-../S4E08MA4	1.1	3.7	7.5	22.5	27	660	770	920	920	920	96	16000	-
7	2.2	22.5	920	1.3	132.1	IE5	BG60Z-../S5E08LA4	1.1	3.7	7.5	22.5	27	850	920	920	920	920	97	16000	-
7	2.2	18.5	1100	1.1	158	IE4	BG60Z-../S4E08MA4	0.9	3.1	6.3	18.5	22.5	790	930	1100	1100	1100	96	16000	-
7	2.2	18.5	1100	1.1	158	IE5	BG60Z-../S5E08LA4	0.9	3.1	6.3	18.5	22.5	1020	1100	1100	1100	1100	97	16000	-
7	2.2	17	1220	0.98	175.1	IE4	BG60Z-../S4E08MA4	0.85	2.8	5.7	17	20.5	870	1030	1220	1220	1220	96	16000	-
7	2.2	17	1220	0.98	175.1	IE5	BG60Z-../S5E08LA4	0.85	2.8	5.7	17	20.5	1130	1220	1220	1220	1220	97	16000	-
7	2.2	14.5	1430	0.84	204.6	IE4	BG60Z-../S4E08MA4	0.7	2.4	4.8	14.5	17.5	1020	1200	1430	1430	1430	96	16000	-
7	2.2	14.5	1430	0.84	204.6	IE5	BG60Z-../S5E08LA4	0.7	2.4	4.8	14.5	17.5	1320	1430	1430	1430	1430	97	16000	-
7	2.2	26	790	2.9	113.6	IE4	BG70Z-../S4E08MA4	1.3	4.4	8.8	26	31.5	560	670	790	790	790	136	20000	-
7	2.2	26	790	2.9	113.6	IE5	BG70Z-../S5E08LA4	1.3	4.4	8.8	26	31.5	730	790	790	790	790	137	20000	-
7	2.2	24	860	2.6	124	IE4	BG70Z-../S4E08MA4	1.2	4	8	24	29	620	730	860	860	860	136	20000	-
7	2.2	24	860	2.6	124	IE5	BG70Z-../S5E08LA4	1.2	4	8	24	29	800	860	860	860	860	137	20000	-
7	2.2	20	1030	2.2	147.2	IE4	BG70Z-../S4E08MA4	1	3.3	6.7	20	24	730	860	1030	1030	1030	136	20000	-
7	2.2	20	1030	2.2	147.2	IE5	BG70Z-../S5E08LA4	1	3.3	6.7	20	24	950	1030	1030	1030	1030	137	20000	-
7	2.2	18	1140	2	163.8	IE4	BG70Z-../S4E08MA4	0.9	3	6.1	18	21.5	810	960	1140	1140	1140	136	20000	-
7	2.2	18	1140	2	163.8	IE5	BG70Z-../S5E08LA4	0.9	3	6.1	18	21.5	1060	1140	1140	1140	1140	137	20000	-
7	2.2	15	1360	1.7	194.4	IE4	BG70Z-../S4E08MA4	0.75	2.5	5.1	15	18.5	970	1140	1360	1360	1360	136	20000	-
7	2.2	15	1360	1.7	194.4	IE5	BG70Z-../S5E08LA4	0.75	2.5	5.1	15	18.5	1260	1360	1360	1360	1360	137	20000	-
7	2.2	14	1470	1.6	210.5	IE4	BG70Z-../S4E08MA4	0.7	2.3	4.7	14	17	1050	1240	1470	1470	1470	136	20000	-
7	2.2	14	1470	1.6	210.5	IE5	BG70Z-../S5E08LA4	0.7	2.3	4.7	14	17	1360	1470	1470	1470	1470	137	20000	-
7	2.2	12	1740	1.3	249.8	IE4	BG70Z-../S4E08MA4	0.6	2	4	12	14	1240	1470	1740	1740	1740	136	20000	-
7	2.2	12	1740	1.3	249.8	IE5	BG70Z-../S5E08LA4	0.6	2	4	12	14	1620	1740	1740	1740	1740	137	20000	-
7	2.2	11.5	1780	1.4	255.5	IE4	BG70G20-../S4E08MA4	0.55	1.9	3.9	11.5	14	1270	1500	1780	1780	1780	133	20000	-
7	2.2	11.5	1780	1.4	255.5	IE5	BG70G20-../S5E08LA4	0.55	1.9	3.9	11.5	14	1660	1780	1780	1780	1780	135	20000	-
7	2.2	10.5	1930	1.3	276.7	IE4	BG70G20-../S4E08MA4	0.5	1.8	3.6	10.5	13	1380	1630	1930	1930	1930	133	20000	-
7	2.2	10.5	1930	1.3	276.7	IE5	BG70G20-../S5E08LA4	0.5	1.8	3.6	10.5	13	1790	1930	1930	1930	1930	135	20000	-
7	2.2	9.1	2250	1.1	328.4	IE4	BG70G20-../S4E08MA4	0.45	1.5	3	9.1	10.5	1640	1930	2250	2250	2250	133	20000	-
7	2.2	7.7	2700	0.92	387.6	IE4	BG70G20-../S4E08MA4	0.38	1.2	2.5	7.7	9.2	1930	2250	2700	2700	2700	133	20000	-
7	2.2	7.7	2700	0.92	387.6	IE5	BG70G20-../S5E08LA4	0.38	1.2	2.5	7.7	9.2	2500	2700	2700	2700	2700	135	20000	-
7	2.2	7.1	2900	0.85	417.8	IE4	BG70G20-../S4E08MA4	0.35	1.1	2.3	7.1	8.6	2050	2450	2900	2900	2900	133	20000	-
7	2.2	7.1	2900	0.85	417.8	IE5	BG70G20-../S5E08LA4	0.35	1.1	2.3	7.1	8.6	2700	2900	2900	2900	2900	135	20000	-
7	2.2	13	1590	2.9	227.2	IE4	BG80G40-../S4E08MA4	0.65	2.2	4.4	13	15.5	1130	1340	1590	1590	1590	215	26000	-
7	2.2	13	1590	2.9	227.2	IE5	BG80G40-../S5E08LA4	0.65	2.2	4.4	13	15.5	1470	1590	1590	1590	1590	216	26000	-
7	2.2	11.5	1760	2.6	252.3	IE4	BG80G40-../S4E08MA4	0.55	1.9	3.9	11.5	14	1260	1480	1760	1760	1760	215	26000	-
7	2.2	11.5	1760	2.6	252.3	IE5	BG80G40-../S5E08LA4	0.55	1.9	3.9	11.5	14	1630	1760	1760	1760	1760	216	26000	-
7	2.2	10.5	1970	2.3	282.8	IE4	BG80G40-../S4E08MA4	0.5	1.7	3.5	10.5	12.5	1410	1660	1970	1970	1970	215	26000	-
7	2.2	10.5	1970	2.3	282.8	IE5	BG80G40-../S5E08LA4	0.5	1.7	3.5	10.5	12.5	1830	1970	1970	1970	1970	216	26000	-
7	2.2	9.5	2150	2.1	314	IE4	BG80G40-../S4E08MA4	0.47	1.5	3.1	9.5	11	2000	2150	2150	2150	2150	215	26000	-
7	2.2	8.3	2500	1.8	360	IE4	BG80G40-../S4E08MA4	0.41	1.3	2.7	8.3	10	1800	2100	2500	2500	2500	215	26000	-
7	2.2	8.3	2500	1.8	360	IE5	BG80G40-../S5E08LA4	0.41	1.3	2.7	8.3	10	2300	2500	2500	2500	2500	216	26000	-
7	2.2	7.5	2750	1.6	399.8	IE4	BG80G40-../S4E08MA4	0.37	1.2	2.5	7.5	9	1990	2350	2750	2750	2750	215	26000	-
7	2.2	7.5	2750	1.6	399.8	IE5	BG80G40-../S5E08LA4	0.37	1.2	2.5	7.5	9	2550	2750	2750	2750	2750	216	26000	-
7	2.2	6.8	3050	1.5	436.2	IE4	BG80G40-../S4E08MA4	0.34	1.1	2.2	6.8	8.2	2150	2550	3050	3050	305			

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	2.5	8200	1.1	1174	IE5	BG90G50-..S5E08LA4	0.12	0.42	0.85	2.5	3	7600	8200	8200	8200	8200	326	65000	-
7	2.2	2.3	9100	1	1301	IE4	BG90G50-..S4E08MA4	0.11	0.38	0.75	2.3	2.7	6500	7600	9100	9100	9100	324	65000	-
7	2.2	2.3	9100	1	1301	IE5	BG90G50-..S5E08LA4	0.11	0.38	0.75	2.3	2.7	8400	9100	9100	9100	9100	326	65000	-
7	2.2	1.8	11000	0.83	1583	IE4	BG90G50-..S4E08MA4	0.09	0.31	0.6	1.8	2.2	7900	9300	11000	11000	11000	324	65000	-
7	2.2	1.8	11000	0.83	1583	IE5	BG90G50-..S5E08LA4	0.09	0.31	0.6	1.8	2.2	10200	11000	11000	11000	11000	326	65000	-
7	2.2	3	6800	2.7	976.1	IE4	BG100G50-..S4E08MA4	0.15	0.5	1	3	3.6	4850	5700	6800	6800	6800	512	90000	-
7	2.2	3	6800	2.7	976.1	IE5	BG100G50-..S5E08LA4	0.15	0.5	1	3	3.6	6300	6800	6800	6800	6800	513	90000	-
7	2.2	2.8	7300	2.5	1043	IE4	BG100G50-..S4E08MA4	0.14	0.47	0.95	2.8	3.4	5200	6100	7300	7300	7300	512	90000	-
7	2.2	2.8	7300	2.5	1043	IE5	BG100G50-..S5E08LA4	0.14	0.47	0.95	2.8	3.4	6700	7300	7300	7300	7300	513	90000	-
7	2.2	2.4	8400	2.2	1204	IE4	BG100G50-..S4E08MA4	0.12	0.41	0.8	2.4	2.9	6000	7100	8400	8400	8400	512	90000	-
7	2.2	2.4	8400	2.2	1204	IE5	BG100G50-..S5E08LA4	0.12	0.41	0.8	2.4	2.9	7800	8400	8400	8400	8400	513	90000	-
7	2.2	2	10100	1.8	1444	IE4	BG100G50-..S4E08MA4	0.1	0.34	0.65	2	2.4	7200	8500	10100	10100	10100	512	90000	-
7	2.2	2	10100	1.8	1444	IE5	BG100G50-..S5E08LA4	0.1	0.34	0.65	2	2.4	9300	10100	10100	10100	10100	513	90000	-
7	2.2	1.7	11700	1.6	1678	IE4	BG100G50-..S4E08MA4	0.085	0.29	0.55	1.7	2.1	8300	9900	11700	11700	11700	512	90000	-
7	2.2	1.7	11700	1.6	1678	IE5	BG100G50-..S5E08LA4	0.085	0.29	0.55	1.7	2.1	10900	11700	11700	11700	11700	513	90000	-
7	2.2	1.6	13000	1.4	1867	IE4	BG100G50-..S4E08MA4	0.08	0.26	0.5	1.6	1.9	9300	11000	13000	13000	13000	512	90000	-
7	2.2	1.6	13000	1.4	1867	IE5	BG100G50-..S5E08LA4	0.08	0.26	0.5	1.6	1.9	12100	13000	13000	13000	13000	513	90000	-
7	2.2	1.3	15000	1.2	2154	IE4	BG100G50-..S4E08MA4	0.065	0.23	0.46	1.3	1.6	10700	12700	15000	15000	15000	512	90000	-
7	2.2	1.3	15000	1.2	2154	IE5	BG100G50-..S5E08LA4	0.065	0.23	0.46	1.3	1.6	14000	15000	15000	15000	15000	513	90000	-
7	2.2	1.1	18500	1	2656	IE4	BG100G50-..S4E08MA4	0.055	0.18	0.37	1.1	1.3	13200	15600	18500	18500	18500	512	90000	-
7	2.2	1.1	18500	1	2656	IE5	BG100G50-..S5E08LA4	0.055	0.18	0.37	1.1	1.3	17200	18500	18500	18500	18500	513	90000	-
7	2.2	1	20500	0.9	2952	IE4	BG100G50-..S4E08MA4	0.05	0.16	0.33	1	1.2	14700	17400	20500	20500	20500	512	90000	-
7	2.2	1	20500	0.9	2952	IE5	BG100G50-..S5E08LA4	0.05	0.16	0.33	1	1.2	19100	20500	20500	20500	20500	513	90000	-
7	2.2	0.9	23000	0.8	3286	IE4	BG100G50-..S4E08MA4	0.045	0.15	0.3	0.9	1	16400	19300	23000	23000	23000	512	90000	-
7	2.2	0.9	23000	0.8	3286	IE5	BG100G50-..S5E08LA4	0.045	0.15	0.3	0.9	1	21000	23000	23000	23000	23000	513	90000	-


MN = 10 Nm (PN = 3.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
10	3.1	1190	25	2.2	252	IE3	BG10-..SPE08LA4	59	198	395	1190	1420	16.3	20	25	25	25	18	570	790	-
10	3.1	870	34	1.8	342	IE3	BG10-..SPE08LA4	43.5	146	290	870	1050	22	27	34	34	34	18	630	880	-
10	3.1	680	43.5	1.6	436	IE3	BG10-..SPE08LA4	34	114	225	680	820	28	34.5	43.5	43.5	43.5	18	650	910	-
10	3.1	560	53	1.4	534	IE3	BG10-..SPE08LA4	28	93	187	560	670	34.5	42.5	53	53	53	18	620	910	-
10	3.1	440	67	1.2	678	IE3	BG10-..SPE08LA4	22	73	147	440	530	44	54	67	67	67	18	660	920	-
10	3.1	435	68	1.3	689	IE3	BG10-..SPE08LA4	21.5	72	145	435	520	44.5	55	68	68	68	18	850	1200	-
10	3.1	390	76	1.2	763	IE3	BG10-..SPE08LA4	19.5	65	131	390	470	49.5	61	76	76	76	18	900	1250	-
10	3.1	370	80	1.1	807	IE3	BG10-..SPE08LA4	18.5	61	123	370	445	52	64	80	80	80	18	660	920	-
10	3.1	320	93	1	933	IE3	BG10-..SPE08LA4	16	53	107	320	385	60	74	93	93	93	18	950	1330	-
10	3.1	290	103	0.96	10.34	IE3	BG10-..SPE08LA4	14.5	48	96	290	345	67	82	103	103	103	18	1000	1400	-
10	3.1	250	119	0.88	11.92	IE3	BG10-..SPE08LA4	12.5	41.5	83	250	300	77	95	119	119	119	18	1030	1440	-
10	3.1	225	132	1.3	11.71	IE3	BG10-..SPE08LA4	11.5	42.5	85	255	305	76	93	117	117	117	20	2800	-	-
10	3.1	375	79	2.7	7.91	IE3	BG20-..SPE08LA4	18.5	63	126	375	455	51	63	79	79	79	25	1760	-	-
10	3.1	345	86	2.8	8.6	IE3	BG20-..SPE08LA4	17	58	116	345	415	55	68	86	86	86	25	2800	-	-
10	3.1	310	95	2.6	9.55	IE3	BG30-..SPE08LA4	15.5	52	104	310	375	62	76	95	95	95	25	3000	-	-
10	3.1	280	106	2.5	10.65	IE3	BG30-..SPE08LA4	14	46.5	93	280	335	69	85	106	106	106	25	2950	-	-
10	3.1	250	118	2.3	11.82	IE3	BG30-..SPE08LA4	12.5	42	84	250	300	76	94	118	118	118	25	3200	-	-
10	3.1	215	137	2.1	13.77	IE3	BG30-..SPE08LA4	10.5	36	72	215	260	89	110	137	137	137	25	3150	-	-
10	3.1	196	152	2	15.27	IE3	BG30-..SPE08LA4	9.8	32.5	65	196	235	99	122	152	152	152	25	3450	-	-
10	3.1	175	170	1.8	17.06	IE3	BG30-..SPE08LA4	8.7</													

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 3.1 kW)																			
M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]						
								150	500	1000	3000	3600	150	500	1000	3000	3600		
10	3.1	100	295	1	29.83	IE3	BG30-./SPE08LA4	5	16.5	33.5	100	120	193	235	295	295	25	5200	-
10	3.1	90	330	0.91	33.09	IE3	BG30-./SPE08LA4	4.5	15	30	90	108	215	260	330	330	25	5400	-
10	3.1	85	350	0.85	35.17	IE3	BG30-./SPE08LA4	4.2	14	28	85	102	225	280	350	350	25	5500	-
10	3.1	210	142	2.9	14.28	IE3	BG40-./SPE08LA4	10.5	35	70	210	250	92	114	142	142	40	4900	-
10	3.1	183	163	2.6	16.39	IE3	BG40-./SPE08LA4	9.1	30.5	61	183	215	106	131	163	163	40	5300	-
10	3.1	164	181	2.3	18.19	IE3	BG40-./SPE08LA4	8.2	27	54	164	197	118	145	181	181	40	5600	-
10	3.1	151	198	2.1	19.84	IE3	BG40-./SPE08LA4	7.5	25	50	151	181	128	158	198	198	40	5800	-
10	3.1	136	220	1.9	22.02	IE3	BG40-./SPE08LA4	6.8	22.5	45	136	163	143	176	220	220	40	6000	-
10	3.1	128	230	1.8	23.43	IE3	BG40-./SPE08LA4	6.4	21	42.5	128	153	152	187	230	230	40	6200	-
10	3.1	115	260	1.6	26.01	IE3	BG40-./SPE08LA4	5.7	19	38	115	138	169	205	260	260	40	6500	-
10	3.1	102	290	1.4	29.34	IE3	BG40-./SPE08LA4	5.1	17	34	102	122	190	230	290	290	40	6800	-
10	3.1	92	325	1.3	32.57	IE3	BG40-./SPE08LA4	4.6	15	30.5	92	110	210	260	325	325	40	7000	-
10	3.1	87	340	1.2	34.2	IE3	BG40-./SPE08LA4	4.3	14.5	29	87	105	220	270	340	340	40	7000	-
10	3.1	79	375	1.1	37.96	IE3	BG40-./SPE08LA4	3.9	13	26	79	94	245	300	375	375	40	7000	-
10	3.1	74	400	1.1	40.19	IE3	BG40-./SPE08LA4	3.7	12	24.5	74	89	260	320	400	400	40	7000	-
10	3.1	67	445	0.95	44.62	IE3	BG40-./SPE08LA4	3.3	11	22	67	80	290	355	445	445	40	7000	-
10	3.1	62	480	0.88	48.36	IE3	BG40-./SPE08LA4	3.1	10	20.5	62	74	310	385	480	480	40	7000	-
10	3.1	136	215	2.9	21.96	IE3	BG50-./SPE08LA4	6.8	22.5	45.5	136	163	142	175	215	215	48	8000	-
10	3.1	123	240	2.6	24.34	IE3	BG50-./SPE08LA4	6.1	20.5	41	123	147	158	194	240	240	48	8700	-
10	3.1	101	295	2.1	29.62	IE3	BG50-./SPE08LA4	5	16.5	33.5	101	121	192	235	295	295	48	8000	-
10	3.1	91	325	1.9	32.84	IE3	BG50-./SPE08LA4	4.5	15	30	91	109	210	260	325	325	48	8700	-
10	3.1	79	375	1.7	37.89	IE3	BG50-./SPE08LA4	3.9	13	26	79	95	245	300	375	375	48	10000	-
10	3.1	71	420	1.5	42	IE3	BG50-./SPE08LA4	3.5	11.5	23.5	71	85	270	335	420	420	48	10000	-
10	3.1	63	470	1.3	47.02	IE3	BG50-./SPE08LA4	3.1	10.5	21	63	76	305	375	470	470	48	10000	-
10	3.1	57	520	1.2	52.12	IE3	BG50-./SPE08LA4	2.8	9.5	19	57	69	335	415	520	520	48	10000	-
10	3.1	50	590	1.1	59.42	IE3	BG50-./SPE08LA4	2.5	8.4	16.5	50	60	385	475	590	590	48	10000	-
10	3.1	45.5	650	0.96	65.86	IE3	BG50-./SPE08LA4	2.2	7.5	15	45.5	54	425	520	650	650	48	10000	-
10	3.1	41.5	710	0.88	71.97	IE3	BG50Z-./SPE08LA4	2	6.9	13.5	41.5	50	465	570	710	710	52	10000	-
10	3.1	43.5	680	1.8	68.32	IE3	BG60Z-./SPE08LA4	2.1	7.3	14.5	43.5	52	440	540	680	680	97	16000	-
10	3.1	39.5	750	1.6	75.71	IE3	BG60Z-./SPE08LA4	1.9	6.6	13	39.5	47.5	490	600	750	750	97	16000	-
10	3.1	32.5	910	1.3	91.09	IE3	BG60Z-./SPE08LA4	1.6	5.4	10.5	32.5	39.5	590	720	910	910	97	16000	-
10	3.1	29.5	1010	1.2	101	IE3	BG60Z-./SPE08LA4	1.4	4.9	9.9	29.5	35.5	650	800	1010	1010	97	16000	-
10	3.1	25	1190	1	119.2	IE3	BG60Z-./SPE08LA4	1.2	4.1	8.3	25	30	770	950	1190	1190	97	16000	-
10	3.1	22.5	1320	0.91	132.1	IE3	BG60Z-./SPE08LA4	1.1	3.7	7.5	22.5	27	850	1050	1320	1320	97	16000	-
10	3.1	34	870	2.6	87.61	IE3	BG70Z-./SPE08LA4	1.7	5.7	11	34	41	560	700	870	870	137	20000	-
10	3.1	31	950	2.4	95.74	IE3	BG70Z-./SPE08LA4	1.5	5.2	10	31	37.5	620	760	950	950	137	20000	-
10	3.1	26	1130	2	113.6	IE3	BG70Z-./SPE08LA4	1.3	4.4	8.8	26	31.5	730	900	1130	1130	137	20000	-
10	3.1	24	1240	1.9	124	IE3	BG70Z-./SPE08LA4	1.2	4	8	24	29	800	990	1240	1240	137	20000	-
10	3.1	20	1470	1.6	147.2	IE3	BG70Z-./SPE08LA4	1	3.3	6.7	20	24	950	1170	1470	1470	137	20000	-
10	3.1	18	1630	1.4	163.8	IE3	BG70Z-./SPE08LA4	0.9	3	6.1	18	21.5	1060	1310	1630	1630	137	20000	-
10	3.1	15	1940	1.2	194.4	IE3	BG70Z-./SPE08LA4	0.75	2.5	5.1	15	18.5	1260	1550	1940	1940	137	20000	-
10	3.1	14	2100	1.1	210.5	IE3	BG70Z-./SPE08LA4	0.7	2.3	4.7	14	17	1360	1680	2100	2100	137	20000	-
10	3.1	12	2450	0.92	249.8	IE3	BG70Z-./SPE08LA4	0.6	2	4	12	14	1620	1990	2450	2450	137	20000	-
10	3.1	11.5	2550	0.98	255.5	IE3	BG70G20-./SPE08LA4	0.55	1.9	3.9	11.5	14	1660	2000	2550	2550	135	20000	-
10	3.1	10.5	2750	0.9	276.7	IE3	BG70G20-./SPE08LA4	0.5	1.8	3.6	10.5	13	1790	2200	2750	2750	135	20000	-
10	3.1	13	2250	2	227.2	IE3	BG80G40-./SPE08LA4	0.65	2.2	4.4	13	15.5	1470	1810	2250	2250	216	26000	-
10	3.1	11.5	2500	1.8	252.3	IE3	BG80G40-./SPE08LA4	0.55	1.9	3.9	11.5	14	1630	2000	2500	2500	216	26000	-
10	3.1	10.5	2800	1.6	282.8	IE3	BG80G40-./SPE08LA4	0.5	1.7	3.5	10.5	12.5	1830	2250	2800	2800	216	26000	-
10	3.1	9.5	3100	1.5	314	IE3	BG80G40-./SPE08LA4	0.47	1.5	3.1	9.5	11	2000	2500	3100	3100	216	26000	-
10	3.1	8.3	3600	1.3	360	IE3	BG80G40-./SPE08LA4	0.41	1.3	2.7	8.3	10	2300	2850	3600	3600	216	26000	-
10	3.1	7.5	3950	1.2	399.8	IE3	BG80G40-./SPE08LA4	0.37	1.2	2.5	7.5	9	2550	3150	3950	3950	216	26000	-
10	3.1	6.8	4350	1.1	436.2	IE3	BG80G40-./SPE08LA4	0.34	1.1	2.2	6.8	8.2	2800	3450	4350	4350	216	26000	-
10	3.1	6.1	4800	0.95	484.3	IE3	BG80G40-./SPE08LA4	0.3	1	2	6.1	7.4	3100	3850	4800	4800	216	26000	-
10	3.1	5.2	5700	0.8	572	IE3	BG80G40-./SPE08LA4	0.26	0.85	1.7	5.2	6.2	3700	4550	5700	5700	216	26000	-
10	3.1	8.3	3600	2.6	360.3	IE3	BG90G50-./SPE08LA4	0.41	1.3	2.7	8.3	9.9	2300	2850	3600	3600	326	65000	-
10	3.1	6.8	4350	2.1	435.8	IE3	BG9												

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 13 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
13	4	1190	32.5	1.7	2.52	IE4	BG10-..S4E09SA4	59	198	395	1190	1420	21	25	32.5	32.5	32.5	22	570	790
13	4	870	44	1.4	3.42	IE4	BG10-..S4E09SA4	43.5	146	290	870	1050	29	34	44	44	44	22	630	880
13	4	680	56	1.2	4.36	IE4	BG10-..S4E09SA4	34	114	225	680	820	37	43.5	56	56	56	22	650	910
13	4	560	69	1.1	5.34	IE4	BG10-..S4E09SA4	28	93	187	560	670	45	53	69	69	69	22	620	910
13	4	440	88	0.92	6.78	IE4	BG10-..S4E09SA4	22	73	147	440	530	57	67	88	88	88	22	660	920
13	4	435	89	0.98	6.89	IE4	BG10-..S4E09SA4	21.5	72	145	435	520	58	68	89	89	89	22	850	1200
13	4	390	99	0.9	7.63	IE4	BG10-..S4E09SA4	19.5	65	131	390	470	64	76	99	99	99	22	900	1250
13	4	370	104	0.84	8.07	IE4	BG10-..S4E09SA4	18.5	61	123	370	445	68	80	104	104	104	22	660	920
13	4	320	121	0.8	9.33	IE4	BG10-..S4E09SA4	16	53	107	320	385	79	93	121	121	121	22	950	1330
13	4	1190	32.5	2.6	2.52	IE4	BG20-..S4E09SA4	59	198	395	1190	1420	21	25	32.5	32.5	32.5	24	1650	-
13	4	900	43	2.1	3.33	IE4	BG20-..S4E09SA4	45	150	300	900	1080	28	33	43	43	43	24	1830	-
13	4	680	56	1.8	4.38	IE4	BG20-..S4E09SA4	34	114	225	680	820	37	43.5	56	56	56	24	1990	-
13	4	540	71	1.6	5.49	IE4	BG20-..S4E09SA4	27	91	182	540	650	46.5	54	71	71	71	24	2100	-
13	4	495	78	1.6	6.06	IE4	BG20-..S4E09SA4	24.5	82	165	495	590	51	60	78	78	78	24	2250	-
13	4	460	84	1.4	6.48	IE4	BG20-..S4E09SA4	23	77	154	460	550	55	64	84	84	84	24	2250	-
13	4	445	87	1.5	6.73	IE4	BG20-..S4E09SA4	22	74	148	445	530	57	67	87	87	87	24	2350	2100
13	4	370	104	1.3	8.02	IE4	BG20-..S4E09SA4	18.5	62	124	370	445	68	80	104	104	104	24	2500	-
13	4	360	107	1.1	8.29	IE4	BG20-..S4E09SA4	18	60	120	360	430	70	82	107	107	107	24	2250	-
13	4	335	115	1.2	8.91	IE4	BG20-..S4E09SA4	16.5	56	112	335	400	75	89	115	115	115	24	2600	-
13	4	310	125	0.97	9.65	IE4	BG20-..S4E09SA4	15.5	51	103	310	370	82	96	125	125	125	24	2250	-
13	4	280	137	1.1	10.54	IE4	BG20-..S4E09SA4	14	47	94	280	340	89	105	137	137	137	24	2700	-
13	4	255	152	1	11.71	IE4	BG20-..S4E09SA4	12.5	42.5	85	255	305	99	117	152	152	152	24	2800	-
13	4	225	171	0.97	13.21	IE4	BG20-..S4E09SA4	11	37.5	75	225	270	112	132	171	171	171	24	2900	-
13	4	200	190	0.9	14.67	IE4	BG20-..S4E09SA4	10	34	68	200	245	124	146	190	190	190	24	3050	-
13	4	192	200	0.87	15.58	IE4	BG20-..S4E09SA4	9.6	32	64	192	230	132	155	200	200	200	24	3100	-
13	4	173	225	0.81	17.31	IE4	BG20-..S4E09SA4	8.6	28.5	57	173	205	147	173	225	225	225	24	3200	-
13	4	550	70	2.8	5.44	IE4	BG30-..S4E09SA4	27.5	91	183	550	660	46	54	70	70	70	29	1670	-
13	4	440	87	2.5	6.75	IE4	BG30-..S4E09SA4	22	74	148	440	530	57	67	87	87	87	29	1760	-
13	4	440	87	2.6	6.76	IE4	BG30-..S4E09SA4	22	73	147	440	530	57	67	87	87	87	29	2550	-
13	4	400	97	2.4	7.5	IE4	BG30-..S4E09SA4	20	66	133	400	480	63	75	97	97	97	29	2750	-
13	4	375	102	2.1	7.91	IE4	BG30-..S4E09SA4	18.5	63	126	375	455	67	79	102	102	102	29	1760	-
13	4	345	111	2.2	8.6	IE4	BG30-..S4E09SA4	17	58	116	345	415	73	86	111	111	111	29	2800	-
13	4	310	124	2	9.55	IE4	BG30-..S4E09SA4	15.5	52	104	310	375	81	95	124	124	124	29	3000	-
13	4	280	138	1.9	10.65	IE4	BG30-..S4E09SA4	14	46.5	93	280	335	90	106	138	138	138	29	2950	-
13	4	250	153	1.8	11.82	IE4	BG30-..S4E09SA4	12.5	42	84	250	300	100	118	153	153	153	29	3200	-
13	4	215	179	1.6	13.77	IE4	BG30-..S4E09SA4	10.5	36	72	215	260	117	137	179	179	179	29	3150	-
13	4	196	198	1.5	15.27	IE4	BG30-..S4E09SA4	9.8	32.5	65	196	235	129	152	198	198	198	29	3450	-
13	4	175	220	1.4	17.06	IE4	BG30-..S4E09SA4	8.7	29	58	175	210	145	170	220	220	220	29	3700	-
13	4	158	245	1.2	18.93	IE4	BG30-..S4E09SA4	7.9	26	52	158	190	160	189	245	245	245	29	4100	-
13	4	150	255	1.2	19.99	IE4	BG30-..S4E09SA4	7.5	25	50	150	180	169	199	255	255	255	29	4200	-
13	4	135	285	1	22.18	IE4	BG30-..S4E09SA4	6.7	22.5	45	135	162	188	220	285	285	285	29	4600	-
13	4	117	330	0.91	25.45	IE4	BG30-..S4E09SA4	5.8	19.5	39	117	141	215	250	330	330	330	29	4850	-
13	4	106	365	0.82	28.24	IE4	BG30-..S4E09SA4	5.3	17.5	35	106	127	240	280	365	365	365	29	5100	-
13	4	390	99	3	7.62	IE4	BG40-..S4E09SA4	19.5	65	131	390	470	64	76	99	99	99	43	2650	-
13	4	330	117	2.5	9	IE4	BG40-..S4E09SA4	16.5	55	111	330	400	76	90	117	117	117	43	2650	-
13	4	325	119	3	9.23	IE4	BG40-..S4E09SA4	16	54	108	325	390	78	92	119	119	119	43	4350	-
13	4	285	134	2.8	10.35	IE4	BG40-..S4E09SA4	14	48	96	285	345	87	103	134	134	134	43	4350	-
13	4	260	149	2.6	11.49	IE4	BG40-..S4E09SA4	13	43.5	87	260	310	97	114	149	149	149	43	4600	-
13	4	230	167	2.5	12.86	IE4	BG40-..S4E09SA4	11.5	38.5	77	230	275	109	128	167	167	167	43	4500	-
13	4	210	185	2.3	14.28	IE4	BG40-..S4E09SA4	10.5	35	70	210	250	121	142	185	185	185	43	4900	-
13	4	183	210	2	16.39	IE4	BG40-..S4E09SA4	9.1	30.5	61	183	215	139	163	210	210	210	43	5300	-
13	4	164	235	1.8	18.19	IE4	BG40-..S4E09SA4	8.2	27	54	164	197	154	181	235	235	235	43	5600	-
13	4	151	255	1.6	19.84	IE4	BG40-..S4E09SA4	7.5	25	50	151	181	168	198	255	255	255	43	5800	-
13	4	136	285	1.5	22.02	IE4	BG40-..S4E09SA4	6.8	22.5	45	136	163	187	220	285	285	285	43	6000	-
13	4	128	300	1.4	23.43	IE4	BG40-..S4E09SA4	6.4	21	42.5	128	153	199	230	300	300	300	43	6200	-
13	4	115	335	1.3	26.01	IE4	BG40-..S4E09SA4	5.7	19	38	115	138	220	260	335	335	335	43	6500	-
13	4	102	380	1.1	29.34	IE4	BG40-..S4E09SA4	5.1	17	34	102	122								

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 3000 \text{ 1/min}$

MN = 13 Nm (PN = 4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
13	4	49	790	1.5	60.9	IE4	BG60-./S4E09SA4	2.4	8.2	16	49	59	510	600	790	790	790	82	16000	-
13	4	44	870	1.4	67.49	IE4	BG60-./S4E09SA4	2.2	7.4	14.5	44	53	570	670	870	870	870	82	16000	-
13	4	43.5	880	1.4	68.32	IE4	BG60Z-./S4E09SA4	2.1	7.3	14.5	43.5	52	580	680	880	880	880	101	16000	-
13	4	39.5	980	1.2	75.71	IE4	BG60Z-./S4E09SA4	1.9	6.6	13	39.5	47.5	640	750	980	980	980	101	16000	-
13	4	32.5	1180	1	91.09	IE4	BG60Z-./S4E09SA4	1.6	5.4	10.5	32.5	39.5	770	910	1180	1180	1180	101	16000	-
13	4	29.5	1310	0.91	101	IE4	BG60Z-./S4E09SA4	1.4	4.9	9.9	29.5	35.5	850	1010	1310	1310	1310	101	16000	-
13	4	50	770	3	59.82	IE4	BG70-./S4E09SA4	2.5	8.3	16.5	50	60	500	590	770	770	770	120	20000	-
13	4	54	710	2.7	54.64	IE4	BG70Z-./S4E09SA4	2.7	9.1	18	54	65	460	540	710	710	710	141	20000	-
13	4	46	840	2.7	64.85	IE4	BG70Z-./S4E09SA4	2.3	7.7	15	46	55	550	640	840	840	840	141	20000	-
13	4	40.5	950	2.4	73.82	IE4	BG70Z-./S4E09SA4	2	6.7	13.5	40.5	48.5	620	730	950	950	950	141	20000	-
13	4	34	1130	2	87.61	IE4	BG70Z-./S4E09SA4	1.7	5.7	11	34	41	740	870	1130	1130	1130	141	20000	-
13	4	31	1240	1.8	95.74	IE4	BG70Z-./S4E09SA4	1.5	5.2	10	31	37.5	810	950	1240	1240	1240	141	20000	-
13	4	26	1470	1.6	113.6	IE4	BG70Z-./S4E09SA4	1.3	4.4	8.8	26	31.5	960	1130	1470	1470	1470	141	20000	-
13	4	24	1610	1.4	124	IE4	BG70Z-./S4E09SA4	1.2	4	8	24	29	1050	1240	1610	1610	1610	141	20000	-
13	4	20	1910	1.2	147.2	IE4	BG70Z-./S4E09SA4	1	3.3	6.7	20	24	1250	1470	1910	1910	1910	141	20000	-
13	4	18	2100	1.1	163.8	IE4	BG70Z-./S4E09SA4	0.9	3	6.1	18	21.5	1390	1630	2100	2100	2100	141	20000	-
13	4	15	2500	0.91	194.4	IE4	BG70Z-./S4E09SA4	0.75	2.5	5.1	15	18.5	1650	1940	2500	2500	2500	141	20000	-
13	4	14	2700	0.84	210.5	IE4	BG70Z-./S4E09SA4	0.7	2.3	4.7	14	17	1780	2100	2700	2700	2700	141	20000	-
13	4	26.5	1460	2.9	112.4	IE4	BG80Z-./S4E09SA4	1.3	4.4	8.8	26.5	32	950	1120	1460	1460	1460	209	26000	-
13	4	24	1620	2.6	124.8	IE4	BG80Z-./S4E09SA4	1.2	4	8	24	28.5	1060	1240	1620	1620	1620	209	26000	-
13	4	20.5	1890	2.2	145.4	IE4	BG80Z-./S4E09SA4	1	3.4	6.8	20.5	24.5	1230	1450	1890	1890	1890	209	26000	-
13	4	18.5	2050	2	161.5	IE4	BG80Z-./S4E09SA4	0.9	3	6.1	18.5	22	1370	1610	2050	2050	2050	209	26000	-
13	4	16	2400	1.7	186.8	IE4	BG80Z-./S4E09SA4	0.8	2.6	5.3	16	19	1580	1860	2400	2400	2400	209	26000	-
13	4	14	2650	1.6	207.4	IE4	BG80Z-./S4E09SA4	0.7	2.4	4.8	14	17	1760	2050	2650	2650	2650	209	26000	-
13	4	13	2950	1.6	227.2	IE4	BG80G40-./S4E09SA4	0.65	2.2	4.4	13	15.5	1930	2250	2950	2950	2950	220	26000	-
13	4	11.5	3250	1.4	252.3	IE4	BG80G40-./S4E09SA4	0.55	1.9	3.9	11.5	14	2100	2500	3250	3250	3250	220	26000	-
13	4	10.5	3650	1.3	282.8	IE4	BG80G40-./S4E09SA4	0.5	1.7	3.5	10.5	12.5	2400	2800	3650	3650	3650	220	26000	-
13	4	9.5	4050	1.1	314	IE4	BG80G40-./S4E09SA4	0.47	1.5	3.1	9.5	11	2650	3100	4050	4050	4050	220	26000	-
13	4	8.3	4650	0.98	360	IE4	BG80G40-./S4E09SA4	0.41	1.3	2.7	8.3	10	3050	3600	4650	4650	4650	220	26000	-
13	4	7.5	5100	0.89	399.8	IE4	BG80G40-./S4E09SA4	0.37	1.2	2.5	7.5	9	3350	3950	5100	5100	5100	220	26000	-
13	4	6.8	5600	0.81	436.2	IE4	BG80G40-./S4E09SA4	0.34	1.1	2.2	6.8	8.2	3700	4350	5600	5600	5600	220	26000	-
13	4	13	2950	2.8	228.1	IE4	BG90Z-./S4E09SA4	0.65	2.1	4.3	13	15.5	1930	2250	2950	2950	2950	319	65000	-
13	4	11	3400	2.7	262.5	IE4	BG90G50-./S4E09SA4	0.55	1.9	3.8	11	13.5	2200	2600	3400	3400	3400	330	65000	-
13	4	10	3850	2.4	298.8	IE4	BG90G50-./S4E09SA4	0.5	1.6	3.3	10	12	2500	2950	3850	3850	3850	330	65000	-
13	4	8.3	4650	2	360.3	IE4	BG90G50-./S4E09SA4	0.41	1.3	2.7	8.3	9.9	3050	3600	4650	4650	4650	330	65000	-
13	4	6.8	5600	1.6	435.8	IE4	BG90G50-./S4E09SA4	0.34	1.1	2.2	6.8	8.2	3700	4350	5600	5600	5600	330	65000	-
13	4	5.9	6500	1.4	504.7	IE4	BG90G50-./S4E09SA4	0.29	0.95	1.9	5.9	7.1	4250	5000	6500	6500	6500	330	65000	-
13	4	5	7600	1.2	588.8	IE4	BG90G50-./S4E09SA4	0.25	0.8	1.6	5	6.1	5000	5800	7600	7600	7600	330	65000	-
13	4	4.6	8300	1.1	644.7	IE4	BG90G50-./S4E09SA4	0.23	0.75	1.5	4.6	5.5	5400	6400	8300	8300	8300	330	65000	-
13	4	4.2	9200	0.99	714.2	IE4	BG90G50-./S4E09SA4	0.21	0.7	1.4	4.2	5	6000	7100	9200	9200	9200	330	65000	-
13	4	3.3	11400	0.8	883.7	IE4	BG90G50-./S4E09SA4	0.16	0.55	1.1	3.3	4	7500	8800	11400	11400	11400	330	65000	-
13	4	5.8	6600	2.8	508.5	IE4	BG100Z-./S4E09SA4	0.29	0.95	1.9	5.8	7	4300	5000	6600	6600	6600	518	90000	-
13	4	5	7600	2.4	591.1	IE4	BG100Z-./S4E09SA4	0.25	0.8	1.6	5	6	5000	5900	7600	7600	7600	518	90000	-
13	4	4.5	8500	2.2	658.1	IE4	BG100Z-./S4E09SA4	0.22	0.75	1.5	4.5	5.4	5500	6500	8500	8500	8500	518	90000	-
13	4	3.9	9800	1.9	759	IE4	BG100Z-./S4E09SA4	0.19	0.65	1.3	3.9	4.7	6400	7500	9800	9800	9800	518	90000	-
13	4	3.5	10900	1.7	845.1	IE4	BG100Z-./S4E09SA4	0.17	0.55	1.1	3.5	4.2	7100	8400	10900	10900	10900	518	90000	-
13	4	3	12600	1.5	976.1	IE4	BG100G50-./S4E09SA4	0.15	0.5	1	3	3.6	8200	9700	12600	12600	12600	517	90000	-
13	4	2.8	13500	1.4	1043	IE4	BG100G50-./S4E09SA4	0.14	0.47	0.95	2.8	3.4	8800	10400	13500	13500	13500	517	90000	-
13	4	2.4	15600	1.2	1204	IE4	BG100G50-./S4E09SA4	0.12	0.41	0.8	2.4	2.9	10200	12000	15600	15600	15600	517	90000	-
13	4	2	18700	0.99	1444	IE4	BG100G50-./S4E09SA4	0.1	0.34	0.65	2	2.4	12200	14400	18700	18700	18700	517	90000	-
13	4	1.7	21500	0.85	1678	IE4	BG100G50-./S4E09SA4	0.085	0.29	0.55	1.7	2.1	14200	16700	21500	21500	21500	517	90000	-

MN = 17.5 Nm (PN = 5.5 kW)




M_N [Nm]	P_N [kW]	n₂ [1/min]	M₂ [Nm]	f_B [-]	i [:1]	IE- Classe	Type	Speed range n₂ [1/min] at motor speed n₁ [1/min]					Torque range M₂ [Nm] at motor speed n₁ [1/min]					m

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 17.5 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
17.5	5.5	1120	46.5	2.7	2.67	IE4	BG30-..S4E11SA6	56	187	370	1120	1340	46.5	46.5	46.5	46.5	46.5	46	1450	-
17.5	5.5	1120	46.5	2.7	2.67	IE5	BG30-..S5E09XA4	56	187	370	1120	1340	34.5	42.5	46.5	46.5	46.5	37	1450	-
17.5	5.5	880	59	2.3	3.4	IE4	BG30-..S4E11SA6	44	147	290	880	1050	59	59	59	59	59	46	1580	-
17.5	5.5	880	59	2.3	3.4	IE5	BG30-..S5E09XA4	44	147	290	880	1050	44	54	59	59	59	37	1580	-
17.5	5.5	710	73	2.3	4.21	IE4	BG30-..S4E11SA6	35.5	118	235	710	850	73	73	73	73	73	46	1630	-
17.5	5.5	710	73	2.3	4.21	IE5	BG30-..S5E09XA4	35.5	118	235	710	850	54	67	73	73	73	37	1630	-
17.5	5.5	550	95	2.1	5.44	IE4	BG30-..S4E11SA6	27.5	91	183	550	660	95	95	95	95	95	46	1670	-
17.5	5.5	550	95	2.1	5.44	IE5	BG30-..S5E09XA4	27.5	91	183	550	660	70	87	95	95	95	37	1670	-
17.5	5.5	440	118	1.8	6.75	IE4	BG30-..S4E11SA6	22	74	148	440	530	118	118	118	118	118	46	1760	-
17.5	5.5	440	118	1.9	6.76	IE4	BG30-..S4E11SA6	22	73	147	440	530	118	118	118	118	118	46	2550	-
17.5	5.5	440	118	1.8	6.75	IE5	BG30-..S5E09XA4	22	74	148	440	530	87	108	118	118	118	37	1760	-
17.5	5.5	440	118	1.9	6.76	IE5	BG30-..S5E09XA4	22	73	147	440	530	87	108	118	118	118	37	2550	-
17.5	5.5	400	131	1.8	7.5	IE4	BG30-..S4E11SA6	20	66	133	400	480	131	131	131	131	131	46	2750	-
17.5	5.5	400	131	1.8	7.5	IE5	BG30-..S5E09XA4	20	66	133	400	480	97	120	131	131	131	37	2750	-
17.5	5.5	375	138	1.6	7.91	IE4	BG30-..S4E11SA6	18.5	63	126	375	455	138	138	138	138	138	46	1760	-
17.5	5.5	375	138	1.6	7.91	IE5	BG30-..S5E09XA4	18.5	63	126	375	455	102	126	138	138	138	37	1760	-
17.5	5.5	345	150	1.6	8.6	IE4	BG30-..S4E11SA6	17	58	116	345	415	150	150	150	150	150	46	2800	-
17.5	5.5	345	150	1.6	8.6	IE5	BG30-..S5E09XA4	17	58	116	345	415	111	137	150	150	150	37	2800	-
17.5	5.5	310	167	1.5	9.55	IE4	BG30-..S4E11SA6	15.5	52	104	310	375	167	167	167	167	167	46	3000	-
17.5	5.5	310	167	1.5	9.55	IE5	BG30-..S5E09XA4	15.5	52	104	310	375	124	152	167	167	167	37	3000	-
17.5	5.5	280	186	1.4	10.65	IE4	BG30-..S4E11SA6	14	46.5	93	280	335	186	186	186	186	186	46	2950	-
17.5	5.5	280	186	1.4	10.65	IE5	BG30-..S5E09XA4	14	46.5	93	280	335	138	170	186	186	186	37	2950	-
17.5	5.5	250	205	1.3	11.82	IE4	BG30-..S4E11SA6	12.5	42	84	250	300	205	205	205	205	205	46	3200	-
17.5	5.5	250	205	1.3	11.82	IE5	BG30-..S5E09XA4	12.5	42	84	250	300	153	189	205	205	205	37	3200	-
17.5	5.5	215	240	1.2	13.77	IE4	BG30-..S4E11SA6	10.5	36	72	215	260	240	240	240	240	240	46	3150	-
17.5	5.5	215	240	1.2	13.77	IE5	BG30-..S5E09XA4	10.5	36	72	215	260	179	220	240	240	240	37	3150	-
17.5	5.5	196	265	1.1	15.27	IE4	BG30-..S4E11SA6	9.8	32.5	65	196	235	265	265	265	265	265	46	3450	-
17.5	5.5	196	265	1.1	15.27	IE5	BG30-..S5E09XA4	9.8	32.5	65	196	235	198	240	265	265	265	37	3450	-
17.5	5.5	175	295	1	17.06	IE4	BG30-..S4E11SA6	8.7	29	58	175	210	295	295	295	295	295	46	3700	-
17.5	5.5	175	295	1	17.06	IE5	BG30-..S5E09XA4	8.7	29	58	175	210	220	270	295	295	295	37	3700	-
17.5	5.5	158	330	0.91	18.93	IE4	BG30-..S4E11SA6	7.9	26	52	158	190	330	330	330	330	330	46	4100	-
17.5	5.5	158	330	0.91	18.93	IE5	BG30-..S5E09XA4	7.9	26	52	158	190	245	300	330	330	330	37	4100	-
17.5	5.5	150	345	0.86	19.99	IE4	BG30-..S4E11SA6	7.5	25	50	150	180	345	345	345	345	345	46	4200	-
17.5	5.5	150	345	0.86	19.99	IE5	BG30-..S5E09XA4	7.5	25	50	150	180	255	315	345	345	345	37	4200	-
17.5	5.5	475	110	2.7	6.29	IE4	BG40-..S4E11SA6	23.5	79	158	475	570	110	110	110	110	110	65	2600	-
17.5	5.5	475	110	2.7	6.29	IE5	BG40-..S5E09XA4	23.5	79	158	475	570	81	100	110	110	110	51	2600	-
17.5	5.5	465	112	2.8	6.4	IE4	BG40-..S4E11SA6	23	78	156	465	560	112	112	112	112	112	65	3750	-
17.5	5.5	465	112	2.8	6.4	IE5	BG40-..S5E09XA4	23	78	156	465	560	83	102	112	112	112	51	3750	-
17.5	5.5	420	124	2.6	7.11	IE4	BG40-..S4E11SA6	21	70	140	420	500	124	124	124	124	124	65	3950	-
17.5	5.5	390	133	2.2	7.62	IE4	BG40-..S4E11SA6	19.5	65	131	390	470	99	121	133	133	133	65	2650	-
17.5	5.5	390	133	2.2	7.62	IE5	BG40-..S5E09XA4	19.5	65	131	390	470	99	121	133	133	133	51	2650	-
17.5	5.5	360	145	2.3	8.31	IE4	BG40-..S4E11SA6	18	60	120	360	430	145	145	145	145	145	65	4100	-
17.5	5.5	360	145	2.3	8.31	IE5	BG40-..S5E09XA4	18	60	120	360	430	108	132	145	145	145	51	4100	-
17.5	5.5	330	157	1.9	9	IE4	BG40-..S4E11SA6	16.5	55	111	330	400	157	157	157	157	157	65	2650	-
17.5	5.5	330	157	1.9	9	IE5	BG40-..S5E09XA4	16.5	55	111	330	400	117	144	157	157	157	51	2650	-
17.5	5.5	325	161	2.2	9.23	IE4	BG40-..S4E11SA6	16	54	108	325	390	161	161	161	161	161	65	4350	-
17.5	5.5	325	161	2.2	9.23	IE5	BG40-..S5E09XA4	16	54	108	325	390	119	147	161	161	161	51	4350	-
17.5	5.5	285	181	2.1	10.35	IE4	BG40-..S4E11SA6	14	48	96	285	345	181	181	181	181	181	65	4350	-
17.5	5.5	285	181	2.1	10.35	IE5	BG40-..S5E09XA4	14	48	96	285	345	134	165	181	181	181	51	4350	-
17.5	5.5	260	200	1.9	11.49	IE4	BG40-..S4E11SA6	13	43.5	87	260	310	200	200	200	200	200	65	4600	-
17.5	5.5	260	200	1.9	11.49	IE5	BG40-..S5E09XA4	13	43.5	87	260	310	149	183	200	200	200	51	4600	-
17.5	5.5	230	225	1.8	12.86	IE4	BG40-..S4E11SA6	11.5	38.5	77	230	275	225	225	225	225	225	65	4500	-
17.5	5.5	230	225	1.8	12.86	IE5	BG40-..S5E09XA4	11.5	38.5	77	230	275	167	205	225	225	225	51	4500	-
17.5	5.5	210	245	1.7	14.28	IE4	BG40-..S4E11SA6	10.5	35	70	210	250	185	225	245	245	245	51	4900	-
17.5	5.5	183	285	1.5	16.39	IE4	BG40-..S4E11SA6	9.1	30.5	61	183	215	285	285	285	285	285	65	5300	-

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 17.5 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
17.5	5.5	123	425	1.5	24.34	IE5	BG50-./S5E09XA4	6.1	20.5	41	123	147	315	385	425	425	425	59	8700	-
17.5	5.5	101	510	1.2	29.62	IE4	BG50-./S4E11SA6	5	16.5	33.5	101	121	510	510	510	510	510	75	8000	-
17.5	5.5	101	510	1.2	29.62	IE5	BG50-./S5E09XA4	5	16.5	33.5	101	121	385	470	510	510	510	59	8000	-
17.5	5.5	91	570	1.1	32.84	IE4	BG50-./S4E11SA6	4.5	15	30	91	109	570	570	570	570	570	75	8700	-
17.5	5.5	91	570	1.1	32.84	IE5	BG50-./S5E09XA4	4.5	15	30	91	109	425	520	570	570	570	59	8700	-
17.5	5.5	79	660	0.95	37.89	IE4	BG50-./S4E11SA6	3.9	13	26	79	95	660	660	660	660	660	75	10000	-
17.5	5.5	79	660	0.95	37.89	IE5	BG50-./S5E09XA4	3.9	13	26	79	95	490	600	660	660	660	59	10000	-
17.5	5.5	71	730	0.86	42	IE4	BG50-./S4E11SA6	3.5	11.5	23.5	71	85	730	730	730	730	730	75	10000	-
17.5	5.5	71	730	0.86	42	IE5	BG50-./S5E09XA4	3.5	11.5	23.5	71	85	540	670	730	730	730	59	10000	-
17.5	5.5	120	430	2.8	24.82	IE4	BG60-./S4E11SA6	6	20	40	120	145	430	430	430	430	430	107	13800	-
17.5	5.5	120	430	2.8	24.82	IE5	BG60-./S5E09XA4	6	20	40	120	145	320	395	430	430	430	90	13800	-
17.5	5.5	102	510	2.3	29.31	IE4	BG60-./S4E11SA6	5.1	17	34	102	122	510	510	510	510	510	107	14800	-
17.5	5.5	102	510	2.3	29.31	IE5	BG60-./S5E09XA4	5.1	17	34	102	122	380	465	510	510	510	90	14800	-
17.5	5.5	92	560	2.1	32.48	IE4	BG60-./S4E11SA6	4.6	15	30.5	92	110	560	560	560	560	560	107	15400	-
17.5	5.5	92	560	2.1	32.48	IE5	BG60-./S5E09XA4	4.6	15	30.5	92	110	420	510	560	560	560	90	15400	-
17.5	5.5	77	670	1.8	38.85	IE4	BG60-./S4E11SA6	3.8	12.5	25.5	77	92	670	670	670	670	670	107	16000	-
17.5	5.5	77	670	1.8	38.85	IE5	BG60-./S5E09XA4	3.8	12.5	25.5	77	92	500	620	670	670	670	90	16000	-
17.5	5.5	69	750	1.6	43.05	IE4	BG60-./S4E11SA6	3.4	11.5	23	69	83	750	750	750	750	750	107	16000	-
17.5	5.5	69	750	1.6	43.05	IE5	BG60-./S5E09XA4	3.4	11.5	23	69	83	550	680	750	750	750	90	16000	-
17.5	5.5	59	880	1.4	50.31	IE4	BG60-./S4E11SA6	2.9	9.9	19.5	59	71	880	880	880	880	880	107	16000	-
17.5	5.5	59	880	1.4	50.31	IE5	BG60-./S5E09XA4	2.9	9.9	19.5	59	71	650	800	880	880	880	90	16000	-
17.5	5.5	53	970	1.2	55.76	IE4	BG60-./S4E11SA6	2.6	8.9	17.5	53	64	970	970	970	970	970	107	16000	-
17.5	5.5	53	970	1.2	55.76	IE5	BG60-./S5E09XA4	2.6	8.9	17.5	53	64	720	890	970	970	970	90	16000	-
17.5	5.5	49	1060	1.1	60.9	IE4	BG60-./S4E11SA6	2.4	8.2	16	49	59	1060	1060	1060	1060	1060	107	16000	-
17.5	5.5	49	1060	1.1	60.9	IE5	BG60-./S5E09XA4	2.4	8.2	16	49	59	790	970	1060	1060	1060	90	16000	-
17.5	5.5	44	1180	1	67.49	IE4	BG60-./S4E11SA6	2.2	7.4	14.5	44	53	1180	1180	1180	1180	1180	107	16000	-
17.5	5.5	44	1180	1	67.49	IE5	BG60-./S5E09XA4	2.2	7.4	14.5	44	53	870	1070	1180	1180	1180	90	16000	-
17.5	5.5	43.5	1190	1	68.32	IE4	BG60Z-./S4E11SA6	2.1	7.3	14.5	43.5	52	1190	1190	1190	1190	1190	123	16000	-
17.5	5.5	43.5	1190	1	68.32	IE5	BG60Z-./S5E09XA4	2.1	7.3	14.5	43.5	52	880	1090	1190	1190	1190	109	16000	-
17.5	5.5	39.5	1320	0.91	75.71	IE4	BG60Z-./S4E11SA6	1.9	6.6	13	39.5	47.5	1320	1320	1320	1320	1320	123	16000	-
17.5	5.5	39.5	1320	0.91	75.71	IE5	BG60Z-./S5E09XA4	1.9	6.6	13	39.5	47.5	980	1210	1320	1320	1320	109	16000	-
17.5	5.5	64	810	2.8	46.54	IE4	BG70-./S4E11SA6	3.2	10.5	21	64	77	810	810	810	810	810	138	20000	-
17.5	5.5	64	810	2.8	46.54	IE5	BG70-./S5E09XA4	3.2	10.5	21	64	77	600	740	810	810	810	128	20000	-
17.5	5.5	59	880	2.6	50.4	IE4	BG70-./S4E11SA6	2.9	9.9	19.5	59	71	880	880	880	880	880	138	20000	-
17.5	5.5	59	880	2.6	50.4	IE5	BG70-./S5E09XA4	2.9	9.9	19.5	59	71	650	800	880	880	880	128	20000	-
17.5	5.5	50	1040	2.2	59.82	IE4	BG70-./S5E09XA4	2.5	8.3	16.5	50	60	1040	1040	1040	1040	1040	138	20000	-
17.5	5.5	54	950	2	54.64	IE4	BG70Z-./S4E11SA6	2.7	9.1	18	54	65	950	950	950	950	950	164	20000	-
17.5	5.5	54	950	2	54.64	IE5	BG70Z-./S5E09XA4	2.7	9.1	18	54	65	710	870	950	950	950	149	20000	-
17.5	5.5	46	1130	2	64.85	IE4	BG70Z-./S4E11SA6	2.3	7.7	15	46	55	1130	1130	1130	1130	1130	164	20000	-
17.5	5.5	46	1130	2	64.85	IE5	BG70Z-./S5E09XA4	2.3	7.7	15	46	55	840	1030	1130	1130	1130	149	20000	-
17.5	5.5	40.5	1290	1.8	73.82	IE4	BG70Z-./S4E11SA6	2	6.7	13.5	40.5	48.5	1290	1290	1290	1290	1290	164	20000	-
17.5	5.5	40.5	1290	1.8	73.82	IE5	BG70Z-./S5E09XA4	2	6.7	13.5	40.5	48.5	950	1180	1290	1290	1290	149	20000	-
17.5	5.5	34	1530	1.5	87.61	IE4	BG70Z-./S4E11SA6	1.7	5.7	11	34	41	1130	1400	1530	1530	1530	164	20000	-
17.5	5.5	31	1670	1.4	95.74	IE4	BG70Z-./S4E11SA6	1.5	5.2	10	31	37.5	1670	1670	1670	1670	1670	164	20000	-
17.5	5.5	31	1670	1.4	95.74	IE5	BG70Z-./S5E09XA4	1.5	5.2	10	31	37.5	1240	1530	1670	1670	1670	149	20000	-
17.5	5.5	26	1980	1.2	113.6	IE4	BG70Z-./S4E11SA6	1.3	4.4	8.8	26	31.5	1980	1980	1980	1980	1980	164	20000	-
17.5	5.5	26	1980	1.2	113.6	IE5	BG70Z-./S5E09XA4	1.3	4.4	8.8	26	31.5	1470	1810	1980	1980	1980	149	20000	-
17.5	5.5	24	2150	1.1	124	IE4	BG70Z-./S4E11SA6	1.2	4	8	24	29	2150	2150	2150	2150	2150	164	20000	-
17.5	5.5	24	2150	1.1	124	IE5	BG70Z-./S5E09XA4	1.2	4	8	24	29	1610	1980	2150	2150	2150	149	20000	-
17.5	5.5	20	2550	0.89	147.2	IE4	BG70Z-./S4E11SA6	1	3.3	6.7	20	24	2550	2550	2550	2550	2550	164	20000	-
17.5	5.5	20	2550	0.89	147.2	IE5	BG70Z-./S5E09XA4	1	3.3	6.7	20	24	1910	2350	2550	2550	2550	149	20000	-
17.5	5.5	18	2850	0.8	163.8	IE4	BG70Z-./S4E11SA6	0.9	3	6.1	18	21.5	2850	2850	2850	2850	2850	164	20000	-
17.5	5.5	18	2850	0.8	163.8	IE5	BG70Z-./S5E09XA4	0.9	3	6.1	18	21.5	2100	2600	2850	2850	2850	149	20000	-
17.5	5.5	35	1470	2.8	84.55	IE4	BG80Z-./S4E11SA6	1.7	5.9	11.5	35	42.5	1470	1470	147					

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 17.5 Nm (PN = 5.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
17.5	5.5	18	2850	2.9	163	IE4	BG90Z-..S4E11SA6	0.9	3	6.1	18	22	2850	2850	2850	2850	2850	336	65000	-
17.5	5.5	18	2850	2.9	163	IE5	BG90Z-..S5E09XA4	0.9	3	6.1	18	22	2100	2600	2850	2850	2850	327	65000	-
17.5	5.5	16.5	3100	2.7	178.5	IE4	BG90Z-..S4E11SA6	0.8	2.8	5.6	16.5	20	3100	3100	3100	3100	3100	336	65000	-
17.5	5.5	16.5	3100	2.7	178.5	IE5	BG90Z-..S5E09XA4	0.8	2.8	5.6	16.5	20	2300	2850	3100	3100	3100	327	65000	-
17.5	5.5	14	3600	2.3	208.3	IE4	BG90Z-..S4E11SA6	0.7	2.4	4.8	14	17	3600	3600	3600	3600	3600	336	65000	-
17.5	5.5	14	3600	2.3	208.3	IE5	BG90Z-..S5E09XA4	0.7	2.4	4.8	14	17	2700	3300	3600	3600	3600	327	65000	-
17.5	5.5	13	3950	2.1	228.1	IE4	BG90Z-..S4E11SA6	0.65	2.1	4.3	13	15.5	3950	3950	3950	3950	3950	336	65000	-
17.5	5.5	13	3950	2.1	228.1	IE5	BG90Z-..S5E09XA4	0.65	2.1	4.3	13	15.5	2950	3600	3950	3950	3950	327	65000	-
17.5	5.5	13.5	3800	2.4	219.9	IE4	BG90G50-..S4E11SA6	0.65	2.2	4.5	13.5	16	3800	3800	3800	3800	3800	353	65000	-
17.5	5.5	13.5	3800	2.4	219.9	IE5	BG90G50-..S5E09XA4	0.65	2.2	4.5	13.5	16	2850	3500	3800	3800	3800	338	65000	-
17.5	5.5	11	4550	2	262.5	IE4	BG90G50-..S4E11SA6	0.55	1.9	3.8	11	13.5	4550	4550	4550	4550	4550	353	65000	-
17.5	5.5	11	4550	2	262.5	IE5	BG90G50-..S5E09XA4	0.55	1.9	3.8	11	13.5	3400	4200	4550	4550	4550	338	65000	-
17.5	5.5	10	5200	1.8	298.8	IE4	BG90G50-..S4E11SA6	0.5	1.6	3.3	10	12	5200	5200	5200	5200	5200	353	65000	-
17.5	5.5	10	5200	1.8	298.8	IE5	BG90G50-..S5E09XA4	0.5	1.6	3.3	10	12	3850	4750	5200	5200	5200	338	65000	-
17.5	5.5	8.3	6300	1.5	360.3	IE4	BG90G50-..S4E11SA6	0.41	1.3	2.7	8.3	9.9	6300	6300	6300	6300	6300	353	65000	-
17.5	5.5	8.3	6300	1.5	360.3	IE5	BG90G50-..S5E09XA4	0.41	1.3	2.7	8.3	9.9	4650	5700	6300	6300	6300	338	65000	-
17.5	5.5	6.8	7600	1.2	435.8	IE4	BG90G50-..S4E11SA6	0.34	1.1	2.2	6.8	8.2	7600	7600	7600	7600	7600	353	65000	-
17.5	5.5	6.8	7600	1.2	435.8	IE5	BG90G50-..S5E09XA4	0.34	1.1	2.2	6.8	8.2	5600	6900	7600	7600	7600	338	65000	-
17.5	5.5	5.9	8800	1	504.7	IE4	BG90G50-..S4E11SA6	0.29	0.95	1.9	5.9	7.1	8800	8800	8800	8800	8800	353	65000	-
17.5	5.5	5.9	8800	1	504.7	IE5	BG90G50-..S5E09XA4	0.29	0.95	1.9	5.9	7.1	6500	8000	8800	8800	8800	338	65000	-
17.5	5.5	5	10300	0.89	588.8	IE4	BG90G50-..S4E11SA6	0.25	0.8	1.6	5	6.1	10300	10300	10300	10300	10300	353	65000	-
17.5	5.5	5	10300	0.89	588.8	IE5	BG90G50-..S5E09XA4	0.25	0.8	1.6	5	6.1	7600	9400	10300	10300	10300	338	65000	-
17.5	5.5	4.6	11200	0.82	644.7	IE4	BG90G50-..S4E11SA6	0.23	0.75	1.5	4.6	5.5	11200	11200	11200	11200	11200	353	65000	-
17.5	5.5	4.6	11200	0.82	644.7	IE5	BG90G50-..S5E09XA4	0.23	0.75	1.5	4.6	5.5	8300	10300	11200	11200	11200	338	65000	-
17.5	5.5	7.8	6600	2.8	382.6	IE4	BG100Z-..S4E11SA6	0.39	1.3	2.6	7.8	9.4	6600	6600	6600	6600	6600	543	90000	-
17.5	5.5	7.8	6600	2.8	382.6	IE5	BG100Z-..S5E09XA4	0.39	1.3	2.6	7.8	9.4	4950	6100	6600	6600	6600	526	90000	-
17.5	5.5	6.5	7900	2.3	456.7	IE4	BG100Z-..S4E11SA6	0.32	1	2.1	6.5	7.8	7900	7900	7900	7900	7900	543	90000	-
17.5	5.5	6.5	7900	2.3	456.7	IE5	BG100Z-..S5E09XA4	0.32	1	2.1	6.5	7.8	5900	7300	7900	7900	7900	526	90000	-
17.5	5.5	5.8	8800	2.1	508.5	IE4	BG100Z-..S4E11SA6	0.29	0.95	1.9	5.8	7	8800	8800	8800	8800	8800	543	90000	-
17.5	5.5	5.8	8800	2.1	508.5	IE5	BG100Z-..S5E09XA4	0.29	0.95	1.9	5.8	7	6600	8100	8800	8800	8800	526	90000	-
17.5	5.5	5	10300	1.8	591.1	IE4	BG100Z-..S4E11SA6	0.25	0.8	1.6	5	6	10300	10300	10300	10300	10300	543	90000	-
17.5	5.5	5	10300	1.8	591.1	IE5	BG100Z-..S5E09XA4	0.25	0.8	1.6	5	6	7600	9400	10300	10300	10300	526	90000	-
17.5	5.5	4.5	11500	1.6	658.1	IE4	BG100Z-..S4E11SA6	0.22	0.75	1.5	4.5	5.4	11500	11500	11500	11500	11500	543	90000	-
17.5	5.5	4.5	11500	1.6	658.1	IE5	BG100Z-..S5E09XA4	0.22	0.75	1.5	4.5	5.4	8500	10500	11500	11500	11500	526	90000	-
17.5	5.5	3.9	13200	1.4	759	IE4	BG100Z-..S4E11SA6	0.19	0.65	1.3	3.9	4.7	13200	13200	13200	13200	13200	543	90000	-
17.5	5.5	3.9	13200	1.4	759	IE5	BG100Z-..S5E09XA4	0.19	0.65	1.3	3.9	4.7	9800	12100	13200	13200	13200	526	90000	-
17.5	5.5	3.5	14700	1.3	845.1	IE4	BG100Z-..S4E11SA6	0.17	0.55	1.1	3.5	4.2	14700	14700	14700	14700	14700	543	90000	-
17.5	5.5	3.5	14700	1.3	845.1	IE5	BG100Z-..S5E09XA4	0.17	0.55	1.1	3.5	4.2	10900	13500	14700	14700	14700	526	90000	-
17.5	5.5	3	17000	1.1	976.1	IE4	BG100G50-..S4E11SA6	0.15	0.5	1	3	3.6	17000	17000	17000	17000	17000	540	90000	-
17.5	5.5	3	17000	1.1	976.1	IE5	BG100G50-..S5E09XA4	0.15	0.5	1	3	3.6	12600	15600	17000	17000	17000	525	90000	-
17.5	5.5	2.8	18200	1	1043	IE4	BG100G50-..S4E11SA6	0.14	0.47	0.95	2.8	3.4	18200	18200	18200	18200	18200	540	90000	-
17.5	5.5	2.8	18200	1	1043	IE5	BG100G50-..S5E09XA4	0.14	0.47	0.95	2.8	3.4	13500	16600	18200	18200	18200	525	90000	-
17.5	5.5	2.4	21000	0.88	1204	IE4	BG100G50-..S4E11SA6	0.12	0.41	0.8	2.4	2.9	21000	21000	21000	21000	21000	540	90000	-
17.5	5.5	2.4	21000	0.88	1204	IE5	BG100G50-..S5E09XA4	0.12	0.41	0.8	2.4	2.9	15600	19200	21000	21000	21000	525	90000	-

MN = 20 Nm (PN = 6.3 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
20	6																			

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ 1/min}$

MN = 20 Nm (PN = 6.3 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
20	6.3	175	340	0.88	17.06	IE5	BG30-../S5E09XA4	8.7	29	58	175	210	220	270	340	340	295	37	3700	-
20	6.3	750	79	3	3.97	IE5	BG40-../S5E09XA4	37.5	125	250	750	900	51	63	79	79	69	51	2400	-
20	6.3	600	98	2.7	4.94	IE5	BG40-../S5E09XA4	30	101	200	600	720	64	79	98	98	86	51	2450	-
20	6.3	475	125	2.3	6.29	IE5	BG40-../S5E09XA4	23.5	79	158	475	570	81	100	125	125	110	51	2600	-
20	6.3	465	128	2.4	6.4	IE5	BG40-../S5E09XA4	23	78	156	465	560	83	102	128	128	112	51	3750	-
20	6.3	420	142	2.3	7.11	IE5	BG40-../S5E09XA4	21	70	140	420	500	92	113	142	142	124	51	3950	-
20	6.3	390	152	1.9	7.62	IE5	BG40-../S5E09XA4	19.5	65	131	390	470	99	121	152	152	133	51	2650	-
20	6.3	360	166	2	8.31	IE5	BG40-../S5E09XA4	18	60	120	360	430	108	132	166	166	145	51	4100	-
20	6.3	330	180	1.6	9	IE5	BG40-../S5E09XA4	16.5	55	111	330	400	117	144	180	180	157	51	2650	-
20	6.3	325	184	1.9	9.23	IE5	BG40-../S5E09XA4	16	54	108	325	390	119	147	184	184	161	51	4350	-
20	6.3	285	205	1.8	10.35	IE5	BG40-../S5E09XA4	14	48	96	285	345	134	165	205	205	181	51	4350	-
20	6.3	260	225	1.7	11.49	IE5	BG40-../S5E09XA4	13	43.5	87	260	310	149	183	225	225	200	51	4600	-
20	6.3	230	255	1.6	12.86	IE5	BG40-../S5E09XA4	11.5	38.5	77	230	275	167	205	255	255	225	51	4500	-
20	6.3	210	285	1.5	14.28	IE5	BG40-../S5E09XA4	10.5	35	70	210	250	185	225	285	285	245	51	4900	-
20	6.3	183	325	1.3	16.39	IE5	BG40-../S5E09XA4	9.1	30.5	61	183	215	210	260	325	325	285	51	5300	-
20	6.3	164	360	1.2	18.19	IE5	BG40-../S5E09XA4	8.2	27	54	164	197	235	290	360	360	315	51	5600	-
20	6.3	151	395	1.1	19.84	IE5	BG40-../S5E09XA4	7.5	25	50	151	181	255	315	395	395	345	51	5800	-
20	6.3	136	440	0.97	22.02	IE5	BG40-../S5E09XA4	6.8	22.5	45	136	163	285	350	440	440	385	51	6000	-
20	6.3	128	465	0.91	23.43	IE5	BG40-../S5E09XA4	6.4	21	42.5	128	153	300	370	465	465	410	51	6200	-
20	6.3	115	520	0.82	26.01	IE5	BG40-../S5E09XA4	5.7	19	38	115	138	335	415	520	520	455	51	6500	-
20	6.3	245	240	2.4	12.06	IE5	BG50-../S5E09XA4	12	41	82	245	295	156	192	240	240	210	59	5700	-
20	6.3	220	265	2.2	13.36	IE5	BG50-../S5E09XA4	11	37	74	220	265	173	210	265	265	230	59	6100	-
20	6.3	181	330	1.9	16.53	IE5	BG50-../S5E09XA4	9	30	60	181	215	210	260	330	330	285	59	6500	-
20	6.3	163	365	1.7	18.33	IE5	BG50-../S5E09XA4	8.1	27	54	163	196	235	290	365	365	320	59	7200	-
20	6.3	136	435	1.4	21.96	IE5	BG50-../S5E09XA4	6.8	22.5	45.5	136	163	285	350	435	435	380	59	8000	-
20	6.3	123	485	1.3	24.34	IE5	BG50-../S5E09XA4	6.1	20.5	41	123	147	315	385	485	485	425	59	8700	-
20	6.3	101	590	1.1	29.62	IE5	BG50-../S5E09XA4	5	16.5	33.5	101	121	385	470	590	590	510	59	8000	-
20	6.3	91	650	0.96	32.84	IE5	BG50-../S5E09XA4	4.5	15	30	91	109	425	520	650	650	570	59	8700	-
20	6.3	79	750	0.83	37.89	IE5	BG50-../S5E09XA4	3.9	13	26	79	95	490	600	750	750	660	59	10000	-
20	6.3	133	445	2.7	22.4	IE5	BG60-../S5E09XA4	6.6	22	44.5	133	160	290	355	445	445	390	90	13300	-
20	6.3	120	495	2.4	24.82	IE5	BG60-../S5E09XA4	6	20	40	120	145	320	395	495	495	430	90	13800	-
20	6.3	102	580	2	29.31	IE5	BG60-../S5E09XA4	5.1	17	34	102	122	380	465	580	580	510	90	14800	-
20	6.3	92	640	1.8	32.48	IE5	BG60-../S5E09XA4	4.6	15	30.5	92	110	420	510	640	640	560	90	15400	-
20	6.3	77	770	1.5	38.85	IE5	BG60-../S5E09XA4	3.8	12.5	25.5	77	92	500	620	770	770	670	90	16000	-
20	6.3	69	860	1.4	43.05	IE5	BG60-../S5E09XA4	3.4	11.5	23	69	83	550	680	860	860	750	90	16000	-
20	6.3	59	1000	1.2	50.31	IE5	BG60-../S5E09XA4	2.9	9.9	19.5	59	71	650	800	1000	1000	880	90	16000	-
20	6.3	53	1110	1.1	55.76	IE5	BG60-../S5E09XA4	2.6	8.9	17.5	53	64	720	890	1110	1110	970	90	16000	-
20	6.3	49	1210	0.99	60.9	IE5	BG60-../S5E09XA4	2.4	8.2	16	49	59	790	970	1210	1210	1060	90	16000	-
20	6.3	44	1340	0.89	67.49	IE5	BG60-../S5E09XA4	2.2	7.4	14.5	44	53	870	1070	1340	1340	1180	90	16000	-
20	6.3	43.5	1360	0.88	68.32	IE5	BG60Z-../S5E09XA4	2.1	7.3	14.5	43.5	52	880	1090	1360	1360	1190	109	16000	-
20	6.3	76	780	2.9	39.22	IE5	BG70-../S5E09XA4	3.8	12.5	25	76	91	500	620	780	780	680	128	19100	-
20	6.3	64	930	2.5	46.54	IE5	BG70-../S5E09XA4	3.2	10.5	21	64	77	600	740	930	930	810	128	20000	-
20	6.3	59	1000	2.3	50.4	IE5	BG70-../S5E09XA4	2.9	9.9	19.5	59	71	650	800	1000	1000	880	128	20000	-
20	6.3	50	1190	1.9	59.82	IE5	BG70-../S5E09XA4	2.5	8.3	16.5	50	60	770	950	1190	1190	1040	128	20000	-
20	6.3	54	1090	1.8	54.64	IE5	BG70Z-../S5E09XA4	2.7	9.1	18	54	65	710	870	1090	1090	950	149	20000	-
20	6.3	46	1290	1.8	64.85	IE5	BG70Z-../S5E09XA4	2.3	7.7	15	46	55	840	1030	1290	1290	1130	149	20000	-
20	6.3	40.5	1470	1.6	73.82	IE5	BG70Z-../S5E09XA4	2	6.7	13.5	40.5	48.5	950	1180	1470	1470	1290	149	20000	-
20	6.3	34	1750	1.3	87.61	IE5	BG70Z-../S5E09XA4	1.7	5.7	11	34	41	1130	1400	1750	1750	1530	149	20000	-
20	6.3	31	1910	1.2	95.74	IE5	BG70Z-../S5E09XA4	1.5	5.2	10	31	37.5	1240	1530	1910	1910	1670	149	20000	-
20	6.3	26	2250	1	113.6	IE5	BG70Z-../S5E09XA4	1.3	4.4	8.8	26	31.5	1470	1810	2250	2250	1980	149	20000	-
20	6.3	24	2450	0.93	124	IE5	BG70Z-../S5E09XA4	1.2	4	8	24	29	1610	1980	2450	2450	2150	149	20000	-
20	6.3	40.5	1730	2.8	73.73	IE5	BG80Z-../S5E09XA4	2	6.7	13.5	40.5	48.5	950	1170	1470	1470	1290	217	26000	-
20	6.3	35	1690	2.5	84.55	IE5	BG80Z-../S5E09XA4	1.7	5.9	11.5	35	42.5	1090	1350	1690	1690	1470	217	26000	-
20	6.3	31.5	1870	2.2	93.89	IE5	BG80Z-../S5E09XA4													

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 20 Nm (PN = 6.3 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
20	6.3	7.8	7600	2.4	382.6	IE5	BG100Z-..S5E09XA4	0.39	1.3	2.6	7.8	9.4	4950	6100	7600	7600	6600	526	90000	-
20	6.3	6.5	9100	2	456.7	IE5	BG100Z-..S5E09XA4	0.32	1	2.1	6.5	7.8	5900	7300	9100	9100	7900	526	90000	-
20	6.3	5.8	10100	1.8	508.5	IE5	BG100Z-..S5E09XA4	0.29	0.95	1.9	5.8	7	6600	8100	10100	10100	8800	526	90000	-
20	6.3	5	11800	1.6	591.1	IE5	BG100Z-..S5E09XA4	0.25	0.8	1.6	5	6	7600	9400	11800	11800	10300	526	90000	-
20	6.3	4.5	13100	1.4	658.1	IE5	BG100Z-..S5E09XA4	0.22	0.75	1.5	4.5	5.4	8500	10500	13100	13100	11500	526	90000	-
20	6.3	3.9	15100	1.2	759	IE5	BG100Z-..S5E09XA4	0.19	0.65	1.3	3.9	4.7	9800	12100	15100	15100	13200	526	90000	-
20	6.3	3.5	16900	1.1	845.1	IE5	BG100Z-..S5E09XA4	0.17	0.55	1.1	3.5	4.2	10900	13500	16900	16900	14700	526	90000	-
20	6.3	3	19500	0.95	976.1	IE5	BG100G50-..S5E09XA4	0.15	0.5	1	3	3.6	12600	15600	19500	19500	17000	525	90000	-
20	6.3	2.8	20500	0.89	1043	IE5	BG100G50-..S5E09XA4	0.14	0.47	0.95	2.8	3.4	13500	16600	20500	20500	18200	525	90000	-

MN = 24 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
24	7.5	1120	64	2	2.67	IE4	BG30-..S4E11SA6	56	187	370	1120	1340	50	57	64	64	46	1450	-	
24	7.5	1120	64	2	2.67	IE5	BG30-..S5E11MA6	56	187	370	1120	1340	64	64	64	64	46	1450	-	
24	7.5	880	81	1.7	3.4	IE4	BG30-..S4E11SA6	44	147	290	880	1050	64	73	81	81	46	1580	-	
24	7.5	880	81	1.7	3.4	IE5	BG30-..S5E11MA6	44	147	290	880	1050	81	81	81	81	46	1580	-	
24	7.5	710	101	1.7	4.21	IE4	BG30-..S4E11SA6	35.5	118	235	710	850	79	90	101	101	46	1630	-	
24	7.5	710	101	1.7	4.21	IE5	BG30-..S5E11MA6	35.5	118	235	710	850	101	101	101	101	46	1630	-	
24	7.5	550	130	1.5	5.44	IE4	BG30-..S4E11SA6	27.5	91	183	550	660	103	116	130	130	46	1670	-	
24	7.5	550	130	1.5	5.44	IE5	BG30-..S5E11MA6	27.5	91	183	550	660	130	130	130	130	46	1670	-	
24	7.5	440	162	1.3	6.75	IE4	BG30-..S4E11SA6	22	74	148	440	530	128	145	162	162	46	1760	-	
24	7.5	440	162	1.4	6.76	IE4	BG30-..S5E11MA6	22	73	147	440	530	128	145	162	162	46	2550	-	
24	7.5	440	162	1.3	6.75	IE5	BG30-..S5E11MA6	22	74	148	440	530	162	162	162	162	46	1760	-	
24	7.5	400	180	1.3	7.5	IE4	BG30-..S4E11SA6	20	66	133	400	480	142	161	180	180	46	2750	-	
24	7.5	400	180	1.3	7.5	IE5	BG30-..S5E11MA6	20	66	133	400	480	180	180	180	180	46	2750	-	
24	7.5	375	189	1.1	7.91	IE4	BG30-..S4E11SA6	18.5	63	126	375	455	150	170	189	189	46	1760	-	
24	7.5	375	189	1.1	7.91	IE5	BG30-..S5E11MA6	18.5	63	126	375	455	189	189	189	189	46	1760	-	
24	7.5	345	205	1.2	8.6	IE4	BG30-..S4E11SA6	17	58	116	345	415	163	184	205	205	46	2800	-	
24	7.5	345	205	1.2	8.6	IE5	BG30-..S5E11MA6	17	58	116	345	415	205	205	205	205	46	2800	-	
24	7.5	310	225	1.1	9.55	IE4	BG30-..S4E11SA6	15.5	52	104	310	375	181	205	225	225	46	3000	-	
24	7.5	310	225	1.1	9.55	IE5	BG30-..S5E11MA6	15.5	52	104	310	375	225	225	225	225	46	3000	-	
24	7.5	280	255	1	10.65	IE4	BG30-..S4E11SA6	14	46.5	93	280	335	200	225	255	255	46	2950	-	
24	7.5	280	255	1	10.65	IE5	BG30-..S5E11MA6	14	46.5	93	280	335	255	255	255	255	46	2950	-	
24	7.5	250	280	0.95	11.82	IE4	BG30-..S4E11SA6	12.5	42	84	250	300	220	250	280	280	46	3200	-	
24	7.5	250	280	0.95	11.82	IE5	BG30-..S5E11MA6	12.5	42	84	250	300	280	280	280	280	46	3200	-	
24	7.5	215	330	0.88	13.77	IE4	BG30-..S4E11SA6	10.5	36	72	215	260	330	330	330	330	46	3150	-	
24	7.5	215	330	0.88	13.77	IE5	BG30-..S5E11MA6	10.5	36	72	215	260	330	330	330	330	46	3150	-	
24	7.5	196	365	0.82	15.27	IE4	BG30-..S4E11SA6	9.8	32.5	65	196	235	290	325	365	365	46	3450	-	
24	7.5	196	365	0.82	15.27	IE5	BG30-..S5E11MA6	9.8	32.5	65	196	235	365	365	365	365	46	3450	-	
24	7.5	940	76	2.9	3.19	IE4	BG40-..S4E11SA6	47	156	310	940	1120	60	68	76	76	65	2350	-	
24	7.5	940	76	2.9	3.19	IE5	BG40-..S5E11MA6	47	156	310	940	1120	76	76	76	76	65	2350	-	
24	7.5	750	95	2.5	3.97	IE4	BG40-..S4E11SA6	37.5	125	250	750	900	75	85	95	95	65	2400	-	
24	7.5	750	95	2.5	3.97	IE5	BG40-..S5E11MA6	37.5	125	250	750	900	95	95	95	95	65	2400	-	
24	7.5	600	118	2.2	4.94	IE4	BG40-..S4E11SA6	30	101	200	600	720	118	118	118	118	65	2450	-	
24	7.5	475	150	2	6.29	IE4	BG40-..S4E11SA6	23.5	79	158	475	570	119	135	150	150	65	2600	-	
24	7.5	475	150	2	6.29	IE5	BG40-..S5E11MA6	23.5	79	158	475	570	150	150	150	150	65	2600	-	
24	7.5	465	153	2	6.4	IE4	BG40-..S4E11MA6	23	78	156	465	560	121	137	153	153	65	3750	-	
24	7.5	465	153	2	6.4	IE5	BG40-..S5E11MA6	23	78	156	465	560	153	153	153	153	65	3750	-	
24	7.5	420	170	1.9	7.11	IE4	BG40-..S4E11SA6	21	70	140	420	500	135	152	170	170	65	3950	-	
24	7.5	420	170	1.9	7.11	IE5	BG40-..S5E11MA6	21	70	140	420	500	170	170	170	170	65	3950	-	
24	7.5	390	182	1.6	7.62	IE4	BG40-..S4E11SA6	19.5	65	131	390	470	182	182	182	182	65	2650	-	
24	7.5	360	199	1.7	8.31	IE4	BG40-..S4E11SA6	18	60	120	360	430	157	178	199	199	65	4100	-	
24	7.5	360	199	1.7	8.31	IE5	BG40-..S													

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 24 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
24	7.5	136	520	0.8	22.02	IE4	BG40-..S4E11SA6	6.8	22.5	45	136	163	415	470	520	520	520	65	6000	-
24	7.5	136	520	0.8	22.02	IE5	BG40-..S5E11MA6	6.8	22.5	45	136	163	520	520	520	520	520	65	6000	-
24	7.5	490	145	3	6.07	IE4	BG50-..S4E11SA6	24.5	82	164	490	590	115	130	145	145	145	75	4700	-
24	7.5	490	145	3	6.07	IE5	BG50-..S5E11MA6	24.5	82	164	490	590	145	145	145	145	145	75	4700	-
24	7.5	445	161	2.8	6.74	IE4	BG50-..S4E11SA6	22	74	148	445	530	128	144	161	161	161	75	3750	-
24	7.5	445	161	2.8	6.74	IE5	BG50-..S5E11MA6	22	74	148	445	530	161	161	161	161	161	75	3750	-
24	7.5	340	205	2.4	8.7	IE4	BG50-..S4E11SA6	17	57	114	340	410	165	187	205	205	205	75	5300	-
24	7.5	340	205	2.4	8.7	IE5	BG50-..S5E11MA6	17	57	114	340	410	205	205	205	205	205	75	5300	-
24	7.5	310	230	2.2	9.65	IE4	BG50-..S4E11SA6	15.5	51	103	310	370	183	205	230	230	230	75	5600	-
24	7.5	310	230	2.2	9.65	IE5	BG50-..S5E11MA6	15.5	51	103	310	370	230	230	230	230	230	75	5600	-
24	7.5	245	285	2	12.06	IE4	BG50-..S4E11MA6	12	41	82	245	295	285	285	285	285	285	75	5700	-
24	7.5	245	285	2	12.06	IE5	BG50-..S5E11MA6	12	41	82	245	295	285	285	285	285	285	75	5700	-
24	7.5	220	320	1.8	13.36	IE4	BG50-..S4E11SA6	11	37	74	220	265	250	285	320	320	320	75	6100	-
24	7.5	181	395	1.6	16.53	IE4	BG50-..S4E11SA6	9	30	60	181	215	310	355	395	395	395	75	6500	-
24	7.5	181	395	1.6	16.53	IE5	BG50-..S5E11MA6	9	30	60	181	215	395	395	395	395	395	75	6500	-
24	7.5	163	435	1.4	18.33	IE4	BG50-..S4E11SA6	8.1	27	54	163	196	345	390	435	435	435	75	7200	-
24	7.5	163	435	1.4	18.33	IE5	BG50-..S5E11MA6	8.1	27	54	163	196	435	435	435	435	435	75	7200	-
24	7.5	136	520	1.2	21.96	IE4	BG50-..S4E11SA6	6.8	22.5	45.5	136	163	415	470	520	520	520	75	8000	-
24	7.5	136	520	1.2	21.96	IE5	BG50-..S5E11MA6	6.8	22.5	45.5	136	163	520	520	520	520	520	75	8000	-
24	7.5	123	580	1.1	24.34	IE4	BG50-..S4E11SA6	6.1	20.5	41	123	147	460	520	580	580	580	75	8700	-
24	7.5	123	580	1.1	24.34	IE5	BG50-..S5E11MA6	6.1	20.5	41	123	147	580	580	580	580	580	75	8700	-
24	7.5	101	710	0.89	29.62	IE4	BG50-..S4E11SA6	5	16.5	33.5	101	121	560	710	710	710	710	75	8000	-
24	7.5	101	710	0.89	29.62	IE5	BG50-..S5E11MA6	5	16.5	33.5	101	121	710	710	710	710	710	75	8000	-
24	7.5	91	780	0.8	32.84	IE4	BG50-..S4E11SA6	4.5	15	30	91	109	620	700	780	780	780	75	8700	-
24	7.5	91	780	0.8	32.84	IE5	BG50-..S5E11MA6	4.5	15	30	91	109	780	780	780	780	780	75	8700	-
24	7.5	178	400	2.7	16.8	IE4	BG60-..S4E11SA6	8.9	29.5	59	178	210	315	360	400	400	400	107	12000	-
24	7.5	178	400	2.7	16.8	IE5	BG60-..S5E11MA6	8.9	29.5	59	178	210	400	400	400	400	400	107	12000	-
24	7.5	161	445	2.6	18.62	IE4	BG60-..S4E11SA6	8	26.5	53	161	193	350	400	445	445	445	107	12400	-
24	7.5	161	445	2.6	18.62	IE5	BG60-..S5E11MA6	8	26.5	53	161	193	445	445	445	445	445	107	12400	-
24	7.5	133	530	2.2	22.4	IE4	BG60-..S4E11SA6	6.6	22	44.5	133	160	425	480	530	530	530	107	13300	-
24	7.5	133	530	2.2	22.4	IE5	BG60-..S5E11MA6	6.6	22	44.5	133	160	530	530	530	530	530	107	13300	-
24	7.5	120	590	2	24.82	IE4	BG60-..S4E11SA6	6	20	40	120	145	470	530	590	590	590	107	13800	-
24	7.5	120	590	2	24.82	IE5	BG60-..S5E11MA6	6	20	40	120	145	590	590	590	590	590	107	13800	-
24	7.5	102	700	1.7	29.31	IE4	BG60-..S4E11SA6	5.1	17	34	102	122	550	630	700	700	700	107	14800	-
24	7.5	102	700	1.7	29.31	IE5	BG60-..S5E11MA6	5.1	17	34	102	122	700	700	700	700	700	107	14800	-
24	7.5	92	770	1.5	32.48	IE4	BG60-..S4E11SA6	4.6	15	30.5	92	110	610	690	770	770	770	107	15400	-
24	7.5	92	770	1.5	32.48	IE5	BG60-..S5E11MA6	4.6	15	30.5	92	110	770	770	770	770	770	107	15400	-
24	7.5	77	930	1.3	38.85	IE4	BG60-..S4E11SA6	3.8	12.5	25.5	77	92	730	830	930	930	930	107	16000	-
24	7.5	77	930	1.3	38.85	IE5	BG60-..S5E11MA6	3.8	12.5	25.5	77	92	930	930	930	930	930	107	16000	-
24	7.5	69	1030	1.2	43.05	IE4	BG60-..S4E11SA6	3.4	11.5	23	69	83	810	920	1030	1030	1030	107	16000	-
24	7.5	69	1030	1.2	43.05	IE5	BG60-..S5E11MA6	3.4	11.5	23	69	83	1030	1030	1030	1030	1030	107	16000	-
24	7.5	59	1200	0.99	50.31	IE4	BG60-..S4E11SA6	2.9	9.9	19.5	59	71	950	1080	1200	1200	1200	107	16000	-
24	7.5	59	1200	0.99	50.31	IE5	BG60-..S5E11MA6	2.9	9.9	19.5	59	71	1200	1200	1200	1200	1200	107	16000	-
24	7.5	53	1330	0.9	55.76	IE4	BG60-..S4E11SA6	2.6	8.9	17.5	53	64	1050	1190	1330	1330	1330	107	16000	-
24	7.5	53	1330	0.9	55.76	IE5	BG60-..S5E11MA6	2.6	8.9	17.5	53	64	1330	1330	1330	1330	1330	107	16000	-
24	7.5	49	1460	0.82	60.9	IE4	BG60-..S4E11SA6	2.4	8.2	16	49	59	1150	1300	1460	1460	1460	107	16000	-
24	7.5	49	1460	0.82	60.9	IE5	BG60-..S5E11MA6	2.4	8.2	16	49	59	1460	1460	1460	1460	1460	107	16000	-
24	7.5	85	840	2.7	35.24	IE4	BG70-..S4E11SA6	4.2	14	28	85	102	660	750	840	840	840	138	18300	-
24	7.5	85	840	2.7	35.24	IE5	BG70-..S5E11MA6	4.2	14	28	85	102	840	840	840	840	840	138	18300	-
24	7.5	76	940	2.4	39.22	IE4	BG70-..S4E11SA6	3.8	12.5	25	76	91	740	840	940	940	940	138	19100	-
24	7.5	76	940	2.4	39.22	IE5	BG70-..S5E11MA6	3.8	12.5	25	76	91	940	940	940	940	940	138	19100	-
24	7.5	64	1110	2.1	46.54	IE4	BG70-..S4E11SA6	3.2	10.5	21	64	77	880	1000	1110	1110	1110	138	20000	-
24	7.5	59	1200	1.9	50.4	IE4	BG70-..S4E11SA6	2.9	9.9	19.5	59	71	950	1080	1200	1200	1200	138	20000	-
24	7.5	59	1200	1.9	50.4	IE5	BG70-..S5E11MA6	2.9	9.9	19.5	59	71	1200	1200	1200					

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 24 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
24	7.5	31.5	2250	1.9	93.89	IE4	BG80Z-..S4E11SA6	1.5	5.3	10.5	31.5	38	1780	2000	2250	2250	2250	234	26000	-
24	7.5	31.5	2250	1.9	93.89	IE5	BG80Z-..S5E11MA6	1.5	5.3	10.5	31.5	38	2250	2250	2250	2250	2250	234	26000	-
24	7.5	26.5	2650	1.6	112.4	IE4	BG80Z-..S4E11SA6	1.3	4.4	8.8	26.5	32	2100	2400	2650	2650	2650	234	26000	-
24	7.5	26.5	2650	1.6	112.4	IE5	BG80Z-..S5E11MA6	1.3	4.4	8.8	26.5	32	2650	2650	2650	2650	2650	234	26000	-
24	7.5	24	2950	1.4	124.8	IE4	BG80Z-..S4E11SA6	1.2	4	8	24	28.5	2350	2650	2950	2950	2950	234	26000	-
24	7.5	24	2950	1.4	124.8	IE5	BG80Z-..S5E11MA6	1.2	4	8	24	28.5	2950	2950	2950	2950	2950	234	26000	-
24	7.5	20.5	3450	1.2	145.4	IE4	BG80Z-..S4E11SA6	1	3.4	6.8	20.5	24.5	2750	3100	3450	3450	3450	234	26000	-
24	7.5	20.5	3450	1.2	145.4	IE5	BG80Z-..S5E11MA6	1	3.4	6.8	20.5	24.5	3450	3450	3450	3450	3450	234	26000	-
24	7.5	18.5	3850	1.1	161.5	IE4	BG80Z-..S4E11SA6	0.9	3	6.1	18.5	22	3050	3450	3850	3850	3850	234	26000	-
24	7.5	18.5	3850	1.1	161.5	IE5	BG80Z-..S5E11MA6	0.9	3	6.1	18.5	22	3850	3850	3850	3850	3850	234	26000	-
24	7.5	16	4450	0.94	186.8	IE4	BG80Z-..S4E11SA6	0.8	2.6	5.3	16	19	3500	4000	4450	4450	4450	234	26000	-
24	7.5	16	4450	0.94	186.8	IE5	BG80Z-..S5E11MA6	0.8	2.6	5.3	16	19	4450	4450	4450	4450	4450	234	26000	-
24	7.5	14	4950	0.84	207.4	IE4	BG80Z-..S4E11SA6	0.7	2.4	4.8	14	17	3900	4450	4950	4950	4950	234	26000	-
24	7.5	14	4950	0.84	207.4	IE5	BG80Z-..S5E11MA6	0.7	2.4	4.8	14	17	4950	4950	4950	4950	4950	234	26000	-
24	7.5	13	5400	0.84	227.2	IE4	BG80G40-..S4E11SA6	0.65	2.2	4.4	13	15.5	4300	4850	5400	5400	5400	242	26000	-
24	7.5	13	5400	0.84	227.2	IE5	BG80G40-..S5E11MA6	0.65	2.2	4.4	13	15.5	5400	5400	5400	5400	5400	242	26000	-
24	7.5	23.5	3050	2.8	127.1	IE4	BG90Z-..S4E11SA6	1.1	3.9	7.8	23.5	28	2400	2700	3050	3050	3050	336	65000	-
24	7.5	23.5	3050	2.8	127.1	IE5	BG90Z-..S5E11MA6	1.1	3.9	7.8	23.5	28	3050	3050	3050	3050	3050	336	65000	-
24	7.5	21.5	3300	2.5	139.2	IE4	BG90Z-..S4E11SA6	1	3.5	7.1	21.5	25.5	2600	2950	3300	3300	3300	336	65000	-
24	7.5	21.5	3300	2.5	139.2	IE5	BG90Z-..S5E11MA6	1	3.5	7.1	21.5	25.5	3300	3300	3300	3300	3300	336	65000	-
24	7.5	18	3900	2.1	163	IE4	BG90Z-..S4E11SA6	0.9	3	6.1	18	22	3050	3500	3900	3900	3900	336	65000	-
24	7.5	18	3900	2.1	163	IE5	BG90Z-..S5E11MA6	0.9	3	6.1	18	22	3900	3900	3900	3900	3900	336	65000	-
24	7.5	16.5	4250	2	178.5	IE4	BG90Z-..S4E11SA6	0.8	2.8	5.6	16.5	20	3350	3800	4250	4250	4250	336	65000	-
24	7.5	16.5	4250	2	178.5	IE5	BG90Z-..S5E11MA6	0.8	2.8	5.6	16.5	20	4250	4250	4250	4250	4250	336	65000	-
24	7.5	14	4950	1.7	208.3	IE4	BG90Z-..S4E11SA6	0.7	2.4	4.8	14	17	3950	4450	4950	4950	4950	336	65000	-
24	7.5	14	4950	1.7	208.3	IE5	BG90Z-..S5E11MA6	0.7	2.4	4.8	14	17	4950	4950	4950	4950	4950	336	65000	-
24	7.5	13	5400	1.5	228.1	IE4	BG90Z-..S4E11SA6	0.65	2.1	4.3	13	15.5	4300	4900	5400	5400	5400	336	65000	-
24	7.5	13	5400	1.5	228.1	IE5	BG90Z-..S5E11MA6	0.65	2.1	4.3	13	15.5	5400	5400	5400	5400	5400	336	65000	-
24	7.5	13.5	5200	1.7	219.9	IE4	BG90G50-..S4E11SA6	0.65	2.2	4.5	13.5	16	4150	4700	5200	5200	5200	353	65000	-
24	7.5	13.5	5200	1.7	219.9	IE5	BG90G50-..S5E11MA6	0.65	2.2	4.5	13.5	16	5200	5200	5200	5200	5200	353	65000	-
24	7.5	11	6300	1.5	262.5	IE4	BG90G50-..S4E11SA6	0.55	1.9	3.8	11	13.5	4950	5600	6300	6300	6300	353	65000	-
24	7.5	11	6300	1.5	262.5	IE5	BG90G50-..S5E11MA6	0.55	1.9	3.8	11	13.5	6300	6300	6300	6300	6300	353	65000	-
24	7.5	10	7100	1.3	298.8	IE4	BG90G50-..S4E11SA6	0.5	1.6	3.3	10	12	5600	6400	7100	7100	7100	353	65000	-
24	7.5	10	7100	1.3	298.8	IE5	BG90G50-..S5E11MA6	0.5	1.6	3.3	10	12	7100	7100	7100	7100	7100	353	65000	-
24	7.5	8.3	8600	1.1	360.3	IE4	BG90G50-..S4E11SA6	0.41	1.3	2.7	8.3	9.9	6800	7700	8600	8600	8600	353	65000	-
24	7.5	8.3	8600	1.1	360.3	IE5	BG90G50-..S5E11MA6	0.41	1.3	2.7	8.3	9.9	8600	8600	8600	8600	8600	353	65000	-
24	7.5	6.8	10400	0.88	435.8	IE4	BG90G50-..S4E11SA6	0.34	1.1	2.2	6.8	8.2	8200	9300	10400	10400	10400	353	65000	-
24	7.5	6.8	10400	0.88	435.8	IE5	BG90G50-..S5E11MA6	0.34	1.1	2.2	6.8	8.2	10400	10400	10400	10400	10400	353	65000	-
24	7.5	12.5	5500	3	232.6	IE4	BG100-..S4E11SA6	0.6	2.1	4.2	12.5	15	4400	5000	5500	5500	5500	453	90000	-
24	7.5	12.5	5500	3	232.6	IE5	BG100-..S5E11MA6	0.6	2.1	4.2	12.5	15	5500	5500	5500	5500	5500	453	90000	-
24	7.5	11.5	6200	2.7	259	IE4	BG100-..S4E11SA6	0.55	1.9	3.8	11.5	13.5	4900	5500	6200	6200	6200	453	90000	-
24	7.5	11.5	6200	2.7	259	IE5	BG100-..S5E11MA6	0.55	1.9	3.8	11.5	13.5	6200	6200	6200	6200	6200	453	90000	-
24	7.5	11	6400	2.9	269.8	IE4	BG100Z-..S4E11SA6	0.55	1.8	3.7	11	13	5100	5800	6400	6400	6400	453	90000	-
24	7.5	11	6400	2.9	269.8	IE5	BG100Z-..S5E11MA6	0.55	1.8	3.7	11	13	6400	6400	6400	6400	6400	453	90000	-
24	7.5	9.9	7200	2.6	300.4	IE4	BG100Z-..S4E11SA6	0.49	1.6	3.3	9.9	11.5	5700	6400	7200	7200	7200	543	90000	-
24	7.5	9.9	7200	2.6	300.4	IE5	BG100Z-..S5E11MA6	0.49	1.6	3.3	9.9	11.5	7200	7200	7200	7200	7200	543	90000	-
24	7.5	8.7	8200	2.2	343.6	IE4	BG100Z-..S4E11SA6	0.43	1.4	2.9	8.7	10	6500	7300	8200	8200	8200	543	90000	-
24	7.5	8.7	8200	2.2	343.6	IE5	BG100Z-..S5E11MA6	0.43	1.4	2.9	8.7	10	8200	8200	8200	8200	8200	543	90000	-
24	7.5	7.8	9100	2	382.6	IE4	BG100Z-..S4E11SA6	0.39	1.3	2.6	7.8	9.4	7200	8200	9100	9100	9100	543	90000	-
24	7.5	7.8	9100	2	382.6	IE5	BG100Z-..S5E11MA6	0.39	1.3	2.6	7.8	9.4	9100	9100	9100	9100	9100	543	90000	-
24	7.5	6.5	10900	1.7	456.7	IE4	BG100Z-..S4E11SA6	0.32	1	2.1	6.5	7.8	8600	9800	10900	10900	10900	543	90000	-
24	7.5	6.5	10900	1.7	456.7	IE5	BG100Z-..S5E11MA6	0.32	1	2.1	6.5	7.8	10900	10900	10900	10900	10900	543	90000	-
24	7.5	5.8	12200	1																

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 30 Nm (PN = 9.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	440	200	1.1	6.75	IE5	BG30-..S5E11LA6	22	74	148	440	530	200	200	200	200	200	58	1760	-
30	9.5	440	200	1.1	6.76	IE5	BG30-..S5E11LA6	22	73	147	440	530	200	200	200	200	200	58	2550	-
30	9.5	440	200	1.1	6.75	IE5	BG30-..S5E11MA6	22	74	148	440	530	178	200	200	200	200	46	1760	-
30	9.5	440	200	1.1	6.76	IE5	BG30-..S5E11MA6	22	73	147	440	530	179	200	200	200	200	46	2550	-
30	9.5	400	225	1	7.5	IE5	BG30-..S5E11LA6	20	66	133	400	480	225	225	225	225	225	58	2750	-
30	9.5	400	225	1	7.5	IE5	BG30-..S5E11MA6	20	66	133	400	480	198	225	225	225	225	46	2750	-
30	9.5	375	235	0.91	7.91	IE5	BG30-..S5E11LA6	18.5	63	126	375	455	235	235	235	235	235	58	1760	-
30	9.5	375	235	0.91	7.91	IE5	BG30-..S5E11MA6	18.5	63	126	375	455	205	235	235	235	235	46	1760	-
30	9.5	345	255	0.95	8.6	IE5	BG30-..S5E11LA6	17	58	116	345	415	255	255	255	255	255	58	2800	-
30	9.5	345	255	0.95	8.6	IE5	BG30-..S5E11MA6	17	58	116	345	415	225	255	255	255	255	46	2800	-
30	9.5	310	285	0.87	9.55	IE5	BG30-..S5E11LA6	15.5	52	104	310	375	285	285	285	285	285	58	3000	-
30	9.5	310	285	0.87	9.55	IE5	BG30-..S5E11MA6	15.5	52	104	310	375	250	285	285	285	285	46	3000	-
30	9.5	280	315	0.83	10.65	IE5	BG30-..S5E11LA6	14	46.5	93	280	335	315	315	315	315	315	58	2950	-
30	9.5	280	315	0.83	10.65	IE5	BG30-..S5E11MA6	14	46.5	93	280	335	280	315	315	315	315	46	2950	-
30	9.5	1210	73	2.7	2.46	IE5	BG40-..S5E11LA6	60	200	405	1210	1460	73	73	73	73	73	77	2150	-
30	9.5	1210	73	2.7	2.46	IE5	BG40-..S5E11MA6	60	200	405	1210	1460	65	73	73	73	73	65	2150	-
30	9.5	940	95	2.3	3.19	IE5	BG40-..S5E11LA6	47	156	310	940	1120	95	95	95	95	95	77	2350	-
30	9.5	940	95	2.3	3.19	IE5	BG40-..S5E11MA6	47	156	310	940	1120	84	95	95	95	95	65	2350	-
30	9.5	750	119	2	3.97	IE5	BG40-..S5E11LA6	37.5	125	250	750	900	119	119	119	119	119	77	2400	-
30	9.5	750	119	2	3.97	IE5	BG40-..S5E11MA6	37.5	125	250	750	900	105	119	119	119	119	65	2400	-
30	9.5	600	148	1.8	4.94	IE5	BG40-..S5E11LA6	30	101	200	600	720	148	148	148	148	148	77	2450	-
30	9.5	600	148	1.8	4.94	IE5	BG40-..S5E11MA6	30	101	200	600	720	130	148	148	148	148	65	2450	-
30	9.5	475	188	1.6	6.29	IE5	BG40-..S5E11LA6	23.5	79	158	475	570	188	188	188	188	188	77	2600	-
30	9.5	475	188	1.6	6.29	IE5	BG40-..S5E11MA6	23.5	79	158	475	570	166	188	188	188	188	65	2600	-
30	9.5	465	192	1.6	6.4	IE5	BG40-..S5E11LA6	23	78	156	465	560	192	192	192	192	192	77	3750	-
30	9.5	465	192	1.6	6.4	IE5	BG40-..S5E11MA6	23	78	156	465	560	169	192	192	192	192	65	3750	-
30	9.5	420	210	1.5	7.11	IE5	BG40-..S5E11LA6	21	70	140	420	500	210	210	210	210	210	77	3950	-
30	9.5	420	210	1.5	7.11	IE5	BG40-..S5E11MA6	21	70	140	420	500	188	210	210	210	210	65	3950	-
30	9.5	390	225	1.3	7.62	IE5	BG40-..S5E11LA6	19.5	65	131	390	470	225	225	225	225	225	77	2650	-
30	9.5	390	225	1.3	7.62	IE5	BG40-..S5E11MA6	19.5	65	131	390	470	200	225	225	225	225	65	2650	-
30	9.5	360	245	1.4	8.31	IE5	BG40-..S5E11LA6	18	60	120	360	430	245	245	245	245	245	77	4100	-
30	9.5	360	245	1.4	8.31	IE5	BG40-..S5E11MA6	18	60	120	360	430	220	245	245	245	245	65	4100	-
30	9.5	330	270	1.1	9	IE5	BG40-..S5E11LA6	16.5	55	111	330	400	270	270	270	270	270	77	2650	-
30	9.5	330	270	1.1	9	IE5	BG40-..S5E11MA6	16.5	55	111	330	400	235	270	270	270	270	65	2650	-
30	9.5	325	275	1.3	9.23	IE5	BG40-..S5E11LA6	16	54	108	325	390	275	275	275	275	275	77	4350	-
30	9.5	325	275	1.3	9.23	IE5	BG40-..S5E11MA6	16	54	108	325	390	240	275	275	275	275	65	4350	-
30	9.5	285	310	1.2	10.35	IE5	BG40-..S5E11LA6	14	48	96	285	345	310	310	310	310	310	77	4350	-
30	9.5	285	310	1.2	10.35	IE5	BG40-..S5E11MA6	14	48	96	285	345	270	310	310	310	310	65	4350	-
30	9.5	260	340	1.1	11.49	IE5	BG40-..S5E11LA6	13	43.5	87	260	310	340	340	340	340	340	77	4600	-
30	9.5	260	340	1.1	11.49	IE5	BG40-..S5E11MA6	13	43.5	87	260	310	300	340	340	340	340	65	4600	-
30	9.5	230	385	1.1	12.86	IE5	BG40-..S5E11LA6	11.5	38.5	77	230	275	385	385	385	385	385	77	4500	-
30	9.5	230	385	1.1	12.86	IE5	BG40-..S5E11MA6	11.5	38.5	77	230	275	340	385	385	385	385	65	4500	-
30	9.5	210	425	0.98	14.28	IE5	BG40-..S5E11LA6	10.5	35	70	210	250	425	425	425	425	425	77	4900	-
30	9.5	210	425	0.98	14.28	IE5	BG40-..S5E11MA6	10.5	35	70	210	250	375	425	425	425	425	65	4900	-
30	9.5	183	490	0.86	16.39	IE5	BG40-..S5E11LA6	9.1	30.5	61	183	215	490	490	490	490	490	77	5300	-
30	9.5	183	490	0.86	16.39	IE5	BG40-..S5E11MA6	9.1	30.5	61	183	215	430	490	490	490	490	65	5300	-
30	9.5	610	147	2.7	4.91	IE5	BG50-..S5E11LA6	30.5	101	200	610	730	147	147	147	147	147	86	3500	-
30	9.5	610	147	2.7	4.91	IE5	BG50-..S5E11MA6	30.5	101	200	610	730	130	147	147	147	147	75	3500	-
30	9.5	490	182	2.4	6.07	IE5	BG50-..S5E11LA6	24.5	82	164	490	590	182	182	182	182	182	86	4700	-
30	9.5	490	182	2.4	6.07	IE5	BG50-..S5E11MA6	24.5	82	164	490	590	160	182	182	182	182	75	4700	-
30	9.5	445	200	2.2	6.74	IE5	BG50-..S5E11LA6	22	74	148	445	530	200	200	200	200	200	86	3750	-
30	9.5	445	200	2.2	6.74	IE5	BG50-..S5E11MA6	22	74	148	445	530	178	200	200	200	200	75	3750	-
30	9.5	340	260	1.9	8.7	IE5	BG50-..S5E11LA6	17	57	114	340	410	260	260	260	260	260	86	5300	-
30	9.5	310	285	1.8	9.65	IE5	BG50-..S5E11MA6	15.5	51	103	310	370	285	285	285	285	285	86	5600	-
30	9.5	310	285	1.8	9.65	IE5	BG50-..S5E11MA6	15.5	51	103	310	370	255	285	285	285	285	75	5600	-
30	9.5	245	360	1.6	12.06	IE5	BG50-..S5E11MA6	12	41	82	245	295								

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 30 Nm (PN = 9.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [·1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	133	670	1.8	22.4	IE5	BG60-../S5E11MA6	6.6	22	44.5	133	160	590	670	670	670	670	107	13300	-
30	9.5	120	740	1.6	24.82	IE5	BG60-../S5E11LA6	6	20	40	120	145	740	740	740	740	740	119	13800	-
30	9.5	120	740	1.6	24.82	IE5	BG60-../S5E11MA6	6	20	40	120	145	650	740	740	740	740	107	13800	-
30	9.5	102	870	1.4	29.31	IE5	BG60-../S5E11LA6	5.1	17	34	102	122	870	870	870	870	870	119	14800	-
30	9.5	102	870	1.4	29.31	IE5	BG60-../S5E11MA6	5.1	17	34	102	122	770	870	870	870	870	107	14800	-
30	9.5	92	970	1.2	32.48	IE5	BG60-../S5E11LA6	4.6	15	30.5	92	110	970	970	970	970	970	119	15400	-
30	9.5	92	970	1.2	32.48	IE5	BG60-../S5E11MA6	4.6	15	30.5	92	110	860	970	970	970	970	107	15400	-
30	9.5	77	1160	1	38.85	IE5	BG60-../S5E11LA6	3.8	12.5	25.5	77	92	1160	1160	1160	1160	1160	119	16000	-
30	9.5	77	1160	1	38.85	IE5	BG60-../S5E11MA6	3.8	12.5	25.5	77	92	1020	1160	1160	1160	1160	107	16000	-
30	9.5	69	1290	0.93	43.05	IE5	BG60-../S5E11LA6	3.4	11.5	23	69	83	1290	1290	1290	1290	1290	119	16000	-
30	9.5	69	1290	0.93	43.05	IE5	BG60-../S5E11MA6	3.4	11.5	23	69	83	1140	1290	1290	1290	1290	107	16000	-
30	9.5	59	1500	0.8	50.31	IE5	BG60-../S5E11LA6	2.9	9.9	19.5	59	71	1500	1500	1500	1500	1500	119	16000	-
30	9.5	59	1500	0.8	50.31	IE5	BG60-../S5E11MA6	2.9	9.9	19.5	59	71	1330	1500	1500	1500	1500	107	16000	-
30	9.5	110	810	2.8	27.21	IE5	BG70-../S5E11LA6	5.5	18	36.5	110	132	810	810	810	810	810	149	16400	-
30	9.5	110	810	2.8	27.21	IE5	BG70-../S5E11MA6	5.5	18	36.5	110	132	720	810	810	810	810	138	16400	-
30	9.5	101	890	2.6	29.69	IE5	BG70-../S5E11LA6	5	16.5	33.5	101	121	890	890	890	890	890	149	16900	-
30	9.5	101	890	2.6	29.69	IE5	BG70-../S5E11MA6	5	16.5	33.5	101	121	780	890	890	890	890	138	16900	-
30	9.5	85	1050	2.2	35.24	IE5	BG70-../S5E11LA6	4.2	14	28	85	102	1050	1050	1050	1050	1050	149	18300	-
30	9.5	85	1050	2.2	35.24	IE5	BG70-../S5E11MA6	4.2	14	28	85	102	930	1050	1050	1050	1050	138	18300	-
30	9.5	76	1170	2	39.22	IE5	BG70-../S5E11LA6	3.8	12.5	25	76	91	1170	1170	1170	1170	1170	149	19100	-
30	9.5	76	1170	2	39.22	IE5	BG70-../S5E11MA6	3.8	12.5	25	76	91	1030	1170	1170	1170	1170	138	19100	-
30	9.5	64	1390	1.6	46.54	IE5	BG70-../S5E11LA6	3.2	10.5	21	64	77	1390	1390	1390	1390	1390	149	20000	-
30	9.5	64	1390	1.6	46.54	IE5	BG70-../S5E11MA6	3.2	10.5	21	64	77	1230	1390	1390	1390	1390	138	20000	-
30	9.5	59	1510	1.5	50.4	IE5	BG70-../S5E11LA6	2.9	9.9	19.5	59	71	1510	1510	1510	1510	1510	149	20000	-
30	9.5	59	1510	1.5	50.4	IE5	BG70-../S5E11MA6	2.9	9.9	19.5	59	71	1330	1510	1510	1510	1510	138	20000	-
30	9.5	50	1790	1.3	59.82	IE5	BG70-../S5E11LA6	2.5	8.3	16.5	50	60	1790	1790	1790	1790	1790	149	20000	-
30	9.5	50	1790	1.3	59.82	IE5	BG70-../S5E11MA6	2.5	8.3	16.5	50	60	1580	1790	1790	1790	1790	138	20000	-
30	9.5	54	1630	1.2	54.64	IE5	BG70Z-../S5E11LA6	2.7	9.1	18	54	65	1630	1630	1630	1630	1630	176	20000	-
30	9.5	54	1630	1.2	54.64	IE5	BG70Z-../S5E11MA6	2.7	9.1	18	54	65	1440	1630	1630	1630	1630	164	20000	-
30	9.5	46	1940	1.2	64.85	IE5	BG70Z-../S5E11LA6	2.3	7.7	15	46	55	1940	1940	1940	1940	1940	176	20000	-
30	9.5	46	1940	1.2	64.85	IE5	BG70Z-../S5E11MA6	2.3	7.7	15	46	55	1710	1940	1940	1940	1940	164	20000	-
30	9.5	40.5	2200	1	73.82	IE5	BG70Z-../S5E11LA6	2	6.7	13.5	40.5	48.5	2200	2200	2200	2200	2200	176	20000	-
30	9.5	40.5	2200	1	73.82	IE5	BG70Z-../S5E11MA6	2	6.7	13.5	40.5	48.5	1950	2200	2200	2200	2200	164	20000	-
30	9.5	34	2600	0.88	87.61	IE5	BG70Z-../S5E11LA6	1.7	5.7	11	34	41	2600	2600	2600	2600	2600	176	20000	-
30	9.5	34	2600	0.88	87.61	IE5	BG70Z-../S5E11MA6	1.7	5.7	11	34	41	2300	2600	2600	2600	2600	164	20000	-
30	9.5	31	2850	0.8	95.74	IE5	BG70Z-../S5E11MA6	1.5	5.2	10	31	37.5	2500	2850	2850	2850	2850	164	20000	-
30	9.5	31	2850	2.9	96.53	IE5	BG80-../S5E11LA6	3	10	20	61	73	1460	1460	1460	1460	1460	204	23800	-
30	9.5	61	1460	2.9	48.8	IE5	BG80-../S5E11MA6	3	10	20	61	73	1290	1460	1460	1460	1460	192	23800	-
30	9.5	52	1710	2.4	57.24	IE5	BG80-../S5E11LA6	2.6	8.7	17	52	62	1710	1710	1710	1710	1710	204	25400	-
30	9.5	52	1710	2.4	57.24	IE5	BG80-../S5E11MA6	2.6	8.7	17	52	62	1510	1710	1710	1710	1710	192	25400	-
30	9.5	47	1900	2.2	63.56	IE5	BG80-../S5E11LA6	2.3	7.8	15.5	47	56	1900	1900	1900	1900	1900	204	26000	-
30	9.5	47	1900	2.2	63.56	IE5	BG80-../S5E11MA6	2.3	7.8	15.5	47	56	1680	1900	1900	1900	1900	192	26000	-
30	9.5	45	1990	2.1	66.4	IE5	BG80Z-../S5E11LA6	2.2	7.5	15	45	54	1990	1990	1990	1990	1990	246	26000	-
30	9.5	45	1990	2.1	66.4	IE5	BG80Z-../S5E11MA6	2.2	7.5	15	45	54	1750	1990	1990	1990	1990	234	26000	-
30	9.5	40.5	2200	1.9	73.73	IE5	BG80Z-../S5E11LA6	2	6.7	13.5	40.5	48.5	2200	2200	2200	2200	2200	246	26000	-
30	9.5	40.5	2200	1.9	73.73	IE5	BG80Z-../S5E11MA6	2	6.7	13.5	40.5	48.5	1950	2200	2200	2200	2200	234	26000	-
30	9.5	35	2500	1.7	84.55	IE5	BG80Z-../S5E11LA6	1.7	5.9	11.5	35	42.5	2200	2500	2500	2500	2500	246	26000	-
30	9.5	35	2500	1.7	84.55	IE5	BG80Z-../S5E11MA6	1.7	5.9	11.5	35	42.5	2200	2500	2500	2500	2500	234	26000	-
30	9.5	31.5	2800	1.5	93.89	IE5	BG80Z-../S5E11LA6	1.5	5.3	10.5	31.5	38	2800	2800	2800	2800	2800	246	26000	-
30	9.5	31.5	2800	1.5	93.89	IE5	BG80Z-../S5E11MA6	1.5	5.3	10.5	31.5	38	2450	2800	2800	2800	2800	234	26000	-
30	9.5	26.5	3350	1.2	112.4	IE5	BG80Z-../S5E11LA6	1.3	4.4	8.8	26.5	32	3350	3350	3350	3350	3350	246	26000	-
30	9.5	26.5	335																	

BG-series helical-gear motors


Selection helical-gear motors - $n_1 = 3000 \text{ 1/min}$

MN = 30 Nm (PN = 9.5 kW)



Mn	Pn	n2	M2	fB	i	IE-Classe	Type	Speed range n2 [1/min]					Torque range M2 [Nm]					m	FrN	FrV
								at motor speed n1 [1/min]					at motor speed n1 [1/min]							
[Nm]	[kW]	[1/min]	[Nm]	[--]	[:1]			150	500	1000	3000	3600	150	500	1000	3000	3600	[kg]	[N]	[N]
30	9.5	10	8900	1	298.8	IE5	BG90G50-..S5E11LA6	0.5	1.6	3.3	10	12	8900	8900	8900	8900	8900	365	65000	-
30	9.5	10	8900	1	298.8	IE5	BG90G50-..S5E11MA6	0.5	1.6	3.3	10	12	7900	8900	8900	8900	8900	353	65000	-
30	9.5	8.3	10800	0.85	360.3	IE5	BG90G50-..S5E11LA6	0.41	1.3	2.7	8.3	9.9	10800	10800	10800	10800	10800	365	65000	-
30	9.5	8.3	10800	0.85	360.3	IE5	BG90G50-..S5E11MA6	0.41	1.3	2.7	8.3	9.9	9500	10800	10800	10800	10800	353	65000	-
30	9.5	15	5900	2.8	198.8	IE5	BG100-..S5E11LA6	0.75	2.5	5	15	18	5900	5900	5900	5900	5900	465	90000	-
30	9.5	15	5900	2.8	198.8	IE5	BG100-..S5E11MA6	0.75	2.5	5	15	18	5200	5900	5900	5900	5900	453	90000	-
30	9.5	12.5	6900	2.4	232.6	IE5	BG100-..S5E11LA6	0.6	2.1	4.2	12.5	15	6900	6900	6900	6900	6900	465	90000	-
30	9.5	12.5	6900	2.4	232.6	IE5	BG100-..S5E11MA6	0.6	2.1	4.2	12.5	15	6100	6900	6900	6900	6900	453	90000	-
30	9.5	11.5	7700	2.2	259	IE5	BG100-..S5E11LA6	0.55	1.9	3.8	11.5	13.5	7700	7700	7700	7700	7700	465	90000	-
30	9.5	11.5	7700	2.2	259	IE5	BG100-..S5E11MA6	0.55	1.9	3.8	11.5	13.5	6800	7700	7700	7700	7700	453	90000	-
30	9.5	11	8000	2.3	269.8	IE5	BG100Z-..S5E11LA6	0.55	1.8	3.7	11	13	7100	8000	8000	8000	8000	555	90000	-
30	9.5	9.9	9000	2.1	300.4	IE5	BG100Z-..S5E11LA6	0.49	1.6	3.3	9.9	11.5	9000	9000	9000	9000	9000	555	90000	-
30	9.5	9.9	9000	2.1	300.4	IE5	BG100Z-..S5E11MA6	0.49	1.6	3.3	9.9	11.5	7900	9000	9000	9000	9000	543	90000	-
30	9.5	8.7	10300	1.8	343.6	IE5	BG100Z-..S5E11LA6	0.43	1.4	2.9	8.7	10	10300	10300	10300	10300	10300	555	90000	-
30	9.5	8.7	10300	1.8	343.6	IE5	BG100Z-..S5E11MA6	0.43	1.4	2.9	8.7	10	9100	10300	10300	10300	10300	543	90000	-
30	9.5	7.8	11400	1.6	382.6	IE5	BG100Z-..S5E11LA6	0.39	1.3	2.6	7.8	9.4	11400	11400	11400	11400	11400	555	90000	-
30	9.5	7.8	11400	1.6	382.6	IE5	BG100Z-..S5E11MA6	0.39	1.3	2.6	7.8	9.4	10100	11400	11400	11400	11400	543	90000	-
30	9.5	6.5	13700	1.4	456.7	IE5	BG100Z-..S5E11LA6	0.32	1	2.1	6.5	7.8	13700	13700	13700	13700	13700	555	90000	-
30	9.5	6.5	13700	1.4	456.7	IE5	BG100Z-..S5E11MA6	0.32	1	2.1	6.5	7.8	12100	13700	13700	13700	13700	543	90000	-
30	9.5	5.8	15200	1.2	508.5	IE5	BG100Z-..S5E11LA6	0.29	0.95	1.9	5.8	7	15200	15200	15200	15200	15200	555	90000	-
30	9.5	5.8	15200	1.2	508.5	IE5	BG100Z-..S5E11MA6	0.29	0.95	1.9	5.8	7	13400	15200	15200	15200	15200	543	90000	-
30	9.5	5	17700	1	591.1	IE5	BG100Z-..S5E11LA6	0.25	0.8	1.6	5	6	17700	17700	17700	17700	17700	555	90000	-
30	9.5	5	17700	1	591.1	IE5	BG100Z-..S5E11MA6	0.25	0.8	1.6	5	6	15600	17700	17700	17700	17700	543	90000	-
30	9.5	4.5	19700	0.94	658.1	IE5	BG100Z-..S5E11LA6	0.22	0.75	1.5	4.5	5.4	19700	19700	19700	19700	19700	555	90000	-
30	9.5	4.5	19700	0.94	658.1	IE5	BG100Z-..S5E11MA6	0.22	0.75	1.5	4.5	5.4	17400	19700	19700	19700	19700	543	90000	-
30	9.5	3.9	22500	0.81	759	IE5	BG100Z-..S5E11LA6	0.19	0.65	1.3	3.9	4.7	22500	22500	22500	22500	22500	555	90000	-
30	9.5	3.9	22500	0.81	759	IE5	BG100Z-..S5E11MA6	0.19	0.65	1.3	3.9	4.7	20000	22500	22500	22500	22500	543	90000	-

MN = 35 Nm (PN = 11 kW)




Mn	Pn	n2	M2	fB	i	IE-Classe	Type	Speed range n2 [1/min]					Torque range M2 [Nm]					m	FrN	FrV
								at motor speed n1 [1/min]					at motor speed n1 [1/min]							
[Nm]	[kW]	[1/min]	[Nm]	[--]	[:1]			150	500	1000	3000	3600	150	500	1000	3000	3600	[kg]	[N]	[N]
35	11	1120	93	1.4	2.67	IE4	BG30-..S4E11MA6	56	187	370	1120	1340	70	80	93	93	93	46	1450	-
35	11	1120	93	1.4	2.67	IE5	BG30-..S5E11LA6	56	187	370	1120	1340	93	93	93	93	93	58	1450	-
35	11	880	119	1.2	3.4	IE4	BG30-..S4E11MA6	44	147	290	880	1050	90	102	119	119	119	46	1580	-
35	11	880	119	1.2	3.4	IE5	BG30-..S5E11LA6	44	147	290	880	1050	119	119	119	119	119	58	1580	-
35	11	710	147	1.2	4.21	IE4	BG30-..S4E11MA6	35.5	118	235	710	850	111	126	147	147	147	46	1630	-
35	11	710	147	1.2	4.21	IE5	BG30-..S5E11LA6	35.5	118	235	710	850	147	147	147	147	147	58	1630	-
35	11	550	190	1.1	5.44	IE4	BG30-..S4E11MA6	27.5	91	183	550	660	144	163	190	190	190	46	1670	-
35	11	550	190	1.1	5.44	IE5	BG30-..S5E11LA6	27.5	91	183	550	660	190	190	190	190	190	58	1670	-
35	11	440	235	0.91	6.75	IE4	BG30-..S4E11MA6	22	74	148	440	530	178	200	235	235	235	46	1760	-
35	11	440	235	0.91	6.75	IE4	BG30-..S5E11MA6	22	74	147	440	530	178	200	235	235	235	46	1760	-
35	11	400	260	0.88	7.5	IE4	BG30-..S4E11MA6	20	66	133	400	480	198	225	260	260	260	46	2750	-
35	11	400	260	0.88	7.5	IE5	BG30-..S5E11MA6	20	66	133	400	480	260	260	260	260	260	58	2750	-
35	11	345	300	0.81	8.6	IE4	BG30-..S4E11MA6	17	58	116	345	415	225	255	300	300	300	46	2800	-
35	11	345	300	0.81	8.6	IE5	BG30-..S5E11MA6	17	58	116	345	415	300	300	300	300	300	58	2800	-
35	11	1210	86	2.3	2.46	IE4	BG40-..S4E11MA6	60	200	405	1210	1460	65	73	86	86	86	65	2150	-
35	11	1210	86	2.3	2.46	IE5	BG40-..S5E11LA6	60	200	405	1210	1460	86	86	86	86	86	77	2150	-
35	11	940	111	2	3.19	IE4	BG40-..S4E11MA6	47	156	310	940	1120	84	95	111	111	111	65	2350	-
35	11	940	111	2	3.19	IE5	BG40-..S5E11LA6	47	156	310	940	1120								

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 11 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
35	11	230	450	0.91	12.86	IE4	BG40-..S4E11MA6	11.5	38.5	77	230	275	340	385	450	450	450	65	4500	-
35	11	230	450	0.91	12.86	IE5	BG40-..S5E11LA6	11.5	38.5	77	230	275	450	450	450	450	450	77	4500	-
35	11	210	495	0.84	14.28	IE4	BG40-..S4E11MA6	10.5	35	70	210	250	375	425	495	495	495	65	4900	-
35	11	210	495	0.84	14.28	IE5	BG40-..S5E11LA6	10.5	35	70	210	250	495	495	495	495	495	77	4900	-
35	11	840	124	2.8	3.55	IE4	BG50-..S4E11MA6	42	140	280	840	1010	94	106	124	124	124	75	3300	-
35	11	840	124	2.8	3.55	IE5	BG50-..S5E11LA6	42	140	280	840	1010	124	124	124	124	124	86	3300	-
35	11	610	171	2.3	4.91	IE4	BG50-..S4E11MA6	30.5	101	200	610	730	130	147	171	171	171	75	3500	-
35	11	610	171	2.3	4.91	IE5	BG50-..S5E11LA6	30.5	101	200	610	730	171	171	171	171	171	86	3500	-
35	11	490	210	2.1	6.07	IE4	BG50-..S4E11MA6	24.5	82	164	490	590	160	182	210	210	210	75	4700	-
35	11	490	210	2.1	6.07	IE5	BG50-..S5E11LA6	24.5	82	164	490	590	210	210	210	210	210	86	4700	-
35	11	445	235	1.9	6.74	IE4	BG50-..S4E11MA6	22	74	148	445	530	235	235	235	235	235	75	3750	-
35	11	445	235	1.9	6.74	IE5	BG50-..S5E11LA6	22	74	148	445	530	235	235	235	235	235	86	3750	-
35	11	340	300	1.6	8.7	IE4	BG50-..S4E11MA6	17	57	114	340	410	230	260	300	300	300	75	5300	-
35	11	340	300	1.6	8.7	IE5	BG50-..S5E11LA6	17	57	114	340	410	300	300	300	300	300	86	5300	-
35	11	310	335	1.5	9.65	IE4	BG50-..S4E11MA6	15.5	51	103	310	370	255	285	335	335	335	75	5600	-
35	11	310	335	1.5	9.65	IE5	BG50-..S5E11LA6	15.5	51	103	310	370	335	335	335	335	335	86	5600	-
35	11	245	420	1.4	12.06	IE4	BG50-..S4E11MA6	12	41	82	245	295	315	360	420	420	420	75	5700	-
35	11	245	420	1.4	12.06	IE5	BG50-..S5E11LA6	12	41	82	245	295	420	420	420	420	420	86	5700	-
35	11	220	465	1.3	13.36	IE4	BG50-..S4E11MA6	11	37	74	220	265	350	400	465	465	465	75	6100	-
35	11	220	465	1.3	13.36	IE5	BG50-..S5E11LA6	11	37	74	220	265	465	465	465	465	465	86	6100	-
35	11	181	570	1.1	16.53	IE4	BG50-..S4E11MA6	9	30	60	181	215	435	495	570	570	570	75	6500	-
35	11	181	570	1.1	16.53	IE5	BG50-..S5E11LA6	9	30	60	181	215	570	570	570	570	570	86	6500	-
35	11	163	640	0.98	18.33	IE4	BG50-..S4E11MA6	8.1	27	54	163	196	485	540	640	640	640	75	7200	-
35	11	163	640	0.98	18.33	IE5	BG50-..S5E11LA6	8.1	27	54	163	196	640	640	640	640	640	86	7200	-
35	11	136	760	0.82	21.96	IE4	BG50-..S4E11MA6	6.8	22.5	45.5	136	163	580	650	760	760	760	75	8000	-
35	11	136	760	0.82	21.96	IE5	BG50-..S5E11LA6	6.8	22.5	45.5	136	163	760	760	760	760	760	86	8000	-
35	11	325	315	2.8	9.13	IE4	BG60-..S4E11MA6	16	54	109	325	390	240	270	315	315	315	107	9800	-
35	11	325	315	2.8	9.13	IE5	BG60-..S5E11LA6	16	54	109	325	390	315	315	315	315	315	119	9800	-
35	11	295	350	2.6	10.12	IE4	BG60-..S4E11MA6	14.5	49	98	295	355	265	300	350	350	350	107	10200	-
35	11	295	350	2.6	10.12	IE5	BG60-..S5E11LA6	14.5	49	98	295	355	350	350	350	350	350	119	10200	-
35	11	245	425	2.3	12.16	IE4	BG60-..S4E11MA6	12	41	82	245	295	320	360	425	425	425	107	10800	-
35	11	245	425	2.3	12.16	IE5	BG60-..S5E11LA6	12	41	82	245	295	425	425	425	425	425	119	10800	-
35	11	220	470	2.2	13.47	IE4	BG60-..S4E11MA6	11	37	74	220	265	355	400	470	470	470	107	11200	-
35	11	220	470	2.2	13.47	IE5	BG60-..S5E11LA6	11	37	74	220	265	470	470	470	470	470	119	11200	-
35	11	178	580	1.9	16.8	IE4	BG60-..S4E11MA6	8.9	29.5	59	178	210	445	500	580	580	580	107	12000	-
35	11	178	580	1.9	16.8	IE5	BG60-..S5E11LA6	8.9	29.5	59	178	210	580	580	580	580	580	119	12000	-
35	11	161	650	1.7	18.62	IE4	BG60-..S4E11MA6	8	26.5	53	161	193	490	550	650	650	650	107	12400	-
35	11	161	650	1.7	18.62	IE5	BG60-..S5E11LA6	8	26.5	53	161	193	650	650	650	650	650	119	12400	-
35	11	133	780	1.5	22.4	IE4	BG60-..S4E11MA6	6.6	22	44.5	133	160	590	670	780	780	780	107	13300	-
35	11	133	780	1.5	22.4	IE5	BG60-..S5E11LA6	6.6	22	44.5	133	160	780	780	780	780	780	119	13300	-
35	11	120	860	1.4	24.82	IE4	BG60-..S4E11MA6	6	20	40	120	145	650	740	860	860	860	107	13800	-
35	11	120	860	1.4	24.82	IE5	BG60-..S5E11LA6	6	20	40	120	145	860	860	860	860	860	119	13800	-
35	11	102	1020	1.2	29.31	IE4	BG60-..S4E11MA6	5.1	17	34	102	122	770	870	1020	1020	1020	107	14800	-
35	11	102	1020	1.2	29.31	IE5	BG60-..S5E11LA6	5.1	17	34	102	122	1020	1020	1020	1020	1020	119	14800	-
35	11	92	1130	1.1	32.48	IE4	BG60-..S4E11MA6	4.6	15	30.5	92	110	860	970	1130	1130	1130	107	15400	-
35	11	92	1130	1.1	32.48	IE5	BG60-..S5E11LA6	4.6	15	30.5	92	110	1130	1130	1130	1130	1130	119	15400	-
35	11	77	1350	0.88	38.85	IE4	BG60-..S4E11MA6	3.8	12.5	25.5	77	92	1020	1160	1350	1350	1350	107	16000	-
35	11	77	1350	0.88	38.85	IE5	BG60-..S5E11LA6	3.8	12.5	25.5	77	92	1350	1350	1350	1350	1350	119	16000	-
35	11	69	1500	0.8	43.05	IE4	BG60-..S4E11MA6	3.4	11.5	23	69	83	1140	1290	1500	1500	1500	107	16000	-
35	11	69	1500	0.8	43.05	IE5	BG60-..S5E11LA6	3.4	11.5	23	69	83	1500	1500	1500	1500	1500	119	16000	-
35	11	130	800	2.9	22.92	IE4	BG70-..S4E11MA6	6.5	21.5	43.5	130	157	600	680	800	800	800	138	15100	-
35	11	130	800	2.9	22.92	IE5	BG70-..S5E11LA6	6.5	21.5	43.5	130	157	800	800	800	800	800	149	15100	-
35	11	110	950	2.4	27.21	IE4	BG70-..S4E11MA6	5.5	18	36.5	110	132	720	810	950	950	950	138	16400	-
35	11	110	950	2.4	27.21	IE5	BG70-..S5E11LA6	5.5	18	36.5	110	132	950	950	950	950	950	149	16400	-
35	11	101	1030	2.2	29.69	IE4	BG70-..S4E11MA6	5	16.5	33.5	101	121	780	890	1030	1030	1030	138	16900	-
35	11	101																		

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 11 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
35	11	47	2200	1.9	63.56	IE4	BG80-../S4E11MA6	2.3	7.8	15.5	47	56	1680	1900	2200	2200	2200	192	26000	-
35	11	47	2200	1.9	63.56	IE5	BG80-../S5E11LA6	2.3	7.8	15.5	47	56	2200	2200	2200	2200	2200	204	26000	-
35	11	45	2300	1.8	66.4	IE4	BG80Z-../S4E11MA6	2.2	7.5	15	45	54	1750	1990	2300	2300	2300	234	26000	-
35	11	45	2300	1.8	66.4	IE5	BG80Z-../S5E11LA6	2.2	7.5	15	45	54	2300	2300	2300	2300	2300	246	26000	-
35	11	40.5	2550	1.6	73.73	IE4	BG80Z-../S4E11MA6	2	6.7	13.5	40.5	48.5	1950	2200	2550	2550	2550	234	26000	-
35	11	40.5	2550	1.6	73.73	IE5	BG80Z-../S5E11LA6	2	6.7	13.5	40.5	48.5	2550	2550	2550	2550	2550	246	26000	-
35	11	35	2950	1.4	84.55	IE4	BG80Z-../S4E11MA6	1.7	5.9	11.5	35	42.5	2200	2500	2950	2950	2950	234	26000	-
35	11	35	2950	1.4	84.55	IE5	BG80Z-../S5E11LA6	1.7	5.9	11.5	35	42.5	2950	2950	2950	2950	2950	246	26000	-
35	11	31.5	3250	1.3	93.89	IE4	BG80Z-../S4E11MA6	1.5	5.3	10.5	31.5	38	2450	2800	3250	3250	3250	234	26000	-
35	11	31.5	3250	1.3	93.89	IE5	BG80Z-../S5E11LA6	1.5	5.3	10.5	31.5	38	3250	3250	3250	3250	3250	246	26000	-
35	11	26.5	3900	1.1	112.4	IE4	BG80Z-../S4E11MA6	1.3	4.4	8.8	26.5	32	2950	3350	3900	3900	3900	234	26000	-
35	11	26.5	3900	1.1	112.4	IE5	BG80Z-../S5E11LA6	1.3	4.4	8.8	26.5	32	3900	3900	3900	3900	3900	246	26000	-
35	11	24	4350	0.96	124.8	IE4	BG80Z-../S4E11MA6	1.2	4	8	24	28.5	3300	3700	4350	4350	4350	234	26000	-
35	11	24	4350	0.96	124.8	IE5	BG80Z-../S5E11LA6	1.2	4	8	24	28.5	4350	4350	4350	4350	4350	246	26000	-
35	11	20.5	5000	0.83	145.4	IE4	BG80Z-../S4E11MA6	1	3.4	6.8	20.5	24.5	3850	4350	5000	5000	5000	234	26000	-
35	11	20.5	5000	0.83	145.4	IE5	BG80Z-../S5E11LA6	1	3.4	6.8	20.5	24.5	5000	5000	5000	5000	5000	246	26000	-
35	11	35.5	2900	2.9	83.91	IE4	BG90Z-../S4E11MA6	1.7	5.9	11.5	35.5	42.5	2200	2500	2900	2900	2900	336	65000	-
35	11	35.5	2900	2.9	83.91	IE5	BG90Z-../S5E11LA6	1.7	5.9	11.5	35.5	42.5	2900	2900	2900	2900	2900	348	65000	-
35	11	31	3350	2.5	96.53	IE4	BG90Z-../S4E11MA6	1.5	5.1	10	31	37	2550	2850	3350	3350	3350	336	65000	-
35	11	31	3350	2.5	96.53	IE5	BG90Z-../S5E11LA6	1.5	5.1	10	31	37	3350	3350	3350	3350	3350	348	65000	-
35	11	28	3650	2.3	105.7	IE4	BG90Z-../S4E11MA6	1.4	4.7	9.4	28	34	2800	3150	3650	3650	3650	336	65000	-
35	11	28	3650	2.3	105.7	IE5	BG90Z-../S5E11LA6	1.4	4.7	9.4	28	34	3650	3650	3650	3650	3650	348	65000	-
35	11	23.5	4400	1.9	127.1	IE4	BG90Z-../S4E11MA6	1.1	3.9	7.8	23.5	28	3350	3800	4400	4400	4400	336	65000	-
35	11	23.5	4400	1.9	127.1	IE5	BG90Z-../S5E11LA6	1.1	3.9	7.8	23.5	28	4400	4400	4400	4400	4400	348	65000	-
35	11	21.5	4850	1.7	139.2	IE4	BG90Z-../S4E11MA6	1	3.5	7.1	21.5	25.5	3650	4150	4850	4850	4850	336	65000	-
35	11	21.5	4850	1.7	139.2	IE5	BG90Z-../S5E11LA6	1	3.5	7.1	21.5	25.5	4850	4850	4850	4850	4850	348	65000	-
35	11	18	5700	1.5	163	IE4	BG90Z-../S4E11MA6	0.9	3	6.1	18	22	4300	4850	5700	5700	5700	336	65000	-
35	11	18	5700	1.5	163	IE5	BG90Z-../S5E11LA6	0.9	3	6.1	18	22	5700	5700	5700	5700	5700	348	65000	-
35	11	16.5	6200	1.3	178.5	IE4	BG90Z-../S4E11MA6	0.8	2.8	5.6	16.5	20	4700	5300	6200	6200	6200	336	65000	-
35	11	16.5	6200	1.3	178.5	IE5	BG90Z-../S5E11LA6	0.8	2.8	5.6	16.5	20	6200	6200	6200	6200	6200	348	65000	-
35	11	14	7200	1.2	208.3	IE4	BG90Z-../S4E11MA6	0.7	2.4	4.8	14	17	5500	6200	7200	7200	7200	336	65000	-
35	11	14	7200	1.2	208.3	IE5	BG90Z-../S5E11LA6	0.7	2.4	4.8	14	17	7200	7200	7200	7200	7200	348	65000	-
35	11	13	7900	1.1	228.1	IE4	BG90Z-../S4E11MA6	0.65	2.1	4.3	13	15.5	6000	6800	7900	7900	7900	336	65000	-
35	11	13	7900	1.1	228.1	IE5	BG90Z-../S5E11LA6	0.65	2.1	4.3	13	15.5	7900	7900	7900	7900	7900	348	65000	-
35	11	13.5	7600	1.2	219.9	IE4	BG90G50-../S4E11MA6	0.65	2.2	4.5	13.5	16	5800	6500	7600	7600	7600	353	65000	-
35	11	13.5	7600	1.2	219.9	IE5	BG90G50-../S5E11LA6	0.65	2.2	4.5	13.5	16	7600	7600	7600	7600	7600	365	65000	-
35	11	11	9100	1	262.5	IE4	BG90G50-../S4E11MA6	0.55	1.9	3.8	11	13.5	6900	7800	9100	9100	9100	353	65000	-
35	11	11	9100	1	262.5	IE5	BG90G50-../S5E11LA6	0.55	1.9	3.8	11	13.5	9100	9100	9100	9100	9100	365	65000	-
35	11	10	10400	0.88	298.8	IE4	BG90G50-../S4E11MA6	0.5	1.6	3.3	10	12	7900	8900	10400	10400	10400	353	65000	-
35	11	10	10400	0.88	298.8	IE5	BG90G50-../S5E11LA6	0.5	1.6	3.3	10	12	10400	10400	10400	10400	10400	365	65000	-
35	11	16.5	6200	2.7	178.6	IE4	BG100-../S4E11MA6	0.8	2.7	5.5	16.5	20	4700	5300	6200	6200	6200	453	90000	-
35	11	16.5	6200	2.7	178.6	IE5	BG100-../S5E11LA6	0.8	2.7	5.5	16.5	20	6200	6200	6200	6200	6200	465	90000	-
35	11	15	6900	2.4	198.8	IE4	BG100-../S4E11MA6	0.75	2.5	5	15	18	5200	5900	6900	6900	6900	453	90000	-
35	11	15	6900	2.4	198.8	IE5	BG100-../S5E11LA6	0.75	2.5	5	15	18	6900	6900	6900	6900	6900	465	90000	-
35	11	12.5	8100	2.1	232.6	IE4	BG100-../S4E11MA6	0.6	2.1	4.2	12.5	15	6100	6900	8100	8100	8100	453	90000	-
35	11	12.5	8100	2.1	232.6	IE5	BG100-../S5E11LA6	0.6	2.1	4.2	12.5	15	8100	8100	8100	8100	8100	465	90000	-
35	11	11.5	9000	1.9	259	IE4	BG100-../S4E11MA6	0.55	1.9	3.8	11.5	13.5	6800	7700	9000	9000	9000	453	90000	-
35	11	11.5	9000	1.9	259	IE5	BG100-../S5E11LA6	0.55	1.9	3.8	11.5	13.5	9000	9000	9000	9000	9000	465	90000	-
35	11	11	9400	2	269.8	IE4	BG100Z-../S4E11MA6	0.55	1.8	3.7	11	13	9400	9400	9400	9400	9400	555	90000	-
35	11	9.9	10500	1.8	300.4	IE4	BG100Z-../S4E11MA6	0.49	1.6	3.3	9.9	11.5	7900	9000	10500	10500	10500	543	90000	-
35	11	9.9	10500	1.8	300.4	IE5	BG100Z-../S5E11LA6	0.49	1.6	3.3	9.9	11.5	10500	10500	10500	10500	10500	555	90000	-
35	11	8.7	12000	1.5</																

BG-series helical-gear motors

Selection helical-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$


MN = 48 Nm (PN = 15 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
48	15	750	190	1.3	3.97	IE5	BG40-..S5E11LA6	37.5	125	250	750	900	138	158	190	190	158	77	2400	-
48	15	600	235	1.1	4.94	IE5	BG40-..S5E11LA6	30	101	200	600	720	172	197	235	235	197	77	2450	-
48	15	475	300	0.98	6.29	IE5	BG40-..S5E11LA6	23.5	79	158	475	570	220	250	300	300	250	77	2600	-
48	15	465	305	1	6.4	IE5	BG40-..S5E11LA6	23	78	156	465	560	220	255	305	305	255	77	3750	-
48	15	420	340	0.95	7.11	IE5	BG40-..S5E11LA6	21	70	140	420	500	245	280	340	340	280	77	3950	-
48	15	390	365	0.81	7.62	IE5	BG40-..S5E11LA6	19.5	65	131	390	470	265	300	365	365	300	77	2650	-
48	15	360	395	0.85	8.31	IE5	BG40-..S5E11LA6	18	60	120	360	430	290	330	395	395	330	77	4100	-
48	15	325	440	0.8	9.23	IE5	BG40-..S5E11LA6	16	54	108	325	390	320	365	440	440	365	77	4350	-
48	15	1210	118	2.6	2.47	IE5	BG50-..S5E11LA6	60	200	400	1210	1450	86	98	118	118	98	86	2900	-
48	15	840	170	2	3.55	IE5	BG50-..S5E11LA6	42	140	280	840	1010	124	142	170	170	142	86	3300	-
48	15	610	235	1.7	4.91	IE5	BG50-..S5E11LA6	30.5	101	200	610	730	171	196	235	235	196	86	3500	-
48	15	490	290	1.5	6.07	IE5	BG50-..S5E11LA6	24.5	82	164	490	590	210	240	290	290	240	86	4700	-
48	15	445	320	1.4	6.74	IE5	BG50-..S5E11LA6	22	74	148	445	530	235	265	320	320	265	86	3750	-
48	15	340	415	1.2	8.7	IE5	BG50-..S5E11LA6	17	57	114	340	410	300	345	415	415	345	86	5300	-
48	15	310	460	1.1	9.65	IE5	BG50-..S5E11LA6	15.5	51	103	310	370	335	385	460	460	385	86	5600	-
48	15	245	570	0.98	12.06	IE5	BG50-..S5E11LA6	12	41	82	245	295	420	480	570	570	480	86	5700	-
48	15	220	640	0.92	13.36	IE5	BG50-..S5E11LA6	11	37	74	220	265	465	530	640	640	530	86	6100	-
48	15	600	235	2.8	4.98	IE5	BG60-..S5E11LA6	30	100	200	600	720	174	199	235	235	199	119	7800	-
48	15	485	295	2.6	6.16	IE5	BG60-..S5E11LA6	24	81	162	485	580	215	245	295	295	245	119	8500	-
48	15	435	325	2.4	6.82	IE5	BG60-..S5E11LA6	21.5	73	146	435	520	235	270	325	325	270	119	8900	-
48	15	435	330	2.4	6.88	IE5	BG60-..S5E11LA6	21.5	72	145	435	520	240	275	330	330	275	119	8600	-
48	15	325	435	2	9.13	IE5	BG60-..S5E11LA6	16	54	109	325	390	315	365	435	435	365	119	9800	-
48	15	295	485	1.9	10.12	IE5	BG60-..S5E11LA6	14.5	49	98	295	355	350	400	485	485	400	119	10200	-
48	15	245	580	1.7	12.16	IE5	BG60-..S5E11LA6	12	41	82	245	295	425	485	580	580	485	119	10800	-
48	15	220	640	1.6	13.47	IE5	BG60-..S5E11LA6	11	37	74	220	265	470	530	640	640	530	119	11200	-
48	15	178	800	1.4	16.8	IE5	BG60-..S5E11LA6	8.9	29.5	59	178	210	580	670	800	800	670	119	12000	-
48	15	161	890	1.3	18.62	IE5	BG60-..S5E11LA6	8	26.5	53	161	193	650	740	890	890	740	119	12400	-
48	15	133	1070	1.1	22.4	IE5	BG60-..S5E11LA6	6.6	22	44.5	133	160	780	890	1070	1070	890	119	13300	-
48	15	120	1190	1	24.82	IE5	BG60-..S5E11LA6	6	20	40	120	145	860	990	1190	1190	990	119	13800	-
48	15	102	1400	0.85	29.31	IE5	BG60-..S5E11LA6	5.1	17	34	102	122	1020	1170	1400	1400	1170	119	14800	-
48	15	169	840	2.7	17.68	IE5	BG70-..S5E11LA6	8.4	28	56	169	200	610	700	840	840	700	149	13400	-
48	15	142	1000	2.3	20.98	IE5	BG70-..S5E11LA6	7.1	23.5	47.5	142	171	730	830	1000	1000	830	149	14600	-
48	15	130	1100	2.1	22.92	IE5	BG70-..S5E11LA6	6.5	21.5	43.5	130	157	800	910	1100	1100	910	149	15100	-
48	15	110	1300	1.8	27.21	IE5	BG70-..S5E11LA6	5.5	18	36.5	110	132	950	1080	1300	1300	1080	149	16400	-
48	15	101	1420	1.6	29.69	IE5	BG70-..S5E11LA6	5	16.5	33.5	101	121	1030	1180	1420	1420	1180	149	16900	-
48	15	85	1690	1.4	35.24	IE5	BG70-..S5E11LA6	4.2	14	28	85	102	1230	1400	1690	1690	1400	149	18300	-
48	15	76	1880	1.2	39.22	IE5	BG70-..S5E11LA6	3.8	12.5	25	76	91	1370	1560	1880	1880	1560	149	19100	-
48	15	64	2200	1	46.54	IE5	BG70-..S5E11LA6	3.2	10.5	21	64	77	1620	1860	2200	2200	1860	149	20000	-
48	15	59	2400	0.95	50.4	IE5	BG70-..S5E11LA6	2.9	9.9	19.5	59	71	1760	2000	2400	2400	2000	149	20000	-
48	15	50	2850	0.8	59.82	IE5	BG70-..S5E11LA6	2.5	8.3	16.5	50	60	2050	2350	2850	2850	2350	149	20000	-
48	15	102	1400	3	29.36	IE5	BG80-..S5E11LA6	5.1	17	34	102	122	1020	1170	1400	1400	1170	204	18900	-
48	15	87	1640	2.6	34.22	IE5	BG80-..S5E11LA6	4.3	14.5	29	87	105	1190	1360	1640	1640	1360	204	20200	-
48	15	78	1820	2.3	38	IE5	BG80-..S5E11LA6	3.9	13	26	78	94	1330	1520	1820	1820	1520	204	21300	-
48	15	68	2100	2	43.94	IE5	BG80-..S5E11LA6	3.4	11	22.5	68	81	1530	1750	2100	2100	1750	204	22600	-
48	15	61	2300	1.8	48.8	IE5	BG80-..S5E11LA6	3	10	20	61	73	1700	1950	2300	2300	1950	204	23800	-
48	15	52	2700	1.5	57.24	IE5	BG80-..S5E11LA6	2.6	8.7	17	52	62	2000	2250	2700	2700	2250	204	25400	-
48	15	47	3050	1.4	63.56	IE5	BG80-..S5E11LA6	2.3	7.8	15.5	47	56	2200	2500	3050	3050	2500	204	26000	-
48	15	45	3150	1.3	66.4	IE5	BG80Z-..S5E11LA6	2.2	7.5	15	45	54	2300	2650	3150	3150	2650	246	26000	-
48	15	40.5	3500	1.2	73.73	IE5	BG80Z-..S5E11LA6	2	6.7	13.5	40.5	48.5	2550	2900	3500	3500	2900	246	26000	-
48	15	35	4050	1	84.55	IE5	BG80Z-..S5E11LA6	1.7	5.9	11.5	35	42.5	2950	3350	4050	4050	3350	246	26000	-
48	15	31.5	4500	0.93	93.89	IE5	BG80Z-..S5E11LA6	1.5	5.3	10.5	31.5	38	3250	3750	4500	4500	3750	246	26000	-
48	15	52	2700	2.5	57.04	IE5	BG90Z-..S5E11LA6	2.6	8.7	17.5	52	63	1990	2250	2700	2700	2250	348	65000	-
48	15	48	2950	2.5	62.47	IE5	BG90Z-..S5E11LA6	2.4	8	16										

Energy Efficient Geared Motors

AC Variable Speed

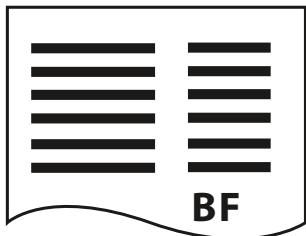

7

BF-series shaft-mounted geared motors - Selection

Description of shaft-mounted gear units	153
Sizes	153
Bauer service factors (f_B) for shaft-mounted geared motors	153
Continuous operation without switching frequency $Z \leq 1/h$	153
Switching duty	153
Bauer service factor	153
Explanation of shock classification	153
Key to abbreviations	154
Selection tables shaft-mounted geared motors	154
Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$	155
Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$	180

Energy Efficient Geared Motors

AC Variable Speed

7

BF-series shaft-mounted geared motors

Description of shaft-mounted gear units

Sizes

Bauer BF-series shaft-mounted geared motors are normally supplied in ten frame sizes and with torques of 90 to 18,500 Nm. Higher torques are available on request. The gear unit is accommodated in a sturdy cast housing

Bauer service factors (f_B) for shaft-mounted geared motors

Of the numerous factors influencing the total loading of a gear unit, the most important include:

- Mean torque (rated torque)
- Daily operating hours
- Severity of torque peaks (shock classification)
- Frequency of torque peaks (switching duty)

These factors can be represented in a simplified and practical manner by *service factors*. The tables and explanations below attempt to provide an objective description of the *shock classification*, rather than a classification of the driven machinery. Experience has shown that, in addition to the torque shocks caused by the driven machinery (M_x/M_N), above all the power transmission components (clutches, chains etc.) plus the mass ratios play a decisive role in this.

See Bauer special imprint SD32 for more information.

Continuous operation without switching frequency $Z \leq 1/h$

Factor f_1 for shock classification and operating time

Shock classification	Operating hours per day t_d	>4 h	>8 h	>16 h
		≤ 8 h	≤ 16 h	≤ 24 h
I		0.8	1.0	1.2
II		1.05	1.25	1.45
III		1.45	1.55	1.7

Switching duty

Factor f_2 for shock classification and switching frequency

Switching frequency in single-shift operation $t_d \leq 8$ h/d

Shock classification	$1 < Z \leq 100$	$100 < Z \leq 1000$	$1000 < Z$
I	0.95	1.1	1.15
II	1.2	1.35	1.4
III	1.55	1.6	1.6

Switching frequency in multiple-shift operation $t_d > 8$ h/d

Shock classification	$1 < Z \leq 100$	$100 < Z \leq 1000$	$1000 < Z$
I	1.3	1.45	1.5
II	1.5	1.6	1.65
III	1.75	1.8	1.8

Bauer service factor

Bauer Service factor $f_B = f_1$ or $f_B = f_2$

For example: Shock classification II for $Z = 100$ switching operations per hour and multiple-shift operation yields a service factor $f_B = f_2 = 1.5$

Explanation of shock classification

Shock classification I:

Uniform without shock loads. All the following requirements must be satisfied:

- $F_I \leq 1,3$
- $M_x/M_N \leq 1,0$
- Shock-absorbing power transmission components (e.g. highly resilient, zero-play coupling, $\varphi \geq 5^\circ$)

BF-series shaft-mounted geared motors

Description of shaft-mounted gear units

Shock classification II:

Moderate shock loads. At least one of the following conditions applies:

- $1.3 < FI \leq 4$
- $1 < M_x/M_N \leq 1.6$
- Shock-neutral power transmission components (e.g. gear wheels, zero-play rigid coupling or resilient coupling with $\varphi N < 5^\circ$)

Shock classification III:

Heavy shock loads. At least one of the following conditions applies:

- $FI > 4$
- $1.6 < M_x/M_N \leq 2.0$
- Shock-amplifying power transmission components (e.g. coupling with play or chain drive)


Key to abbreviations

Z	Switching duty number of switching operations per hour
t_d	Daily operating time in hours (h/d)
FI	Factor of inertia $FI = (J_{ext} + J_{rot})/J_{rot}$
J_{ext}	Mass moment of inertia of the machine to be driven, in relation to the motor's rotor shaft (kgm^2)
J_{rot}	Mass moment of inertia of the motor rotor (kgm^2)
M_x	Highest impact torque above the static torque which can occur during normal operation or in emergency situations
M_N	Required static load torque for the application
M_x/M_N	Relative torque - Factor
φN	Torsional offset of the resilient coupling under rated torque

Selection tables shaft-mounted geared motors

Key to abbreviations

P	Rated output
n_2	Rated speed of the output shaft
i	Gear reduction ratio
M_2	Rated torque at the output shaft
f_B	Bauer service factor
F_{RN}	Maximum permissible radial force with normal bearings
F_{RV}	Maximum permissible radial force with reinforced bearings in each case with standard solid shaft (Code -.1 und -.2)

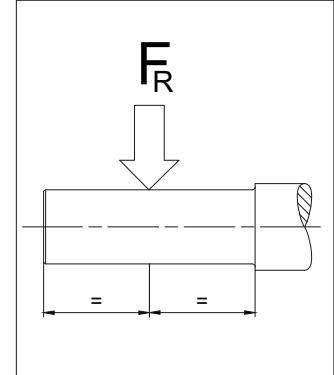

Use the selection tables to determine the size of geared motor required. The codes clearly define the Type of gear unit and output shaft (see chapter 11 „dimensional drawings shaft-mounted gear motors“).


Motor power overload protection

Motor-power ratings, particularly in conjunction with four-stage and multi-stage gear units, are more than ample in some instances. Consequently, and in much the same way as with low-power motors, rated current is not a measure of gear loading and cannot be used to protect the gear unit against overloading. It is advisable to provide gears at risk from excessive load or blockage with a protective mechanism (e. g., sliding clutch, sliding hub, shear pin or an alternative).

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 0.76 Nm (PN = 0.12 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
0.76	0.12	9.9	114	2.1	151.2	IE4	BF10Z-../S4E04SA4-1	0.95	3.3	6.6	9.9	11.5	114	114	114	114	114	21	6400	-
0.76	0.12	9	126	1.9	166.2	IE4	BF10Z-../S4E04SA4-1	0.9	3	6	9	10.5	126	126	126	126	126	21	6400	-
0.76	0.12	8.3	136	1.8	180.1	IE4	BF10Z-../S4E04SA4-1	0.8	2.7	5.5	8.3	9.9	136	136	136	136	136	21	6400	-
0.76	0.12	7.5	150	1.6	198	IE4	BF10Z-../S4E04SA4-1	0.75	2.5	5	7.5	9	150	150	150	150	150	21	6400	-
0.76	0.12	6.9	163	1.5	214.5	IE4	BF10Z-../S4E04SA4-1	0.65	2.3	4.6	6.9	8.3	163	163	163	163	163	21	6400	-
0.76	0.12	6.3	179	1.3	235.8	IE4	BF10Z-../S4E04SA4-1	0.6	2.1	4.2	6.3	7.6	179	179	179	179	179	21	6400	-
0.76	0.12	5.8	195	1.2	257.4	IE4	BF10Z-../S4E04SA4-1	0.55	1.9	3.8	5.8	6.9	195	195	195	195	195	21	6400	-
0.76	0.12	5.2	215	1.1	283.1	IE4	BF10Z-../S4E04SA4-1	0.5	1.7	3.5	5.2	6.3	215	215	215	215	215	21	6400	-
0.76	0.12	4.6	245	0.97	324.3	IE4	BF10Z-../S4E04SA4-1	0.46	1.5	3	4.6	5.5	245	245	245	245	245	21	6400	-
0.76	0.12	4.2	270	0.89	356.6	IE4	BF10Z-../S4E04SA4-1	0.42	1.4	2.8	4.2	5	270	270	270	270	270	21	6400	-
0.76	0.12	3.9	285	0.83	380.2	IE4	BF10Z-../S4E04SA4-1	0.39	1.3	2.6	3.9	4.7	285	285	285	285	285	21	6400	-
0.76	0.12	4.6	240	1.1	322.3	IE4	BF10G06-../S4E04SA4-1	0.46	1.5	3.1	4.6	5.5	240	240	240	240	240	25	6400	-
0.76	0.12	3.9	285	0.91	377.9	IE4	BF10G06-../S4E04SA4-1	0.39	1.3	2.6	3.9	4.7	285	285	285	285	285	25	6400	-
0.76	0.12	3.5	320	0.81	424.5	IE4	BF10G06-../S4E04SA4-1	0.35	1.1	2.3	3.5	4.2	320	320	320	320	320	25	6400	-
0.76	0.12	7.6	149	2.8	197.1	IE4	BF20Z-../S4E04SA4-1	0.75	2.5	5	7.6	9.1	149	149	149	149	149	28	7900	-
0.76	0.12	6.9	164	2.5	216.9	IE4	BF20Z-../S4E04SA4-1	0.65	2.3	4.6	6.9	8.2	164	164	164	164	164	28	7900	-
0.76	0.12	6.3	179	2.3	235.9	IE4	BF20Z-../S4E04SA4-1	0.6	2.1	4.2	6.3	7.6	179	179	179	179	179	28	7900	-
0.76	0.12	5.7	197	2.1	259.6	IE4	BF20Z-../S4E04SA4-1	0.55	1.9	3.8	5.7	6.9	197	197	197	197	197	28	7900	-
0.76	0.12	5	220	1.9	295.5	IE4	BF20Z-../S4E04SA4-1	0.5	1.6	3.3	5	6	220	220	220	220	220	28	7900	-
0.76	0.12	4.6	245	1.7	325.2	IE4	BF20Z-../S4E04SA4-1	0.46	1.5	3	4.6	5.5	245	245	245	245	245	28	7900	-
0.76	0.12	4.4	255	1.6	339.1	IE4	BF20Z-../S4E04SA4-1	0.44	1.4	2.9	4.4	5.3	255	255	255	255	255	28	7900	-
0.76	0.12	4	280	1.5	373.1	IE4	BF20Z-../S4E04SA4-1	0.4	1.3	2.6	4	4.8	280	280	280	280	280	28	7900	-
0.76	0.12	3.5	315	1.3	418.1	IE4	BF20Z-../S4E04SA4-1	0.35	1.1	2.3	3.5	4.3	315	315	315	315	315	28	7900	-
0.76	0.12	3.2	345	1.2	460	IE4	BF20Z-../S4E04SA4-1	0.32	1	2.1	3.2	3.9	345	345	345	345	345	28	7900	-
0.76	0.12	2.9	390	1.2	513.7	IE4	BF20G06-../S4E04SA4-1	0.29	0.95	1.9	2.9	3.5	390	390	390	390	390	31	7900	-
0.76	0.12	2.4	465	0.98	617	IE4	BF20G06-../S4E04SA4-1	0.24	0.8	1.6	2.4	2.9	465	465	465	465	465	31	7900	-
0.76	0.12	2	550	0.82	736.1	IE4	BF20G06-../S4E04SA4-1	0.2	0.65	1.3	2	2.4	550	550	550	550	550	31	7900	-
0.76	0.12	2.4	470	1.3	622.4	IE4	BF30G06-../S4E04SA4-1	0.24	0.8	1.6	2.4	2.8	470	470	470	470	470	41	7400	-
0.76	0.12	2.1	530	1.2	705.1	IE4	BF30G06-../S4E04SA4-1	0.21	0.7	1.4	2.1	2.5	530	530	530	530	530	41	7400	-
0.76	0.12	1.8	620	1	817.1	IE4	BF30G06-../S4E04SA4-1	0.18	0.6	1.2	1.8	2.2	620	620	620	620	620	41	7400	-
0.76	0.12	1.5	730	0.86	961.1	IE4	BF30G06-../S4E04SA4-1	0.15	0.5	1	1.5	1.8	730	730	730	730	730	41	7400	-


MN = 1 Nm (PN = 0.157 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1	0.157	9.9	151	1.6	151.2	IE2	BF10Z-../SHE04SA4-1	0.95	3.3	6.6	9.9	11.5	114	128	151	151	151	21	6400	-
1	0.157	9	166	1.4	166.2	IE2	BF10Z-../SHE04SA4-1	0.9	3	6	9	10.5	126	141	166	166	166	21	6400	-
1	0.157	8.3	180	1.3	180.1	IE2	BF10Z-../SHE04SA4-1	0.8	2.7	5.5	8.3	9.9	136	153	180	180	180	21	6400	-
1	0.157	7.5	198	1.2	198	IE2	BF10Z-../SHE04SA4-1	0.75	2.5	5	7.5	9	150	168	198	198	198	21	6400	-
1	0.157	6.9	210	1.1	214.5	IE2	BF10Z-../SHE04SA4-1	0.65	2.3	4.6	6.9	8.3	163	182	210	210	210	21	6400	-
1	0.157	6.3	235	1	235.8	IE2	BF10Z-../SHE04SA4-1	0.6	2.1	4.2	6.3	7.6	179	200	235	235	235	21	6400	-
1	0.157	5.8	255	0.93	257.4	IE2	BF10Z-../SHE04SA4-1	0.55	1.9	3.8	5.8	6.9	195	215	255	255	255	21	6400	-
1	0.157	5.2	280	0.85	283.1	IE2	BF10Z-../SHE04SA4-1	0.5	1.7	3.5	5.2	6.3	215	240	280	280	280	21	6400	-
1	0.157	4.6	320	0.81	322.3	IE2	BF10G06-../SHE04SA4-1	0.46	1.5	3.1	4.6	5.5	240	270	320	320	320	25	6400	-
1	0.157	10.5	141	3	141.2	IE2	BF20Z-../SHE04SA4-1	1	3.5	7	10.5	12.5	107	120	141	141	141	28	7900	-
1	0.157	9.6	155	2.7	155.4	IE2	BF20Z-../SHE04SA4-1	0.95	3.2	6.4	9.6	11.5	118	132	155	155	155	28	7900	-
1	0.157	9.1	164	2.6	164.3	IE2	BF20Z-../SHE04SA4-1	0.9	3	6	9.1	10.5	124	139	164	164	164	28	7900	-
1	0.157	8.2	180	2.3	180.8	IE2	BF20Z-../SHE04SA4-1	0.8	2.7	5.5	8.2	9.9	137	153	180	180	180	28	7900	-
1	0.157	7.6	197	2.1	197.1	IE2	BF20Z-../SHE04SA4-1	0.75	2.5	5	7.6	9.1	149	167	197	197	197	28	7900	-
1	0.157	6.9	215	1.9	216.9	IE2	BF20Z-../SHE04SA4-1	0.65	2.3	4.6	6.9	8.2	164	184	215	215	215	28	7900	-
1</																				

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$




MN = 1.3 Nm (PN = 0.2 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.3	0.2	56	34.5	2.7	26.76	IE5	BF06-..S5E06MA4	5.6	18.5	37	56	67	34.5	34.5	34.5	34.5	34.5	12	3000	-
1.3	0.2	47.5	40.5	2.3	31.5	IE5	BF06-..S5E06MA4	4.7	15.5	31.5	47.5	57	40.5	40.5	40.5	40.5	40.5	12	3200	-
1.3	0.2	39.5	48.5	1.9	37.69	IE5	BF06-..S5E06MA4	3.9	13	26.5	39.5	47.5	48.5	48.5	48.5	48.5	48.5	12	3500	-
1.3	0.2	32.5	59	1.6	46.14	IE5	BF06-..S5E06MA4	3.2	10.5	21.5	32.5	39	59	59	59	59	12	3800	-	
1.3	0.2	25.5	75	1.3	58.33	IE5	BF06-..S5E06MA4	2.5	8.5	17	25.5	30.5	75	75	75	75	75	12	4000	-
1.3	0.2	22	86	1.1	66.82	IE5	BF06-..S5E06MA4	2.2	7.4	14.5	22	26.5	86	86	86	86	86	12	4000	-
1.3	0.2	17.5	108	0.87	83.61	IE5	BF06-..S5E06MA4	1.7	5.9	11.5	17.5	21.5	108	108	108	108	108	12	4000	-
1.3	0.2	24	80	3	61.55	IE5	BF10-..S5E06MA4	2.4	8.1	16	24	29	80	80	80	80	80	23	4700	-
1.3	0.2	22	87	2.7	67.69	IE5	BF10-..S5E06MA4	2.2	7.3	14.5	22	26.5	87	87	87	87	87	23	4900	-
1.3	0.2	19	100	2.4	77.55	IE5	BF10-..S5E06MA4	1.9	6.4	12.5	19	23	100	100	100	100	100	23	5100	-
1.3	0.2	17.5	110	2.2	85.27	IE5	BF10-..S5E06MA4	1.7	5.8	11.5	17.5	21	110	110	110	110	110	23	5300	-
1.3	0.2	16	118	2	90.91	IE5	BF10-..S5E06MA4	1.6	5.4	10.5	16	19.5	118	118	118	118	118	23	5400	-
1.3	0.2	15	129	1.8	99.97	IE5	BF10-..S5E06MA4	1.5	5	10	15	18	129	129	129	129	129	23	5600	-
1.3	0.2	13	145	1.6	112.3	IE5	BF10-..S5E06MA4	1.3	4.4	8.9	13	16	145	145	145	145	145	23	5900	-
1.3	0.2	12	160	1.5	123.5	IE5	BF10-..S5E06MA4	1.2	4	8	12	14.5	160	160	160	160	160	23	6100	-
1.3	0.2	11.5	167	1.4	128.9	IE5	BF10-..S5E06MA4	1.1	3.8	7.7	11.5	13.5	167	167	167	167	167	23	6200	-
1.3	0.2	10.5	184	1.3	141.8	IE5	BF10-..S5E06MA4	1	3.5	7	10.5	12.5	184	184	184	184	184	23	6400	-
1.3	0.2	9.9	196	1.2	151.2	IE5	BF10Z-..S5E06MA4	0.95	3.3	6.6	9.9	11.5	196	196	196	196	196	24	6400	-
1.3	0.2	9	215	1.1	166.2	IE5	BF10Z-..S5E06MA4	0.9	3	6	9	10.5	215	215	215	215	215	24	6400	-
1.3	0.2	8.3	230	1	180.1	IE5	BF10Z-..S5E06MA4	0.8	2.7	5.5	8.3	9.9	230	230	230	230	230	24	6400	-
1.3	0.2	7.5	255	0.93	198	IE5	BF10Z-..S5E06MA4	0.75	2.5	5	7.5	9	255	255	255	255	255	24	6400	-
1.3	0.2	6.9	275	0.86	214.5	IE5	BF10Z-..S5E06MA4	0.65	2.3	4.6	6.9	8.3	275	275	275	275	275	24	6400	-
1.3	0.2	13.5	143	2.9	110.2	IE5	BF20-..S5E06MA4	1.3	4.5	9	13.5	16	143	143	143	143	143	30	7300	-
1.3	0.2	12	160	2.6	123.5	IE5	BF20-..S5E06MA4	1.2	4	8	12	14.5	160	160	160	160	160	30	7600	-
1.3	0.2	11	176	2.4	135.9	IE5	BF20-..S5E06MA4	1.1	3.6	7.3	11	13	176	176	176	176	176	30	7900	-
1.3	0.2	10.5	183	2.3	141.2	IE5	BF20Z-..S5E06MA4	1	3.5	7	10.5	12.5	183	183	183	183	183	31	7900	-
1.3	0.2	9.6	200	2.1	155.4	IE5	BF20Z-..S5E06MA4	0.95	3.2	6.4	9.6	11.5	200	200	200	200	200	31	7900	-
1.3	0.2	9.1	210	2	164.3	IE5	BF20Z-..S5E06MA4	0.9	3	6	9.1	10.5	210	210	210	210	210	31	7900	-
1.3	0.2	8.2	235	1.8	180.8	IE5	BF20Z-..S5E06MA4	0.8	2.7	5.5	8.2	9.9	235	235	235	235	235	31	7900	-
1.3	0.2	7.6	255	1.6	197.1	IE5	BF20Z-..S5E06MA4	0.75	2.5	5	7.6	9.1	255	255	255	255	255	31	7900	-
1.3	0.2	6.9	280	1.5	216.9	IE5	BF20Z-..S5E06MA4	0.65	2.3	4.6	6.9	8.2	280	280	280	280	280	31	7900	-
1.3	0.2	6.3	305	1.4	235.9	IE5	BF20Z-..S5E06MA4	0.6	2.1	4.2	6.3	7.6	305	305	305	305	305	31	7900	-
1.3	0.2	5.7	335	1.2	259.6	IE5	BF20Z-..S5E06MA4	0.55	1.9	3.8	5.7	6.9	335	335	335	335	335	31	7900	-
1.3	0.2	5	380	1.1	295.5	IE5	BF20Z-..S5E06MA4	0.5	1.6	3.3	5	6	380	380	380	380	380	31	7900	-
1.3	0.2	4.6	420	0.99	325.2	IE5	BF20Z-..S5E06MA4	0.46	1.5	3	4.6	5.5	420	420	420	420	420	31	7900	-
1.3	0.2	4.4	440	0.95	339.1	IE5	BF20Z-..S5E06MA4	0.44	1.4	2.9	4.4	5.3	440	440	440	440	440	31	7900	-
1.3	0.2	4	485	0.87	373.1	IE5	BF20Z-..S5E06MA4	0.4	1.3	2.6	4	4.8	485	485	485	485	485	31	7900	-
1.3	0.2	9	215	2.6	165.8	IE5	BF30Z-..S5E06MA4	0.9	3	6	9	10.5	215	215	215	215	215	42	7400	-
1.3	0.2	8.4	225	2.5	176.6	IE5	BF30Z-..S5E06MA4	0.8	2.8	5.6	8.4	10	225	225	225	225	225	42	7400	-
1.3	0.2	7.7	250	2.3	194.3	IE5	BF30Z-..S5E06MA4	0.75	2.5	5.1	7.7	9.2	250	250	250	250	250	42	7400	-
1.3	0.2	6.6	290	2	224.8	IE5	BF30Z-..S5E06MA4	0.65	2.2	4.4	6.6	8	290	290	290	290	290	42	7400	-
1.3	0.2	6	320	1.8	247.3	IE5	BF30Z-..S5E06MA4	0.6	2	4	6	7.2	320	320	320	320	320	42	7400	-
1.3	0.2	5.6	340	1.7	263.5	IE5	BF30Z-..S5E06MA4	0.55	1.8	3.7	5.6	6.8	340	340	340	340	340	42	7400	-
1.3	0.2	5.1	375	1.5	289.8	IE5	BF30Z-..S5E06MA4	0.5	1.7	3.4	5.1	6.2	375	375	375	375	375	42	7400	-
1.3	0.2	4.8	400	1.4	310.7	IE5	BF30Z-..S5E06MA4	0.48	1.6	3.2	4.8	5.7	400	400	400	400	400	42	7400	-
1.3	0.2	4.3	440	1.3	341.8	IE5	BF30Z-..S5E06MA4	0.43	1.4	2.9	4.3	5.2	440	440	440	440	440	42	7400	-
1.3	0.2	3.9	485	1.2	375.1	IE5	BF30Z-..S5E06MA4	0.39	1.3	2.6	3.9	4.7	485	485	485	485	485	42	7400	-
1.3	0.2	3.6	530	1.1	412.6	IE5	BF30Z-..S5E06MA4	0.36	1.2	2.4	3.6	4.3	530	530	530	530	530	42	7400	-
1.3	0.2	3.2	600	0.95	463.3	IE5	BF30Z-..S5E06MA4	0.32	1	2.1	3.2	3.8	600	600	600	600	600	42	7400	-
1.3	0.2	2.9	660	0.86	509.6	IE5	BF30Z-..S5E06MA4	0.29	0.95	1.9	2.9	3.5	660	660	660	660	660	42	7400	-
1.3	0.2	2.5	770	1.3	597.3	IE5	BF40G10-..S5E06MA4	0.25	0.8	1.6	2.5	3	770	770	770	770	770	58	10600	-
1.3	0.2	2	950	1.1	731.6	IE5	BF40G10-..S5E06MA4	0.2	0.65	1.3	2	2.4	950	950	950	950	950	58	10600	-
1.3	0.2	1.6	1200	0.83	928.9	IE5	BF40G10-..S5E06MA4	0.16	0.5	1	1.6	1.9	1200	1200	1200	1200	1200	58	10600	-
1.3	0.2	4.2	460	2.8	354	IE5	BF50Z-..S5E06MA4	0.42	1.4	2.8	4.2	5	460	460	460	460	460	82	13600	-
1.3	0.2	3.8	510	2.5	392.8	IE5	BF50Z-..S5E06MA4	0.38	1.2	2.5	3.8	4.5	510	510	510</td					

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.3	0.2	1.2	1570	1.6	1211	IE5	BF60G20-..S5E06MA4	0.12	0.41	0.8	1.2	1.4	1570	1570	1570	1570	1570	134	15300	43300
1.3	0.2	1	1940	1.3	1494	IE5	BF60G20-..S5E06MA4	0.1	0.33	0.65	1	1.2	1940	1940	1940	1940	1940	134	15300	43300
1.3	0.2	0.9	2150	1.2	1658	IE5	BF60G20-..S5E06MA4	0.09	0.3	0.6	0.9	1	2150	2150	2150	2150	2150	134	15300	43300
1.3	0.2	0.75	2500	0.98	1955	IE5	BF60G20-..S5E06MA4	0.075	0.25	0.5	0.75	0.9	2500	2500	2500	2500	2500	134	15300	43300
1.3	0.2	0.65	2800	0.89	2172	IE5	BF60G20-..S5E06MA4	0.065	0.23	0.46	0.65	0.8	2800	2800	2800	2800	2800	134	15300	43300
1.3	0.2	0.9	2100	2.7	1621	IE5	BF70G20-..S5E06MA4	0.09	0.3	0.6	0.9	1.1	2100	2100	2100	2100	2100	212	16100	47700
1.3	0.2	0.75	2450	2.3	1912	IE5	BF70G20-..S5E06MA4	0.075	0.26	0.5	0.75	0.9	2450	2450	2450	2450	2450	212	16100	47700
1.3	0.2	0.6	3150	1.8	2448	IE5	BF70G20-..S5E06MA4	0.06	0.2	0.4	0.6	0.7	3150	3150	3150	3150	3150	212	16100	47700
1.3	0.2	0.5	3700	1.5	2849	IE5	BF70G20-..S5E06MA4	0.05	0.17	0.35	0.5	0.6	3700	3700	3700	3700	3700	212	16100	47700
1.3	0.2	0.43	4400	1.3	3417	IE5	BF70G20-..S5E06MA4	0.043	0.14	0.29	0.43	0.5	4400	4400	4400	4400	4400	212	16100	47700
1.3	0.2	0.36	5300	1.1	4090	IE5	BF70G20-..S5E06MA4	0.036	0.12	0.24	0.36	0.44	5300	5300	5300	5300	5300	212	16100	47700
1.3	0.2	0.33	5900	0.97	4542	IE5	BF70G20-..S5E06MA4	0.033	0.11	0.22	0.33	0.39	5900	5900	5900	5900	5900	212	16100	47700
1.3	0.2	0.29	6600	0.86	5124	IE5	BF70G20-..S5E06MA4	0.029	0.095	0.19	0.29	0.35	6600	6600	6600	6600	6600	212	16100	47700

MN = 1.6 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.6	0.25	73	32.5	2.9	20.42	IE4	BF06-..S4E06MA4	7.3	24	48.5	73	88	32.5	32.5	32.5	32.5	32.5	12	2700	-
1.6	0.25	56	42.5	2.2	26.76	IE4	BF06-..S4E06MA4	5.6	18.5	37	56	67	42.5	42.5	42.5	42.5	42.5	12	3000	-
1.6	0.25	47.5	50	1.9	31.5	IE4	BF06-..S4E06MA4	4.7	15.5	31.5	47.5	57	50	50	50	50	50	12	3200	-
1.6	0.25	39.5	60	1.6	37.69	IE4	BF06-..S4E06MA4	3.9	13	26.5	39.5	47.5	60	60	60	60	60	12	3500	-
1.6	0.25	32.5	73	1.3	46.14	IE4	BF06-..S4E06MA4	3.2	10.5	21.5	32.5	39	73	73	73	73	73	12	3800	-
1.6	0.25	25.5	93	1	58.33	IE4	BF06-..S4E06MA4	2.5	8.5	17	25.5	30.5	93	93	93	93	93	12	4000	-
1.6	0.25	22	106	0.89	66.82	IE4	BF06-..S4E06MA4	2.2	7.4	14.5	22	26.5	106	106	106	106	106	12	4000	-
1.6	0.25	29	82	2.9	51.28	IE4	BF10-..S4E06MA4	2.9	9.7	19.5	29	35	82	82	82	82	82	23	4400	-
1.6	0.25	26.5	90	2.7	56.39	IE4	BF10-..S4E06MA4	2.6	8.8	17.5	26.5	31.5	90	90	90	90	90	23	4550	-
1.6	0.25	24	98	2.4	61.55	IE4	BF10-..S4E06MA4	2.4	8.1	16	24	29	98	98	98	98	98	23	4700	-
1.6	0.25	22	108	2.2	67.69	IE4	BF10-..S4E06MA4	2.2	8.1	14.5	22	26.5	108	108	108	108	108	23	4900	-
1.6	0.25	19	124	1.9	77.55	IE4	BF10-..S4E06MA4	1.9	6.4	12.5	19	23	124	124	124	124	124	23	5100	-
1.6	0.25	17.5	136	1.8	85.27	IE4	BF10-..S4E06MA4	1.7	5.8	11.5	17.5	21	136	136	136	136	136	23	5300	-
1.6	0.25	16	145	1.6	90.91	IE4	BF10-..S4E06MA4	1.6	5.4	10.5	16	19.5	145	145	145	145	145	23	5400	-
1.6	0.25	15	159	1.5	99.97	IE4	BF10-..S4E06MA4	1.5	5	10	15	18	159	159	159	159	159	23	5600	-
1.6	0.25	13	179	1.3	112.3	IE4	BF10-..S4E06MA4	1.3	4.4	8.9	13	16	179	179	179	179	179	23	5900	-
1.6	0.25	12	197	1.2	123.5	IE4	BF10-..S4E06MA4	1.2	4	8	12	14.5	197	197	197	197	197	23	6100	-
1.6	0.25	11.5	205	1.2	128.9	IE4	BF10-..S4E06MA4	1.1	3.8	7.7	11.5	13.5	205	205	205	205	205	23	6200	-
1.6	0.25	10.5	225	1.1	141.8	IE4	BF10-..S4E06MA4	1	3.5	7	10.5	12.5	225	225	225	225	225	23	6400	-
1.6	0.25	9.9	240	0.99	151.2	IE4	BF10Z-..S4E06MA4	0.95	3.3	6.6	9.9	11.5	240	240	240	240	240	24	6400	-
1.6	0.25	9	265	0.9	166.2	IE4	BF10Z-..S4E06MA4	0.9	3	6	9	10.5	265	265	265	265	265	24	6400	-
1.6	0.25	8.3	285	0.83	180.1	IE4	BF10Z-..S4E06MA4	0.8	2.7	5.5	8.3	9.9	285	285	285	285	285	24	6400	-
1.6	0.25	17	139	3	87.31	IE4	BF20-..S4E06MA4	1.7	5.7	11	17	20.5	139	139	139	139	139	30	6600	-
1.6	0.25	15.5	153	2.7	96.08	IE4	BF20-..S4E06MA4	1.5	5.2	10	15.5	18.5	153	153	153	153	153	30	6900	-
1.6	0.25	14.5	160	2.6	100.2	IE4	BF20-..S4E06MA4	1.4	4.9	9.9	14.5	17.5	160	160	160	160	160	30	7000	-
1.6	0.25	13.5	176	2.4	110.2	IE4	BF20-..S4E06MA4	1.3	4.5	9	13.5	16	176	176	176	176	176	30	7300	-
1.6	0.25	12	197	2.1	123.5	IE4	BF20-..S4E06MA4	1.2	4	8	12	14.5	197	197	197	197	197	30	7600	-
1.6	0.25	11	215	1.9	135.9	IE4	BF20-..S4E06MA4	1.1	3.6	7.3	11	13	215	215	215	215	215	30	7900	-
1.6	0.25	10.5	225	1.9	141.2	IE4	BF20Z-..S4E06MA4	1	3.5	7	10.5	12.5	225	225	225	225	225	31	7900	-
1.6	0.25	9.6	245	1.7	155.4	IE4	BF20Z-..S4E06MA4	0.95	3.2	6.4	9.6	11.5	245	245	245	245	245	31	7900	-
1.6	0.25	9.1	260	1.6	164.3	IE4	BF20Z-..S4E06MA4	0.9	3	6	9.1	10.5	260	260	260	260	260	31	7900	-
1.6	0.25	8.2	285	1.5	180.8	IE4	BF20Z-..S4E06MA4	0.8	2.7	5.5	8.2	9.9	285	285	285	285	285	31	7900	-
1.6	0.25	7.6	315	1.3	197.1	IE4	BF20Z-..S4E06MA4	0.75	2.5	5	7.6	9.1	315	315	315	315	315	31	7900	-
1.6																				

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.6 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.6	0.25	7.4	320	2.8	202.2	IE4	BF40Z-../S4E06MA4	0.7	2.4	4.9	7.4	8.9	320	320	320	320	320	53	10600	-
1.6	0.25	6.7	355	2.5	222.4	IE4	BF40Z-../S4E06MA4	0.65	2.2	4.4	6.7	8	355	355	355	355	355	53	10600	-
1.6	0.25	5.9	405	2.2	253.2	IE4	BF40Z-../S4E06MA4	0.55	1.9	3.9	5.9	7.1	405	405	405	405	405	53	10600	-
1.6	0.25	5.3	445	2	278.5	IE4	BF40Z-../S4E06MA4	0.5	1.7	3.5	5.3	6.4	445	445	445	445	445	53	10600	-
1.6	0.25	5	470	1.9	295.1	IE4	BF40Z-../S4E06MA4	0.5	1.6	3.3	5	6	470	470	470	470	470	53	10600	-
1.6	0.25	4.6	510	1.7	324.7	IE4	BF40Z-../S4E06MA4	0.46	1.5	3	4.6	5.5	510	510	510	510	510	53	10600	-
1.6	0.25	4.3	550	1.6	346.8	IE4	BF40Z-../S4E06MA4	0.43	1.4	2.8	4.3	5.1	550	550	550	550	550	53	10600	-
1.6	0.25	3.9	610	1.5	381.5	IE4	BF40Z-../S4E06MA4	0.39	1.3	2.6	3.9	4.7	610	610	610	610	610	53	10600	-
1.6	0.25	3.5	660	1.3	417.3	IE4	BF40Z-../S4E06MA4	0.35	1.1	2.3	3.5	4.3	660	660	660	660	660	53	10600	-
1.6	0.25	3.2	730	1.2	459.1	IE4	BF40Z-../S4E06MA4	0.32	1	2.1	3.2	3.9	730	730	730	730	730	53	10600	-
1.6	0.25	2.9	820	1.1	514.6	IE4	BF40Z-../S4E06MA4	0.29	0.95	1.9	2.9	3.4	820	820	820	820	820	53	10600	-
1.6	0.25	2.6	900	0.99	566.1	IE4	BF40Z-../S4E06MA4	0.26	0.85	1.7	2.6	3.1	900	900	900	900	900	53	10600	-
1.6	0.25	2.5	950	1	597.3	IE4	BF40G10-../S4E06MA4	0.25	0.8	1.6	2.5	3	950	950	950	950	950	58	10600	-
1.6	0.25	2	1170	0.85	731.6	IE4	BF40G10-../S4E06MA4	0.2	0.65	1.3	2	2.4	1170	1170	1170	1170	1170	58	10600	-
1.6	0.25	5.4	440	2.9	276.8	IE4	BF50Z-../S4E06MA4	0.5	1.8	3.6	5.4	6.5	440	440	440	440	440	82	13600	-
1.6	0.25	4.7	500	2.6	316.6	IE4	BF50Z-../S4E06MA4	0.47	1.5	3.1	4.7	5.6	500	500	500	500	500	82	13600	-
1.6	0.25	4.2	560	2.3	354	IE4	BF50Z-../S4E06MA4	0.42	1.4	2.8	4.2	5	560	560	560	560	560	82	13600	-
1.6	0.25	3.8	620	2.1	392.8	IE4	BF50Z-../S4E06MA4	0.38	1.2	2.5	3.8	4.5	620	620	620	620	620	82	13600	-
1.6	0.25	3.4	700	1.8	439.3	IE4	BF50Z-../S4E06MA4	0.34	1.1	2.2	3.4	4	700	700	700	700	700	82	13600	-
1.6	0.25	3	790	1.6	496.4	IE4	BF50Z-../S4E06MA4	0.3	1	2	3	3.6	790	790	790	790	790	82	13600	-
1.6	0.25	2.7	880	1.5	555.2	IE4	BF50Z-../S4E06MA4	0.27	0.9	1.8	2.7	3.2	880	880	880	880	880	82	13600	-
1.6	0.25	2.6	880	1.6	555.9	IE4	BF50G10-../S4E06MA4	0.26	0.85	1.7	2.6	3.2	880	880	880	880	880	86	13600	-
1.6	0.25	2.2	1080	1.3	680.9	IE4	BF50G10-../S4E06MA4	0.22	0.7	1.4	2.2	2.6	1080	1080	1080	1080	1080	86	13600	-
1.6	0.25	1.7	1380	1	864.5	IE4	BF50G10-../S4E06MA4	0.17	0.55	1.1	1.7	2	1380	1380	1380	1380	1380	86	13600	-
1.6	0.25	1.4	1640	0.85	1029	IE4	BF50G10-../S4E06MA4	0.14	0.48	0.95	1.4	1.7	1640	1640	1640	1640	1640	86	13600	-
1.6	0.25	2.6	910	2.7	569.3	IE4	BF60G20-../S4E06MA4	0.26	0.85	1.7	2.6	3.1	910	910	910	910	910	134	15300	43300
1.6	0.25	2.1	1100	2.3	689	IE4	BF60G20-../S4E06MA4	0.21	0.7	1.4	2.1	2.6	1100	1100	1100	1100	1100	134	15300	43300
1.6	0.25	1.8	1300	1.9	813.2	IE4	BF60G20-../S4E06MA4	0.18	0.6	1.2	1.8	2.2	1300	1300	1300	1300	1300	134	15300	43300
1.6	0.25	1.5	1500	1.7	937.6	IE4	BF60G20-../S4E06MA4	0.15	0.5	1	1.5	1.9	1500	1500	1500	1500	1500	134	15300	43300
1.6	0.25	1.2	1930	1.3	1211	IE4	BF60G20-../S4E06MA4	0.12	0.41	0.8	1.2	1.4	1930	1930	1930	1930	1930	134	15300	43300
1.6	0.25	1	2350	1	1494	IE4	BF60G20-../S4E06MA4	0.1	0.33	0.65	1	1.2	2350	2350	2350	2350	2350	134	15300	43300
1.6	0.25	0.9	2650	0.94	1658	IE4	BF60G20-../S4E06MA4	0.09	0.3	0.6	0.9	1	2650	2650	2650	2650	2650	134	15300	43300
1.6	0.25	0.75	3100	0.8	1955	IE4	BF60G20-../S4E06MA4	0.075	0.25	0.5	0.75	0.9	3100	3100	3100	3100	3100	134	15300	43300
1.6	0.25	1	2200	2.6	1390	IE4	BF70G20-../S4E06MA4	0.1	0.35	0.7	1	1.2	2200	2200	2200	2200	2200	212	16100	47700
1.6	0.25	0.9	2550	2.2	1621	IE4	BF70G20-../S4E06MA4	0.09	0.3	0.6	0.9	1.1	2550	2550	2550	2550	2550	212	16100	47700
1.6	0.25	0.75	3050	1.9	1912	IE4	BF70G20-../S4E06MA4	0.075	0.26	0.5	0.75	0.9	3050	3050	3050	3050	3050	212	16100	47700
1.6	0.25	0.6	3900	1.5	2448	IE4	BF70G20-../S4E06MA4	0.06	0.2	0.4	0.6	0.7	3900	3900	3900	3900	3900	212	16100	47700
1.6	0.25	0.5	4550	1.3	2849	IE4	BF70G20-../S4E06MA4	0.05	0.17	0.35	0.5	0.6	4550	4550	4550	4550	4550	212	16100	47700
1.6	0.25	0.43	5400	1	3417	IE4	BF70G20-../S4E06MA4	0.043	0.14	0.29	0.43	0.5	5400	5400	5400	5400	5400	212	16100	47700
1.6	0.25	0.36	6500	0.87	4090	IE4	BF70G20-../S4E06MA4	0.036	0.12	0.24	0.36	0.44	6500	6500	6500	6500	6500	212	16100	47700
1.6	0.25	5.4	440	2.9	276.8	IE4	BF50Z-../S4E06MA4	0.5	1.8	3.6	5.4	6.5	500	500	500	500	500	82	13600	-
1.6	0.25	4.7	500	2.6	316.6	IE4	BF50Z-../S4E06MA4	0.47	1.5	3.1	4.7	5.6	500	500	500	500	500	82	13600	-
1.6	0.25	4.2	560	2.3	354	IE4	BF50Z-../S4E06MA4	0.42	1.4	2.8	4.2	5	560	560	560	560	560	82	13600	-
1.6	0.25	3.8	620	2.1	392.8	IE4	BF50Z-../S4E06MA4	0.38	1.2	2.5	3.8	4.5	620	620	620	620	620	82	13600	-
1.6	0.25	3.4	700	1.8	439.3	IE4	BF50Z-../S4E06MA4	0.34	1.1	2.2	3.4	4	700	700	700	700	700	82	13600	-
1.6	0.25	3	790	1.6	496.4	IE4	BF50Z-../S4E06MA4	0.3	1	2	3	3.6	790	790	790	790	790	82	13600	-
1.6	0.25	2.7	880	1.5	555.2	IE4	BF50Z-../S4E06MA4	0.27	0.9	1.8	2.7	3.2	880	880	880	880	880	82	13600	-
1.6	0.25	2.6	880	1.6	555.9	IE4	BF50G10-../S4E06MA4	0.26	0.85	1.7	2.6	3.2	880	880	880	880	880	86	13600	-
1.6	0.25	2.2	1080	1.3	680.9	IE4	BF50G10-../S4E06MA4	0.22	0.7	1.4	2.2	2.6	1080	1080	1080	1080	1080	86	13600	-
1.6	0.25	1.7	1380	1	864.5	IE4	BF50G10-../S4E06MA4	0.17	0.55	1.1	1.7	2	1380	1380	1380	1380	1380	86	13600	-
1.6	0.25	1.4	1640	0.85	1029	IE4	BF50G10-../S4E06MA4	0.14	0.48	0.95	1.4	1.7	1640	1640	1640	1640	1640	86	13600	-
1.6	0.25	2.6	910	2.7	569.3	IE4	BF60Z-../S4E06MA4	0.26	0.85	1.7	2.6	3.1	910	910	910	910	910	134	15300	43300

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$


MN = 2.4 Nm (PN = 0.37 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.4	0.37	24	147	1.6	61.55	IE4	BF10.../S4E06LA4	2.4	8.1	16	24	29	147	147	147	147	147	23	4700	-
2.4	0.37	24	147	1.6	61.55	IE1	BF10.../SSE06MA4	2.4	8.1	16	24	29	110	123	135	147	147	23	4700	-
2.4	0.37	22	162	1.5	67.69	IE4	BF10.../S4E06LA4	2.2	7.3	14.5	22	26.5	162	162	162	162	162	23	4900	-
2.4	0.37	22	162	1.5	67.69	IE1	BF10.../SSE06MA4	2.2	7.3	14.5	22	26.5	121	135	148	162	162	23	4900	-
2.4	0.37	19	186	1.3	77.55	IE1	BF10.../SSE06MA4	1.9	6.4	12.5	19	23	139	155	170	186	186	23	5100	-
2.4	0.37	19	186	1.3	77.55	IE4	BF10.../S4E06LA4	1.9	6.4	12.5	19	23	186	186	186	186	186	23	5100	-
2.4	0.37	17.5	200	1.2	85.27	IE1	BF10.../SSE06MA4	1.7	5.8	11.5	17.5	21	153	170	187	200	200	23	5300	-
2.4	0.37	17.5	200	1.2	85.27	IE4	BF10.../S4E06LA4	1.7	5.8	11.5	17.5	21	200	200	200	200	200	23	5300	-
2.4	0.37	16	215	1.1	90.91	IE4	BF10.../S4E06LA4	1.6	5.4	10.5	16	19.5	215	215	215	215	215	23	5400	-
2.4	0.37	16	215	1.1	90.91	IE1	BF10.../SSE06MA4	1.6	5.4	10.5	16	19.5	163	181	200	215	215	23	5400	-
2.4	0.37	15	235	1	99.97	IE4	BF10.../S4E06LA4	1.5	5	10	15	18	235	235	235	235	235	23	5600	-
2.4	0.37	15	235	1	99.97	IE1	BF10.../SSE06MA4	1.5	5	10	15	18	179	199	215	235	235	23	5600	-
2.4	0.37	13	265	0.89	112.3	IE4	BF10.../S4E06LA4	1.3	4.4	8.9	13	16	265	265	265	265	265	23	5900	-
2.4	0.37	13	265	0.89	112.3	IE1	BF10.../SSE06MA4	1.3	4.4	8.9	13	16	200	220	245	265	265	23	5900	-
2.4	0.37	12	295	0.81	123.5	IE1	BF10.../SSE06MA4	1.2	4	8	12	14.5	220	245	270	295	295	23	6100	-
2.4	0.37	12	295	0.81	123.5	IE4	BF10.../S4E06LA4	1.2	4	8	12	14.5	295	295	295	295	295	23	6100	-
2.4	0.37	25.5	139	3	58.24	IE4	BF20.../S4E06LA4	2.5	8.5	17	25.5	30.5	139	139	139	139	139	30	5600	-
2.4	0.37	25.5	139	3	58.24	IE1	BF20.../SSE06MA4	2.5	8.5	17	25.5	30.5	104	116	128	139	139	30	5600	-
2.4	0.37	23	153	2.7	64.08	IE4	BF20.../S4E06LA4	2.3	7.8	15.5	23	28	153	153	153	153	153	30	5900	-
2.4	0.37	23	153	2.7	64.08	IE1	BF20.../SSE06MA4	2.3	7.8	15.5	23	28	115	128	140	153	153	30	5900	-
2.4	0.37	21.5	167	2.5	69.7	IE1	BF20.../SSE06MA4	2.1	7.1	14	21.5	25.5	125	139	153	167	167	30	6100	-
2.4	0.37	21.5	167	2.5	69.7	IE4	BF20.../S4E06LA4	2.1	7.1	14	21.5	25.5	167	167	167	167	167	30	6100	-
2.4	0.37	19.5	184	2.3	76.69	IE4	BF20.../S4E06LA4	1.9	6.5	13	19.5	23	184	184	184	184	184	30	6300	-
2.4	0.37	19.5	184	2.3	76.69	IE1	BF20.../SSE06MA4	1.9	6.5	13	19.5	23	138	153	168	184	184	30	6300	-
2.4	0.37	17	205	2	87.31	IE1	BF20.../SSE06MA4	1.7	5.7	11	17	20.5	157	174	192	205	205	30	6600	-
2.4	0.37	17	205	2	87.31	IE4	BF20.../S4E06LA4	1.7	5.7	11	17	20.5	205	205	205	205	205	30	6600	-
2.4	0.37	15.5	230	1.8	96.08	IE4	BF20.../S4E06LA4	1.5	5.2	10	15.5	18.5	230	230	230	230	230	30	6900	-
2.4	0.37	15.5	230	1.8	96.08	IE1	BF20.../SSE06MA4	1.5	5.2	10	15.5	18.5	172	192	210	230	230	30	6900	-
2.4	0.37	14.5	240	1.7	100.2	IE4	BF20.../S4E06LA4	1.4	4.9	9.9	14.5	17.5	240	240	240	240	240	30	7000	-
2.4	0.37	14.5	240	1.7	100.2	IE1	BF20.../SSE06MA4	1.4	4.9	9.9	14.5	17.5	180	200	220	240	240	30	7000	-
2.4	0.37	13.5	260	1.6	110.2	IE4	BF20.../S4E06LA4	1.3	4.5	9	13.5	16	260	260	260	260	260	30	7300	-
2.4	0.37	13.5	260	1.6	110.2	IE1	BF20.../SSE06MA4	1.3	4.5	9	13.5	16	240	260	260	260	260	30	7300	-
2.4	0.37	12	295	1.4	123.5	IE4	BF20.../S4E06LA4	1.2	4	8	12	14.5	295	295	295	295	295	30	7600	-
2.4	0.37	12	295	1.4	123.5	IE1	BF20.../SSE06MA4	1.2	4	8	12	14.5	220	245	270	295	295	30	7600	-
2.4	0.37	11	325	1.3	135.9	IE4	BF20.../S4E06LA4	1.1	3.6	7.3	11	13	325	325	325	325	325	30	7900	-
2.4	0.37	11	325	1.3	135.9	IE1	BF20.../SSE06MA4	1.1	3.6	7.3	11	13	240	270	295	325	325	30	7900	-
2.4	0.37	10.5	335	1.2	141.2	IE1	BF20Z.../SSE06MA4	1	3.5	7	10.5	12.5	250	280	310	335	335	31	7900	-
2.4	0.37	10.5	335	1.2	141.2	IE4	BF20Z.../S4E06LA4	1	3.5	7	10.5	12.5	335	335	335	335	335	31	7900	-
2.4	0.37	9.6	370	1.1	155.4	IE4	BF20Z.../S4E06LA4	0.95	3.2	6.4	9.6	11.5	370	370	370	370	370	31	7900	-
2.4	0.37	9.1	390	1.1	164.3	IE1	BF20Z.../SSE06MA4	0.95	3.2	6.4	9.6	11.5	275	310	340	370	370	31	7900	-
2.4	0.37	9.1	390	1.1	164.3	IE4	BF20Z.../S4E06LA4	0.9	3	6	9.1	10.5	295	325	360	390	390	31	7900	-
2.4	0.37	8.2	430	0.97	180.8	IE4	BF20Z.../S4E06LA4	0.8	2.7	5.5	8.2	9.9	430	430	430	430	430	31	7900	-
2.4	0.37	8.2	430	0.97	180.8	IE1	BF20Z.../SSE06MA4	0.8	2.7	5.5	8.2	9.9	325	360	395	430	430	31	7900	-
2.4	0.37	7.6	470	0.89	197.1	IE4	BF20Z.../S4E06LA4	0.75	2.5	5	7.6	9.1	470	470	470	470	470	31	7900	-
2.4	0.37	7.6	470	0.89	197.1	IE1	BF20Z.../SSE06MA4	0.75	2.5	5	7.6	9.1	350	390	430	470	470	31	7900	-
2.4	0.37	6.9	520	0.81	216.9	IE4	BF20Z.../SSE06MA4	0.65	2.3	4.6	6.9	8.2	390	430	475	520	520	31	7900	-
2.4	0.37	6.9	520	0.81	216.9	IE1	BF20Z.../S4E06LA4	0.65	2.3	4.6	6.9	8.2	520	520	520	520	520	31	7900	-
2.4	0.37	18.5	190	3	79.34	IE1	BF30.../SSE06MA4	1.8	6.3	12.5	18.5	22.5	142	158	174	190	190	40	5900	-
2.4	0.37	18.5	190	3	79.34	IE4	BF30.../S4E06LA4	1.8	6.3	12.5	18.5	22.5	190	190	190	190	190	40	5900	-
2.4	0.37	17	205	2.7	87.08	IE1	BF30.../SSE06MA4	1.7	5.7	11	17	20.5	156	174	191	205	205	40	6200	-
2.4	0.37	17	205	2.7	87.08	IE4	BF30.../S4E06LA4	1.7	5.7	11	17	20.5	205	205	205	205	205	40	6200	-
2.4	0.37	15.5	225	2.5	95.79	IE1	BF30.../SSE06MA4	1.5	5.2	10	15.5	18.5	172	191	210	225	225	40	6400	-
2.4	0.37	15.5	225	2.5	95.79	IE4	BF30.../S4E06LA4	1.5	5.2	10	15.5	18.5	225	225	225	225	225	40	6400	-
2.4	0.37	13.5	255	2.2	107.6	IE4	BF30.../S4E06LA4	1.3	4.6	9.2	13.5	16.5	255	255	255	255	255	40	6700	-
2.4	0.37	13.5	255	2.2	107.6	IE1	BF30.../SSE06MA4	1.3	4.6	9.2	13.5	16.5								

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$




MN = 2.4 Nm (PN = 0.37 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.4	0.37	9.6	370	2.4	155.6	IE1	BF40Z-../SSE06MA4	0.95	3.2	6.4	9.6	11.5	280	310	340	370	370	53	10600	-
2.4	0.37	9.6	370	2.4	155.6	IE4	BF40Z-../S4E06LA4	0.95	3.2	6.4	9.6	11.5	370	370	370	370	370	53	10600	-
2.4	0.37	8.7	410	2.2	171.2	IE4	BF40Z-../S4E06LA4	0.85	2.9	5.8	8.7	10.5	410	410	410	410	410	53	10600	-
2.4	0.37	8.7	410	2.2	171.2	IE1	BF40Z-../SSE06MA4	0.85	2.9	5.8	8.7	10.5	305	340	375	410	410	53	10600	-
2.4	0.37	7.9	450	2	188.3	IE4	BF40Z-../S4E06LA4	0.75	2.6	5.3	7.9	9.5	450	450	450	450	450	53	10600	-
2.4	0.37	7.9	450	2	188.3	IE1	BF40Z-../SSE06MA4	0.75	2.6	5.3	7.9	9.5	335	375	410	450	450	53	10600	-
2.4	0.37	7.4	485	1.9	202.2	IE4	BF40Z-../S4E06LA4	0.7	2.4	4.9	7.4	8.9	485	485	485	485	485	53	10600	-
2.4	0.37	7.4	485	1.9	202.2	IE1	BF40Z-../SSE06MA4	0.7	2.4	4.9	7.4	8.9	360	400	440	485	485	53	10600	-
2.4	0.37	6.7	530	1.7	222.4	IE4	BF40Z-../S4E06LA4	0.65	2.2	4.4	6.7	8	530	530	530	530	530	53	10600	-
2.4	0.37	6.7	530	1.7	222.4	IE1	BF40Z-../SSE06MA4	0.65	2.2	4.4	6.7	8	400	440	485	530	530	53	10600	-
2.4	0.37	5.9	600	1.5	253.2	IE4	BF40Z-../S4E06LA4	0.55	1.9	3.9	5.9	7.1	600	600	600	600	600	53	10600	-
2.4	0.37	5.9	600	1.5	253.2	IE1	BF40Z-../SSE06MA4	0.55	1.9	3.9	5.9	7.1	455	500	550	600	600	53	10600	-
2.4	0.37	5.3	660	1.3	278.5	IE4	BF40Z-../S4E06LA4	0.5	1.7	3.5	5.3	6.4	660	660	660	660	660	53	10600	-
2.4	0.37	5.3	660	1.3	278.5	IE1	BF40Z-../SSE06MA4	0.5	1.7	3.5	5.3	6.4	500	550	610	660	660	53	10600	-
2.4	0.37	5	700	1.3	295.1	IE4	BF40Z-../S4E06LA4	0.5	1.6	3.3	5	6	700	700	700	700	700	53	10600	-
2.4	0.37	5	700	1.3	295.1	IE1	BF40Z-../SSE06MA4	0.5	1.6	3.3	5	6	530	590	640	700	700	53	10600	-
2.4	0.37	4.6	770	1.2	324.7	IE4	BF40Z-../S4E06LA4	0.46	1.5	3	4.6	5.5	770	770	770	770	770	53	10600	-
2.4	0.37	4.6	770	1.2	324.7	IE1	BF40Z-../SSE06MA4	0.46	1.5	3	4.6	5.5	580	640	710	770	770	53	10600	-
2.4	0.37	4.3	830	1.1	346.8	IE1	BF40Z-../SSE06MA4	0.43	1.4	2.8	4.3	5.1	620	690	760	830	830	53	10600	-
2.4	0.37	4.3	830	1.1	346.8	IE4	BF40Z-../S4E06LA4	0.43	1.4	2.8	4.3	5.1	830	830	830	830	830	53	10600	-
2.4	0.37	3.9	910	0.98	381.5	IE4	BF40Z-../S4E06LA4	0.39	1.3	2.6	3.9	4.7	910	910	910	910	910	53	10600	-
2.4	0.37	3.9	910	0.98	381.5	IE1	BF40Z-../SSE06MA4	0.39	1.3	2.6	3.9	4.7	680	760	830	910	910	53	10600	-
2.4	0.37	3.5	1000	0.9	417.3	IE1	BF40Z-../SSE06MA4	0.35	1.1	2.3	3.5	4.3	750	830	910	1000	1000	53	10600	-
2.4	0.37	3.5	1000	0.9	417.3	IE4	BF40Z-../S4E06LA4	0.35	1.1	2.3	3.5	4.3	1000	1000	1000	1000	1000	53	10600	-
2.4	0.37	3.2	1100	0.82	459.1	IE1	BF40Z-../SSE06MA4	0.32	1	2.1	3.2	3.9	820	910	1010	1100	1100	53	10600	-
2.4	0.37	3.2	1100	0.82	459.1	IE4	BF40Z-../S4E06LA4	0.32	1	2.1	3.2	3.9	1100	1100	1100	1100	1100	53	10600	-
2.4	0.37	8.1	440	3	183.5	IE4	BF50Z-../S4E06LA4	0.8	2.7	5.4	8.1	9.8	440	440	440	440	440	82	13600	-
2.4	0.37	8.1	440	3	183.5	IE1	BF50Z-../SSE06MA4	0.8	2.7	5.4	8.1	9.8	330	365	400	440	440	82	13600	-
2.4	0.37	7.3	490	2.6	205.2	IE4	BF50Z-../S4E06LA4	0.7	2.4	4.8	7.3	8.7	490	490	490	490	490	82	13600	-
2.4	0.37	7.3	490	2.6	205.2	IE1	BF50Z-../SSE06MA4	0.7	2.4	4.8	7.3	8.7	365	410	450	490	490	82	13600	-
2.4	0.37	6	590	2.2	247.5	IE1	BF50Z-../SSE06MA4	0.6	2	4	6	7.2	445	495	540	590	590	82	13600	-
2.4	0.37	6	590	2.2	247.5	IE4	BF50Z-../S4E06LA4	0.6	2	4	6	7.2	590	590	590	590	590	82	13600	-
2.4	0.37	5.4	660	2	276.8	IE4	BF50Z-../S4E06LA4	0.5	1.8	3.6	5.4	6.5	660	660	660	660	660	82	13600	-
2.4	0.37	5.4	660	2	276.8	IE1	BF50Z-../SSE06MA4	0.5	1.8	3.6	5.4	6.5	495	550	600	660	660	82	13600	-
2.4	0.37	4.7	750	1.7	316.6	IE1	BF50Z-../SSE06MA4	0.47	1.5	3.1	4.7	5.6	560	630	690	750	750	82	13600	-
2.4	0.37	4.2	840	1.5	354	IE1	BF50Z-../SSE06MA4	0.42	1.4	2.8	4.2	5	630	700	770	840	840	82	13600	-
2.4	0.37	4.2	840	1.5	354	IE4	BF50Z-../S4E06LA4	0.42	1.4	2.8	4.2	5	840	840	840	840	840	82	13600	-
2.4	0.37	3.8	940	1.4	392.8	IE1	BF50Z-../SSE06MA4	0.38	1.2	2.5	3.8	4.5	700	780	860	940	940	82	13600	-
2.4	0.37	3.4	1050	1.2	439.3	IE4	BF50Z-../S4E06LA4	0.34	1.1	2.2	3.4	4	1050	1050	1050	1050	1050	82	13600	-
2.4	0.37	3.4	1050	1.2	439.3	IE1	BF50Z-../SSE06MA4	0.34	1.1	2.2	3.4	4	790	870	960	1050	1050	82	13600	-
2.4	0.37	3	1190	1.1	496.4	IE1	BF50Z-../SSE06MA4	0.3	1	2	3	3.6	890	990	1090	1190	1190	82	13600	-
2.4	0.37	3	1190	1.1	496.4	IE4	BF50Z-../S4E06LA4	0.3	1	2	3	3.6	1190	1190	1190	1190	1190	82	13600	-
2.4	0.37	2.7	1330	0.98	555.2	IE4	BF50Z-../S4E06LA4	0.27	0.9	1.8	2.7	3.2	1330	1330	1330	1330	1330	82	13600	-
2.4	0.37	2.7	1330	0.98	555.2	IE1	BF50Z-../SSE06MA4	0.27	0.9	1.8	2.7	3.2	990	1110	1220	1330	1330	82	13600	-
2.4	0.37	2.6	1330	1	555.9	IE1	BF50G10-../SSE06MA4	0.26	0.85	1.7	2.6	3.2	1000	1110	1220	1330	1330	86	13600	-
2.4	0.37	2.6	1330	1	555.9	IE4	BF50G10-../S4E06LA4	0.26	0.85	1.7	2.6	3.2	1330	1330	1330	1330	1330	86	13600	-
2.4	0.37	2.2	1630	0.86	680.9	IE4	BF50G10-../S4E06LA4	0.22	0.7	1.4	2.2	2.6	1630	1630	1630	1630	1630	86	13600	-
2.4	0.37	2.2	1630	0.86	680.9	IE1	BF50G10-../SSE06MA4	0.22	0.7	1.4	2.2	2.6	1220	1360	1490	1630	1630	86	13600	-
2.4	0.37	2.6	1360	1.8	569.3	IE4	BF60G20-../S4E06LA4	0.26	0.85	1.7	2.6	3.1	1360	1360	1360	1360	1360	134	15300	43300
2.4	0.37	2.6	1360	1.8	569.3	IE1	BF60G20-../SSE06MA4	0.26	0.85	1.7	2.6	3.1	1020	1130	1250	1360	1360	134	15300	43300
2.4	0.37	2.1	1650	1.5	689	IE1	BF60G20-../SSE06MA4	0.21	0.7	1.4	2.1	2.6	1240	1370	1510	1650	1650	134	15300	43300
2.4	0.37	2.1	1650	1.5	689	IE4	BF60G20-../S4E06LA4	0.21	0.7	1.4	2.1	2.6	1650	1650	1650	1650	1650	134	15300	43300
2.4	0.37	1.8	1950	1.3	813.2	IE1	BF60G20-../SSE06MA4	0.18	0.6	1.2	1.8	2.2	1460	1620	1780	1950	1950	134	15300	43300

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.6 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	162	23.5	2.9	9.21	IE4	BF06-../S4E06LA4	16	54	108	162	195	23	23.5	23.5	23.5	23.5	12	1900	-
2.6	0.4	124	31	2.4	12.07	IE4	BF06-../S4E06LA4	12	41	82	124	149	30	31	31	31	31	12	2000	-
2.6	0.4	105	36.5	2.3	14.21	IE4	BF06-../S4E06LA4	10.5	35	70	105	126	35.5	36.5	36.5	36.5	36.5	12	2100	-
2.6	0.4	88	44	2.2	16.99	IE4	BF06-../S4E06LA4	8.8	29	58	88	105	42	44	44	44	44	12	2500	-
2.6	0.4	73	53	1.8	20.42	IE4	BF06-../S4E06LA4	7.3	24	48.5	73	88	51	53	53	53	53	12	2700	-
2.6	0.4	56	69	1.4	26.76	IE4	BF06-../S4E06LA4	5.6	18.5	37	56	67	66	69	69	69	69	12	3000	-
2.6	0.4	47.5	81	1.2	31.5	IE4	BF06-../S4E06LA4	4.7	15.5	31.5	47.5	57	78	81	81	81	12	3200	-	
2.6	0.4	39.5	97	0.97	37.69	IE4	BF06-../S4E06LA4	3.9	13	26.5	39.5	47.5	94	97	97	97	97	12	3500	-
2.6	0.4	47.5	81	2.9	31.31	IE4	BF10-../S4E06LA4	4.7	15.5	31.5	47.5	57	78	81	81	81	23	3600	-	
2.6	0.4	41	93	2.6	36.15	IE4	BF10-../S4E06LA4	4.1	13.5	27.5	41	49.5	90	93	93	93	93	23	3800	-
2.6	0.4	37.5	103	2.3	39.75	IE4	BF10-../S4E06LA4	3.7	12.5	25	37.5	45	99	103	103	103	103	23	3950	-
2.6	0.4	34.5	111	2.1	43.06	IE4	BF10-../S4E06LA4	3.4	11.5	23	34.5	41.5	107	111	111	111	111	23	4100	-
2.6	0.4	31.5	123	1.9	47.35	IE4	BF10-../S4E06LA4	3.1	10.5	21	31.5	38	118	123	123	123	123	23	4250	-
2.6	0.4	29	133	1.8	51.28	IE4	BF10-../S4E06LA4	2.9	9.7	19.5	29	35	128	133	133	133	133	23	4400	-
2.6	0.4	26.5	146	1.6	56.39	IE4	BF10-../S4E06LA4	2.6	8.8	17.5	26.5	31.5	140	146	146	146	146	23	4550	-
2.6	0.4	24	160	1.5	61.55	IE4	BF10-../S4E06LA4	2.4	8.1	16	24	29	153	160	160	160	160	23	4700	-
2.6	0.4	22	175	1.4	67.69	IE4	BF10-../S4E06LA4	2.2	7.3	14.5	22	26.5	169	175	175	175	175	23	4900	-
2.6	0.4	19	200	1.2	77.55	IE4	BF10-../S4E06LA4	1.9	6.4	12.5	19	23	193	200	200	200	200	23	5100	-
2.6	0.4	17.5	220	1.1	85.27	IE4	BF10-../S4E06LA4	1.7	5.8	11.5	17.5	21	210	220	220	220	220	23	5300	-
2.6	0.4	16	235	1	90.91	IE4	BF10-../S4E06LA4	1.6	5.4	10.5	16	19.5	225	235	235	235	235	23	5400	-
2.6	0.4	15	255	0.92	99.97	IE4	BF10-../S4E06LA4	1.5	5	10	15	18	245	255	255	255	255	23	5600	-
2.6	0.4	13	290	0.82	112.3	IE4	BF10-../S4E06LA4	1.3	4.4	8.9	13	16	280	290	290	290	290	23	5900	-
2.6	0.4	28	138	3	53.43	IE4	BF20-../S4E06LA4	2.8	9.3	18.5	28	33.5	133	138	138	138	138	30	5500	-
2.6	0.4	25.5	151	2.8	58.24	IE4	BF20-../S4E06LA4	2.5	8.5	17	25.5	30.5	145	151	151	151	151	30	5600	-
2.6	0.4	23	166	2.5	64.08	IE4	BF20-../S4E06LA4	2.3	7.8	15.5	23	28	160	166	166	166	166	30	5900	-
2.6	0.4	21.5	181	2.3	69.7	IE4	BF20-../S4E06LA4	2.1	7.1	14	21.5	25.5	174	181	181	181	181	30	6100	-
2.6	0.4	19.5	199	2.1	76.69	IE4	BF20-../S4E06LA4	1.9	6.5	13	19.5	23	191	199	199	199	199	30	6300	-
2.6	0.4	17	225	1.9	87.31	IE4	BF20-../S4E06LA4	1.7	5.7	11	17	20.5	215	225	225	225	225	30	6600	-
2.6	0.4	15.5	245	1.7	96.08	IE4	BF20-../S4E06LA4	1.5	5.2	10	15.5	18.5	240	245	245	245	245	30	6900	-
2.6	0.4	14.5	260	1.6	100.2	IE4	BF20-../S4E06LA4	1.4	4.9	9.9	14.5	17.5	250	260	260	260	260	30	7000	-
2.6	0.4	13.5	285	1.5	110.2	IE4	BF20-../S4E06LA4	1.3	4.5	9	13.5	16	275	285	285	285	285	30	7300	-
2.6	0.4	12	320	1.3	123.5	IE4	BF20-../S4E06LA4	1.2	4	8	12	14.5	305	320	320	320	320	30	7600	-
2.6	0.4	11	350	1.2	135.9	IE4	BF20-../S4E06LA4	1.1	3.6	7.3	11	13	335	350	350	350	350	30	7900	-
2.6	0.4	10.5	365	1.1	141.2	IE4	BF20Z-../S4E06LA4	1	3.5	7	10.5	12.5	350	365	365	365	365	31	7900	-
2.6	0.4	9.6	400	1	155.4	IE4	BF20Z-../S4E06LA4	0.95	3.2	6.4	9.6	11.5	385	400	400	400	400	31	7900	-
2.6	0.4	9.1	425	0.98	164.3	IE4	BF20Z-../S4E06LA4	0.9	3	6	9.1	10.5	410	425	425	425	425	31	7900	-
2.6	0.4	8.2	470	0.89	180.8	IE4	BF20Z-../S4E06LA4	0.8	2.7	5.5	8.2	9.9	450	470	470	470	470	31	7900	-
2.6	0.4	7.6	510	0.82	197.1	IE4	BF20Z-../S4E06LA4	0.75	2.5	5	7.6	9.1	490	510	510	510	510	31	7900	-
2.6	0.4	20.5	187	3	72.13	IE4	BF30-../S4E06LA4	2	6.9	13.5	20.5	24.5	180	187	187	187	187	40	5700	-
2.6	0.4	18.5	205	2.8	79.34	IE4	BF30-../S4E06LA4	1.8	6.3	12.5	18.5	22.5	198	205	205	205	205	40	5900	-
2.6	0.4	17	225	2.5	87.08	IE4	BF30-../S4E06LA4	1.7	5.7	11	17	20.5	215	225	225	225	225	40	6200	-
2.6	0.4	15.5	245	2.3	95.79	IE4	BF30-../S4E06LA4	1.5	5.2	10	15.5	18.5	235	245	245	245	245	40	6400	-
2.6	0.4	13.5	275	2	107.6	IE4	BF30-../S4E06LA4	1.3	4.6	9.2	13.5	16.5	265	275	275	275	275	40	6700	-
2.6	0.4	12.5	305	1.9	118.3	IE4	BF30-../S4E06LA4	1.2	4.2	8.4	12.5	15	295	305	305	305	305	40	7000	-
2.6	0.4	12	320	1.8	124.7	IE4	BF30-../S4E06LA4	1.2	4	8	12	14	310	320	320	320	320	40	7100	-
2.6	0.4	10.5	355	1.6	137.1	IE4	BF30-../S4E06LA4	1	3.6	7.2	10.5	13	340	355	355	355	355	40	7400	-
2.6	0.4	9.9	390	1.5	150.7	IE4	BF30Z-../S4E06LA4	0.95	3.3	6.6	9.9	11.5	375	390	390	390	390	42	7400	-
2.6	0.4	9	430	1.3	165.8	IE4	BF30Z-../S4E06LA4	0.9	3	6	9	10.5	410	430	430	430	430	42	7400	-
2.6	0.4	8.4	455	1.2	176.6	IE4	BF30Z-../S4E06LA4	0.8	2.8	5.6	8.4	10	440	455	455	455	455	42	7400	-
2.6	0.4	7.7	500	1.1	194.3	IE4	BF30Z-../S4E06LA4	0.75	2.5	5.1	7.7	9.2	485	500	500	500	500	42	7400	-
2.6	0.4	6.6	580	0.98	224.8	IE4	BF30Z-../S4E06LA4	0.65	2.2	4.4	6.6	8	560	580	580	580	580	42	7400	-
2.6	0.4	6	640	0.89	247.3	IE4	BF30Z-../S4E06LA4	0.6	2	4	6	7.2	610	640	640	640	640	42	7400	-
2.6	0.4	5.6	680	0.83	263.5	IE4	BF30Z-../S4E06LA4	0.55	1.8	3.7	5.6	6.8	650	680	680	680	680	42	7400	-
2.6	0.4	10.5	365	2.4	141.4	IE4	BF40Z-../S4E06LA4	1	3.5	7	10.5	12.5	350	365	365	365	365	53	10600	-
2.6	0.4	9.6	400	2.2	155.6	IE4	BF40Z-../S4E06LA4	0.95	3.2	6.4	9.6	11.5	385	400	400</					

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.6 Nm (PN = 0.4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	2.6	1480	1.7	569.3	IE4	BF60G20-../S4E06LA4	0.26	0.85	1.7	2.6	3.1	1420	1480	1480	1480	1480	134	15300	43300
2.6	0.4	2.1	1790	1.4	689	IE4	BF60G20-../S4E06LA4	0.21	0.7	1.4	2.1	2.6	1720	1790	1790	1790	1790	134	15300	43300
2.6	0.4	1.8	2100	1.2	813.2	IE4	BF60G20-../S4E06LA4	0.18	0.6	1.2	1.8	2.2	2000	2100	2100	2100	2100	134	15300	43300
2.6	0.4	1.5	2400	1	937.6	IE4	BF60G20-../S4E06LA4	0.15	0.5	1	1.5	1.9	2300	2400	2400	2400	2400	134	15300	43300
2.6	0.4	1.7	2250	2.5	872.1	IE4	BF70G20-../S4E06LA4	0.17	0.55	1.1	1.7	2	2150	2250	2250	2250	2250	212	16100	47700
2.6	0.4	1.4	2600	2.2	1017	IE4	BF70G20-../S4E06LA4	0.14	0.49	0.95	1.4	1.7	2500	2600	2600	2600	2600	212	16100	47700
2.6	0.4	1	3600	1.6	1390	IE4	BF70G20-../S4E06LA4	0.1	0.35	0.7	1	1.2	3450	3600	3600	3600	3600	212	16100	47700
2.6	0.4	0.9	4200	1.4	1621	IE4	BF70G20-../S4E06LA4	0.09	0.3	0.6	0.9	1.1	4050	4200	4200	4200	4200	212	16100	47700
2.6	0.4	0.75	4950	1.1	1912	IE4	BF70G20-../S4E06LA4	0.075	0.26	0.5	0.75	0.9	4750	4950	4950	4950	4950	212	16100	47700
2.6	0.4	0.6	6300	0.9	2448	IE4	BF70G20-../S4E06LA4	0.06	0.2	0.4	0.6	0.7	6100	6300	6300	6300	6300	212	16100	47700

MN = 3.5 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
3.5	0.55	195	26.5	2.5	7.66	IE1	BF06-../SSE06LA4	19.5	65	130	195	230	19.1	22	26.5	26.5	26.5	12	1800	-
3.5	0.55	162	32	2.2	9.21	IE1	BF06-../SSE06LA4	16	54	108	162	195	23	26.5	32	32	32	12	1900	-
3.5	0.55	124	42	1.8	12.07	IE1	BF06-../SSE06LA4	12	41	82	124	149	30	35	42	42	42	12	2000	-
3.5	0.55	105	49.5	1.7	14.21	IE1	BF06-../SSE06LA4	10.5	35	70	105	126	35.5	41	49.5	49.5	49.5	12	2100	-
3.5	0.55	88	59	1.6	16.99	IE1	BF06-../SSE06LA4	8.8	29	58	88	105	42	49	59	59	59	12	2500	-
3.5	0.55	73	71	1.3	20.42	IE1	BF06-../SSE06LA4	7.3	24	48.5	73	88	51	59	71	71	71	12	2700	-
3.5	0.55	56	93	1	26.76	IE1	BF06-../SSE06LA4	5.6	18.5	37	56	67	66	77	93	93	93	12	3000	-
3.5	0.55	47.5	110	0.86	31.5	IE1	BF06-../SSE06LA4	4.7	15.5	31.5	47.5	57	78	91	110	110	12	3200	-	
3.5	0.55	64	81	2.9	23.28	IE1	BF10-../SSE06LA4	6.4	21	42.5	64	77	58	67	81	81	81	23	3200	-
3.5	0.55	58	89	2.7	25.6	IE1	BF10-../SSE06LA4	5.8	19.5	39	58	70	64	74	89	89	89	23	3350	-
3.5	0.55	52	99	2.4	28.47	IE1	BF10-../SSE06LA4	5.2	17.5	35	52	63	71	82	99	99	99	23	3450	-
3.5	0.55	47.5	109	2.2	31.31	IE1	BF10-../SSE06LA4	4.7	15.5	31.5	47.5	57	78	90	109	109	23	3600	-	
3.5	0.55	41	126	1.9	36.15	IE1	BF10-../SSE06LA4	4.1	13.5	27.5	41	49.5	90	104	126	126	126	23	3800	-
3.5	0.55	37.5	139	1.7	39.75	IE1	BF10-../SSE06LA4	3.7	12.5	25	37.5	45	99	115	139	139	139	23	3950	-
3.5	0.55	34.5	150	1.6	43.06	IE1	BF10-../SSE06LA4	3.4	11.5	23	34.5	41.5	107	124	150	150	150	23	4100	-
3.5	0.55	31.5	165	1.4	47.35	IE1	BF10-../SSE06LA4	3.1	10.5	21	31.5	38	118	137	165	165	165	23	4250	-
3.5	0.55	29	179	1.3	51.28	IE1	BF10-../SSE06LA4	2.9	9.7	19.5	29	35	128	148	179	179	179	23	4400	-
3.5	0.55	26.5	197	1.2	56.39	IE1	BF10-../SSE06LA4	2.6	8.8	17.5	26.5	31.5	140	163	197	197	197	23	4550	-
3.5	0.55	24	215	1.1	61.55	IE1	BF10-../SSE06LA4	2.4	8.1	16	24	29	153	178	215	215	215	23	4700	-
3.5	0.55	22	235	1	67.69	IE1	BF10-../SSE06LA4	2.2	7.3	14.5	22	26.5	169	196	235	235	235	23	4900	-
3.5	0.55	19	270	0.88	77.55	IE1	BF10-../SSE06LA4	1.9	6.4	12.5	19	23	193	220	270	270	270	23	5100	-
3.5	0.55	17.5	295	0.8	85.27	IE1	BF10-../SSE06LA4	1.7	5.8	11.5	17.5	21	210	245	295	295	295	23	5300	-
3.5	0.55	35.5	146	2.9	41.72	IE1	BF20-../SSE06LA4	3.5	11.5	23.5	35.5	43	104	120	146	146	146	30	4950	-
3.5	0.55	32.5	160	2.6	45.9	IE1	BF20-../SSE06LA4	3.2	10.5	21.5	32.5	39	114	133	160	160	160	30	5100	-
3.5	0.55	30.5	169	2.5	48.56	IE1	BF20-../SSE06LA4	3	10	20.5	30.5	37	121	140	169	169	169	30	5200	-
3.5	0.55	28	187	2.2	53.43	IE1	BF20-../SSE06LA4	2.8	9.3	18.5	28	33.5	133	154	187	187	187	30	5500	-
3.5	0.55	25.5	200	2.1	58.24	IE1	BF20-../SSE06LA4	2.5	8.5	17	25.5	30.5	145	168	200	200	200	30	5600	-
3.5	0.55	23	220	1.9	64.08	IE1	BF20-../SSE06LA4	2.3	7.8	15.5	23	28	160	185	220	220	220	30	5900	-
3.5	0.55	21.5	240	1.7	69.7	IE1	BF20-../SSE06LA4	2.1	7.1	14	21.5	25.5	174	200	240	240	240	30	6100	-
3.5	0.55	19.5	265	1.6	76.69	IE1	BF20-../SSE06LA4	1.9	6.5	13	19.5	23	191	220	265	265	265	30	6300	-
3.5	0.55	17	305	1.4	87.31	IE1	BF20-../SSE06LA4	1.7	5.7	11	17	20.5	215	250	305	305	305	30	6600	-
3.5	0.55	15.5	335	1.2	96.08	IE1	BF20-../SSE06LA4	1.5	5.2	10	15.5	18.5	240	275	335	335	335	30	6900	-
3.5	0.55	14.5	350	1.2	100.2	IE1	BF20-../SSE06LA4	1.4	4.9	9.9	14.5	17.5	250	290	350	350	350	30	7000	-
3.5	0.55	13.5	385	1.1	110.2	IE1	BF20-../SSE06LA4	1.3	4.5	9	13.5	16	275	315	385	385	385	30	7300	-
3.5	0.55	12	430	0.97	123.5	IE1	BF20-../SSE06LA4	1.2	4	8	12	14.5	305	355	430	430	430	30	7600	-
3.5	0.55	11	475	0.88	135.9	IE1	BF20-../SSE06LA4	1.1	3.6	7.3	11	13	335	390	475	475	475	30	7900	-
3.5	0.55	10.5	490	1.8	141.4	IE1	BF30-../SSE06LA4	1	3.5	7	10.5	12.5								

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 3.5 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
3.5	0.55	6.7	770	1.2	222.4	IE1	BF40Z-../SSE06LA4	0.65	2.2	4.4	6.7	8	550	640	770	770	770	53	10600	-
3.5	0.55	5.9	880	1	253.2	IE1	BF40Z-../SSE06LA4	0.55	1.9	3.9	5.9	7.1	630	730	880	880	880	53	10600	-
3.5	0.55	5.3	970	0.92	278.5	IE1	BF40Z-../SSE06LA4	0.5	1.7	3.5	5.3	6.4	690	800	970	970	970	53	10600	-
3.5	0.55	5	1030	0.87	295.1	IE1	BF40Z-../SSE06LA4	0.5	1.6	3.3	5	6	730	850	1030	1030	1030	53	10600	-
3.5	0.55	10.5	480	2.7	138.1	IE1	BF50Z-../SSE06LA4	1	3.6	7.2	10.5	13	345	400	480	480	480	82	13600	-
3.5	0.55	9.7	540	2.4	154.5	IE1	BF50Z-../SSE06LA4	0.95	3.2	6.4	9.7	11.5	385	445	540	540	540	82	13600	-
3.5	0.55	8.1	640	2	183.5	IE1	BF50Z-../SSE06LA4	0.8	2.7	5.4	8.1	9.8	455	530	640	640	640	82	13600	-
3.5	0.55	7.3	710	1.8	205.2	IE1	BF50Z-../SSE06LA4	0.7	2.4	4.8	7.3	8.7	510	590	710	710	710	82	13600	-
3.5	0.55	6	860	1.5	247.5	IE1	BF50Z-../SSE06LA4	0.6	2	4	6	7.2	610	710	860	860	860	82	13600	-
3.5	0.55	5.4	960	1.3	276.8	IE1	BF50Z-../SSE06LA4	0.5	1.8	3.6	5.4	6.5	690	800	960	960	960	82	13600	-
3.5	0.55	4.7	1100	1.2	316.6	IE1	BF50Z-../SSE06LA4	0.47	1.5	3.1	4.7	5.6	790	910	1100	1100	1100	82	13600	-
3.5	0.55	4.2	1230	1	354	IE1	BF50Z-../SSE06LA4	0.42	1.4	2.8	4.2	5	880	1020	1230	1230	1230	82	13600	-
3.5	0.55	3.8	1370	0.95	392.8	IE1	BF50Z-../SSE06LA4	0.38	1.2	2.5	3.8	4.5	980	1130	1370	1370	1370	82	13600	-
3.5	0.55	3.4	1530	0.85	439.3	IE1	BF50Z-../SSE06LA4	0.34	1.1	2.2	3.4	4	1090	1270	1530	1530	1530	82	13600	-
3.5	0.55	2.6	1990	1.3	569.3	IE1	BF60G20-../SSE06LA4	0.26	0.85	1.7	2.6	3.1	1420	1650	1990	1990	1990	134	15300	43300
3.5	0.55	2.1	2400	1	689	IE1	BF60G20-../SSE06LA4	0.21	0.7	1.4	2.1	2.6	1720	1990	2400	2400	2400	134	15300	43300
3.5	0.55	1.8	2800	0.88	813.2	IE1	BF60G20-../SSE06LA4	0.18	0.6	1.2	1.8	2.2	2000	2350	2800	2800	2800	134	15300	43300
3.5	0.55	2.5	2000	2.8	577.5	IE1	BF70G20-../SSE06LA4	0.25	0.85	1.7	2.5	3.1	1440	1670	2000	2000	2000	212	16100	47700
3.5	0.55	2.2	2350	2.4	673.6	IE1	BF70G20-../SSE06LA4	0.22	0.7	1.4	2.2	2.6	1680	1950	2350	2350	2350	212	16100	47700
3.5	0.55	1.7	3050	1.9	872.1	IE1	BF70G20-../SSE06LA4	0.17	0.55	1.1	1.7	2	2150	2500	3050	3050	3050	212	16100	47700
3.5	0.55	1.4	3550	1.6	1017	IE1	BF70G20-../SSE06LA4	0.14	0.49	0.95	1.4	1.7	2500	2900	3550	3550	3550	212	16100	47700
3.5	0.55	1	4850	1.2	1390	IE1	BF70G20-../SSE06LA4	0.1	0.35	0.7	1	1.2	3450	4000	4850	4850	4850	212	16100	47700
3.5	0.55	0.9	5600	1	1621	IE1	BF70G20-../SSE06LA4	0.09	0.3	0.6	0.9	1.1	4050	4700	5600	5600	5600	212	16100	47700
3.5	0.55	0.75	6600	0.85	1912	IE1	BF70G20-../SSE06LA4	0.075	0.26	0.5	0.75	0.9	4750	5500	6600	6600	6600	212	16100	47700

MN = 5 Nm (PN = 0.78 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	260	28.5	2.2	5.72	IE4	BF06-../S4E08MA4	26	87	174	260	310	28.5	28.5	28.5	28.5	28.5	16	1600	-
5	0.78	195	38	1.8	7.66	IE4	BF06-../S4E08MA4	19.5	65	130	195	230	38	38	38	38	38	16	1800	-
5	0.78	162	46	1.5	9.21	IE4	BF06-../S4E08MA4	16	54	108	162	195	46	46	46	46	46	16	1900	-
5	0.78	124	60	1.2	12.07	IE4	BF06-../S4E08MA4	12	41	82	124	149	60	60	60	60	60	16	2000	-
5	0.78	105	71	1.2	14.21	IE4	BF06-../S4E08MA4	10.5	35	70	105	126	71	71	71	71	71	16	2100	-
5	0.78	88	84	1.1	16.99	IE4	BF06-../S4E08MA4	8.8	29	58	88	105	84	84	84	84	84	16	2500	-
5	0.78	73	102	0.93	20.42	IE4	BF06-../S4E08MA4	7.3	24	48.5	73	88	102	102	102	102	102	16	2700	-
5	0.78	99	75	2.4	15.04	IE4	BF10-../S4E08MA4	9.9	33	66	99	119	75	75	75	75	75	27	2800	-
5	0.78	82	91	2.6	18.23	IE4	BF10-../S4E08MA4	8.2	27	54	82	98	91	91	91	91	91	27	2900	-
5	0.78	74	100	2.4	20.05	IE4	BF10-../S4E08MA4	7.4	24.5	49.5	74	89	100	100	100	100	100	27	3000	-
5	0.78	64	116	2.1	23.28	IE4	BF10-../S4E08MA4	6.4	21	42.5	64	77	116	116	116	116	116	27	3200	-
5	0.78	58	128	1.9	25.6	IE4	BF10-../S4E08MA4	5.8	19.5	39	58	70	128	128	128	128	128	27	3350	-
5	0.78	52	142	1.7	28.47	IE4	BF10-../S4E08MA4	5.2	17.5	35	52	63	142	142	142	142	142	27	3450	-
5	0.78	47.5	156	1.5	31.31	IE4	BF10-../S4E08MA4	4.7	15.5	31.5	47.5	57	156	156	156	156	156	27	3600	-
5	0.78	41	180	1.3	36.15	IE4	BF10-../S4E08MA4	4.1	13.5	27.5	41	49.5	180	180	180	180	180	27	3800	-
5	0.78	37.5	198	1.2	39.75	IE4	BF10-../S4E08MA4	3.7	12.5	25	37.5	45	198	198	198	198	198	27	3950	-
5	0.78	34.5	215	1.1	43.06	IE4	BF10-../S4E08MA4	3.4	11.5	23	34.5	41.5	215	215	215	215	215	27	4100	-
5	0.78	31.5	235	1	47.35	IE4	BF10-../S4E08MA4	3.1	10.5	21	31.5	38	235	235	235	235	235	27	4250	-
5	0.78	29	255	0.94	51.28	IE4	BF10-../S4E08MA4	2.9	9.7	19.5	29	35	255	255	255	255	255	27	4400	-
5	0.78	26.5	280	0.85	56.39	IE4	BF10-../S4E08MA4	2.6	8.8	17.5	26.5	31.5	280	280	280	280	280	27	4550	-
5	0.78	54	138	3	27.62	IE4	BF20-../S4E08MA4	5.4	18	36	54	65	138	138	138	138	138	33	4150	-
5	0.78	49	152	2.8	30.4	IE4	BF20-../S4E08MA4	4.9	16	32.5	49	59	152	152	152	152	152	33	4400	-
5	0.78	46	162	2.6	32.58	IE4	BF20-../S4E08MA4	4.6	15	30.5</										

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 0.78 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	20.5	360	1.6	72.13	IE4	BF30.../S4E08MA4	2	6.9	13.5	20.5	24.5	360	360	360	360	360	43	5700	-
5	0.78	18.5	395	1.4	79.34	IE4	BF30.../S4E08MA4	1.8	6.3	12.5	18.5	22.5	395	395	395	395	395	43	5900	-
5	0.78	17	435	1.3	87.08	IE4	BF30.../S4E08MA4	1.7	5.7	11	17	20.5	435	435	435	435	435	43	6200	-
5	0.78	15.5	475	1.2	95.79	IE4	BF30.../S4E08MA4	1.5	5.2	10	15.5	18.5	475	475	475	475	475	43	6400	-
5	0.78	13.5	530	1.1	107.6	IE4	BF30.../S4E08MA4	1.3	4.6	9.2	13.5	16.5	530	530	530	530	530	43	6700	-
5	0.78	12.5	590	0.96	118.3	IE4	BF30.../S4E08MA4	1.2	4.2	8.4	12.5	15	590	590	590	590	590	43	7000	-
5	0.78	12	620	0.91	124.7	IE4	BF30.../S4E08MA4	1.2	4	8	12	14	620	620	620	620	620	43	7100	-
5	0.78	10.5	680	0.83	137.1	IE4	BF30.../S4E08MA4	1	3.6	7.2	10.5	13	680	680	680	680	680	43	7400	-
5	0.78	24	305	2.9	61.25	IE4	BF40.../S4E08MA4	2.4	8.1	16	24	29	305	305	305	305	305	53	7600	-
5	0.78	22	335	2.7	67.38	IE4	BF40.../S4E08MA4	2.2	7.4	14.5	22	26.5	335	335	335	335	335	53	8000	-
5	0.78	21	355	2.5	71.4	IE4	BF40.../S4E08MA4	2.1	7	14	21	25	355	355	355	355	355	53	8100	-
5	0.78	19	390	2.3	78.55	IE4	BF40.../S4E08MA4	1.9	6.3	12.5	19	22.5	390	390	390	390	390	53	8500	-
5	0.78	17.5	415	2.1	83.91	IE4	BF40.../S4E08MA4	1.7	5.9	11.5	17.5	21	415	415	415	415	415	53	8700	-
5	0.78	16	460	1.9	92.31	IE4	BF40.../S4E08MA4	1.6	5.4	10.5	16	19	460	460	460	460	460	53	9100	-
5	0.78	14.5	500	1.8	101	IE4	BF40.../S4E08MA4	1.4	4.9	9.9	14.5	17.5	500	500	500	500	500	53	9400	-
5	0.78	13.5	550	1.6	111.1	IE4	BF40.../S4E08MA4	1.3	4.5	9	13.5	16	550	550	550	550	550	53	9800	-
5	0.78	12	620	1.4	124.5	IE4	BF40.../S4E08MA4	1.2	4	8	12	14	620	620	620	620	620	53	10200	-
5	0.78	10.5	680	1.3	137	IE4	BF40.../S4E08MA4	1	3.6	7.2	10.5	13	680	680	680	680	680	53	10600	-
5	0.78	700	1.3	141.4	IE4	BF40Z.../S4E08MA4	1	3.5	7	10.5	12.5	700	700	700	700	700	56	10600	-	
5	0.78	9.6	770	1.2	155.6	IE4	BF40Z.../S4E08MA4	0.95	3.2	6.4	9.6	11.5	770	770	770	770	770	56	10600	-
5	0.78	8.7	850	1.1	171.2	IE4	BF40Z.../S4E08MA4	0.85	2.9	5.8	8.7	10.5	850	850	850	850	850	56	10600	-
5	0.78	7.9	940	0.96	188.3	IE4	BF40Z.../S4E08MA4	0.75	2.6	5.3	7.9	9.5	940	940	940	940	940	56	10600	-
5	0.78	7.4	1010	0.89	202.2	IE4	BF40Z.../S4E08MA4	0.7	2.4	4.9	7.4	8.9	1010	1010	1010	1010	1010	56	10600	-
5	0.78	6.7	1110	0.81	222.4	IE4	BF40Z.../S4E08MA4	0.65	2.2	4.4	6.7	8	1110	1110	1110	1110	1110	56	10600	-
5	0.78	16.5	450	2.9	90.24	IE4	BF50.../S4E08MA4	1.6	5.5	11	16.5	19.5	450	450	450	450	450	81	11800	-
5	0.78	14.5	500	2.6	100.9	IE4	BF50.../S4E08MA4	1.4	4.9	9.9	14.5	17.5	500	500	500	500	500	81	12300	-
5	0.78	13	570	2.3	114	IE4	BF50.../S4E08MA4	1.3	4.3	8.7	13	15.5	570	570	570	570	570	81	12900	-
5	0.78	11.5	630	2	127.5	IE4	BF50.../S4E08MA4	1.1	3.9	7.8	11.5	14	630	630	630	630	630	81	13600	-
5	0.78	10.5	690	1.9	138.1	IE4	BF50Z.../S4E08MA4	1	3.6	7.2	10.5	13	690	690	690	690	690	86	13600	-
5	0.78	9.7	770	1.7	154.5	IE4	BF50Z.../S4E08MA4	0.95	3.2	6.4	9.7	11.5	770	770	770	770	770	86	13600	-
5	0.78	8.1	910	1.4	183.5	IE4	BF50Z.../S4E08MA4	0.8	2.7	5.4	8.1	9.8	910	910	910	910	910	86	13600	-
5	0.78	7.3	1020	1.3	205.2	IE4	BF50Z.../S4E08MA4	0.7	2.4	4.8	7.3	8.7	1020	1020	1020	1020	1020	86	13600	-
5	0.78	6	1230	1.1	247.5	IE4	BF50Z.../S4E08MA4	0.6	2	4	6	7.2	1230	1230	1230	1230	1230	86	13600	-
5	0.78	5.4	1380	0.94	276.8	IE4	BF50Z.../S4E08MA4	0.5	1.8	3.6	5.4	6.5	1380	1380	1380	1380	1380	86	13600	-
5	0.78	4.7	1580	0.82	316.6	IE4	BF50Z.../S4E08MA4	0.47	1.5	3.1	4.7	5.6	1580	1580	1580	1580	1580	86	13600	-
5	0.78	8.8	840	2.7	169.2	IE4	BF60Z.../S4E08MA4	0.85	2.9	5.9	8.8	10.5	840	840	840	840	840	130	15300	43300
5	0.78	7.9	930	2.5	187.7	IE4	BF60Z.../S4E08MA4	0.75	2.6	5.3	7.9	9.5	930	930	930	930	930	130	15300	43300
5	0.78	6.7	1100	2.1	221.4	IE4	BF60Z.../S4E08MA4	0.65	2.2	4.5	6.7	8.1	1100	1100	1100	1100	1100	130	15300	43300
5	0.78	6.1	1220	1.9	245.6	IE4	BF60Z.../S4E08MA4	0.6	2	4	6.1	7.3	1220	1220	1220	1220	1220	130	15300	43300
5	0.78	5.1	1460	1.6	293.4	IE4	BF60Z.../S4E08MA4	0.5	1.7	3.4	5.1	6.1	1460	1460	1460	1460	1460	130	15300	43300
5	0.78	4.6	1620	1.4	325.6	IE4	BF60Z.../S4E08MA4	0.46	1.5	3	4.6	5.5	1620	1620	1620	1620	1620	130	15300	43300
5	0.78	3.9	1900	1.2	380	IE4	BF60Z.../S4E08MA4	0.39	1.3	2.6	3.9	4.7	1900	1900	1900	1900	1900	130	15300	43300
5	0.78	3.5	2100	1.1	421.6	IE4	BF60Z.../S4E08MA4	0.35	1.1	2.3	3.5	4.2	2100	2100	2100	2100	2100	130	15300	43300
5	0.78	3.2	2250	1	459.9	IE4	BF60Z.../S4E08MA4	0.32	1	2.1	3.2	3.9	2250	2250	2250	2250	2250	130	15300	43300
5	0.78	2.9	2550	0.9	510.3	IE4	BF60Z.../S4E08MA4	0.29	0.95	1.9	2.9	3.5	2550	2550	2550	2550	2550	130	15300	43300
5	0.78	2.6	2800	0.88	569.3	IE4	BF60G20.../S4E08MA4	0.26	0.85	1.7	2.6	3.1	2800	2800	2800	2800	2800	137	15300	43300
5	0.78	4.3	1700	3	341.7	IE4	BF70Z.../S4E08MA4	0.43	1.4	2.9	4.3	5.2	1700	1700	1700	1700	1700	218	16100	47700
5	0.78	3.7	1990	2.6	398.7	IE4	BF70Z.../S4E08MA4	0.37	1.2	2.5	3.7	4.5	1990	1990	1990	1990	1990	218	16100	47700
5	0.78	3.4	2150	2.4	439.2	IE4	BF70Z.../S4E08MA4	0.34	1.1	2.2	3.4	4	2150	2150	2150	2150	2150	218	16100	47700
5	0.78	2.9	2550	2	512.4	IE4	BF70Z.../S4E08MA4	0.29	0.95	1.9	2.9	3.5	2550	2550	2550	2550	2550	218	16100	47700
5	0.78	2.8	2600	2.2	524.1	IE4	BF70G20.../S4E08MA4	0.28	0.95	1.9	2.8	3.4	2600	2600	2600	2600	2600	216	16100	47700
5	0.78	2.5	2850	2	577.5	IE4	BF70G20.../S4E08MA4	0.25	0.85	1.7	2.5	3.1	2850	2850	2850	2850	2850	216	16100	47700
5	0.78	2.2	3350	1.7	673.6	IE4	BF70G20.../S4E08MA4	0.22	0.7	1.4	2.2	2.6	3350	3350	3350	3350	3350	216	16100	47700
5	0.78	1.7	4350	1.3	872.1															

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 1.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	260	40	1.5	5.72	IE3	BF06-..SPE08LA4	26	87	174	260	310	37	40	40	40	40	17	1600	-
7	1.1	195	53	1.3	7.66	IE3	BF06-..SPE08LA4	19.5	65	130	195	230	49.5	53	53	53	53	17	1800	-
7	1.1	162	64	1.1	9.21	IE3	BF06-..SPE08LA4	16	54	108	162	195	59	64	64	64	64	17	1900	-
7	1.1	124	84	0.89	12.07	IE3	BF06-..SPE08LA4	12	41	82	124	149	78	84	84	84	84	17	2000	-
7	1.1	105	99	0.85	14.21	IE3	BF06-..SPE08LA4	10.5	35	70	105	126	92	99	99	99	99	17	2100	-
7	1.1	88	118	0.8	16.99	IE3	BF06-..SPE08LA4	8.8	29	58	88	105	110	118	118	118	17	2500	-	
7	1.1	197	53	2.9	7.58	IE3	BF10-..SPE08LA4	19.5	65	131	197	235	49	53	53	53	53	28	2200	-
7	1.1	154	67	2.6	9.69	IE3	BF10-..SPE08LA4	15	51	103	154	185	62	67	67	67	67	28	2350	-
7	1.1	126	82	2.2	11.84	IE3	BF10-..SPE08LA4	12.5	42	84	126	152	76	82	82	82	82	28	2500	-
7	1.1	99	105	1.7	15.04	IE3	BF10-..SPE08LA4	9.9	33	66	99	119	97	105	105	105	105	28	2800	-
7	1.1	82	127	1.9	18.23	IE3	BF10-..SPE08LA4	8.2	27	54	82	98	118	127	127	127	127	28	2900	-
7	1.1	74	140	1.7	20.05	IE3	BF10-..SPE08LA4	7.4	24.5	49.5	74	89	130	140	140	140	140	28	3000	-
7	1.1	64	162	1.5	23.28	IE3	BF10-..SPE08LA4	6.4	21	42.5	64	77	151	162	162	162	162	28	3200	-
7	1.1	58	179	1.3	25.6	IE3	BF10-..SPE08LA4	5.8	19.5	39	58	70	166	179	179	179	179	28	3350	-
7	1.1	52	199	1.2	28.47	IE3	BF10-..SPE08LA4	5.2	17.5	35	52	63	185	199	199	199	199	28	3450	-
7	1.1	47.5	215	1.1	31.31	IE3	BF10-..SPE08LA4	4.7	15.5	31.5	47.5	57	200	215	215	215	215	28	3600	-
7	1.1	41	250	0.95	36.15	IE3	BF10-..SPE08LA4	4.1	13.5	27.5	41	49.5	230	250	250	250	250	28	3800	-
7	1.1	37.5	275	0.86	39.75	IE3	BF10-..SPE08LA4	3.7	12.5	25	37.5	45	255	275	275	275	275	28	3950	-
7	1.1	34.5	300	0.8	43.06	IE3	BF10-..SPE08LA4	3.4	11.5	23	34.5	41.5	275	300	300	300	300	28	4100	-
7	1.1	96	108	2.8	15.54	IE3	BF20-..SPE08LA4	9.6	32	64	96	115	101	108	108	108	108	35	3450	-
7	1.1	81	129	2.9	18.45	IE3	BF20-..SPE08LA4	8.1	27	54	81	97	119	129	129	129	35	3600	-	
7	1.1	68	154	2.6	22.04	IE3	BF20-..SPE08LA4	6.8	22.5	45	68	81	143	154	154	154	154	35	3800	-
7	1.1	61	169	2.4	24.25	IE3	BF20-..SPE08LA4	6.1	20.5	41	61	74	157	169	169	169	169	35	3950	-
7	1.1	54	193	2.2	27.62	IE3	BF20-..SPE08LA4	5.4	18	36	54	65	179	193	193	193	193	35	4150	-
7	1.1	49	210	2	30.4	IE3	BF20-..SPE08LA4	4.9	16	32.5	49	59	197	210	210	210	210	35	4400	-
7	1.1	46	225	1.8	32.58	IE3	BF20-..SPE08LA4	4.6	15	30.5	46	55	210	225	225	225	225	35	4450	-
7	1.1	41.5	250	1.7	35.85	IE3	BF20-..SPE08LA4	4.1	13.5	27.5	41.5	50	230	250	250	250	250	35	4650	-
7	1.1	35.5	290	1.4	41.72	IE3	BF20-..SPE08LA4	3.5	11.5	23.5	35.5	43	270	290	290	290	290	35	4950	-
7	1.1	32.5	320	1.3	45.9	IE3	BF20-..SPE08LA4	3.2	10.5	21.5	32.5	39	295	320	320	320	320	35	5100	-
7	1.1	30.5	335	1.2	48.56	IE3	BF20-..SPE08LA4	3	10	20.5	30.5	37	315	335	335	335	335	35	5200	-
7	1.1	28	370	1.1	53.43	IE3	BF20-..SPE08LA4	2.8	9.3	18.5	28	33.5	345	370	370	370	370	35	5500	-
7	1.1	25.5	405	1	58.24	IE3	BF20-..SPE08LA4	2.5	8.5	17	25.5	30.5	375	405	405	405	405	35	5600	-
7	1.1	23	445	0.94	64.08	IE3	BF20-..SPE08LA4	2.3	7.8	15.5	23	28	415	445	445	445	445	35	5900	-
7	1.1	21.5	485	0.86	69.7	IE3	BF20-..SPE08LA4	2.1	7.1	14	21.5	25.5	450	485	485	485	485	35	6100	-
7	1.1	53	197	2.9	28.23	IE3	BF30-..SPE08LA4	5.3	17.5	35	53	63	183	197	197	197	197	45	3800	-
7	1.1	48	215	2.6	31.05	IE3	BF30-..SPE08LA4	4.8	16	32	48	57	200	215	215	215	215	45	4000	-
7	1.1	42.5	245	2.3	35	IE3	BF30-..SPE08LA4	4.2	14	28.5	42.5	51	225	245	245	245	245	45	4200	-
7	1.1	38.5	265	2.1	38.49	IE3	BF30-..SPE08LA4	3.8	12.5	25.5	38.5	46.5	250	265	265	265	265	45	4400	-
7	1.1	36.5	285	2	41.01	IE3	BF30-..SPE08LA4	3.6	12	24	36.5	43.5	265	285	285	285	285	45	4500	-
7	1.1	33	315	1.8	45.1	IE3	BF30-..SPE08LA4	3.3	11	22	33	39.5	290	315	315	315	315	45	4700	-
7	1.1	28.5	365	1.6	52.2	IE3	BF30-..SPE08LA4	2.8	9.5	19	28.5	34	335	365	365	365	365	45	5000	-
7	1.1	26	400	1.4	57.41	IE3	BF30-..SPE08LA4	2.6	8.7	17	26	31	370	400	400	400	400	45	5200	-
7	1.1	24.5	425	1.3	61.17	IE3	BF30-..SPE08LA4	2.4	8.1	16	24.5	29	395	425	425	425	425	45	5300	-
7	1.1	22	470	1.2	67.28	IE3	BF30-..SPE08LA4	2.2	7.4	14.5	22	26.5	435	470	470	470	470	45	5500	-
7	1.1	20.5	500	1.1	72.13	IE3	BF30-..SPE08LA4	2	6.9	13.5	20.5	24.5	465	500	500	500	500	45	5700	-
7	1.1	18.5	550	1	79.34	IE3	BF30-..SPE08LA4	1.8	6.3	12.5	18.5	22.5	510	550	550	550	550	45	5900	-
7	1.1	17	600	0.94	87.08	IE3	BF30-..SPE08LA4	1.7	5.7	11	17	20.5	560	600	600	600	600	45	6200	-
7	1.1	15.5	670	0.85	95.79	IE3	BF30-..SPE08LA4	1.5	5.2	10	15.5	18.5	620	670	670	670	670	45	6400	-
7	1.1	32.5	315	2.8	45.56	IE3	BF40-..SPE08LA4	3.2	10.5	21.5	32.5	39.5	295	315	315	315	315	54	6800	-
7	1.1	30.5	340	2.6	48.92	IE3	BF40-..SPE08LA4	3	10	20	30.5	36.5	315	340	340	340	340	54	7000	-
7	1.1	27.5	375	2.4	53.82	IE3	BF40-..SPE08LA4	2.7	9.2	18.5	27.5	33	345	375	375	375	375	54	7200	-
7	1.1	24	425	2.1	61.25	IE3	BF40-..SPE08LA4	2.4	8.1	16	24	29	395	425	425	425	425	54	7600	-
7	1.1	22	470	1.9	67.38	IE3	BF40-..SPE08LA4	2.2	7.4	14.5	22	26.5	435	470	470	470	470	54	8000	-
7	1.1	21	495	1.8	71.4	IE3	BF40-..SPE08LA4	2.1	7	14	21	25	460	495	495	495	495	54	8100	-
7	1.1	19	540	1.6	78.55	IE3	BF40-..SPE08LA4	1.9	6.3	12.5	19	22.5	510	540	540	540	540	54	8500	-
7	1.1	17.5	580	1.5	83.91	IE3	BF40-..SPE08LA4	1.7	5.9	11.5	17.5	21	540	580	580	580	580	54	8700	-
7	1.1	16	640	1.4	92.31	IE3</														

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 1.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	7.9	1310	1.8	187.7	IE3	BF60Z-../SPE08LA4	0.75	2.6	5.3	7.9	9.5	1220	1310	1310	1310	1310	131	15300	43300
7	1.1	6.7	1540	1.5	221.4	IE3	BF60Z-../SPE08LA4	0.65	2.2	4.5	6.7	8.1	1430	1540	1540	1540	1540	131	15300	43300
7	1.1	6.1	1710	1.3	245.6	IE3	BF60Z-../SPE08LA4	0.6	2	4	6.1	7.3	1590	1710	1710	1710	1710	131	15300	43300
7	1.1	5.1	2050	1.1	293.4	IE3	BF60Z-../SPE08LA4	0.5	1.7	3.4	5.1	6.1	1900	2050	2050	2050	2050	131	15300	43300
7	1.1	4.6	2250	1	325.6	IE3	BF60Z-../SPE08LA4	0.46	1.5	3	4.6	5.5	2100	2250	2250	2250	2250	131	15300	43300
7	1.1	3.9	2650	0.86	380	IE3	BF60Z-../SPE08LA4	0.39	1.3	2.6	3.9	4.7	2450	2650	2650	2650	2650	131	15300	43300
7	1.1	5.7	1810	2.9	258.7	IE3	BF70Z-../SPE08LA4	0.55	1.9	3.8	5.7	6.9	1680	1810	1810	1810	1810	220	16100	47700
7	1.1	4.9	2100	2.5	301.8	IE3	BF70Z-../SPE08LA4	0.49	1.6	3.3	4.9	5.9	1960	2100	2100	2100	2100	220	16100	47700
7	1.1	4.3	2350	2.2	341.7	IE3	BF70Z-../SPE08LA4	0.43	1.4	2.9	4.3	5.2	2200	2350	2350	2350	2350	220	16100	47700
7	1.1	3.7	2750	1.9	398.7	IE3	BF70Z-../SPE08LA4	0.37	1.2	2.5	3.7	4.5	2550	2750	2750	2750	2750	220	16100	47700
7	1.1	3.4	3050	1.7	439.2	IE3	BF70Z-../SPE08LA4	0.34	1.1	2.2	3.4	4	2850	3050	3050	3050	3050	220	16100	47700
7	1.1	2.9	3550	1.4	512.4	IE3	BF70Z-../SPE08LA4	0.29	0.95	1.9	2.9	3.5	3300	3550	3550	3550	3550	220	16100	47700
7	1.1	2.8	3650	1.6	524.1	IE3	BF70G20-../SPE08LA4	0.28	0.95	1.9	2.8	3.4	3400	3650	3650	3650	3650	217	16100	47700
7	1.1	2.5	4000	1.4	577.5	IE3	BF70G20-../SPE08LA4	0.25	0.85	1.7	2.5	3.1	3750	4000	4000	4000	4000	217	16100	47700
7	1.1	2.2	4700	1.2	673.6	IE3	BF70G20-../SPE08LA4	0.22	0.7	1.4	2.2	2.6	4350	4700	4700	4700	4700	217	16100	47700
7	1.1	1.7	6100	0.93	872.1	IE3	BF70G20-../SPE08LA4	0.17	0.55	1.1	1.7	2	5600	6100	6100	6100	6100	217	16100	47700
7	1.1	1.4	7100	0.8	1017	IE3	BF70G20-../SPE08LA4	0.14	0.49	0.95	1.4	1.7	6600	7100	7100	7100	7100	217	16100	47700
7	1.1	2.9	3550	2.9	511.2	IE3	BF80Z-../SPE08LA4	0.29	0.95	1.9	2.9	3.5	3300	3550	3550	3550	3550	336	39600	75000
7	1.1	2.5	4050	2.6	583.4	IE3	BF80Z-../SPE08LA4	0.25	0.85	1.7	2.5	3	3750	4050	4050	4050	4050	336	39600	75000
7	1.1	2.2	4600	2.3	662.1	IE3	BF80Z-../SPE08LA4	0.22	0.75	1.5	2.2	2.7	4300	4600	4600	4600	4600	336	39600	75000
7	1.1	1.9	5300	1.9	770.6	IE3	BF80Z-../SPE08LA4	0.19	0.6	1.2	1.9	2.3	5000	5300	5300	5300	5300	336	39600	75000
7	1.1	1.7	6100	1.7	874.6	IE3	BF80Z-../SPE08LA4	0.17	0.55	1.1	1.7	2	5600	6100	6100	6100	6100	336	39600	75000
7	1.1	1.5	6900	1.5	990.4	IE3	BF80Z-../SPE08LA4	0.15	0.5	1	1.5	1.8	6400	6900	6900	6900	6900	336	39600	75000
7	1.1	1.3	7800	1.3	1124	IE3	BF80Z-../SPE08LA4	0.13	0.44	0.85	1.3	1.6	7300	7800	7800	7800	7800	336	39600	75000
7	1.1	1.1	9300	1.1	1329	IE3	BF80G40-../SPE08LA4	0.11	0.37	0.75	1.1	1.3	8600	9300	9300	9300	9300	341	39600	75000
7	1.1	1	10400	1	1491	IE3	BF80G40-../SPE08LA4	0.1	0.33	0.65	1	1.2	9600	10400	10400	10400	10400	341	39600	75000
7	1.1	0.85	11800	0.89	1693	IE3	BF80G40-../SPE08LA4	0.085	0.29	0.55	0.85	1	11000	11800	11800	11800	11800	341	39600	75000
7	1.1	1.5	6800	2.7	976.1	IE3	BF90G50-../SPE08LA4	0.15	0.5	1	1.5	1.8	6300	6800	6800	6800	6800	612	42800	120000
7	1.1	1.4	7300	2.5	1043	IE3	BF90G50-../SPE08LA4	0.14	0.47	0.95	1.4	1.7	6700	7300	7300	7300	7300	612	42800	120000
7	1.1	1.2	8400	2.2	1204	IE3	BF90G50-../SPE08LA4	0.12	0.41	0.8	1.2	1.4	7800	8400	8400	8400	8400	612	42800	120000
7	1.1	1	10100	1.8	1444	IE3	BF90G50-../SPE08LA4	0.1	0.34	0.65	1	1.2	9300	10100	10100	10100	10100	612	42800	120000
7	1.1	0.85	11700	1.6	1678	IE3	BF90G50-../SPE08LA4	0.085	0.29	0.55	0.85	1	10900	11700	11700	11700	11700	612	42800	120000
7	1.1	0.8	13000	1.4	1867	IE3	BF90G50-../SPE08LA4	0.08	0.26	0.5	0.8	0.95	12100	13000	13000	13000	13000	612	42800	120000
7	1.1	0.65	15000	1.2	2154	IE3	BF90G50-../SPE08LA4	0.065	0.23	0.46	0.65	0.8	14000	15000	15000	15000	15000	612	42800	120000
7	1.1	0.55	18500	1	2656	IE3	BF90G50-../SPE08LA4	0.055	0.18	0.37	0.55	0.65	17200	18500	18500	18500	18500	612	42800	120000
7	1.1	0.5	20500	0.9	2952	IE3	BF90G50-../SPE08LA4	0.05	0.16	0.33	0.5	0.6	19100	20500	20500	20500	20500	612	42800	120000
7	1.1	0.45	23000	0.8	3286	IE3	BF90G50-../SPE08LA4	0.045	0.15	0.3	0.45	0.5	21000	23000	23000	23000	23000	612	42800	120000

MN = 10 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	260	57	1.1	5.72	IE1	BF06-../SSE08LA4	26	87	174	260	310	37	45.5	57	57	57	17	1600	-
10	1.55	195	76	0.89	7.66	IE1	BF06-../SSE08LA4	19.5	65	130	195	230	49.5	61	76	76	76	17	1800	-
10	1.55	265	56	2.5	5.6	IE4	BF10-../S4E09SA4	26.5	89	178	265	320	47.5	56	56	56	56	32	1950	-
10	1.55	265	56	2.5	5.6	IE1	BF10-../SSE08LA4	26.5	89	178	265	320	36	44.5	56	56	56	28	1950	-
10	1.55	197	75	2	7.58	IE4	BF10-../S4E09SA4	19.5	65	131	197	235	64	75	75	75	75	32	2200	-
10	1.55	197	75	2	7.58	IE1	BF10-../SSE08LA4	19.5	65	131	197	235	49	60	75	75	75	28	2200	-
10	1.55	154	96	1.8	9.69	IE4	BF10-../S4E09SA4	15	51	103	154	185	82	96	96	96	96	32	2350	-
10	1.55	154	96	1.8	9.69	IE1	BF10-../SSE08LA4</td													

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$


MN = 10 Nm (PN = 1.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [>1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	89	167	2.1	16.77	IE4	BF20-..S4E09SA4	8.9	29.5	59	89	107	142	167	167	167	167	38	3500	-
10	1.55	89	167	2.1	16.77	IE1	BF20-..SSE08LA4	8.9	29.5	59	89	107	109	134	167	167	167	35	3500	-
10	1.55	81	184	2	18.45	IE1	BF20-..SSE08LA4	8.1	27	54	81	97	119	147	184	184	184	35	3600	-
10	1.55	81	184	2	18.45	IE4	BF20-..S4E09SA4	8.1	27	54	81	97	156	184	184	184	184	38	3600	-
10	1.55	68	220	1.8	22.04	IE1	BF20-..SSE08LA4	6.8	22.5	45	68	81	143	176	220	220	220	35	3800	-
10	1.55	68	220	1.8	22.04	IE4	BF20-..S4E09SA4	6.8	22.5	45	68	81	187	220	220	220	220	38	3800	-
10	1.55	61	240	1.6	24.25	IE1	BF20-..SSE08LA4	6.1	20.5	41	61	74	157	194	240	240	240	35	3950	-
10	1.55	61	240	1.6	24.25	IE4	BF20-..S4E09SA4	6.1	20.5	41	61	74	205	240	240	240	240	38	3950	-
10	1.55	54	275	1.5	27.62	IE1	BF20-..SSE08LA4	5.4	18	36	54	65	179	220	275	275	275	35	4150	-
10	1.55	54	275	1.5	27.62	IE4	BF20-..S4E09SA4	5.4	18	36	54	65	230	275	275	275	275	38	4150	-
10	1.55	49	300	1.4	30.4	IE1	BF20-..SSE08LA4	4.9	16	32.5	49	59	197	240	300	300	300	35	4400	-
10	1.55	49	300	1.4	30.4	IE4	BF20-..S4E09SA4	4.9	16	32.5	49	59	255	300	300	300	300	38	4400	-
10	1.55	46	325	1.3	32.58	IE4	BF20-..S4E09SA4	4.6	15	30.5	46	55	275	325	325	325	325	38	4450	-
10	1.55	46	325	1.3	32.58	IE1	BF20-..SSE08LA4	4.6	15	30.5	46	55	210	260	325	325	325	35	4450	-
10	1.55	41.5	355	1.2	35.85	IE1	BF20-..SSE08LA4	4.1	13.5	27.5	41.5	50	230	285	355	355	355	35	4650	-
10	1.55	41.5	355	1.2	35.85	IE4	BF20-..S4E09SA4	4.1	13.5	27.5	41.5	50	300	355	355	355	355	38	4650	-
10	1.55	35.5	415	1	41.72	IE4	BF20-..S4E09SA4	3.5	11.5	23.5	35.5	43	350	415	415	415	415	38	4950	-
10	1.55	35.5	415	1	41.72	IE1	BF20-..SSE08LA4	3.5	11.5	23.5	35.5	43	270	330	415	415	415	35	4950	-
10	1.55	32.5	455	0.92	45.9	IE1	BF20-..SSE08LA4	3.2	10.5	21.5	32.5	39	295	365	455	455	455	35	5100	-
10	1.55	32.5	455	0.92	45.9	IE4	BF20-..S4E09SA4	3.2	10.5	21.5	32.5	39	390	455	455	455	455	38	5100	-
10	1.55	30.5	485	0.86	48.56	IE1	BF20-..SSE08LA4	3	10	20.5	30.5	37	315	385	485	485	485	35	5200	-
10	1.55	30.5	485	0.86	48.56	IE4	BF20-..S4E09SA4	3	10	20.5	30.5	37	410	485	485	485	485	38	5200	-
10	1.55	116	129	2.8	12.91	IE1	BF30-..SSE08LA4	11.5	38.5	77	116	139	83	103	129	129	129	45	3050	-
10	1.55	116	129	2.8	12.91	IE4	BF30-..S4E09SA4	11.5	38.5	77	116	139	109	129	129	129	129	49	3050	-
10	1.55	93	160	2.5	16	IE1	BF30-..SSE08LA4	9.3	31	62	93	112	104	128	160	160	160	45	3250	-
10	1.55	93	160	2.5	16	IE4	BF30-..S4E09SA4	9.3	31	62	93	112	136	160	160	160	160	49	3250	-
10	1.55	84	176	2.7	17.65	IE1	BF30-..SSE08LA4	8.4	28	56	84	101	114	141	176	176	176	45	3300	-
10	1.55	84	176	2.7	17.65	IE4	BF30-..S4E09SA4	8.4	28	56	84	101	150	176	176	176	176	49	3300	-
10	1.55	77	194	2.6	19.41	IE1	BF30-..SSE08LA4	7.7	25.5	51	77	92	126	155	194	194	194	45	3400	-
10	1.55	77	194	2.6	19.41	IE4	BF30-..S4E09SA4	7.7	25.5	51	77	92	164	194	194	194	194	49	3400	-
10	1.55	68	215	2.4	21.85	IE4	BF30-..S4E09SA4	6.8	22.5	45.5	68	82	185	215	215	215	215	49	3500	-
10	1.55	68	215	2.4	21.85	IE1	BF30-..SSE08LA4	6.8	22.5	45.5	68	82	142	174	215	215	215	45	3500	-
10	1.55	62	240	2.3	24.03	IE4	BF30-..S4E09SA4	6.2	20.5	41.5	62	74	200	240	240	240	240	49	3600	-
10	1.55	62	240	2.3	24.03	IE1	BF30-..SSE08LA4	6.2	20.5	41.5	62	74	156	192	240	240	240	45	3600	-
10	1.55	53	280	2	28.23	IE4	BF30-..S4E09SA4	5.3	17.5	35	53	63	235	280	280	280	280	49	3800	-
10	1.55	53	280	2	28.23	IE1	BF30-..SSE08LA4	5.3	17.5	35	53	63	183	225	280	280	280	45	3800	-
10	1.55	48	310	1.8	31.05	IE4	BF30-..S4E09SA4	4.8	16	32	48	57	260	310	310	310	310	49	4000	-
10	1.55	48	310	1.8	31.05	IE1	BF30-..SSE08LA4	4.8	16	32	48	57	200	245	310	310	310	45	4000	-
10	1.55	42.5	350	1.6	35	IE4	BF30-..SSE08LA4	4.2	14	28.5	42.5	51	295	350	350	350	350	49	4200	-
10	1.55	38.5	380	1.5	38.49	IE4	BF30-..S4E09SA4	3.8	12.5	25.5	38.5	46.5	325	380	380	380	380	49	4400	-
10	1.55	38.5	380	1.5	38.49	IE1	BF30-..SSE08LA4	3.8	12.5	25.5	38.5	46.5	250	305	380	380	380	45	4400	-
10	1.55	36.5	410	1.4	41.01	IE4	BF30-..S4E09SA4	3.6	12	24	36.5	43.5	345	410	410	410	410	49	4500	-
10	1.55	36.5	410	1.4	41.01	IE1	BF30-..SSE08LA4	3.6	12	24	36.5	43.5	265	325	410	410	410	45	4500	-
10	1.55	33	450	1.3	45.1	IE4	BF30-..S4E09SA4	3.3	11	22	33	39.5	380	450	450	450	450	49	4700	-
10	1.55	28.5	520	1.1	52.2	IE1	BF30-..SSE08LA4	2.8	9.5	19	28.5	34	335	415	520	520	520	45	5000	-
10	1.55	28.5	520	1.1	52.2	IE4	BF30-..S4E09SA4	2.8	9.5	19	28.5	34	440	520	520	520	520	49	5000	-
10	1.55	26	570	0.99	57.41	IE4	BF30-..S4E09SA4	2.6	8.7	17	26	31	370	455	570	570	570	49	5200	-
10	1.55	26	570	0.99	57.41	IE1	BF30-..SSE08LA4	2.6	8.7	17	26	31	370	455	570	570	570	45	5200	-
10	1.55	24.5	610	0.93	61.17	IE4	BF30-..S4E09SA4	2.4	8.1	16	24.5	29	510	610	610	610	610	49	5300	-
10	1.55	24.5	610	0.93	61.17	IE1	BF30-..SSE08LA4	2.4	8.1	16	24.5	29	395	485	610	610	610	45	5300	-
10	1.55	22	670	0.85	67.28	IE1	BF30-..SSE08LA4	2.2	7.4	14.5	22	26.5	435	530	670	670	670	45	5500	-
10	1.55	22	670	0.85	67.28	IE4	BF30-..S4E09SA4	2.2	7.4	14.5	22	26.5	570	670	670	670	670	49	5500	-
10	1.55	55	265	2.9	26.86	IE1	BF40-..SSE08LA4	5.5	18.5	37	55	67	174	210	265	265	265	54	5600	-
10	1.55	55	265	2.9	26.86	IE4	BF40-..S4E09SA4	5.5	18.5	37	55	67	225	265	265	265	265	58	5600	-
10	1.55	50	295	2.7	29.55	IE4	BF40-..S4E09SA4	5	16.5	33.5	50	60	250	295	295	295	295	58	5800	-
10	1.55	50	295	2.7	29.55	IE1</td														

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$




MN = 10 Nm (PN = 1.55 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	16	920	0.97	92.31	IE1	BF40.../SSE08LA4	1.6	5.4	10.5	16	19	600	730	920	920	920	54	9100	-
10	1.55	14.5	1010	0.89	101	IE4	BF40.../S4E09SA4	1.4	4.9	9.9	14.5	17.5	850	1010	1010	1010	1010	58	9400	-
10	1.55	14.5	1010	0.89	101	IE1	BF40.../SSE08LA4	1.4	4.9	9.9	14.5	17.5	650	800	1010	1010	1010	54	9400	-
10	1.55	13.5	1110	0.81	111.1	IE1	BF40.../SSE08LA4	1.3	4.5	9	13.5	16	720	880	1110	1110	1110	54	9800	-
10	1.55	13.5	1110	0.81	111.1	IE4	BF40.../S4E09SA4	1.3	4.5	9	13.5	16	940	1110	1110	1110	1110	58	9800	-
10	1.55	31.5	470	2.8	47.14	IE4	BF50.../S4E09SA4	3.1	10.5	21	31.5	38	400	470	470	470	470	86	8900	-
10	1.55	31.5	470	2.8	47.14	IE1	BF50.../SSE08LA4	3.1	10.5	21	31.5	38	305	375	470	470	470	83	8900	-
10	1.55	26	560	2.3	56.86	IE4	BF50.../S4E09SA4	2.6	8.7	17.5	26	31.5	480	560	560	560	560	86	9300	-
10	1.55	26	560	2.3	56.86	IE1	BF50.../SSE08LA4	2.6	8.7	17.5	26	31.5	365	450	560	560	560	83	9300	-
10	1.55	23.5	630	2	63.59	IE1	BF50.../SSE08LA4	2.3	7.8	15.5	23.5	28	410	500	630	630	630	83	9800	-
10	1.55	23.5	630	2	63.59	IE4	BF50.../S4E09SA4	2.3	7.8	15.5	23.5	28	540	630	630	630	630	86	9800	-
10	1.55	20.5	720	1.8	72.72	IE4	BF50.../S4E09SA4	2	6.8	13.5	20.5	24.5	610	720	720	720	720	86	10700	-
10	1.55	20.5	720	1.8	72.72	IE1	BF50.../SSE08LA4	2	6.8	13.5	20.5	24.5	470	580	720	720	720	83	10700	-
10	1.55	18	810	1.6	81.33	IE4	BF50.../S4E09SA4	1.8	6.1	12	18	22	690	810	810	810	810	86	11300	-
10	1.55	18	810	1.6	81.33	IE1	BF50.../SSE08LA4	1.8	6.1	12	18	22	520	650	810	810	810	83	11300	-
10	1.55	16.5	900	1.4	90.24	IE1	BF50.../SSE08LA4	1.6	5.5	11	16.5	19.5	580	720	900	900	900	83	11800	-
10	1.55	16.5	900	1.4	90.24	IE4	BF50.../S4E09SA4	1.6	5.5	11	16.5	19.5	760	900	900	900	900	86	11800	-
10	1.55	14.5	1000	1.3	100.9	IE1	BF50.../SSE08LA4	1.4	4.9	9.9	14.5	17.5	650	800	1000	1000	1000	83	12300	-
10	1.55	14.5	1000	1.3	100.9	IE4	BF50.../S4E09SA4	1.4	4.9	9.9	14.5	17.5	850	1000	1000	1000	1000	86	12300	-
10	1.55	13	1140	1.1	114	IE1	BF50.../SSE08LA4	1.3	4.3	8.7	13	15.5	740	910	1140	1140	1140	83	12900	-
10	1.55	13	1140	1.1	114	IE4	BF50.../S4E09SA4	1.3	4.3	8.7	13	15.5	960	1140	1140	1140	1140	86	12900	-
10	1.55	11.5	1270	1	127.5	IE4	BF50.../S4E09SA4	1.1	3.9	7.8	11.5	14	1080	1270	1270	1270	1270	86	13600	-
10	1.55	11.5	1270	1	127.5	IE1	BF50.../SSE08LA4	1.1	3.9	7.8	11.5	14	820	1020	1270	1270	1270	83	13600	-
10	1.55	10.5	1380	0.94	138.1	IE1	BF50Z.../SSE08LA4	1	3.6	7.2	10.5	13	1170	1380	1380	1380	1380	88	13600	-
10	1.55	10.5	1380	0.94	138.1	IE4	BF50Z.../S4E09SA4	1	3.6	7.2	10.5	13	1170	1380	1380	1380	1380	91	13600	-
10	1.55	9.7	1540	0.84	154.5	IE4	BF50Z.../S4E09SA4	0.95	3.2	6.4	9.7	11.5	1310	1540	1540	1540	1540	91	13600	-
10	1.55	9.7	1540	0.84	154.5	IE1	BF50Z.../SSE08LA4	0.95	3.2	6.4	9.7	11.5	1000	1230	1540	1540	1540	88	13600	-
10	1.55	18.5	800	2.9	80.05	IE4	BF60.../S4E09SA4	1.8	6.2	12	18.5	22	680	800	800	800	800	116	12600	35600
10	1.55	16	930	2.5	93.44	IE4	BF60.../S4E09SA4	1.6	5.3	10.5	16	19	790	930	930	930	930	116	13500	38200
10	1.55	14	1030	2.2	103.7	IE4	BF60.../S4E09SA4	1.4	4.8	9.6	14	17	880	1030	1030	1030	1030	116	14100	39900
10	1.55	13	1130	2	113.1	IE4	BF60.../S4E09SA4	1.3	4.4	8.8	13	15.5	960	1130	1130	1130	1130	116	14600	41300
10	1.55	11.5	1250	1.8	125.5	IE4	BF60.../S4E09SA4	1.1	3.9	7.9	11.5	14	1060	1250	1250	1250	1250	116	15300	43300
10	1.55	10.5	1400	1.6	140.8	IE1	BF60Z.../SSE08LA4	1	3.5	7.1	10.5	12.5	910	1120	1400	1400	1400	131	15300	43300
10	1.55	10.5	1400	1.6	140.8	IE4	BF60Z.../S4E09SA4	1	3.5	7.1	10.5	12.5	1190	1400	1400	1400	1400	135	15300	43300
10	1.55	8.8	1690	1.4	169.2	IE4	BF60Z.../S4E09SA4	0.85	2.9	5.9	8.8	10.5	1430	1690	1690	1690	1690	135	15300	43300
10	1.55	8.8	1690	1.4	169.2	IE1	BF60Z.../SSE08LA4	0.85	2.9	5.9	8.8	10.5	1090	1350	1690	1690	1690	131	15300	43300
10	1.55	7.9	1870	1.2	187.7	IE1	BF60Z.../SSE08LA4	0.75	2.6	5.3	7.9	9.5	1220	1500	1870	1870	1870	131	15300	43300
10	1.55	7.9	1870	1.2	187.7	IE4	BF60Z.../S4E09SA4	0.75	2.6	5.3	7.9	9.5	1590	1870	1870	1870	1870	135	15300	43300
10	1.55	6.7	2200	1	221.4	IE1	BF60Z.../SSE08LA4	0.65	2.2	4.5	6.7	8.1	1430	1770	2200	2200	2200	131	15300	43300
10	1.55	6.7	2200	1	221.4	IE4	BF60Z.../S4E09SA4	0.65	2.2	4.5	6.7	8.1	1880	2200	2200	2200	2200	135	15300	43300
10	1.55	6.1	2450	0.94	245.6	IE1	BF60Z.../SSE08LA4	0.6	2	4	6.1	7.3	1590	1960	2450	2450	2450	131	15300	43300
10	1.55	6.1	2450	0.94	245.6	IE4	BF60Z.../S4E09SA4	0.6	2	4	6.1	7.3	2050	2450	2450	2450	2450	135	15300	43300
10	1.55	8.3	1790	2.9	179.7	IE4	BF70Z.../S4E09SA4	0.8	2.7	5.5	8.3	10	1520	1790	1790	1790	1790	223	16100	47700
10	1.55	8.3	1790	2.9	179.7	IE1	BF70Z.../SSE08LA4	0.8	2.7	5.5	8.3	10	1160	1430	1790	1790	1790	220	16100	47700
10	1.55	7.5	1990	2.6	199.7	IE4	BF70Z.../S4E09SA4	0.75	2.5	5	7.5	9	1690	1990	1990	1990	1990	223	16100	47700
10	1.55	7.5	1990	2.6	199.7	IE1	BF70Z.../SSE08LA4	0.75	2.5	5	7.5	9	1290	1590	1990	1990	1990	220	16100	47700
10	1.55	6.4	2300	2.2	233	IE4	BF70Z.../S4E09SA4	0.6	2.1	4.2	6.4	7.7	1980	2300	2300	2300	2300	223	16100	47700
10	1.55	6.4	2300	2.2	233	IE1	BF70Z.../SSE08LA4	0.6	2.1	4.2	6.4	7.7	1510	1860	2300	2300	2300	220	16100	47700
10	1.55	5.7	2550	2	258.7	IE1	BF70Z.../SSE08LA4	0.55	1.9	3.8	5.7	6.9	1680	2050	2550	2550	2550	220	16100	47700
10	1.55	5.7	2550	2	258.7	IE4	BF70Z.../S4E09SA4	0.55	1.9	3.8	5.7	6.9	2150	2550	2550	2550	2550	223	16100	47700
10	1.55	4.9	3000	1.7	301.8	IE1	BF70Z.../SSE08LA4	0.49	1.6	3.3	4.9	5.9	1960	2400	3000	3000	3000	220	16100	47700
10	1.55	4.9	3000	1.7	301.8	IE4	BF70Z.../S4E09SA4	0.49	1.6	3.3	4.9	5.9	2550	3000	3000	3000	3000	223	16100	47700
10	1.55	4.3	3400	1.5	341.7	IE4	BF70Z.../S4E09SA4	0.43												

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 1.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	1.9	7700	1.4	770.6	IE4	BF80Z-..S4E09SA4	0.19	0.6	1.2	1.9	2.3	6500	7700	7700	7700	7700	340	39600	75000
10	1.55	1.7	8700	1.2	874.6	IE4	BF80Z-..S4E09SA4	0.17	0.55	1.1	1.7	2	7400	8700	8700	8700	8700	340	39600	75000
10	1.55	1.7	8700	1.2	874.6	IE1	BF80Z-..SSE08LA4	0.17	0.55	1.1	1.7	2	5600	6900	8700	8700	8700	336	39600	75000
10	1.55	1.5	9900	1.1	990.4	IE1	BF80Z-..SSE08LA4	0.15	0.5	1	1.5	1.8	6400	7900	9900	9900	9900	336	39600	75000
10	1.55	1.5	9900	1.1	990.4	IE4	BF80Z-..S4E09SA4	0.15	0.5	1	1.5	1.8	8400	9900	9900	9900	9900	340	39600	75000
10	1.55	1.3	11200	0.93	1124	IE4	BF80Z-..S4E09SA4	0.13	0.44	0.85	1.3	1.6	9500	11200	11200	11200	11200	340	39600	75000
10	1.55	1.3	11200	0.93	1124	IE1	BF80Z-..SSE08LA4	0.13	0.44	0.85	1.3	1.6	7300	8900	11200	11200	11200	336	39600	75000
10	1.55	2.2	6500	2.8	658.1	IE4	BF90Z-..S4E09SA4	0.22	0.75	1.5	2.2	2.7	5500	6500	6500	6500	6500	604	42800	120000
10	1.55	1.9	7500	2.4	759	IE4	BF90Z-..S4E09SA4	0.19	0.65	1.3	1.9	2.3	6400	7500	7500	7500	7500	604	42800	120000
10	1.55	1.7	8400	2.2	845.1	IE4	BF90Z-..S4E09SA4	0.17	0.55	1.1	1.7	2.1	7100	8400	8400	8400	8400	604	42800	120000
10	1.55	1.5	9700	1.9	976.1	IE1	BF90G50-..SSE08LA4	0.15	0.5	1	1.5	1.8	6300	7800	9700	9700	9700	612	42800	120000
10	1.55	1.5	9700	1.9	976.1	IE4	BF90G50-..S4E09SA4	0.15	0.5	1	1.5	1.8	8200	9700	9700	9700	9700	616	42800	120000
10	1.55	1.4	10400	1.8	1043	IE4	BF90G50-..S4E09SA4	0.14	0.47	0.95	1.4	1.7	8800	10400	10400	10400	10400	616	42800	120000
10	1.55	1.4	10400	1.8	1043	IE1	BF90G50-..SSE08LA4	0.14	0.47	0.95	1.4	1.7	6700	8300	10400	10400	10400	612	42800	120000
10	1.55	1.2	12000	1.5	1204	IE1	BF90G50-..SSE08LA4	0.12	0.41	0.8	1.2	1.4	7800	9600	12000	12000	12000	612	42800	120000
10	1.55	1.2	12000	1.5	1204	IE4	BF90G50-..S4E09SA4	0.12	0.41	0.8	1.2	1.4	10200	12000	12000	12000	12000	616	42800	120000
10	1.55	1	14400	1.3	1444	IE1	BF90G50-..SSE08LA4	0.1	0.34	0.65	1	1.2	9300	11500	14400	14400	14400	612	42800	120000
10	1.55	1	14400	1.3	1444	IE4	BF90G50-..S4E09SA4	0.1	0.34	0.65	1	1.2	12200	14400	14400	14400	14400	616	42800	120000
10	1.55	0.85	16700	1.1	1678	IE4	BF90G50-..S4E09SA4	0.085	0.29	0.55	0.85	1	14200	16700	16700	16700	16700	616	42800	120000
10	1.55	0.85	16700	1.1	1678	IE1	BF90G50-..SSE08LA4	0.085	0.29	0.55	0.85	1	10900	13400	16700	16700	16700	612	42800	120000
10	1.55	0.8	18600	0.99	1867	IE1	BF90G50-..SSE08LA4	0.08	0.26	0.5	0.8	0.95	12100	14900	18600	18600	18600	612	42800	120000
10	1.55	0.8	18600	0.99	1867	IE4	BF90G50-..S4E09SA4	0.08	0.26	0.5	0.8	0.95	15800	18600	18600	18600	18600	616	42800	120000
10	1.55	0.65	21500	0.86	2154	IE4	BF90G50-..S4E09SA4	0.065	0.23	0.46	0.65	0.8	18300	21500	21500	21500	21500	616	42800	120000
10	1.55	0.65	21500	0.86	2154	IE1	BF90G50-..SSE08LA4	0.065	0.23	0.46	0.65	0.8	14000	17200	21500	21500	21500	612	42800	120000


MN = 14 Nm (PN = 2.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	265	78	1.8	5.6	IE5	BF10-..S5E09XA4	26.5	89	178	265	320	72	78	78	78	78	40	1950	-
14	2.2	265	78	1.8	5.6	IE2	BF10-..SHE09SA4	26.5	89	178	265	320	47.5	56	78	78	78	32	1950	-
14	2.2	197	106	1.4	7.58	IE5	BF10-..S5E09XA4	19.5	65	131	197	235	98	106	106	106	106	40	2200	-
14	2.2	197	106	1.4	7.58	IE2	BF10-..SHE09SA4	19.5	65	131	197	235	64	75	106	106	106	32	2200	-
14	2.2	154	135	1.3	9.69	IE5	BF10-..S5E09XA4	15	51	103	154	185	125	135	135	135	135	40	2350	-
14	2.2	154	135	1.3	9.69	IE2	BF10-..SHE09SA4	15	51	103	154	185	82	96	135	135	135	32	2350	-
14	2.2	126	165	1.1	11.84	IE5	BF10-..S5E09XA4	12.5	42	84	126	152	153	165	165	165	165	40	2500	-
14	2.2	126	165	1.1	11.84	IE2	BF10-..SHE09SA4	12.5	42	84	126	152	100	118	165	165	165	32	2500	-
14	2.2	99	210	0.87	15.04	IE5	BF10-..S5E09XA4	9.9	33	66	99	119	195	210	210	210	210	40	2800	-
14	2.2	99	210	0.87	15.04	IE2	BF10-..SHE09SA4	9.9	33	66	99	119	127	150	210	210	210	32	2800	-
14	2.2	82	255	0.94	18.23	IE5	BF10-..S5E09XA4	8.2	27	54	82	98	154	182	255	255	255	32	2900	-
14	2.2	74	280	0.86	20.05	IE2	BF10-..SHE09SA4	7.4	24.5	49.5	74	89	170	200	280	280	280	32	3000	-
14	2.2	74	280	0.86	20.05	IE5	BF10-..S5E09XA4	7.4	24.5	49.5	74	89	260	280	280	280	280	40	3000	-
14	2.2	245	84	2.4	6.04	IE2	BF20-..SHE09SA4	24.5	82	165	245	295	51	60	84	84	84	38	2550	-
14	2.2	245	84	2.4	6.04	IE5	BF20-..S5E09XA4	24.5	82	165	245	295	78	84	84	84	84	46	2550	-
14	2.2	187	112	2	8	IE2	BF20-..SHE09SA4	18.5	62	125	187	225	68	80	112	112	112	38	2850	-
14	2.2	187	112	2	8	IE5	BF20-..S5E09XA4	18.5	62	125	187	225	104	112	112	112	112	46	2850	-
14	2.2	142	147	1.7	10.51	IE2	BF20-..SHE09SA4	14	47.5	95	142	171	89	105	147	147	147	38	3100	-
14	2.2	142	147	1.7	10.51	IE5	BF20-..S5E09XA4	14	47.5	95	142	171	136	147	147	147	147	46	3100	-
14	2.2	113	184	1.5	13.18	IE5	BF20-..SHE09SA4	11	37.5	75	113	136	112	131	184	184	184	38	3300	-
14	2.2	113	184	1.5	13.18	IE2	BF20-..SHE09SA4	11	37.5	75	113	136	215	215	215	215	215	38	3300	-
14	2.2	96	215	1.4	15.54	IE														

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$




MN = 14 Nm (PN = 2.2 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	116	180	2	12.91	IE2	BF30-..SHE09XA4	11.5	38.5	77	116	139	109	129	180	180	180	49	3050	-
14	2.2	116	180	2	12.91	IE5	BF30-..S5E09XA4	11.5	38.5	77	116	139	167	180	180	180	180	57	3050	-
14	2.2	93	220	1.8	16	IE5	BF30-..S5E09XA4	9.3	31	62	93	112	205	220	220	220	220	57	3250	-
14	2.2	93	220	1.8	16	IE2	BF30-..SHE09XA4	9.3	31	62	93	112	136	160	220	220	220	49	3250	-
14	2.2	84	245	1.9	17.65	IE5	BF30-..S5E09XA4	8.4	28	56	84	101	225	245	245	245	245	57	3300	-
14	2.2	84	245	1.9	17.65	IE2	BF30-..SHE09XA4	8.4	28	56	84	101	150	176	245	245	245	49	3300	-
14	2.2	77	270	1.8	19.41	IE5	BF30-..S5E09XA4	7.7	25.5	51	77	92	250	270	270	270	270	57	3400	-
14	2.2	77	270	1.8	19.41	IE2	BF30-..SHE09XA4	7.7	25.5	51	77	92	164	194	270	270	270	49	3400	-
14	2.2	68	305	1.7	21.85	IE5	BF30-..S5E09XA4	6.8	22.5	45.5	68	82	280	305	305	305	305	57	3500	-
14	2.2	68	305	1.7	21.85	IE2	BF30-..SHE09XA4	6.8	22.5	45.5	68	82	185	215	305	305	305	49	3500	-
14	2.2	62	335	1.6	24.03	IE5	BF30-..S5E09XA4	6.2	20.5	41.5	62	74	310	335	335	335	335	57	3600	-
14	2.2	62	335	1.6	24.03	IE2	BF30-..SHE09XA4	6.2	20.5	41.5	62	74	200	240	335	335	335	49	3600	-
14	2.2	53	395	1.4	28.23	IE2	BF30-..SHE09XA4	5.3	17.5	35	53	63	235	280	395	395	395	49	3800	-
14	2.2	53	395	1.4	28.23	IE5	BF30-..S5E09XA4	5.3	17.5	35	53	63	365	395	395	395	395	57	3800	-
14	2.2	48	430	1.3	31.05	IE2	BF30-..SHE09XA4	4.8	16	32	48	57	260	310	430	430	430	49	4000	-
14	2.2	48	430	1.3	31.05	IE5	BF30-..S5E09XA4	4.8	16	32	48	57	400	430	430	430	430	57	4000	-
14	2.2	42.5	490	1.2	35	IE2	BF30-..SHE09XA4	4.2	14	28.5	42.5	51	295	350	490	490	490	49	4200	-
14	2.2	42.5	490	1.2	35	IE5	BF30-..S5E09XA4	4.2	14	28.5	42.5	51	455	490	490	490	490	57	4200	-
14	2.2	38.5	530	1.1	38.49	IE5	BF30-..S5E09XA4	3.8	12.5	25.5	38.5	46.5	500	530	530	530	530	57	4400	-
14	2.2	38.5	530	1.1	38.49	IE2	BF30-..SHE09XA4	3.8	12.5	25.5	38.5	46.5	325	380	530	530	530	49	4400	-
14	2.2	36.5	570	0.99	41.01	IE2	BF30-..SHE09XA4	3.6	12	24	36.5	43.5	345	410	570	570	570	49	4500	-
14	2.2	36.5	570	0.99	41.01	IE5	BF30-..S5E09XA4	3.6	12	24	36.5	43.5	530	570	570	570	570	57	4500	-
14	2.2	33	630	0.9	45.1	IE2	BF30-..SHE09XA4	3.3	11	22	33	39.5	380	450	630	630	630	49	4700	-
14	2.2	33	630	0.9	45.1	IE5	BF30-..S5E09XA4	3.3	11	22	33	39.5	580	630	630	630	630	57	4700	-
14	2.2	127	165	2.8	11.79	IE5	BF40-..S5E09XA4	12.5	42	84	127	152	153	165	165	165	165	66	4450	-
14	2.2	127	165	2.8	11.79	IE2	BF40-..SHE09XA4	12.5	42	84	127	152	100	117	165	165	165	58	4450	-
14	2.2	99	210	2.5	15.02	IE5	BF40-..S5E09XA4	9.9	33	66	99	119	195	210	210	210	210	66	4800	-
14	2.2	99	210	2.5	15.02	IE2	BF40-..SHE09XA4	9.9	33	66	99	119	127	150	210	210	210	58	4800	-
14	2.2	86	240	2.6	17.35	IE2	BF40-..SHE09XA4	8.6	28.5	57	86	103	147	173	240	240	240	58	4950	-
14	2.2	86	240	2.6	17.35	IE5	BF40-..S5E09XA4	8.6	28.5	57	86	103	225	240	240	240	240	66	4950	-
14	2.2	78	265	2.5	19.09	IE2	BF40-..SHE09XA4	7.8	26	52	78	94	162	190	265	265	265	58	5100	-
14	2.2	78	265	2.5	19.09	IE5	BF40-..S5E09XA4	7.8	26	52	78	94	245	265	265	265	265	66	5100	-
14	2.2	69	300	2.3	21.6	IE2	BF40-..SHE09XA4	6.9	23	46	69	83	183	215	300	300	300	58	5200	-
14	2.2	69	300	2.3	21.6	IE5	BF40-..S5E09XA4	6.9	23	46	69	83	280	300	300	300	300	66	5200	-
14	2.2	63	330	2.2	23.77	IE2	BF40-..SHE09XA4	6.3	21	42	63	75	200	235	330	330	330	58	5400	-
14	2.2	63	330	2.2	23.77	IE5	BF40-..S5E09XA4	6.3	21	42	63	75	305	330	330	330	330	66	5400	-
14	2.2	55	375	2	26.86	IE2	BF40-..S5E09XA4	5.5	18.5	37	55	67	345	375	375	375	375	66	5600	-
14	2.2	55	375	2	26.86	IE5	BF40-..SHE09XA4	5.5	18.5	37	55	67	225	265	375	375	375	58	5600	-
14	2.2	50	410	1.9	29.55	IE2	BF40-..SHE09XA4	5	16.5	33.5	50	60	250	295	410	410	410	58	5800	-
14	2.2	43.5	475	1.8	34.21	IE5	BF40-..S5E09XA4	4.3	14.5	29	43.5	52	440	475	475	475	475	66	5800	-
14	2.2	43.5	475	1.8	34.21	IE2	BF40-..SHE09XA4	4.3	14.5	29	43.5	52	290	340	475	475	475	66	6000	-
14	2.2	39.5	520	1.7	37.64	IE5	BF40-..S5E09XA4	3.9	13	26.5	39.5	47.5	485	520	520	520	520	66	6200	-
14	2.2	39.5	520	1.7	37.64	IE2	BF40-..SHE09XA4	3.9	13	26.5	39.5	47.5	315	375	520	520	520	58	6200	-
14	2.2	36	570	1.6	41.42	IE5	BF40-..S5E09XA4	3.6	12	24	36	43	350	410	570	570	570	66	6500	-
14	2.2	32.5	630	1.4	45.56	IE2	BF40-..S5E09XA4	3.2	10.5	21.5	32.5	39.5	590	630	630	630	630	66	6800	-
14	2.2	32.5	630	1.4	45.56	IE5	BF40-..SHE09XA4	3.2	10.5	21.5	32.5	39.5	385	455	630	630	630	58	6800	-
14	2.2	30.5	680	1.3	48.92	IE2	BF40-..SHE09XA4	3	10	20	30.5	36.5	415	485	680	680	680	58	7000	-
14	2.2	30.5	680	1.3	48.92	IE5	BF40-..S5E09XA4	3	10	20	30.5	36.5	630	680	680	680	680	66	7000	-
14	2.2	27.5	750	1.2	53.82	IE5	BF40-..S5E09XA4	2.7	9.2	18.5	27.5	33	690	750	750	750	750	66	7200	-
14	2.2	27.5	750	1.2	53.82	IE2	BF40-..SHE09XA4	2.7	9.2	18.5	27.5	33	455	530	750	750	750	58	7200	-
14	2.2	24	850	1	61.25	IE5	BF40-..S5E09XA4	2.4	8.1	16	24	29	790	850	850	850	850	66	7600	-
14	2.2	24	850	1	61.25	IE2	BF40-..SHE09XA4	2.4	8.1	16	24	29	520	610	850	850	850	58	7600	-
14	2.2	22	940	0.95	67.38	IE5	BF40-..SHE09XA4	2.2	7.4	14.5	22	26.5	870	940	940	940	940	66	8000	-
14	2.2	22	940	0.95	67.38	IE2	BF40-..SHE09XA4	2.2	7.4	14.5	22	26.5	570	670	940	940	940	58	8000	-
14	2.2	21	990	0.9	71.4	IE5	BF40-..S5E09XA4	2.1	7	14	21	25	920	990	990	990	990	66	8100	-
14	2.2	21	990	0.9	71.4	IE2	BF40-..SHE09XA4	2.1	7	14	21	25	600	710	990					

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	13	1590	0.81	114	IE5	BF50-..S5E09XA4	1.3	4.3	8.7	13	15.5	1480	1590	1590	1590	1590	94	12900	-
14	2.2	27.5	760	3	54.44	IE5	BF60-..S5E09XA4	2.7	9.1	18	27.5	33	700	760	760	760	760	124	10500	29700
14	2.2	27.5	760	3	54.44	IE2	BF60-..SHE09SA4	2.7	9.1	18	27.5	33	460	540	760	760	760	116	10500	29700
14	2.2	24.5	840	2.7	60.4	IE5	BF60-..S5E09XA4	2.4	8.2	16.5	24.5	29.5	780	840	840	840	840	124	11100	31400
14	2.2	24.5	840	2.7	60.4	IE2	BF60-..SHE09SA4	2.4	8.2	16.5	24.5	29.5	510	600	840	840	840	116	11100	31400
14	2.2	20.5	1010	2.3	72.15	IE2	BF60-..SHE09SA4	2	6.9	13.5	20.5	24.5	610	720	1010	1010	1010	110	11200	34000
14	2.2	20.5	1010	2.3	72.15	IE5	BF60-..S5E09XA4	2	6.9	13.5	20.5	24.5	930	1010	1010	1010	1010	124	12000	34000
14	2.2	18.5	1120	2.1	80.05	IE2	BF60-..SHE09SA4	1.8	6.2	12	18.5	22	680	800	1120	1120	1120	116	12600	35600
14	2.2	18.5	1120	2.1	80.05	IE5	BF60-..S5E09XA4	1.8	6.2	12	18.5	22	1040	1120	1120	1120	1120	124	12600	35600
14	2.2	16	1300	1.8	93.44	IE5	BF60-..S5E09XA4	1.6	5.3	10.5	16	19	1210	1300	1300	1300	1300	124	13500	38200
14	2.2	16	1300	1.8	93.44	IE2	BF60-..SHE09SA4	1.6	5.3	10.5	16	19	790	930	1300	1300	1300	116	13500	38200
14	2.2	14	1450	1.6	103.7	IE5	BF60-..S5E09XA4	1.4	4.8	9.6	14	17	1340	1450	1450	1450	1450	124	14100	39900
14	2.2	14	1450	1.6	103.7	IE2	BF60-..SHE09SA4	1.4	4.8	9.6	14	17	880	1030	1450	1450	1450	116	14100	39900
14	2.2	13	1580	1.5	113.1	IE5	BF60-..S5E09XA4	1.3	4.4	8.8	13	15.5	1470	1580	1580	1580	1580	124	14600	41300
14	2.2	13	1580	1.5	113.1	IE2	BF60-..SHE09SA4	1.3	4.4	8.8	13	15.5	960	1130	1580	1580	1580	116	14600	41300
14	2.2	11.5	1750	1.3	125.5	IE2	BF60-..SHE09SA4	1.1	3.9	7.9	11.5	14	1060	1250	1750	1750	1750	116	15300	43300
14	2.2	11.5	1750	1.3	125.5	IE5	BF60-..S5E09XA4	1.1	3.9	7.9	11.5	14	1630	1750	1750	1750	1750	124	15300	43300
14	2.2	10.5	1970	1.2	140.8	IE5	BF60Z-..S5E09XA4	1	3.5	7.1	10.5	12.5	1830	1970	1970	1970	1970	143	15300	43300
14	2.2	10.5	1970	1.2	140.8	IE2	BF60Z-..SHE09SA4	1	3.5	7.1	10.5	12.5	1190	1400	1970	1970	1970	135	15300	43300
14	2.2	8.8	2350	0.97	169.2	IE2	BF60Z-..SHE09SA4	0.85	2.9	5.9	8.8	10.5	1430	1690	2350	2350	2350	135	15300	43300
14	2.2	8.8	2350	0.97	169.2	IE5	BF60Z-..S5E09XA4	0.85	2.9	5.9	8.8	10.5	2150	2350	2350	2350	2350	143	15300	43300
14	2.2	7.9	2600	0.88	187.7	IE2	BF60Z-..SHE09SA4	0.75	2.6	5.3	7.9	9.5	1590	1870	2600	2600	2600	135	15300	43300
14	2.2	7.9	2600	0.88	187.7	IE5	BF60Z-..S5E09XA4	0.75	2.6	5.3	7.9	9.5	2400	2600	2600	2600	2600	143	15300	43300
14	2.2	12	1710	3	122.7	IE2	BF70-..SHE09SA4	1.2	4	8.1	12	14.5	1040	1220	1710	1710	1710	202	16100	47700
14	2.2	12	1710	3	122.7	IE5	BF70-..S5E09XA4	1.2	4	8.1	12	14.5	1590	1710	1710	1710	1710	210	16100	47700
14	2.2	11	1860	2.8	133	IE5	BF70Z-..S5E09XA4	1.1	3.7	7.5	11	13.5	1720	1860	1860	1860	1860	231	16100	47700
14	2.2	11	1860	2.8	133	IE2	BF70Z-..SHE09SA4	1.1	3.7	7.5	11	13.5	1130	1330	1860	1860	1860	223	16100	47700
14	2.2	9.7	2150	2.4	154	IE5	BF70Z-..S5E09XA4	0.95	3.2	6.4	9.7	11.5	2000	2150	2150	2150	2150	231	16100	47700
14	2.2	9.7	2150	2.4	154	IE2	BF70Z-..SHE09SA4	0.95	3.2	6.4	9.7	11.5	1300	1540	2150	2150	2150	223	16100	47700
14	2.2	8.3	2500	2.1	179.7	IE5	BF70Z-..S5E09XA4	0.8	2.7	5.5	8.3	10	2300	2500	2500	2500	2500	231	16100	47700
14	2.2	8.3	2500	2.1	179.7	IE2	BF70Z-..SHE09SA4	0.8	2.7	5.5	8.3	10	1520	1790	2500	2500	2500	223	16100	47700
14	2.2	7.5	2750	1.9	199.7	IE2	BF70Z-..SHE09SA4	0.75	2.5	5	7.5	9	1690	1990	2750	2750	2750	223	16100	47700
14	2.2	7.5	2750	1.9	199.7	IE5	BF70Z-..S5E09XA4	0.75	2.5	5	7.5	9	2550	2750	2750	2750	2750	231	16100	47700
14	2.2	6.4	3250	1.6	233	IE5	BF70Z-..S5E09XA4	0.6	2.1	4.2	6.4	7.7	3000	3250	3250	3250	3250	231	16100	47700
14	2.2	6.4	3250	1.6	233	IE2	BF70Z-..SHE09SA4	0.6	2.1	4.2	6.4	7.7	1980	2300	3250	3250	3250	223	16100	47700
14	2.2	5.7	3600	1.4	258.7	IE5	BF70Z-..S5E09XA4	0.55	1.9	3.8	5.7	6.9	3350	3600	3600	3600	3600	231	16100	47700
14	2.2	5.7	3600	1.4	258.7	IE2	BF70Z-..SHE09SA4	0.55	1.9	3.8	5.7	6.9	2150	2550	3600	3600	3600	223	16100	47700
14	2.2	4.9	4200	1.2	301.8	IE5	BF70Z-..S5E09XA4	0.49	1.6	3.3	4.9	5.9	3900	4200	4200	4200	4200	231	16100	47700
14	2.2	4.9	4200	1.2	301.8	IE2	BF70Z-..SHE09SA4	0.49	1.6	3.3	4.9	5.9	2550	3000	4200	4200	4200	223	16100	47700
14	2.2	4.3	4750	1.1	341.7	IE5	BF70Z-..S5E09XA4	0.43	1.4	2.9	4.3	5.2	4400	4750	4750	4750	4750	231	16100	47700
14	2.2	4.3	4750	1.1	341.7	IE2	BF70Z-..SHE09SA4	0.43	1.4	2.9	4.3	5.2	2900	3400	4750	4750	4750	223	16100	47700
14	2.2	3.7	5500	0.93	398.7	IE5	BF70Z-..S5E09XA4	0.37	1.2	2.5	3.7	4.5	5100	5500	5500	5500	5500	231	16100	47700
14	2.2	3.7	5500	0.93	398.7	IE2	BF70Z-..SHE09SA4	0.37	1.2	2.5	3.7	4.5	3350	3950	5500	5500	5500	223	16100	47700
14	2.2	3.4	6100	0.85	439.2	IE5	BF70Z-..S5E09XA4	0.34	1.1	2.2	3.4	4	5700	6100	6100	6100	6100	231	16100	47700
14	2.2	3.4	6100	0.85	439.2	IE2	BF70Z-..SHE09SA4	0.34	1.1	2.2	3.4	4	3700	4350	6100	6100	6100	223	16100	47700
14	2.2	6.3	3300	2.9	237.1	IE5	BF80-..S5E09XA4	0.6	2.1	4.2	6.3	7.5	3050	3300	3300	3300	3300	307	36900	75000
14	2.2	6.3	3300	2.9	237.1	IE2	BF80-..SHE09SA4	0.6	2.1	4.2	6.3	7.5	2000	2350	3300	3300	3300	299	36900	75000
14	2.2	5.5	3750	2.5	269.1	IE2	BF80-..SHE09SA4	0.55	1.8	3.7	5.5	6.6	3450	3750	3750	3750	3750	307	39600	75000
14	2.2	5.5	3750	2.5	269.1	IE5	BF80Z-..S5E09XA4	0.55	1.8	3.7	5.5	6.6	2250	2650	3750	3750	3750	299	39600	75000
14	2.2	5.1	4050	2.6	291.7	IE2	BF80Z-..SHE09SA4	0.5	1.7	3.4	5.1	6.1	2450	2900	4050	4050	4050	340	39600	75000
14	2.2	5.1	4050	2.6	291.7	IE5	BF80Z-..S5E09XA4	0.5	1.7	3.4	5.1	6.1	3750	4050	4050	4050	4050	348	39600	75000
14	2.2	4.3	4850	2.2	347.3	IE5	BF80Z-..S5E09XA4	0.43	1											

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	1.5	13600	1.4	976.1	IE2	BF90G50-..SHE09SA4	0.15	0.5	1	1.5	1.8	8200	9700	13600	13600	13600	616	42800	120000
14	2.2	1.5	13600	1.4	976.1	IE5	BF90G50-..S5E09XA4	0.15	0.5	1	1.5	1.8	12600	13600	13600	13600	13600	624	42800	120000
14	2.2	1.4	14600	1.3	1043	IE5	BF90G50-..S5E09XA4	0.14	0.47	0.95	1.4	1.7	13500	14600	14600	14600	14600	624	42800	120000
14	2.2	1.4	14600	1.3	1043	IE2	BF90G50-..SHE09SA4	0.14	0.47	0.95	1.4	1.7	8800	10400	14600	14600	14600	616	42800	120000
14	2.2	1.2	16800	1.1	1204	IE2	BF90G50-..SHE09SA4	0.12	0.41	0.8	1.2	1.4	10200	12000	16800	16800	16800	616	42800	120000
14	2.2	1.2	16800	1.1	1204	IE5	BF90G50-..S5E09XA4	0.12	0.41	0.8	1.2	1.4	15600	16800	16800	16800	16800	624	42800	120000
14	2.2	1	20000	0.92	1444	IE2	BF90G50-..SHE09SA4	0.1	0.34	0.65	1	1.2	12200	14400	20000	20000	20000	616	42800	120000
14	2.2	1	20000	0.92	1444	IE5	BF90G50-..S5E09XA4	0.1	0.34	0.65	1	1.2	18700	20000	20000	20000	20000	624	42800	120000

MN = 19 Nm (PN = 3 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
19	3	235	120	2.2	6.34	IE4	BF30-..S4E11SA6	23.5	78	157	235	280	120	120	120	120	120	66	2400	-
19	3	185	153	1.9	8.07	IE4	BF30-..S4E11SA6	18.5	61	123	185	220	153	153	153	153	153	66	2650	-
19	3	150	189	1.7	9.99	IE4	BF30-..S4E11SA6	15	50	100	150	180	189	189	189	189	189	66	2850	-
19	3	116	245	1.5	12.91	IE4	BF30-..S4E11SA6	11.5	38.5	77	116	139	245	245	245	245	245	66	3050	-
19	3	93	300	1.3	16	IE4	BF30-..S4E11SA6	9.3	31	62	93	112	300	300	300	300	300	66	3250	-
19	3	84	335	1.4	17.65	IE4	BF30-..S4E11SA6	8.4	28	56	84	101	335	335	335	335	335	66	3300	-
19	3	77	365	1.4	19.41	IE4	BF30-..S4E11SA6	7.7	25.5	51	77	92	365	365	365	365	365	66	3400	-
19	3	68	415	1.3	21.85	IE4	BF30-..S4E11SA6	6.8	22.5	45.5	68	82	415	415	415	415	415	66	3500	-
19	3	62	455	1.2	24.03	IE4	BF30-..S4E11SA6	6.2	20.5	41.5	62	74	455	455	455	455	455	66	3600	-
19	3	53	530	1.1	28.23	IE4	BF30-..S4E11SA6	5.3	17.5	35	53	63	530	530	530	530	530	66	3800	-
19	3	48	580	0.97	31.05	IE4	BF30-..S4E11SA6	4.8	16	32	48	57	580	580	580	580	580	66	4000	-
19	3	42.5	660	0.86	35	IE4	BF30-..S4E11SA6	4.2	14	28.5	42.5	51	660	660	660	660	660	66	4200	-
19	3	255	111	3	5.87	IE4	BF40-..S4E11SA6	25.5	85	170	255	305	111	111	111	111	111	80	3550	-
19	3	196	144	2.5	7.62	IE4	BF40-..S4E11SA6	19.5	65	131	196	235	144	144	144	144	144	80	3900	-
19	3	158	180	2.3	9.48	IE4	BF40-..S4E11SA6	15.5	52	105	158	189	180	180	180	180	180	80	4150	-
19	3	127	220	2.1	11.79	IE4	BF40-..S4E11SA6	12.5	42	84	127	152	220	220	220	220	220	80	4450	-
19	3	99	285	1.8	15.02	IE4	BF40-..S4E11SA6	9.9	33	66	99	119	285	285	285	285	285	80	4800	-
19	3	86	325	1.9	17.35	IE4	BF40-..S4E11SA6	8.6	28.5	57	86	103	325	325	325	325	325	80	4950	-
19	3	78	360	1.8	19.09	IE4	BF40-..S4E11SA6	7.8	26	52	78	94	360	360	360	360	360	80	5100	-
19	3	69	410	1.7	21.6	IE4	BF40-..S4E11SA6	6.9	23	46	69	83	410	410	410	410	410	80	5200	-
19	3	63	450	1.6	23.77	IE4	BF40-..S4E11SA6	6.3	21	42	63	75	450	450	450	450	450	80	5400	-
19	3	55	510	1.5	26.86	IE4	BF40-..S4E11SA6	5.5	18.5	37	55	67	510	510	510	510	510	80	5600	-
19	3	50	560	1.4	29.55	IE4	BF40-..S4E11SA6	5	16.5	33.5	50	60	560	560	560	560	560	80	5800	-
19	3	43.5	640	1.3	34.21	IE4	BF40-..S4E11SA6	4.3	14.5	29	43.5	52	640	640	640	640	640	80	6000	-
19	3	39.5	710	1.2	37.64	IE4	BF40-..S4E11SA6	3.9	13	26.5	39.5	47.5	710	710	710	710	710	80	6200	-
19	3	36	780	1.1	41.42	IE4	BF40-..S4E11SA6	3.6	12	24	36	43	780	780	780	780	780	80	6500	-
19	3	32.5	860	1	45.56	IE4	BF40-..S4E11SA6	3.2	10.5	21.5	32.5	39.5	860	860	860	860	860	80	6800	-
19	3	30.5	920	0.97	48.92	IE4	BF40-..S4E11SA6	3	10	20	30.5	36.5	920	920	920	920	920	80	7000	-
19	3	27.5	1020	0.88	53.82	IE4	BF40-..S4E11SA6	2.7	9.2	18.5	27.5	33	1020	1020	1020	1020	1020	80	7200	-
19	3	102	275	2.8	14.65	IE4	BF50-..S4E11SA6	10	34	68	102	122	275	275	275	275	275	110	6100	-
19	3	89	315	3	16.7	IE4	BF50-..S4E11SA6	8.9	29.5	59	89	107	315	315	315	315	315	110	6200	-
19	3	80	350	2.8	18.68	IE4	BF50-..S4E11SA6	8	26.5	53	80	96	350	350	350	350	350	110	6400	-
19	3	64	435	2.5	23.14	IE4	BF50-..S4E11SA6	6.4	21.5	43	64	77	435	435	435	435	435	110	6800	-
19	3	57	490	2.4	25.88	IE4	BF50-..S4E11SA6	5.7	19	38.5	57	69	490	490	490	490	490	110	7100	-
19	3	47	600	2.1	31.73	IE4	BF50-..S4E11SA6	4.7	15.5	31.5	47	56	600	600	600	600	600	110	7500	-
19	3	42	670	1.9	35.49	IE4	BF50-..S4E11SA6	4.2	14	28	42	50	670	670	670	670	670	110	7800	-
19	3	35.5	800	1.6	42.15	IE4	BF50-..S4E11SA6	3.5	11.5	23.5	35.5	42.5	800	800	800	800	800	110	8500	-
19	3	31.5	890	1.5	47.14	IE4	BF50-..S4E11SA6	3.1	10.5	21	31.5	38	890	890	890	890	890	110	8900	-
19	3	26	1080	1.2	56.86	IE4	BF50-..S4E11SA6	2.6	8.7	17.5	26	31.5	1080	1080	1080	1080	1080	110	9300	-
19	3	23.5	1200	1.1	63.59	IE4	BF50-..S4E11SA6</													

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 19 Nm (PN = 3 kW)



Mn	Pn	n2	M2	fB	i	IE-Classe	Type	Speed range n2 [1/min]					Torque range M2 [Nm]					m	FrN	FrV
								at motor speed n1 [1/min]					at motor speed n1 [1/min]							
[Nm]	[kW]	[1/min]	[Nm]	[--]	[:1]			150	500	1000	1500	1800	150	500	1000	1500	1800	[kg]	[N]	[N]
19	3	7.5	3750	1.4	199.7	IE4	BF70Z-../S4E11SA6	0.75	2.5	5	7.5	9	3750	3750	3750	3750	3750	247	16100	47700
19	3	6.4	4400	1.2	233	IE4	BF70Z-../S4E11SA6	0.6	2.1	4.2	6.4	7.7	4400	4400	4400	4400	4400	247	16100	47700
19	3	5.7	4900	1.1	258.7	IE4	BF70Z-../S4E11SA6	0.55	1.9	3.8	5.7	6.9	4900	4900	4900	4900	4900	247	16100	47700
19	3	4.9	5700	0.91	301.8	IE4	BF70Z-../S4E11SA6	0.49	1.6	3.3	4.9	5.9	5700	5700	5700	5700	5700	247	16100	47700
19	3	4.3	6400	0.8	341.7	IE4	BF70Z-../S4E11SA6	0.43	1.4	2.9	4.3	5.2	6400	6400	6400	6400	6400	247	16100	47700
19	3	8.1	3500	2.7	184.5	IE4	BF80-../S4E11SA6	0.8	2.7	5.4	8.1	9.7	3500	3500	3500	3500	3500	316	31800	75000
19	3	7.1	3950	2.4	209.4	IE4	BF80-../S4E11SA6	0.7	2.3	4.7	7.1	8.5	3950	3950	3950	3950	3950	316	34300	75000
19	3	6.3	4500	2.1	237.1	IE4	BF80-../S4E11SA6	0.6	2.1	4.2	6.3	7.5	4500	4500	4500	4500	4500	316	36900	75000
19	3	5.5	5100	1.9	269.1	IE4	BF80-../S4E11SA6	0.55	1.8	3.7	5.5	6.6	5100	5100	5100	5100	5100	316	39600	75000
19	3	5.1	5500	1.9	291.7	IE4	BF80Z-../S4E11SA6	0.5	1.7	3.4	5.1	6.1	5500	5500	5500	5500	5500	363	39600	75000
19	3	4.3	6500	1.6	347.3	IE4	BF80Z-../S4E11SA6	0.43	1.4	2.8	4.3	5.1	6500	6500	6500	6500	6500	363	39600	75000
19	3	3.8	7400	1.4	394.2	IE4	BF80Z-../S4E11SA6	0.38	1.2	2.5	3.8	4.5	7400	7400	7400	7400	7400	363	39600	75000
19	3	3.3	8500	1.2	450.4	IE4	BF80Z-../S4E11SA6	0.33	1.1	2.2	3.3	3.9	8500	8500	8500	8500	8500	363	39600	75000
19	3	2.9	9700	1.1	511.2	IE4	BF80Z-../S4E11SA6	0.29	0.95	1.9	2.9	3.5	9700	9700	9700	9700	9700	363	39600	75000
19	3	2.5	11000	0.95	583.4	IE4	BF80Z-../S4E11SA6	0.25	0.85	1.7	2.5	3	11000	11000	11000	11000	11000	363	39600	75000
19	3	2.2	12500	0.83	662.1	IE4	BF80Z-../S4E11SA6	0.22	0.75	1.5	2.2	2.7	12500	12500	12500	12500	12500	363	39600	75000
19	3	4.3	6500	2.8	343.6	IE4	BF90Z-../S4E11SA6	0.43	1.4	2.9	4.3	5.2	6500	6500	6500	6500	6500	629	42800	120000
19	3	3.9	7200	2.5	382.6	IE4	BF90Z-../S4E11SA6	0.39	1.3	2.6	3.9	4.7	7200	7200	7200	7200	7200	629	42800	120000
19	3	3.2	8600	2.1	456.7	IE4	BF90Z-../S4E11SA6	0.32	1	2.1	3.2	3.9	8600	8600	8600	8600	8600	629	42800	120000
19	3	2.9	9600	1.9	508.5	IE4	BF90Z-../S4E11SA6	0.29	0.95	1.9	2.9	3.5	9600	9600	9600	9600	9600	629	42800	120000
19	3	2.5	11200	1.6	591.1	IE4	BF90Z-../S4E11SA6	0.25	0.8	1.6	2.5	3	11200	11200	11200	11200	11200	629	42800	120000
19	3	2.2	12500	1.5	658.1	IE4	BF90Z-../S4E11SA6	0.22	0.75	1.5	2.2	2.7	12500	12500	12500	12500	12500	629	42800	120000
19	3	1.9	14400	1.3	759	IE4	BF90Z-../S4E11SA6	0.19	0.65	1.3	1.9	2.3	14400	14400	14400	14400	14400	629	42800	120000
19	3	1.7	16000	1.2	845.1	IE4	BF90Z-../S4E11SA6	0.17	0.55	1.1	1.7	2.1	16000	16000	16000	16000	16000	629	42800	120000
19	3	1.5	18500	1	976.1	IE4	BF90G50-../S4E11SA6	0.15	0.5	1	1.5	1.8	18500	18500	18500	18500	18500	639	42800	120000
19	3	1.4	19800	0.93	1043	IE4	BF90G50-../S4E11SA6	0.14	0.47	0.95	1.4	1.7	19800	19800	19800	19800	19800	639	42800	120000
19	3	1.2	22500	0.81	1204	IE4	BF90G50-../S4E11SA6	0.12	0.41	0.8	1.2	1.4	22500	22500	22500	22500	22500	639	42800	120000

MN = 20 Nm (PN = 3.1 kW)




Mn	Pn	n2	M2	fB	i	IE-Classe	Type	Speed range n2 [1/min]					Torque range M2 [Nm]					m	FrN	FrV
								at motor speed n1 [1/min]					at motor speed n1 [1/min]							
[Nm]	[kW]	[1/min]	[Nm]	[--]	[:1]			150	500	1000	1500	1800	150	500	1000	1500	1800	[kg]	[N]	[N]
20	3.1	265	112	1.2	5.6	IE3	BF10-../SPE09XA4	26.5	89	178	265	320	72	89	112	112	112	40	1950	-
20	3.1	197	151	1	7.58	IE3	BF10-../SPE09XA4	19.5	65	131	197	235	98	121	151	151	151	40	2200	-
20	3.1	154	193	0.91	9.69	IE3	BF10-../SPE09XA4	15	51	103	154	185	125	155	193	193	193	40	2350	-
20	3.1	245	120	1.7	6.04	IE3	BF20-../SPE09XA4	24.5	82	165	245	295	78	96	120	120	120	46	2550	-
20	3.1	187	160	1.4	8	IE3	BF20-../SPE09XA4	18.5	62	125	187	225	104	128	160	160	160	46	2850	-
20	3.1	142	210	1.2	10.51	IE3	BF20-../SPE09XA4	14	47.5	95	142	171	136	168	210	210	210	46	3100	-
20	3.1	113	260	1.1	13.18	IE3	BF20-../SPE09XA4	11	37.5	75	113	136	171	210	260	260	260	46	3300	-
20	3.1	96	310	0.98	15.54	IE3	BF20-../SPE09XA4	9.6	32	64	96	115	200	245	310	310	310	46	3450	-
20	3.1	89	335	1.1	16.77	IE3	BF20-../SPE09XA4	8.9	29.5	59	89	107	215	265	335	335	335	46	3500	-
20	3.1	81	365	1	18.45	IE3	BF20-../SPE09XA4	8.1	27	54	81	97	235	295	365	365	365	46	3600	-
20	3.1	68	440	0.9	22.04	IE3	BF20-../SPE09XA4	6.8	22.5	45	68	81	285	350	440	440	440	46	3800	-
20	3.1	61	485	0.82	24.25	IE3	BF20-../SPE09XA4	6.1	20.5	41	61	74	315	385	485	485	485	46	3950	-
20	3.1	235	126	2.1	6.34	IE3	BF30-../SPE09XA4	23.5	78	157	235	280	82	101	126	126	126	57	2400	-
20	3.1	185	161	1.8	8.07	IE3	BF30-../SPE09XA4	18.5	61	123	185	220	104	129	161	161	161	57	2650	-
20	3.1	150	199	1.6	9.99	IE3	BF30-../SPE09XA4	15	50	100	150	180	129	159	199	199	199	57	2850	-
20	3.1	116	255	1.4	12.91	IE3	BF30-../SPE09XA4	11.5	38.5	77	116	139	167	205	255	255	255	57	3050	-
20	3.1	93	320	1.3	16	IE3	BF30-../SPE09XA4	9.3	31	62	93	112	205	255	320	320	320	57	3250	-
20	3.1	84	350	1.3	17.65	IE3	BF30-../SPE09XA4	8.4	28	56	84	101	225	280	350	350	350	57	3300	-
20	3.1																			

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 20 Nm (PN = 3.1 kW)




Mn [Nm]	Pn [kW]	n_2 [1/min]	M2 [Nm]	fB [-]	i [:1]	IE- Classe	Type	Speed range n_2 [1/min] at motor speed n_1 [1/min]					Torque range M2 [Nm] at motor speed n_1 [1/min]					m [kg]	Frn [N]	FrV [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
20	3.1	27.5	1070	0.84	53.82	IE3	BF40-..SPE09XA4	2.7	9.2	18.5	27.5	33	690	860	1070	1070	1070	66	7200	-
20	3.1	102	290	2.7	14.65	IE3	BF50-..SPE09XA4	10	34	68	102	122	190	230	290	290	290	94	6100	-
20	3.1	64	460	2.4	23.14	IE3	BF50-..SPE09XA4	6.4	21.5	43	64	77	300	370	460	460	460	94	6800	-
20	3.1	57	510	2.2	25.88	IE3	BF50-..SPE09XA4	5.7	19	38.5	57	69	335	410	510	510	510	94	7100	-
20	3.1	47	630	2	31.73	IE3	BF50-..SPE09XA4	4.7	15.5	31.5	47	56	410	500	630	630	630	94	7500	-
20	3.1	42	700	1.8	35.49	IE3	BF50-..SPE09XA4	4.2	14	28	42	50	460	560	700	700	700	94	7800	-
20	3.1	35.5	840	1.5	42.15	IE3	BF50-..SPE09XA4	3.5	11.5	23.5	35.5	42.5	540	670	840	840	840	94	8500	-
20	3.1	31.5	940	1.4	47.14	IE3	BF50-..SPE09XA4	3.1	10.5	21	31.5	38	610	750	940	940	940	94	8900	-
20	3.1	26	1130	1.1	56.86	IE3	BF50-..SPE09XA4	2.6	8.7	17.5	26	31.5	730	900	1130	1130	1130	94	9300	-
20	3.1	23.5	1270	1	63.59	IE3	BF50-..SPE09XA4	2.3	7.8	15.5	23.5	28	820	1010	1270	1270	1270	94	9800	-
20	3.1	20.5	1450	0.89	72.72	IE3	BF50-..SPE09XA4	2	6.8	13.5	20.5	24.5	940	1160	1450	1450	1450	94	10700	-
20	3.1	18	1620	0.8	81.33	IE3	BF50-..SPE09XA4	1.8	6.1	12	18	22	1050	1300	1620	1620	1620	94	11300	-
20	3.1	48	620	3	31.2	IE3	BF60-..SPE09XA4	4.8	16	32	48	57	405	495	620	620	620	124	8800	24900
20	3.1	43	690	2.9	34.62	IE3	BF60-..SPE09XA4	4.3	14	28.5	43	51	450	550	690	690	690	124	9100	25700
20	3.1	36	830	2.5	41.6	IE3	BF60-..SPE09XA4	3.6	12	24	36	43	540	660	830	830	830	124	9600	27100
20	3.1	32	920	2.4	46.16	IE3	BF60-..SPE09XA4	3.2	10.5	21.5	32	38.5	600	730	920	920	920	124	9900	28000
20	3.1	27.5	1080	2.1	54.44	IE3	BF60-..SPE09XA4	2.7	9.1	18	27.5	33	700	870	1080	1080	1080	124	10500	27900
20	3.1	24.5	1200	1.9	60.4	IE3	BF60-..SPE09XA4	2.4	8.2	16.5	24.5	29.5	780	960	1200	1200	1200	124	11100	31400
20	3.1	20.5	1440	1.6	72.15	IE3	BF60-..SPE09XA4	2	6.9	13.5	20.5	24.5	930	1150	1440	1440	1440	124	12000	34000
20	3.1	18.5	1600	1.4	80.05	IE3	BF60-..SPE09XA4	1.8	6.2	12	18.5	22	1040	1280	1600	1600	1600	124	12600	35600
20	3.1	16	1860	1.2	93.44	IE3	BF60-..SPE09XA4	1.6	5.3	10.5	16	19	1210	1490	1860	1860	1860	124	13500	38200
20	3.1	14	2050	1.1	103.7	IE3	BF60-..SPE09XA4	1.4	4.8	9.6	14	17	1340	1650	2050	2050	2050	124	14100	39900
20	3.1	13	2250	1	113.1	IE3	BF60-..SPE09XA4	1.3	4.4	8.8	13	15.5	1470	1800	2250	2250	2250	124	14600	41300
20	3.1	11.5	2500	0.92	125.5	IE3	BF60-..SPE09XA4	1.1	3.9	7.9	11.5	14	1630	2000	2500	2500	2500	124	15300	43300
20	3.1	10.5	2800	0.82	140.8	IE3	BF60Z-..SPE09XA4	1	3.5	7.1	10.5	12.5	1830	2250	2800	2800	2800	143	15300	43300
20	3.1	15.5	1900	2.7	95.46	IE3	BF70-..SPE09XA4	1.5	5.2	10	15.5	18.5	1240	1520	1900	1900	1900	210	14000	43700
20	3.1	14	2100	2.5	105.2	IE3	BF70-..SPE09XA4	1.4	4.7	9.5	14	17	1360	1680	2100	2100	2100	210	14700	45100
20	3.1	12	2450	2.1	122.7	IE3	BF70-..SPE09XA4	1.2	4	8.1	12	14.5	1590	1960	2450	2450	2450	210	16100	47700
20	3.1	11	2650	2	133	IE3	BF70Z-..SPE09XA4	1.1	3.7	7.5	11	13.5	1720	2100	2650	2650	2650	231	16100	47700
20	3.1	9.7	3050	1.7	154	IE3	BF70Z-..SPE09XA4	0.95	3.2	6.4	9.7	11.5	2000	2450	3050	3050	3050	231	16100	47700
20	3.1	8.3	3550	1.4	179.7	IE3	BF70Z-..SPE09XA4	0.8	2.7	5.5	8.3	10	2300	2850	3550	3550	3550	231	16100	47700
20	3.1	7.5	3950	1.3	199.7	IE3	BF70Z-..SPE09XA4	0.75	2.5	5	7.5	9	2550	3150	3950	3950	3950	231	16100	47700
20	3.1	6.4	4650	1.1	233	IE3	BF70Z-..SPE09XA4	0.6	2.1	4.2	6.4	7.7	3000	3700	4650	4650	4650	231	16100	47700
20	3.1	5.7	5100	1	258.7	IE3	BF70Z-..SPE09XA4	0.55	1.9	3.8	5.7	6.9	3350	4100	5100	5100	5100	231	16100	47700
20	3.1	4.9	6000	0.86	301.8	IE3	BF70Z-..SPE09XA4	0.49	1.6	3.3	4.9	5.9	3900	4800	6000	6000	6000	231	16100	47700
20	3.1	9.4	3150	3	158.5	IE3	BF80-..SPE09XA4	0.9	3.1	6.3	9.4	11	2050	2500	3150	3150	3150	307	29000	75000
20	3.1	8.1	3650	2.6	184.5	IE3	BF80-..SPE09XA4	0.8	2.7	5.4	8.1	9.7	2350	2950	3650	3650	3650	307	31800	75000
20	3.1	7.1	4150	2.3	209.4	IE3	BF80-..SPE09XA4	0.7	2.3	4.7	7.1	8.5	2700	3350	4150	4150	4150	307	34300	75000
20	3.1	6.3	4700	2	237.1	IE3	BF80-..SPE09XA4	0.6	2.1	4.2	6.3	7.5	3050	3750	4700	4700	4700	307	36900	75000
20	3.1	5.5	5300	1.8	269.1	IE3	BF80-..SPE09XA4	0.55	1.8	3.7	5.5	6.6	3450	4300	5300	5300	5300	307	39600	75000
20	3.1	5.1	5800	1.8	291.7	IE3	BF80Z-..SPE09XA4	0.5	1.7	3.4	5.1	6.1	3750	4650	5800	5800	5800	348	39600	75000
20	3.1	4.3	6900	1.5	347.3	IE3	BF80Z-..SPE09XA4	0.43	1.4	2.8	4.3	5.1	4500	5500	6900	6900	6900	348	39600	75000
20	3.1	3.8	7800	1.3	394.2	IE3	BF80Z-..SPE09XA4	0.38	1.2	2.5	3.8	4.5	5100	6300	7800	7800	7800	348	39600	75000
20	3.1	3.3	9000	1.2	450.4	IE3	BF80Z-..SPE09XA4	0.33	1.1	2.2	3.3	3.9	5800	7200	9000	9000	9000	348	39600	75000
20	3.1	2.9	10200	1	511.2	IE3	BF80Z-..SPE09XA4	0.29	0.95	1.9	2.9	3.5	6600	8100	10200	10200	10200	348	39600	75000
20	3.1	2.5	11600	0.9	583.4	IE3	BF80Z-..SPE09XA4	0.25	0.85	1.7	2.5	3	7500	9300	11600	11600	11600	348	39600	75000
20	3.1	4.3	6800	2.7	343.6	IE3	BF90Z-..SPE09XA4	0.43	1.4	2.9	4.3	5.2	4450	5400	6800	6800	6800	612	42800	120000
20	3.1	3.9	7600	2.4	382.6	IE3	BF90Z-..SPE09XA4	0.39	1.3	2.6	3.9	4.7	4950	6100	7600	7600	7600	612	42800	120000
20	3.1	3.2	9100	2	456.7	IE3	BF90Z-..SPE09XA4	0.32	1	2.1	3.2	3.9	5900	7300	9100	9100	9100	612	42800	120000
20	3.1	2.9	10100	1.8	508.5	IE3	BF90Z-..SPE09XA4	0.29	0.95	1.9	2.9	3.5	6600	8100	10100	10100	10100	612	42800	120000
20	3.1	2.5	11800	1.6	591.1	IE3	BF90Z-..SPE09XA4	0.25	0.8	1.6	2.5	3	7600	9400	11800	11800	11800	612	42800	120000
20	3.1	2.2	13100	1.4	658.1	IE3	BF90Z-..SPE09XA4	0.22	0.75	1.5	2.2	2.7	8500	10500	13100	13100	13100	612	42800	120000
20	3.1	1.9	15100	1.2	759	IE3	BF90Z-..SPE09XA4	0.19	0.65	1.3	1.9	2.3	9800	12100						

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$


MN = 25.5 Nm (PN = 4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
25.5	4	196	194	1.9	7.62	IE3	BF40-..SPE11SA6	19.5	65	131	196	235	144	167	194	194	194	80	3900	-
25.5	4	158	240	1.7	9.48	IE3	BF40-..SPE11SA6	15.5	52	105	158	189	180	205	240	240	240	80	4150	-
25.5	4	127	300	1.5	11.79	IE3	BF40-..SPE11SA6	12.5	42	84	127	152	220	255	300	300	300	80	4450	-
25.5	4	99	380	1.4	15.02	IE3	BF40-..SPE11SA6	9.9	33	66	99	119	285	330	380	380	380	80	4800	-
25.5	4	86	440	1.4	17.35	IE3	BF40-..SPE11SA6	8.6	28.5	57	86	103	325	380	440	440	440	80	4950	-
25.5	4	78	485	1.4	19.09	IE3	BF40-..SPE11SA6	7.8	26	52	78	94	360	415	485	485	485	80	5100	-
25.5	4	69	550	1.3	21.6	IE3	BF40-..SPE11SA6	6.9	23	46	69	83	410	475	550	550	550	80	5200	-
25.5	4	63	600	1.2	23.77	IE3	BF40-..SPE11SA6	6.3	21	42	63	75	450	520	600	600	600	80	5400	-
25.5	4	55	680	1.1	26.86	IE3	BF40-..SPE11SA6	5.5	18.5	37	55	67	510	590	680	680	680	80	5600	-
25.5	4	50	750	1.1	29.55	IE3	BF40-..SPE11SA6	5	16.5	33.5	50	60	560	650	750	750	750	80	5800	-
25.5	4	43.5	870	0.97	34.21	IE3	BF40-..SPE11SA6	4.3	14.5	29	43.5	52	640	750	870	870	870	80	6000	-
25.5	4	39.5	950	0.93	37.64	IE3	BF40-..SPE11SA6	3.9	13	26.5	39.5	47.5	710	820	950	950	950	80	6200	-
25.5	4	36	1050	0.85	41.42	IE3	BF40-..SPE11SA6	3.6	12	24	36	43	780	910	1050	1050	1050	80	6500	-
25.5	4	194	196	2.8	7.71	IE3	BF50-..SPE11SA6	19	64	129	194	230	146	169	196	196	196	110	5100	-
25.5	4	140	270	2.5	10.68	IE3	BF50-..SPE11SA6	14	46.5	93	140	168	200	230	270	270	270	110	5600	-
25.5	4	102	370	2.1	14.65	IE3	BF50-..SPE11SA6	10	34	68	102	122	275	320	370	370	370	110	6100	-
25.5	4	89	425	2.2	16.7	IE3	BF50-..SPE11SA6	8.9	29.5	59	89	107	315	365	425	425	425	110	6200	-
25.5	4	80	475	2.1	18.68	IE3	BF50-..SPE11SA6	8	26.5	53	80	96	350	410	475	475	475	110	6400	-
25.5	4	64	590	1.9	23.14	IE3	BF50-..SPE11SA6	6.4	21.5	43	64	77	435	500	590	590	590	110	6800	-
25.5	4	57	650	1.8	25.88	IE3	BF50-..SPE11SA6	5.7	19	38.5	57	69	490	560	650	650	650	110	7100	-
25.5	4	47	800	1.6	31.73	IE3	BF50-..SPE11SA6	4.7	15.5	31.5	47	56	600	690	800	800	800	110	7500	-
25.5	4	42	900	1.4	35.49	IE3	BF50-..SPE11SA6	4.2	14	28	42	50	670	780	900	900	900	110	7800	-
25.5	4	35.5	1070	1.2	42.15	IE3	BF50-..SPE11SA6	3.5	11.5	23.5	35.5	42.5	800	920	1070	1070	1070	110	8500	-
25.5	4	31.5	1200	1.1	47.14	IE3	BF50-..SPE11SA6	3.1	10.5	21	31.5	38	890	1030	1200	1200	1200	110	8900	-
25.5	4	26	1440	0.9	56.86	IE3	BF50-..SPE11SA6	2.6	8.7	17.5	26	31.5	1080	1250	1440	1440	1440	110	9300	-
25.5	4	23.5	1620	0.8	63.59	IE3	BF50-..SPE11SA6	2.3	7.8	15.5	23.5	28	1200	1390	1620	1620	1620	110	9800	-
25.5	4	66	570	2.9	22.58	IE3	BF60-..SPE11SA6	6.6	22	44	66	79	425	495	570	570	570	141	8000	22600
25.5	4	59	630	2.7	25.05	IE3	BF60-..SPE11SA6	5.9	19.5	39.5	59	71	475	550	630	630	630	141	8200	23200
25.5	4	48	790	2.4	31.2	IE3	BF60-..SPE11SA6	4.8	16	32	48	57	590	680	790	790	790	141	8800	24900
25.5	4	43	880	2.2	34.62	IE3	BF60-..SPE11SA6	4.3	14	28.5	43	51	650	760	880	880	880	141	9100	25700
25.5	4	36	1060	2	41.6	IE3	BF60-..SPE11SA6	3.6	12	24	36	43	790	910	1060	1060	1060	141	9600	27100
25.5	4	32	1170	1.9	46.16	IE3	BF60-..SPE11SA6	3.2	10.5	21.5	32	38.5	870	1010	1170	1170	1170	141	9900	28000
25.5	4	27.5	1380	1.7	54.44	IE3	BF60-..SPE11SA6	2.7	9.1	18	27.5	33	1030	1190	1380	1380	1380	141	10500	29700
25.5	4	24.5	1540	1.5	60.4	IE3	BF60-..SPE11SA6	2.4	8.2	16.5	24.5	29.5	1140	1320	1540	1540	1540	141	11100	31400
25.5	4	20.5	1830	1.3	72.15	IE3	BF60-..SPE11SA6	2	6.9	13.5	20.5	24.5	1370	1580	1830	1830	1830	141	12000	34000
25.5	4	18.5	2000	1.1	80.05	IE3	BF60-..SPE11SA6	1.8	6.2	12	18.5	22	1520	1760	2000	2000	2000	141	12600	35600
25.5	4	16	2350	0.97	93.44	IE3	BF60-..SPE11SA6	1.6	5.3	10.5	16	19	1770	2050	2350	2350	2350	141	13500	38200
25.5	4	14	2600	0.87	103.7	IE3	BF60-..SPE11SA6	1.4	4.8	9.6	14	17	1970	2250	2600	2600	2600	141	14100	39900
25.5	4	13	2850	0.8	113.1	IE3	BF60-..SPE11SA6	1.3	4.4	8.8	13	15.5	2100	2450	2850	2850	2850	141	14600	41300
25.5	4	20.5	1840	2.8	72.26	IE3	BF70-..SPE11SA6	2	6.9	13.5	20.5	24.5	1370	1580	1840	1840	1840	220	12000	39600
25.5	4	18	2050	2.5	81.82	IE3	BF70-..SPE11SA6	1.8	6.1	12	18	21.5	1550	1800	2050	2050	2050	220	12800	41300
25.5	4	15.5	2400	2.1	95.46	IE3	BF70-..SPE11SA6	1.5	5.2	10	15.5	18.5	1810	2100	2400	2400	2400	220	14000	43700
25.5	4	14	2650	1.9	105.2	IE3	BF70-..SPE11SA6	1.4	4.7	9.5	14	17	1990	2300	2650	2650	2650	220	14700	45100
25.5	4	12	3100	1.7	122.7	IE3	BF70-..SPE11SA6	1.2	4	8.1	12	14.5	2300	2650	3100	3100	3100	220	16100	47700
25.5	4	11	3350	1.5	133	IE3	BF70Z-..SPE11SA6	1.1	3.7	7.5	11	13.5	2500	2900	3350	3350	3350	247	16100	47700
25.5	4	9.7	3900	1.3	154	IE3	BF70Z-..SPE11SA6	0.95	3.2	6.4	9.7	11.5	2900	3350	3900	3900	3900	247	16100	47700
25.5	4	8.3	4550	1.1	179.7	IE3	BF70Z-..SPE11SA6	0.8	2.7	5.5	8.3	10	3400	3950	4550	4550	4550	247	16100	47700
25.5	4	7.5	5000	1	199.7	IE3	BF70Z-..SPE11SA6	0.75	2.5	5	7.5	9	3750	4350	5000	5000	5000	247	16100	47700
25.5	4	6.4	5900	0.88	233	IE3	BF70Z-..SPE11SA6	0.6	2.1	4.2	6.4	7.7	4400	5100	5900	5900	5900	247	16100	47700
25.5	4	12	3100	3	122.4	IE3	BF80-..SPE11SA6	1.2	4	8.1	12	14.5	2300	2650	3100	3100	3100	316	24500	75000
25.5	4	10.5	3550	2.7	139.7	IE3	BF80-..SPE11SA6	1	3.5	7.1	10.5	12.5	2650	3050	3550	3550	3550	316	26700	75000
25.5	4	9.4	4000	2.4	158.5	IE3	BF80-..SPE11SA6	0.9	3.1	6.3	9.4	11	3000	3450	4000	4000	4000	316	29000	75000
25.5	4	8.1	4700	2	184.5	IE3	BF80-..SPE11SA6	0.8	2.7	5.4	8.1	9.7	3500	4050	4700	4700	4700	316	31800	75000
25.5	4	7.1	5300	1.8	209.4	IE3	BF80-..SPE11SA6	0.7	2.3	4.7	7.1	8.5	3950	4						

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$




MN = 26.5 Nm (PN = 4 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
26.5	4	235	168	1.6	6.34	IE5	BF30-..S5E11MA6	23.5	78	157	235	280	168	168	168	168	168	66	2400	-
26.5	4	185	210	1.3	8.07	IE5	BF30-..S5E11MA6	18.5	61	123	185	220	210	210	210	210	210	66	2650	-
26.5	4	150	260	1.2	9.99	IE5	BF30-..S5E11MA6	15	50	100	150	180	260	260	260	260	260	66	2850	-
26.5	4	116	340	1.1	12.91	IE5	BF30-..S5E11MA6	11.5	38.5	77	116	139	340	340	340	340	340	66	3050	-
26.5	4	93	420	0.96	16	IE5	BF30-..S5E11MA6	9.3	31	62	93	112	420	420	420	420	420	66	3250	-
26.5	4	84	465	1	17.65	IE5	BF30-..S5E11MA6	8.4	28	56	84	101	465	465	465	465	465	66	3300	-
26.5	4	77	510	0.97	19.41	IE5	BF30-..S5E11MA6	7.7	25.5	51	77	92	510	510	510	510	510	66	3400	-
26.5	4	68	570	0.9	21.85	IE5	BF30-..S5E11MA6	6.8	22.5	45.5	68	82	570	570	570	570	570	66	3500	-
26.5	4	62	630	0.86	24.03	IE5	BF30-..S5E11MA6	6.2	20.5	41.5	62	74	630	630	630	630	630	66	3600	-
26.5	4	255	155	2.2	5.87	IE5	BF40-..S5E11MA6	25.5	85	170	255	305	155	155	155	155	155	80	3550	-
26.5	4	196	200	1.8	7.62	IE5	BF40-..S5E11MA6	19.5	65	131	196	235	200	200	200	200	200	80	3900	-
26.5	4	158	250	1.7	9.48	IE5	BF40-..S5E11MA6	15.5	52	105	158	189	250	250	250	250	250	80	4150	-
26.5	4	127	310	1.5	11.79	IE5	BF40-..S5E11MA6	12.5	42	84	127	152	310	310	310	310	310	80	4450	-
26.5	4	99	395	1.3	15.02	IE5	BF40-..S5E11MA6	9.9	33	66	99	119	395	395	395	395	395	80	4800	-
26.5	4	86	455	1.4	17.35	IE5	BF40-..S5E11MA6	8.6	28.5	57	86	103	455	455	455	455	455	80	4950	-
26.5	4	78	500	1.3	19.09	IE5	BF40-..S5E11MA6	7.8	26	52	78	94	500	500	500	500	500	80	5100	-
26.5	4	69	570	1.2	21.6	IE5	BF40-..S5E11MA6	6.9	23	46	69	83	570	570	570	570	570	80	5200	-
26.5	4	63	620	1.2	23.77	IE5	BF40-..S5E11MA6	6.3	21	42	63	75	620	620	620	620	620	80	5400	-
26.5	4	55	710	1.1	26.86	IE5	BF40-..S5E11MA6	5.5	18.5	37	55	67	710	710	710	710	710	80	5600	-
26.5	4	50	780	1	29.55	IE5	BF40-..S5E11MA6	5	16.5	33.5	50	60	780	780	780	780	780	80	5800	-
26.5	4	43.5	900	0.94	34.21	IE5	BF40-..S5E11MA6	4.3	14.5	29	43.5	52	900	900	900	900	900	80	6000	-
26.5	4	39.5	990	0.89	37.64	IE5	BF40-..S5E11MA6	3.9	13	26.5	39.5	47.5	990	990	990	990	990	80	6200	-
26.5	4	36	1090	0.82	41.42	IE5	BF40-..S5E11MA6	3.6	12	24	36	43	1090	1090	1090	1090	1090	80	6500	-
26.5	4	194	200	2.7	7.71	IE5	BF50-..S5E11MA6	19	64	129	194	230	200	200	200	200	200	110	5100	-
26.5	4	140	280	2.4	10.68	IE5	BF50-..S5E11MA6	14	46.5	93	140	168	280	280	280	280	280	110	5600	-
26.5	4	102	385	2	14.65	IE5	BF50-..S5E11MA6	10	34	68	102	122	385	385	385	385	385	110	6100	-
26.5	4	89	440	2.1	16.7	IE5	BF50-..S5E11MA6	8.9	29.5	59	89	107	440	440	440	440	440	110	6200	-
26.5	4	80	495	2	18.68	IE5	BF50-..S5E11MA6	8	26.5	53	80	96	495	495	495	495	495	110	6400	-
26.5	4	64	610	1.8	23.14	IE5	BF50-..S5E11MA6	6.4	21.5	43	64	77	610	610	610	610	610	110	6800	-
26.5	4	57	680	1.7	25.88	IE5	BF50-..S5E11MA6	5.7	19	38.5	57	69	680	680	680	680	680	110	7100	-
26.5	4	47	840	1.5	31.73	IE5	BF50-..S5E11MA6	4.7	15.5	31.5	47	56	840	840	840	840	840	110	7500	-
26.5	4	42	940	1.4	35.49	IE5	BF50-..S5E11MA6	4.2	14	28	42	50	940	940	940	940	940	110	7800	-
26.5	4	35.5	1110	1.2	42.15	IE5	BF50-..S5E11MA6	3.5	11.5	23.5	35.5	42.5	1110	1110	1110	1110	1110	110	8500	-
26.5	4	31.5	1240	1	47.14	IE5	BF50-..S5E11MA6	3.1	10.5	21	31.5	38	1240	1240	1240	1240	1240	110	8900	-
26.5	4	26	1500	0.86	56.86	IE5	BF50-..S5E11MA6	2.6	8.7	17.5	26	31.5	1500	1500	1500	1500	1500	110	9300	-
26.5	4	79	495	3	18.81	IE5	BF60-..S5E11MA6	7.9	26.5	53	79	95	495	495	495	495	495	141	7600	21500
26.5	4	66	590	2.8	22.58	IE5	BF60-..S5E11MA6	6.6	22	44	66	79	590	590	590	590	590	141	8000	22600
26.5	4	59	660	2.6	25.05	IE5	BF60-..S5E11MA6	5.9	19.5	39.5	59	71	660	660	660	660	660	141	8200	23200
26.5	4	48	820	2.3	31.2	IE5	BF60-..S5E11MA6	4.8	16	32	48	57	820	820	820	820	820	141	8800	24900
26.5	4	43	910	2.2	34.62	IE5	BF60-..S5E11MA6	4.3	14	28.5	43	51	910	910	910	910	910	141	9100	25700
26.5	4	36	1100	1.9	41.6	IE5	BF60-..S5E11MA6	3.6	12	24	36	43	1100	1100	1100	1100	1100	141	9600	27100
26.5	4	32	1220	1.8	46.16	IE5	BF60-..S5E11MA6	3.2	10.5	21.5	32	38.5	1220	1220	1220	1220	1220	141	9900	28000
26.5	4	27.5	1440	1.6	54.44	IE5	BF60-..S5E11MA6	2.7	9.1	18	27.5	33	1440	1440	1440	1440	1440	141	10500	29700
26.5	4	24.5	1600	1.4	60.4	IE5	BF60-..S5E11MA6	2.4	8.2	16.5	24.5	29.5	1600	1600	1600	1600	1600	141	11100	31400
26.5	4	20.5	1910	2.7	72.26	IE5	BF70-..S5E11MA6	2	6.9	13.5	20.5	24.5	1910	1910	1910	1910	1910	220	12000	39600
26.5	4	18	2150	2.4	81.82	IE5	BF70-..S5E11MA6	1.8	6.1	12	21.5	25	2150	2150	2150	2150	2150	220	12800	41300
26.5	4	15.5	2500	2.1	95.46	IE5	BF70-..S5E11MA6	1.5	5.2	10	15.5	18.5	2500	2500	2500	2500	2500	220	14000	43700
26.5	4	14	2750	1.9	105.2	IE5	BF70-..S5E11MA6	1.4	4.7	9.5	14	17	2750	2750	2750	2750	2750	220	14700	45100
26.5	4	12	3250	1.6	122.7	IE5	BF70-..S5E11MA6	1.2	4	8.1	12	14.5	3250	3250	3250	3250	3250	220	16100	47700
26.5	4	11	3500	1.5	133	IE5	BF70Z-..S5E11MA6	1.1	3.7	7.5	11	13.5	3500	3500	3500	3500	3500	247	16100	47700
26.5	4	9.7	4050	1.3	154	IE5	BF70Z-..S5E11MA6	0.95	3.2	6.4	9.7	11.5	4050	4050	4050	4050	4050	247	16100	47700
26.5	4	8.3	4750	1.1	179.7	IE5	BF70Z-..S5E11MA6	0.8	2.7	5.5	8.3	10	4750	4750	4750	4750	4750	247	16100	47700
26.5	4	7.5	5200	0.98	199.7	IE5	BF70Z-..S5E11MA6	0.75	2.5	5	7.5	9	5200	5200	5200	5200	5200	247	16100	47700
26.5	4	6.4	6100	0.84	233	IE5	BF70Z-..S5E11MA6	0.6	2.1	4.2	6.4	7.7	6100	6100	6100	6100	6100	247	16100	47700
26.5	4	12	3200</																	

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 26.5 Nm (PN = 4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
26.5	4	2.5	15600	1.2	591.1	IE5	BF90Z-../S5E11MA6	0.25	0.8	1.6	2.5	3	15600	15600	15600	15600	15600	629	42800	120000
26.5	4	2.2	17400	1.1	658.1	IE5	BF90Z-../S5E11MA6	0.22	0.75	1.5	2.2	2.7	17400	17400	17400	17400	17400	629	42800	120000
26.5	4	1.9	20000	0.92	759	IE5	BF90Z-../S5E11MA6	0.19	0.65	1.3	1.9	2.3	20000	20000	20000	20000	20000	629	42800	120000
26.5	4	1.7	22000	0.83	845.1	IE5	BF90Z-../S5E11MA6	0.17	0.55	1.1	1.7	2.1	22000	22000	22000	22000	22000	629	42800	120000


MN = 35 Nm (PN = 5.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
35	5.5	235	220	1.2	6.34	IE5	BF30-../S5E11LA6	23.5	78	157	235	280	220	220	220	220	220	78	2400	-
35	5.5	235	220	1.2	6.34	IE4	BF30-../S4E11MA6	23.5	78	157	235	280	168	190	220	220	220	66	2400	-
35	5.5	185	280	1	8.07	IE5	BF30-../S5E11LA6	18.5	61	123	185	220	280	280	280	280	280	78	2650	-
35	5.5	185	280	1	8.07	IE4	BF30-../S4E11MA6	18.5	61	123	185	220	210	240	280	280	280	66	2650	-
35	5.5	150	345	0.92	9.99	IE4	BF30-../S4E11MA6	15	50	100	150	180	260	295	345	345	345	66	2850	-
35	5.5	150	345	0.92	9.99	IE5	BF30-../S5E11LA6	15	50	100	150	180	345	345	345	345	345	78	2850	-
35	5.5	116	450	0.81	12.91	IE5	BF30-../S5E11LA6	11.5	38.5	77	116	139	450	450	450	450	450	78	3050	-
35	5.5	116	450	0.81	12.91	IE4	BF30-../S4E11MA6	11.5	38.5	77	116	139	340	385	450	450	450	66	3050	-
35	5.5	255	205	1.6	5.87	IE5	BF40-../S5E11LA6	25.5	85	170	255	305	205	205	205	205	205	92	3550	-
35	5.5	255	205	1.6	5.87	IE4	BF40-../S4E11MA6	25.5	85	170	255	305	155	176	205	205	205	80	3550	-
35	5.5	196	265	1.4	7.62	IE4	BF40-../S4E11MA6	19.5	65	131	196	235	200	225	265	265	265	80	3900	-
35	5.5	196	265	1.4	7.62	IE5	BF40-../S5E11LA6	19.5	65	131	196	235	265	265	265	265	265	92	3900	-
35	5.5	158	330	1.3	9.48	IE4	BF40-../S4E11MA6	15.5	52	105	158	189	250	280	330	330	330	80	4150	-
35	5.5	158	330	1.3	9.48	IE5	BF40-../S5E11LA6	15.5	52	105	158	189	330	330	330	330	330	92	4150	-
35	5.5	127	410	1.1	11.79	IE4	BF40-../S4E11MA6	12.5	42	84	127	152	310	350	410	410	410	80	4450	-
35	5.5	127	410	1.1	11.79	IE5	BF40-../S5E11LA6	12.5	42	84	127	152	410	410	410	410	410	92	4450	-
35	5.5	99	520	0.99	15.02	IE5	BF40-../S5E11LA6	9.9	33	66	99	119	520	520	520	520	520	92	4800	-
35	5.5	99	520	0.99	15.02	IE4	BF40-../S4E11MA6	9.9	33	66	99	119	395	450	520	520	520	80	4800	-
35	5.5	86	600	1	17.35	IE4	BF40-../S4E11MA6	8.6	28.5	57	86	103	455	520	600	600	600	80	4950	-
35	5.5	86	600	1	17.35	IE5	BF40-../S5E11LA6	8.6	28.5	57	86	103	600	600	600	600	600	92	4950	-
35	5.5	78	660	0.99	19.09	IE4	BF40-../S4E11MA6	7.8	26	52	78	94	660	660	660	660	660	92	5100	-
35	5.5	78	660	0.99	19.09	IE5	BF40-../S5E11LA6	7.8	26	52	78	94	500	570	660	660	660	80	5100	-
35	5.5	69	750	0.93	21.6	IE4	BF40-../S4E11MA6	6.9	23	46	69	83	570	640	750	750	750	92	5200	-
35	5.5	69	750	0.93	21.6	IE5	BF40-../S5E11LA6	6.9	23	46	69	83	750	750	750	750	750	92	5200	-
35	5.5	63	830	0.88	23.77	IE4	BF40-../S4E11MA6	6.3	21	42	63	75	620	710	830	830	830	80	5400	-
35	5.5	63	830	0.88	23.77	IE5	BF40-../S5E11LA6	6.3	21	42	63	75	830	830	830	830	830	92	5400	-
35	5.5	55	940	0.82	26.86	IE4	BF40-../S4E11MA6	5.5	18.5	37	55	67	710	800	940	940	940	80	5600	-
35	5.5	55	940	0.82	26.86	IE5	BF40-../S5E11LA6	5.5	18.5	37	55	67	940	940	940	940	940	92	5600	-
35	5.5	275	188	2.6	5.38	IE4	BF50-../S4E11MA6	27.5	92	185	275	330	142	161	188	188	188	110	4500	-
35	5.5	275	188	2.6	5.38	IE5	BF50-../S5E11LA6	27.5	92	185	275	330	188	188	188	188	188	122	4500	-
35	5.5	194	265	2.1	7.71	IE4	BF50-../S4E11MA6	19	64	129	194	230	200	230	265	265	265	110	5100	-
35	5.5	194	265	2.1	7.71	IE5	BF50-../S5E11LA6	19	64	129	194	230	265	265	265	265	265	122	5100	-
35	5.5	140	370	1.8	10.68	IE4	BF50-../S4E11MA6	14	46.5	93	140	168	370	370	370	370	370	110	5600	-
35	5.5	140	370	1.8	10.68	IE5	BF50-../S5E11LA6	14	46.5	93	140	168	370	370	370	370	370	122	5600	-
35	5.5	102	510	1.5	14.65	IE4	BF50-../S4E11MA6	10	34	68	102	122	385	435	510	510	510	110	6100	-
35	5.5	102	510	1.5	14.65	IE5	BF50-../S5E11LA6	10	34	68	102	122	510	510	510	510	510	122	6100	-
35	5.5	89	580	1.6	16.7	IE4	BF50-../S4E11MA6	8.9	29.5	59	89	107	440	500	580	580	580	122	6200	-
35	5.5	89	580	1.6	16.7	IE5	BF50-../S5E11LA6	8.9	29.5	59	89	107	440	500	580	580	580	110	6200	-
35	5.5	80	650	1.5	18.68	IE4	BF50-../S4E11MA6	8	26.5	53	80	96	495	560	650	650	650	110	6400	-
35	5.5	80	650	1.5	18.68	IE5	BF50-../S5E11LA6	8	26.5	53	80	96	650	650	650	650	650	122	6400	-
35	5.5	64	800	1.4	23.14	IE4	BF50-../S4E11MA6	6.4	21.5	43	64	77	610	690	800	800	800	110	6800	-
35	5.5	64	800	1.4	23.14	IE5	BF50-../S5E11LA6	6.4	21.5	43	64	77	800	800	800	800	800	122	6800	-
35	5.5	57	900	1.3	25.88	IE4	BF50-../S4E11MA6	5.7	19	38.5	57	69	680	770	900	900	900	110	7100	-
35	5.5	57	900	1.3	25.88															

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$




MN = 35 Nm (PN = 5.5 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
35	5.5	43	1210	1.6	34.62	IE5	BF60.../S5E11LA6	4.3	14	28.5	43	51	1210	1210	1210	1210	1210	153	9100	25700
35	5.5	36	1450	1.4	41.6	IE5	BF60.../S5E11LA6	3.6	12	24	36	43	1450	1450	1450	1450	1450	153	9600	27100
35	5.5	36	1450	1.4	41.6	IE4	BF60.../S4E11MA6	3.6	12	24	36	43	1100	1240	1450	1450	1450	141	9600	27100
35	5.5	32	1610	1.4	46.16	IE4	BF60.../S4E11MA6	3.2	10.5	21.5	32	38.5	1220	1380	1610	1610	1610	141	9900	28000
35	5.5	32	1610	1.4	46.16	IE5	BF60.../S5E11LA6	3.2	10.5	21.5	32	38.5	1610	1610	1610	1610	1610	153	9900	28000
35	5.5	27.5	1900	1.2	54.44	IE4	BF60.../S4E11MA6	2.7	9.1	18	27.5	33	1440	1630	1900	1900	1900	141	10500	29700
35	5.5	27.5	1900	1.2	54.44	IE5	BF60.../S5E11LA6	2.7	9.1	18	27.5	33	1900	1900	1900	1900	1900	153	10500	29700
35	5.5	24.5	2100	1.1	60.4	IE4	BF60.../S4E11MA6	2.4	8.2	16.5	24.5	29.5	2100	2100	2100	2100	2100	153	11100	31400
35	5.5	24.5	2100	1.1	60.4	IE5	BF60.../S5E11LA6	2.4	8.2	16.5	24.5	29.5	1600	1810	2100	2100	2100	141	11100	31400
35	5.5	20.5	2500	0.91	72.15	IE4	BF60.../S4E11MA6	2	6.9	13.5	20.5	24.5	1910	2150	2500	2500	2500	141	12000	34000
35	5.5	20.5	2500	0.91	72.15	IE5	BF60.../S5E11LA6	2	6.9	13.5	20.5	24.5	2500	2500	2500	2500	2500	153	12000	34000
35	5.5	18.5	2800	0.82	80.05	IE4	BF60.../S4E11MA6	1.8	6.2	12	18.5	22	2100	2400	2800	2800	2800	141	12600	35600
35	5.5	18.5	2800	0.82	80.05	IE5	BF60.../S5E11LA6	1.8	6.2	12	18.5	22	2800	2800	2800	2800	2800	153	12600	35600
35	5.5	26.5	1950	2.7	55.79	IE5	BF70.../S5E11LA6	2.6	8.9	17.5	26.5	32	1950	1950	1950	1950	1950	232	10200	36000
35	5.5	26.5	1950	2.7	55.79	IE4	BF70.../S4E11MA6	2.6	8.9	17.5	26.5	32	1470	1670	1950	1950	1950	220	10200	36000
35	5.5	24	2150	2.4	61.94	IE5	BF70.../S5E11LA6	2.4	8	16	24	29	2150	2150	2150	2150	2150	232	10800	37400
35	5.5	24	2150	2.4	61.94	IE4	BF70.../S4E11MA6	2.4	8	16	24	29	1640	1850	2150	2150	2150	220	10800	37400
35	5.5	20.5	2500	2.1	72.26	IE5	BF70.../S5E11LA6	2	6.9	13.5	20.5	24.5	2500	2500	2500	2500	2500	232	12000	39600
35	5.5	20.5	2500	2.1	72.26	IE4	BF70.../S4E11MA6	2	6.9	13.5	20.5	24.5	1910	2150	2500	2500	2500	220	12000	39600
35	5.5	18	2850	1.8	81.82	IE5	BF70.../S5E11LA6	1.8	6.1	12	18	21.5	2850	2850	2850	2850	2850	232	12800	41300
35	5.5	18	2850	1.8	81.82	IE4	BF70.../S4E11MA6	1.8	6.1	12	18	21.5	2150	2450	2850	2850	2850	220	12800	41300
35	5.5	15.5	3300	1.6	95.46	IE4	BF70.../S4E11MA6	1.5	5.2	10	15.5	18.5	2500	2850	3300	3300	3300	220	14000	43700
35	5.5	15.5	3300	1.6	95.46	IE5	BF70.../S5E11LA6	1.5	5.2	10	15.5	18.5	3300	3300	3300	3300	3300	232	14000	43700
35	5.5	14	3650	1.4	105.2	IE4	BF70.../S4E11MA6	1.4	4.7	9.5	14	17	2750	3150	3650	3650	3650	220	14700	45100
35	5.5	12	4250	1.2	122.7	IE5	BF70.../S5E11LA6	1.2	4	8.1	12	14.5	4250	4250	4250	4250	4250	232	16100	47700
35	5.5	12	4250	1.2	122.7	IE4	BF70.../S4E11MA6	1.2	4	8.1	12	14.5	3250	3650	4250	4250	4250	220	16100	47700
35	5.5	11	4650	1.1	133	IE4	BF70Z.../S4E11MA6	1.1	3.7	7.5	11	13.5	3500	3950	4650	4650	4650	247	16100	47700
35	5.5	11	4650	1.1	133	IE5	BF70Z.../S5E11LA6	1.1	3.7	7.5	11	13.5	4650	4650	4650	4650	4650	258	16100	47700
35	5.5	9.7	5300	0.96	154	IE4	BF70Z.../S4E11MA6	0.95	3.2	6.4	9.7	11.5	4050	4600	5300	5300	5300	247	16100	47700
35	5.5	9.7	5300	0.96	154	IE5	BF70Z.../S5E11LA6	0.95	3.2	6.4	9.7	11.5	5300	5300	5300	5300	5300	258	16100	47700
35	5.5	8.3	6200	0.83	179.7	IE4	BF70Z.../S4E11MA6	0.8	2.7	5.5	8.3	10	4750	5300	6200	6200	6200	247	16100	47700
35	5.5	8.3	6200	0.83	179.7	IE5	BF70Z.../S5E11LA6	0.8	2.7	5.5	8.3	10	6200	6200	6200	6200	6200	258	16100	47700
35	5.5	15.5	3300	2.9	94.38	IE5	BF80.../S5E11LA6	1.5	5.2	10.5	15.5	19	3300	3300	3300	3300	3300	328	20300	68500
35	5.5	15.5	3300	2.9	94.38	IE4	BF80.../S4E11MA6	1.5	5.2	10.5	15.5	19	2500	2800	3300	3300	3300	316	20300	68500
35	5.5	13.5	3750	2.5	107.9	IE4	BF80.../S4E11MA6	1.3	4.6	9.2	13.5	16.5	2850	3200	3750	3750	3750	316	22400	72300
35	5.5	13.5	3750	2.5	107.9	IE5	BF80.../S5E11LA6	1.3	4.6	9.2	13.5	16.5	3750	3750	3750	3750	3750	328	22400	72300
35	5.5	12	4250	2.2	122.4	IE4	BF80.../S4E11MA6	1.2	4	8.1	12	14.5	3200	3650	4250	4250	4250	316	24500	75000
35	5.5	12	4250	2.2	122.4	IE5	BF80.../S5E11LA6	1.2	4	8.1	12	14.5	4250	4250	4250	4250	4250	328	24500	75000
35	5.5	10.5	4850	1.9	139.7	IE4	BF80.../S4E11MA6	1	3.5	7.1	10.5	12.5	4850	4850	4850	4850	4850	316	26700	75000
35	5.5	10.5	4850	1.9	139.7	IE5	BF80.../S5E11LA6	1	3.5	7.1	10.5	12.5	3700	4150	4850	4850	4850	316	26700	75000
35	5.5	9.4	5500	1.7	158.5	IE4	BF80.../S4E11MA6	0.9	3.1	6.3	9.4	11	4200	4750	5500	5500	5500	316	29000	75000
35	5.5	9.4	5500	1.7	158.5	IE5	BF80.../S5E11LA6	0.9	3.1	6.3	9.4	11	5500	5500	5500	5500	5500	328	29000	75000
35	5.5	8.1	6400	1.5	184.5	IE4	BF80.../S4E11MA6	0.8	2.7	5.4	8.1	9.7	4850	5500	6400	6400	6400	316	31800	75000
35	5.5	8.1	6400	1.5	184.5	IE5	BF80.../S5E11LA6	0.8	2.7	5.4	8.1	9.7	6400	6400	6400	6400	6400	328	31800	75000
35	5.5	7.1	7300	1.3	209.4	IE4	BF80.../S4E11MA6	0.7	2.3	4.7	7.1	8.5	5500	6200	7300	7300	7300	316	34300	75000
35	5.5	7.1	7300	1.3	209.4	IE5	BF80.../S5E11LA6	0.7	2.3	4.7	7.1	8.5	7300	7300	7300	7300	7300	328	34300	75000
35	5.5	6.3	8200	1.1	237.1	IE5	BF80.../S5E11LA6	0.6	2.1	4.2	6.3	7.5	8200	8200	8200	8200	8200	328	34900	75000
35	5.5	6.3	8200	1.1	237.1	IE4	BF80.../S4E11MA6	0.6	2.1	4.2	6.3	7.5	6200	7100	8200	8200	8200	316	36900	75000
35	5.5	5.5	9400	1	269.1	IE4	BF80.../S4E11MA6	0.55	1.8	3.7	5.5	6.6	7100	8000	9400	9400	9400	316	39600	75000
35	5.5	5.5	9400	1	269.1	IE5	BF80.../S5E11LA6	0.55	1.8	3.7	5.5	6.6	9400	9400	9400	9400	9400	328	39600	75000
35	5.5	5.1	10200	1	291.7	IE5	BF80Z.../S5E11LA6	0.5	1.7	3.4	5.1	6.1	10200	10200	10200	10200	10200	375	39600	75000
35	5.5	5.1	10200	1	291.7															

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 48 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
48	7.5	235	300	0.86	6.34	IE3	BF30.../SPE11LA6	23.5	78	157	235	280	220	250	300	300	300	78	2400	-
48	7.5	255	280	1.2	5.87	IE3	BF40.../SPE11LA6	25.5	85	170	255	305	205	230	280	280	280	92	3550	-
48	7.5	196	365	1	7.62	IE3	BF40.../SPE11LA6	19.5	65	131	196	235	265	300	365	365	365	92	3900	-
48	7.5	158	455	0.91	9.48	IE3	BF40.../SPE11LA6	15.5	52	105	158	189	330	375	455	455	455	92	4150	-
48	7.5	127	560	0.82	11.79	IE3	BF40.../SPE11LA6	12.5	42	84	127	152	410	470	560	560	560	92	4450	-
48	7.5	275	255	1.9	5.38	IE3	BF50.../SPE11LA6	27.5	92	185	275	330	188	215	255	255	255	122	4500	-
48	7.5	194	370	1.5	7.71	IE3	BF50.../SPE11LA6	19	64	129	194	230	265	305	370	370	370	122	5100	-
48	7.5	140	510	1.3	10.68	IE3	BF50.../SPE11LA6	14	46.5	93	140	168	370	425	510	510	510	122	5600	-
48	7.5	102	700	1.1	14.65	IE3	BF50.../SPE11LA6	10	34	68	102	122	510	580	700	700	700	122	6100	-
48	7.5	89	800	1.2	16.7	IE3	BF50.../SPE11LA6	8.9	29.5	59	89	107	580	660	800	800	800	122	6200	-
48	7.5	80	890	1.1	18.68	IE3	BF50.../SPE11LA6	8	26.5	53	80	96	650	740	890	890	890	122	6400	-
48	7.5	64	1110	0.99	23.14	IE3	BF50.../SPE11LA6	6.4	21.5	43	64	77	800	920	1110	1110	1110	122	6800	-
48	7.5	57	1240	0.93	25.88	IE3	BF50.../SPE11LA6	5.7	19	38.5	57	69	900	1030	1240	1240	1240	122	7100	-
48	7.5	47	1520	0.83	31.73	IE3	BF50.../SPE11LA6	4.7	15.5	31.5	47	56	1110	1260	1520	1520	1520	122	7500	-
48	7.5	285	250	3	5.22	IE3	BF60.../SPE11LA6	28.5	95	191	285	340	182	205	250	250	250	153	5200	14800
48	7.5	193	370	2.3	7.74	IE3	BF60.../SPE11LA6	19	64	129	193	230	270	305	370	370	370	153	6000	16900
48	7.5	145	490	2	10.31	IE3	BF60.../SPE11LA6	14.5	48	96	145	174	360	410	490	490	490	153	6500	18400
48	7.5	105	680	1.7	14.24	IE3	BF60.../SPE11LA6	10.5	35	70	105	126	495	560	680	680	680	153	7100	20000
48	7.5	88	810	1.8	16.96	IE3	BF60.../SPE11LA6	8.8	29	58	88	106	590	670	810	810	810	153	7300	20600
48	7.5	79	900	1.7	18.81	IE3	BF60.../SPE11LA6	7.9	26.5	53	79	95	650	750	900	900	900	153	7600	21500
48	7.5	66	1080	1.5	22.58	IE3	BF60.../SPE11LA6	6.6	22	44	66	79	790	900	1080	1080	1080	153	8000	22600
48	7.5	59	1200	1.4	25.05	IE3	BF60.../SPE11LA6	5.9	19.5	39.5	59	71	870	1000	1200	1200	1200	153	8200	23200
48	7.5	48	1490	1.3	31.2	IE3	BF60.../SPE11LA6	4.8	16	32	48	57	1090	1240	1490	1490	1490	153	8800	24900
48	7.5	43	1660	1.2	34.62	IE3	BF60.../SPE11LA6	4.3	14	28.5	43	51	1210	1380	1660	1660	1660	153	9100	25700
48	7.5	36	1990	1.1	41.6	IE3	BF60.../SPE11LA6	3.6	12	24	36	43	1450	1660	1990	1990	1990	153	9600	27100
48	7.5	32	2200	0.99	46.16	IE3	BF60.../SPE11LA6	3.2	10.5	21.5	32	38.5	1610	1840	2200	2200	2200	153	9900	28000
48	7.5	27.5	2600	0.88	54.44	IE3	BF60.../SPE11LA6	2.7	9.1	18	27.5	33	1900	2150	2600	2600	2600	153	10500	29700
48	7.5	40.5	1770	2.9	36.88	IE3	BF70.../SPE11LA6	4	13.5	27	40.5	48.5	1290	1470	1770	1770	1770	232	7900	31100
48	7.5	34.5	2050	2.5	43.02	IE3	BF70.../SPE11LA6	3.4	11.5	23	34.5	41.5	1500	1720	2050	2050	2050	232	8700	32800
48	7.5	31	2250	2.3	47.82	IE3	BF70.../SPE11LA6	3.1	10	20.5	31	37.5	1670	1910	2250	2250	2250	232	9100	34000
48	7.5	26.5	2650	1.9	55.79	IE3	BF70.../SPE11LA6	2.6	8.9	17.5	26.5	32	1950	2200	2650	2650	2650	232	10200	36000
48	7.5	24	2950	1.7	61.94	IE3	BF70.../SPE11LA6	2.4	8	16	24	29	2150	2450	2950	2950	2950	232	10800	37400
48	7.5	20.5	3450	1.5	72.26	IE3	BF70.../SPE11LA6	2	6.9	13.5	20.5	24.5	2500	2850	3450	3450	3450	232	12000	39600
48	7.5	18	3900	1.3	81.82	IE3	BF70.../SPE11LA6	1.8	6.1	12	18	21.5	2850	3250	3900	3900	3900	232	12800	41300
48	7.5	15.5	4550	1.1	95.46	IE3	BF70.../SPE11LA6	1.5	5.2	10	15.5	18.5	3300	3800	4550	4550	4550	232	14000	43700
48	7.5	14	5000	1	105.2	IE3	BF70.../SPE11LA6	1.4	4.7	9.5	14	17	3650	4200	5000	5000	5000	232	14700	45100
48	7.5	12	5800	0.88	122.7	IE3	BF70.../SPE11LA6	1.2	4	8.1	12	14.5	4250	4900	5800	5800	5800	232	16100	47700
48	7.5	11	6300	0.81	133	IE3	BF70Z.../SPE11LA6	1.1	3.7	7.5	11	13.5	4650	5300	6300	6300	6300	258	16100	47700
48	7.5	21	3350	2.8	69.86	IE3	BF80.../SPE11LA6	2.1	7.1	14	21	25.5	2400	2750	3350	3350	3350	328	15900	60600
48	7.5	18	3950	2.4	83.16	IE3	BF80.../SPE11LA6	1.8	6	12	18	21.5	2900	3300	3950	3950	3950	328	18400	65100
48	7.5	15.5	4500	2.1	94.38	IE3	BF80.../SPE11LA6	1.5	5.2	10.5	15.5	19	3300	3750	4500	4500	4500	328	20300	68500
48	7.5	13.5	5100	1.8	107.9	IE3	BF80.../SPE11LA6	1.3	4.6	9.2	13.5	16.5	3750	4300	5100	5100	5100	328	22400	72300
48	7.5	12	5800	1.6	122.4	IE3	BF80.../SPE11LA6	1.2	4	8.1	12	14.5	4250	4850	5800	5800	5800	328	24500	75000
48	7.5	10.5	6700	1.4	139.7	IE3	BF80.../SPE11LA6	1	3.5	7.1	10.5	12.5	4850	5500	6700	6700	6700	328	26700	75000
48	7.5	9.4	7600	1.2	158.5	IE3	BF80.../SPE11LA6	0.9	3.1	6.3	9.4	11	5500	6300	7600	7600	7600	328	29000	75000
48	7.5	8.1	8800	1.1	184.5	IE3	BF80.../SPE11LA6	0.8	2.7	5.4	8.1	9.7	6400	7300	8800	8800	8800	328	31800	75000
48	7.5	7.1	10000	0.95	209.4	IE3	BF80.../SPE11LA6	0.7	2.3	4.7	7.1	8.5	7300	8300	10000	10000	10000	328	34300	75000
48	7.5	6.3	11300	0.83	237.1	IE3	BF80.../SPE11LA6	0.6	2.1	4.2	6.3	7.5	8200	9400	11300	11300	11300	328	36900	75000
48	7.5	12.5	5700	2.9	119.7	IE3	BF90.../SPE11LA6	1.2	4.1	8.3	12.5	15	4150	4750	5700	5700	5700	581	24500	90800
48	7.5	10.5	6600	2.5	139.1	IE3	BF90.../SPE11LA6	1	3.5	7.1	10.5	12.5	4850	5500	6600	6600	6600	581	27700	96300
48	7.5	9.6	7400	2.3	154.8	IE3	BF90.../SPE11LA6	0.95	3.2	6.4	9.6	11.5	5400	6100	7400	7400	7400	581	30100	100800
48	7.5	8.3	8500	2	178.6	IE3	BF90.../SPE11LA6	0.8	2.7	5.5	8.3	10	6200	7100	8500	8500	8500	581	33400	106700
48	7.5	7.5	9500	1.8	198.8	IE3	BF90.../SPE11LA6	0.75	2.5	5	7.5	9	6900	7900	9500	9500	9500	581	36000	

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 0.65 Nm (PN = 0.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
0.65	0.2	19.5	98	2.4	151.2	IE5	BF10Z-../S5E04SA4-1	0.95	3.3	6.6	19.5	23.5	98	98	98	98	98	21	6400	-
0.65	0.2	18	108	2.2	166.2	IE5	BF10Z-../S5E04SA4-1	0.9	3	6	18	21.5	108	108	108	108	108	21	6400	-
0.65	0.2	16.5	117	2.1	180.1	IE5	BF10Z-../S5E04SA4-1	0.8	2.7	5.5	16.5	19.5	117	117	117	117	117	21	6400	-
0.65	0.2	15	128	1.9	198	IE5	BF10Z-../S5E04SA4-1	0.75	2.5	5	15	18	128	128	128	128	128	21	6400	-
0.65	0.2	13.5	139	1.7	214.5	IE5	BF10Z-../S5E04SA4-1	0.65	2.3	4.6	13.5	16.5	139	139	139	139	139	21	6400	-
0.65	0.2	12.5	153	1.6	235.8	IE5	BF10Z-../S5E04SA4-1	0.6	2.1	4.2	12.5	15	153	153	153	153	153	21	6400	-
0.65	0.2	11.5	167	1.4	257.4	IE5	BF10Z-../S5E04SA4-1	0.55	1.9	3.8	11.5	13.5	167	167	167	167	167	21	6400	-
0.65	0.2	10.5	184	1.3	283.1	IE5	BF10Z-../S5E04SA4-1	0.5	1.7	3.5	10.5	12.5	184	184	184	184	184	21	6400	-
0.65	0.2	9.2	210	1.1	324.3	IE5	BF10Z-../S5E04SA4-1	0.46	1.5	3	9.2	11	210	210	210	210	210	21	6400	-
0.65	0.2	8.4	230	1	356.6	IE5	BF10Z-../S5E04SA4-1	0.42	1.4	2.8	8.4	10	230	230	230	230	230	21	6400	-
0.65	0.2	7.8	245	0.97	380.2	IE5	BF10Z-../S5E04SA4-1	0.39	1.3	2.6	7.8	9.4	245	245	245	245	245	21	6400	-
0.65	0.2	7.1	270	0.88	418	IE5	BF10Z-../S5E04SA4-1	0.35	1.1	2.3	7.1	8.6	270	270	270	270	270	21	6400	-
0.65	0.2	9.3	205	1.2	322.3	IE5	BF10G06-../S5E04SA4-1	0.46	1.5	3.1	9.3	11	205	205	205	205	205	25	6400	-
0.65	0.2	7.9	245	1.1	377.9	IE5	BF10G06-../S5E04SA4-1	0.39	1.3	2.6	7.9	9.5	245	245	245	245	245	25	6400	-
0.65	0.2	7	275	0.94	424.5	IE5	BF10G06-../S5E04SA4-1	0.35	1.1	2.3	7	8.4	275	275	275	275	275	25	6400	-
0.65	0.2	13.5	140	3	216.9	IE5	BF20Z-../S5E04SA4-1	0.65	2.3	4.6	13.5	16.5	140	140	140	140	140	28	7900	-
0.65	0.2	12.5	153	2.7	235.9	IE5	BF20Z-../S5E04SA4-1	0.6	2.1	4.2	12.5	15	153	153	153	153	153	28	7900	-
0.65	0.2	11.5	168	2.5	259.6	IE5	BF20Z-../S5E04SA4-1	0.55	1.9	3.8	11.5	13.5	168	168	168	168	168	28	7900	-
0.65	0.2	10	192	2.2	295.5	IE5	BF20Z-../S5E04SA4-1	0.5	1.6	3.3	10	12	192	192	192	192	192	28	7900	-
0.65	0.2	9.2	210	2	325.2	IE5	BF20Z-../S5E04SA4-1	0.46	1.5	3	9.2	11	210	210	210	210	210	28	7900	-
0.65	0.2	8.8	220	1.9	339.1	IE5	BF20Z-../S5E04SA4-1	0.44	1.4	2.9	8.8	10.5	220	220	220	220	220	28	7900	-
0.65	0.2	8	240	1.7	373.1	IE5	BF20Z-../S5E04SA4-1	0.4	1.3	2.6	8	9.6	240	240	240	240	240	28	7900	-
0.65	0.2	7.1	270	1.5	418.1	IE5	BF20Z-../S5E04SA4-1	0.35	1.1	2.3	7.1	8.6	270	270	270	270	270	28	7900	-
0.65	0.2	6.5	295	1.4	460	IE5	BF20Z-../S5E04SA4-1	0.32	1	2.1	6.5	7.8	295	295	295	295	295	28	7900	-
0.65	0.2	5.8	330	1.4	513.7	IE5	BF20G06-../S5E04SA4-1	0.29	0.95	1.9	5.8	7	330	330	330	330	330	31	7900	-
0.65	0.2	4.8	400	1.1	617	IE5	BF20G06-../S5E04SA4-1	0.24	0.8	1.6	4.8	5.8	400	400	400	400	400	31	7900	-
0.65	0.2	4	475	0.96	736.1	IE5	BF20G06-../S5E04SA4-1	0.2	0.65	1.3	4	4.8	475	475	475	475	475	31	7900	-
0.65	0.2	3.7	520	0.87	810	IE5	BF20G06-../S5E04SA4-1	0.18	0.6	1.2	3.7	4.4	520	520	520	520	520	31	7900	-
0.65	0.2	4.8	400	1.6	622.4	IE5	BF30G06-../S5E04SA4-1	0.24	0.8	1.6	4.8	5.7	400	400	400	400	400	41	7400	-
0.65	0.2	4.2	455	1.4	705.1	IE5	BF30G06-../S5E04SA4-1	0.21	0.7	1.4	4.2	5.1	455	455	455	455	455	41	7400	-
0.65	0.2	3.6	530	1.2	817.1	IE5	BF30G06-../S5E04SA4-1	0.18	0.6	1.2	3.6	4.4	530	530	530	530	530	41	7400	-
0.65	0.2	3.1	620	1	961.1	IE5	BF30G06-../S5E04SA4-1	0.15	0.5	1	3.1	3.7	620	620	620	620	620	41	7400	-
0.65	0.2	2.6	740	0.84	1150	IE5	BF30G06-../S5E04SA4-1	0.13	0.43	0.85	2.6	3.1	740	740	740	740	740	41	7400	-

MN = 0.8 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
0.8	0.25	19.5	120	2	151.2	IE5	BF10Z-../S5E04SA4-1	0.95	3.3	6.6	19.5	23.5	114	120	120	120	120	21	6400	-
0.8	0.25	18	132	1.8	166.2	IE5	BF10Z-../S5E04SA4-1	0.9	3	6	18	21.5	126	132	132	132	132	21	6400	-
0.8	0.25	16.5	144	1.7	180.1	IE5	BF10Z-../S5E04SA4-1	0.8	2.7	5.5	16.5	19.5	136	144	144	144	144	21	6400	-
0.8	0.25	15	158	1.5	198	IE5	BF10Z-../S5E04SA4-1	0.75	2.5	5	15	18	150	158	158	158	158	21	6400	-
0.8	0.25	13.5	171	1.4	214.5	IE5	BF10Z-../S5E04SA4-1	0.65	2.3	4.6	13.5	16.5	163	171	171	171	171	21	6400	-
0.8	0.25	12.5	188	1.3	235.8	IE5	BF10Z-../S5E04SA4-1	0.6	2.1	4.2	12.5	15	179	188	188	188	188	21	6400	-
0.8	0.25	11.5	205	1.2	257.4	IE5	BF10Z-../S5E04SA4-1	0.55	1.9	3.8	11.5	13.5	195	205	205	205	205	21	6400	-
0.8	0.25	10.5	225	1.1	283.1	IE5	BF10Z-../S5E04SA4-1	0.5	1.7	3.5	10.5	12.5	215	225	225	225	225	21	6400	-
0.8	0.25	9.2	255	0.93	324.3	IE5	BF10Z-../S5E04SA4-1	0.46	1.5	3	9.2	11	245	255	255	255	255	21	6400	-
0.8	0.25	8.4	285	0.84	356.6	IE5	BF10Z-../S5E04SA4-1	0.42	1.4	2.8	8.4	10	270	285	285	285	285	21	6400	-
0.8	0.25	9.3	255	1	322.3	IE5	BF10G06-../S5E04SA4-1	0.46	1.5	3.1	9.3	11	240	255	255	255	255	25	6400	-
0.8	0.25	7.9	300	0.86	377.9	IE5	BF10G06-../S5E04SA4-1	0.39	1.3	2.6	7.9	9.5	285	300	300	300	300	25	6400	-
0.8	0.25	16.5	144	2.9	180.8	IE5	BF20Z-../S5E04SA4-1	0.8	2.7	5.5	16.5	19.5	137	144	144	144	144	2		

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1 Nm (PN = 0.315 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1	0.315	19.5	151	1.6	151.2	IE4	BF10Z-../S4E04SA4-1	0.95	3.3	6.6	19.5	23.5	114	128	151	151	151	21	6400	-
1	0.315	18	166	1.4	166.2	IE4	BF10Z-../S4E04SA4-1	0.9	3	6	18	21.5	126	141	166	166	166	21	6400	-
1	0.315	16.5	180	1.3	180.1	IE4	BF10Z-../S4E04SA4-1	0.8	2.7	5.5	16.5	19.5	136	153	180	180	180	21	6400	-
1	0.315	15	198	1.2	198	IE4	BF10Z-../S4E04SA4-1	0.75	2.5	5	15	18	150	168	198	198	198	21	6400	-
1	0.315	13.5	210	1.1	214.5	IE4	BF10Z-../S4E04SA4-1	0.65	2.3	4.6	13.5	16.5	163	182	210	210	210	21	6400	-
1	0.315	12.5	235	1	235.8	IE4	BF10Z-../S4E04SA4-1	0.6	2.1	4.2	12.5	15	179	200	235	235	235	21	6400	-
1	0.315	11.5	255	0.93	257.4	IE4	BF10Z-../S4E04SA4-1	0.55	1.9	3.8	11.5	13.5	195	215	255	255	255	21	6400	-
1	0.315	10.5	280	0.85	283.1	IE4	BF10Z-../S4E04SA4-1	0.5	1.7	3.5	10.5	12.5	215	240	280	280	280	21	6400	-
1	0.315	9.3	320	0.81	322.3	IE4	BF10G06-../S4E04SA4-1	0.46	1.5	3.1	9.3	11	240	270	320	320	320	25	6400	-
1	0.315	21	141	3	141.2	IE4	BF20Z-../S4E04SA4-1	1	3.5	7	21	25	107	120	141	141	141	28	7900	-
1	0.315	19	155	2.7	155.4	IE4	BF20Z-../S4E04SA4-1	0.95	3.2	6.4	19	23	118	132	155	155	155	28	7900	-
1	0.315	18	164	2.6	164.3	IE4	BF20Z-../S4E04SA4-1	0.9	3	6	18	21.5	124	139	164	164	164	28	7900	-
1	0.315	16.5	180	2.3	180.8	IE4	BF20Z-../S4E04SA4-1	0.8	2.7	5.5	16.5	19.5	137	153	180	180	180	28	7900	-
1	0.315	15	197	2.1	197.1	IE4	BF20Z-../S4E04SA4-1	0.75	2.5	5	15	18	149	167	197	197	197	28	7900	-
1	0.315	13.5	215	1.9	216.9	IE4	BF20Z-../S4E04SA4-1	0.65	2.3	4.6	13.5	16.5	164	184	215	215	215	28	7900	-
1	0.315	12.5	235	1.8	235.9	IE4	BF20Z-../S4E04SA4-1	0.6	2.1	4.2	12.5	15	179	200	235	235	235	28	7900	-
1	0.315	11.5	255	1.6	259.6	IE4	BF20Z-../S4E04SA4-1	0.55	1.9	3.8	11.5	13.5	197	220	255	255	255	28	7900	-
1	0.315	10	295	1.4	295.5	IE4	BF20Z-../S4E04SA4-1	0.5	1.6	3.3	10	12	220	250	295	295	295	28	7900	-
1	0.315	9.2	325	1.3	325.2	IE4	BF20Z-../S4E04SA4-1	0.46	1.5	3	9.2	11	245	275	325	325	325	28	7900	-
1	0.315	8.8	335	1.2	339.1	IE4	BF20Z-../S4E04SA4-1	0.44	1.4	2.9	8.8	10.5	255	285	335	335	335	28	7900	-
1	0.315	8	370	1.1	373.1	IE4	BF20Z-../S4E04SA4-1	0.4	1.3	2.6	8	9.6	280	315	370	370	370	28	7900	-
1	0.315	7.1	415	1	418.1	IE4	BF20Z-../S4E04SA4-1	0.35	1.1	2.3	7.1	8.6	315	355	415	415	415	28	7900	-
1	0.315	6.5	460	0.91	460	IE4	BF20Z-../S4E04SA4-1	0.32	1	2.1	6.5	7.8	345	390	460	460	460	28	7900	-
1	0.315	5.8	510	0.9	513.7	IE4	BF20G06-../S4E04SA4-1	0.29	0.95	1.9	5.8	7	390	435	510	510	510	31	7900	-
1	0.315	4.8	620	1	622.4	IE4	BF30G06-../S4E04SA4-1	0.24	0.8	1.6	4.8	5.7	470	520	620	620	620	41	7400	-
1	0.315	4.2	700	0.89	705.1	IE4	BF30G06-../S4E04SA4-1	0.21	0.7	1.4	4.2	5.1	530	590	700	700	700	41	7400	-

MN = 1.3 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.3	0.4	112	34.5	2.7	26.76	IE5	BF06-../S5E06MA4	5.6	18.5	37	112	134	34.5	34.5	34.5	34.5	34.5	12	3000	-
1.3	0.4	95	40.5	2.3	31.5	IE5	BF06-../S5E06MA4	4.7	15.5	31.5	95	114	40.5	40.5	40.5	40.5	40.5	12	3200	-
1.3	0.4	79	48.5	1.9	37.69	IE5	BF06-../S5E06MA4	3.9	13	26.5	79	95	48.5	48.5	48.5	48.5	48.5	12	3500	-
1.3	0.4	65	59	1.6	46.14	IE5	BF06-../S5E06MA4	3.2	10.5	21.5	65	78	59	59	59	59	59	12	3800	-
1.3	0.4	51	75	1.3	58.33	IE5	BF06-../S5E06MA4	2.5	8.5	17	51	61	75	75	75	75	75	12	4000	-
1.3	0.4	44.5	86	1.1	66.82	IE5	BF06-../S5E06MA4	2.2	7.4	14.5	44.5	53	86	86	86	86	12	4000	-	
1.3	0.4	35.5	108	0.87	83.61	IE5	BF06-../S5E06MA4	1.7	5.9	11.5	35.5	43	108	108	108	108	108	12	4000	-
1.3	0.4	48.5	80	3	61.55	IE5	BF10-../S5E06MA4	2.4	8.1	16	48.5	58	80	80	80	80	23	4700	-	
1.3	0.4	44	87	2.7	67.69	IE5	BF10-../S5E06MA4	2.2	7.3	14.5	44	53	87	87	87	87	87	23	4900	-
1.3	0.4	38.5	100	2.4	77.55	IE5	BF10-../S5E06MA4	1.9	6.4	12.5	38.5	46	100	100	100	100	100	23	5100	-
1.3	0.4	35	110	2.2	85.27	IE5	BF10-../S5E06MA4	1.7	5.8	11.5	35	42	110	110	110	110	110	23	5300	-
1.3	0.4	32.5	118	2	90.91	IE5	BF10-../S5E06MA4	1.6	5.4	10.5	32.5	39.5	118	118	118	118	118	23	5400	-
1.3	0.4	30	129	1.8	99.97	IE5	BF10-../S5E06MA4	1.5	5	10	30	36	129	129	129	129	129	23	5600	-
1.3	0.4	26.5	145	1.6	112.3	IE5	BF10-../S5E06MA4	1.3	4.4	8.9	26.5	32	145	145	145	145	145	23	5900	-
1.3	0.4	24	160	1.5	123.5	IE5	BF10-../S5E06MA4	1.2	4	8	24	29	160	160	160	160	160	23	6100	-
1.3	0.4	23	167	1.4	128.9	IE5	BF10-../S5E06MA4	1.1	3.8	7.7	23	27.5	167	167	167	167	167	23	6200	-
1.3	0.4	21	184	1.3	141.8	IE5	BF10-../S5E06MA4	1	3.5	7	21	25	184	184	184	184	184	23	6400	-
1.3	0.4	19.5	196	1.2	151.2	IE5	BF10Z-../S5E06MA4	0.95	3.3	6.6	19.5	23.5	196	196	196	196	196	24	6400	-
1.3	0.4	18	215	1.1	166.2	IE5	BF10Z-../S5E06MA4	0.9	3	6	18	21.5	215	215	215	215	215	24	6400	-
1.3	0.4	16.5	230	1	180.1	IE5	BF10Z-../S5E06MA4	0.8	2.7	5.5	16.5	19.5	230	230	230	230	230	24	6400	-
1.3	0.4	15	255	0.93	198	IE5	BF10Z-../S5E06MA4	0.75	2.5	5	15	18	255	255	255	255	255	24	6400	-

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.3	0.4	15	250	2.3	194.3	IE5	BF30Z-../S5E06MA4	0.75	2.5	5.1	15	18.5	250	250	250	250	250	42	7400	-
1.3	0.4	13	290	2	224.8	IE5	BF30Z-../S5E06MA4	0.65	2.2	4.4	13	16	290	290	290	290	290	42	7400	-
1.3	0.4	12	320	1.8	247.3	IE5	BF30Z-../S5E06MA4	0.6	2	4	12	14.5	320	320	320	320	320	42	7400	-
1.3	0.4	11	340	1.7	263.5	IE5	BF30Z-../S5E06MA4	0.55	1.8	3.7	11	13.5	340	340	340	340	340	42	7400	-
1.3	0.4	10	375	1.5	289.8	IE5	BF30Z-../S5E06MA4	0.5	1.7	3.4	10	12	375	375	375	375	375	42	7400	-
1.3	0.4	9.6	400	1.4	310.7	IE5	BF30Z-../S5E06MA4	0.48	1.6	3.2	9.6	11.5	400	400	400	400	400	42	7400	-
1.3	0.4	8.7	440	1.3	341.8	IE5	BF30Z-../S5E06MA4	0.43	1.4	2.9	8.7	10.5	440	440	440	440	440	42	7400	-
1.3	0.4	7.9	485	1.2	375.1	IE5	BF30Z-../S5E06MA4	0.39	1.3	2.6	7.9	9.5	485	485	485	485	485	42	7400	-
1.3	0.4	7.2	530	1.1	412.6	IE5	BF30Z-../S5E06MA4	0.36	1.2	2.4	7.2	8.7	530	530	530	530	530	42	7400	-
1.3	0.4	6.4	600	0.95	463.3	IE5	BF30Z-../S5E06MA4	0.32	1	2.1	6.4	7.7	600	600	600	600	600	42	7400	-
1.3	0.4	5.8	660	0.86	509.6	IE5	BF30Z-../S5E06MA4	0.29	0.95	1.9	5.8	7	660	660	660	660	660	42	7400	-
1.3	0.4	5.5	690	0.82	537	IE5	BF30Z-../S5E06MA4	0.27	0.9	1.8	5.5	6.7	690	690	690	690	690	42	7400	-
1.3	0.4	11.5	325	2.7	253.2	IE5	BF40Z-../S5E06MA4	0.55	1.9	3.9	11.5	14	325	325	325	325	325	53	10600	-
1.3	0.4	10.5	360	2.5	278.5	IE5	BF40Z-../S5E06MA4	0.5	1.7	3.5	10.5	12.5	360	360	360	360	360	53	10600	-
1.3	0.4	10	380	2.3	295.1	IE5	BF40Z-../S5E06MA4	0.5	1.6	3.3	10	12	380	380	380	380	380	53	10600	-
1.3	0.4	9.2	420	2.1	324.7	IE5	BF40Z-../S5E06MA4	0.46	1.5	3	9.2	11	420	420	420	420	420	53	10600	-
1.3	0.4	8.6	450	2	346.8	IE5	BF40Z-../S5E06MA4	0.43	1.4	2.8	8.6	10	450	450	450	450	450	53	10600	-
1.3	0.4	7.8	495	1.8	381.5	IE5	BF40Z-../S5E06MA4	0.39	1.3	2.6	7.8	9.4	495	495	495	495	495	53	10600	-
1.3	0.4	7.1	540	1.7	417.3	IE5	BF40Z-../S5E06MA4	0.35	1.1	2.3	7.1	8.6	540	540	540	540	540	53	10600	-
1.3	0.4	6.5	590	1.5	459.1	IE5	BF40Z-../S5E06MA4	0.32	1	2.1	6.5	7.8	590	590	590	590	590	53	10600	-
1.3	0.4	5.8	660	1.3	514.6	IE5	BF40Z-../S5E06MA4	0.29	0.95	1.9	5.8	6.9	660	660	660	660	660	53	10600	-
1.3	0.4	5.2	730	1.2	566.1	IE5	BF40Z-../S5E06MA4	0.26	0.85	1.7	5.2	6.3	730	730	730	730	730	53	10600	-
1.3	0.4	5	770	1.3	597.3	IE5	BF40G10-../S5E06MA4	0.25	0.8	1.6	5	6	770	770	770	770	770	58	10600	-
1.3	0.4	4.1	950	1.1	731.6	IE5	BF40G10-../S5E06MA4	0.2	0.65	1.3	4.1	4.9	950	950	950	950	950	58	10600	-
1.3	0.4	3.2	1200	0.83	928.9	IE5	BF40G10-../S5E06MA4	0.16	0.5	1	3.2	3.8	1200	1200	1200	1200	1200	58	10600	-
1.3	0.4	8.4	460	2.8	354	IE5	BF50Z-../S5E06MA4	0.42	1.4	2.8	8.4	10	460	460	460	460	460	82	13600	-
1.3	0.4	7.6	510	2.5	392.8	IE5	BF50Z-../S5E06MA4	0.38	1.2	2.5	7.6	9.1	510	510	510	510	510	82	13600	-
1.3	0.4	6.8	570	2.3	439.3	IE5	BF50Z-../S5E06MA4	0.34	1.1	2.2	6.8	8.1	570	570	570	570	570	82	13600	-
1.3	0.4	6	640	2	496.4	IE5	BF50Z-../S5E06MA4	0.3	1	2	6	7.2	640	640	640	640	640	82	13600	-
1.3	0.4	5.4	720	1.8	555.2	IE5	BF50Z-../S5E06MA4	0.27	0.9	1.8	5.4	6.4	720	720	720	720	720	82	13600	-
1.3	0.4	5.3	720	1.9	555.9	IE5	BF50G10-../S5E06MA4	0.26	0.85	1.7	5.3	6.4	720	720	720	720	720	86	13600	-
1.3	0.4	4.4	880	1.6	680.9	IE5	BF50G10-../S5E06MA4	0.22	0.7	1.4	4.4	5.2	880	880	880	880	880	86	13600	-
1.3	0.4	3.4	1120	1.2	864.5	IE5	BF50G10-../S5E06MA4	0.17	0.55	1.1	3.4	4.1	1120	1120	1120	1120	1120	86	13600	-
1.3	0.4	2.9	1330	1	1029	IE5	BF50G10-../S5E06MA4	0.14	0.48	0.95	2.9	3.4	1330	1330	1330	1330	1330	86	13600	-
1.3	0.4	2.4	1560	0.9	1203	IE5	BF50G10-../S5E06MA4	0.12	0.41	0.8	2.4	2.9	1560	1560	1560	1560	1560	86	13600	-
1.3	0.4	4.3	890	2.8	689	IE5	BF60G20-../S5E06MA4	0.21	0.7	1.4	4.3	5.2	890	890	890	890	890	134	15300	43300
1.3	0.4	3.6	1050	2.4	813.2	IE5	BF60G20-../S5E06MA4	0.18	0.6	1.2	3.6	4.4	1050	1050	1050	1050	1050	134	15300	43300
1.3	0.4	3.1	1210	2.1	937.6	IE5	BF60G20-../S5E06MA4	0.15	0.5	1	3.1	3.8	1210	1210	1210	1210	1210	134	15300	43300
1.3	0.4	2.4	1570	1.6	1211	IE5	BF60G20-../S5E06MA4	0.12	0.41	0.8	2.4	2.9	1570	1570	1570	1570	1570	134	15300	43300
1.3	0.4	2	1940	1.3	1494	IE5	BF60G20-../S5E06MA4	0.1	0.33	0.65	2	2.4	1940	1940	1940	1940	1940	134	15300	43300
1.3	0.4	1.8	2150	1.2	1658	IE5	BF60G20-../S5E06MA4	0.09	0.3	0.6	1.8	2.1	2150	2150	2150	2150	2150	134	15300	43300
1.3	0.4	1.5	2500	0.98	1955	IE5	BF60G20-../S5E06MA4	0.075	0.25	0.5	1.5	1.8	2500	2500	2500	2500	2500	134	15300	43300
1.3	0.4	1.3	2800	0.89	2172	IE5	BF60G20-../S5E06MA4	0.065	0.23	0.46	1.3	1.6	2800	2800	2800	2800	2800	134	15300	43300
1.3	0.4	1.8	2100	2.7	1621	IE5	BF70G20-../S5E06MA4	0.09	0.3	0.6	1.8	2.2	2100	2100	2100	2100	2100	212	16100	47700
1.3	0.4	1.5	2450	2.3	1912	IE5	BF70G20-../S5E06MA4	0.075	0.26	0.5	1.5	1.8	2450	2450	2450	2450	2450	212	16100	47700
1.3	0.4	1.2	3150	1.8	2448	IE5	BF70G20-../S5E06MA4	0.06	0.2	0.4	1.2	1.4	3150	3150	3150	3150	3150	212	16100	47700
1.3	0.4	1	3700	1.5	2849	IE5	BF70G20-../S5E06MA4	0.05	0.17	0.35	1	1.2	3700	3700	3700	3700	3700	212	16100	47700
1.3	0.4	0.85	4400	1.3	3417	IE5	BF70G20-../S5E06MA4	0.043	0.14	0.29	0.85	1	4400	4400	4400	4400	4400	212	16100	47700
1.3	0.4	0.7	5300	1.1	4090	IE5	BF70G20-../S5E06MA4	0.036	0.12	0.24	0.7	0.85	5300	5300	5300	5300	5300	212	16100	47700
1.3	0.4	0.65	5900	0.97	4542	IE5	BF70G20-../S5E06MA4	0.033	0.11	0.22	0.65	0.75	5900	5900	5900	5900	5900	212	16100	47700
1.3	0.4	0.55	6600	0.86	5124	IE5	BF70G20-../S5E06MA4	0.029	0.095	0.19	0.55	0.7	6600	6600	6600	6600	6600	212	16100	47700

MN = 1.75 Nm (PN = 0.55 kW)




M_N [Nm]	P_N [kW]	n₂ [1/min]	M₂ [Nm]	

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.75 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.75	0.55	30	174	1.4	99.97	IE5	BF10-..S5E06MA4	1.5	5	10	30	36	174	174	174	174	174	23	5600	-
1.75	0.55	26.5	196	1.2	112.3	IE5	BF10-..S5E06MA4	1.3	4.4	8.9	26.5	32	196	196	196	196	196	23	5900	-
1.75	0.55	24	215	1.1	123.5	IE5	BF10-..S5E06MA4	1.2	4	8	24	29	215	215	215	215	215	23	6100	-
1.75	0.55	23	225	1.1	128.9	IE5	BF10-..S5E06MA4	1.1	3.8	7.7	23	27.5	225	225	225	225	225	23	6200	-
1.75	0.55	21	245	0.97	141.8	IE5	BF10-..S5E06MA4	1	3.5	7	21	25	245	245	245	245	245	23	6400	-
1.75	0.55	19.5	260	0.91	151.2	IE5	BF10Z-..S5E06MA4	0.95	3.3	6.6	19.5	23.5	260	260	260	260	260	24	6400	-
1.75	0.55	18	290	0.83	166.2	IE5	BF10Z-..S5E06MA4	0.9	3	6	18	21.5	290	290	290	290	290	24	6400	-
1.75	0.55	34	152	2.7	87.31	IE5	BF20-..S5E06MA4	1.7	5.7	11	34	41	152	152	152	152	152	30	6600	-
1.75	0.55	31	168	2.5	96.08	IE5	BF20-..S5E06MA4	1.5	5.2	10	31	37	168	168	168	168	168	30	6900	-
1.75	0.55	29.5	175	2.4	100.2	IE5	BF20-..S5E06MA4	1.4	4.9	9.9	29.5	35.5	175	175	175	175	175	30	7000	-
1.75	0.55	27	192	2.2	110.2	IE5	BF20-..S5E06MA4	1.3	4.5	9	27	32.5	192	192	192	192	192	30	7300	-
1.75	0.55	24	215	1.9	123.5	IE5	BF20-..S5E06MA4	1.2	4	8	24	29	215	215	215	215	215	30	7600	-
1.75	0.55	22	235	1.8	135.9	IE5	BF20-..S5E06MA4	1.1	3.6	7.3	22	26	235	235	235	235	235	30	7900	-
1.75	0.55	21	245	1.7	141.2	IE5	BF20Z-..S5E06MA4	1	3.5	7	21	25	245	245	245	245	245	31	7900	-
1.75	0.55	19	270	1.5	155.4	IE5	BF20Z-..S5E06MA4	0.95	3.2	6.4	19	23	270	270	270	270	270	31	7900	-
1.75	0.55	18	285	1.5	164.3	IE5	BF20Z-..S5E06MA4	0.9	3	6	18	21.5	285	285	285	285	285	31	7900	-
1.75	0.55	16.5	315	1.3	180.8	IE5	BF20Z-..S5E06MA4	0.8	2.7	5.5	16.5	19.5	315	315	315	315	315	31	7900	-
1.75	0.55	15	340	1.2	197.1	IE5	BF20Z-..S5E06MA4	0.75	2.5	5	15	18	340	340	340	340	340	31	7900	-
1.75	0.55	13.5	375	1.1	216.9	IE5	BF20Z-..S5E06MA4	0.65	2.3	4.6	13.5	16.5	375	375	375	375	375	31	7900	-
1.75	0.55	12.5	410	1	235.9	IE5	BF20Z-..S5E06MA4	0.6	2.1	4.2	12.5	15	410	410	410	410	410	31	7900	-
1.75	0.55	11.5	450	0.92	259.6	IE5	BF20Z-..S5E06MA4	0.55	1.9	3.8	11.5	13.5	450	450	450	450	450	31	7900	-
1.75	0.55	10	510	0.81	295.5	IE5	BF20Z-..S5E06MA4	0.5	1.6	3.3	10	12	510	510	510	510	510	31	7900	-
1.75	0.55	27.5	188	3	107.6	IE5	BF30-..S5E06MA4	1.3	4.6	9.2	27.5	33	188	188	188	188	188	40	6700	-
1.75	0.55	25	205	2.8	118.3	IE5	BF30-..S5E06MA4	1.2	4.2	8.4	25	30	205	205	205	205	205	40	7000	-
1.75	0.55	24	215	2.6	124.7	IE5	BF30-..S5E06MA4	1.2	4	8	24	28.5	215	215	215	215	215	40	7100	-
1.75	0.55	21.5	235	2.4	137.1	IE5	BF30-..S5E06MA4	1	3.6	7.2	21.5	26	235	235	235	235	235	40	7400	-
1.75	0.55	19.5	260	2.2	150.7	IE5	BF30Z-..S5E06MA4	0.95	3.3	6.6	19.5	23.5	260	260	260	260	260	42	7400	-
1.75	0.55	18	290	2	165.8	IE5	BF30Z-..S5E06MA4	0.9	3	6	18	21.5	290	290	290	290	290	42	7400	-
1.75	0.55	16.5	305	1.8	176.6	IE5	BF30Z-..S5E06MA4	0.8	2.8	5.6	16.5	20	305	305	305	305	305	42	7400	-
1.75	0.55	15	340	1.7	194.3	IE5	BF30Z-..S5E06MA4	0.75	2.5	5.1	15	18.5	340	340	340	340	340	42	7400	-
1.75	0.55	13	390	1.4	224.8	IE5	BF30Z-..S5E06MA4	0.65	2.2	4.4	13	16	390	390	390	390	390	42	7400	-
1.75	0.55	12	430	1.3	247.3	IE5	BF30Z-..S5E06MA4	0.6	2	4	12	14.5	430	430	430	430	430	42	7400	-
1.75	0.55	11	460	1.2	263.5	IE5	BF30Z-..S5E06MA4	0.55	1.8	3.7	11	13.5	460	460	460	460	460	42	7400	-
1.75	0.55	10	500	1.1	289.8	IE5	BF30Z-..S5E06MA4	0.5	1.7	3.4	10	12	500	500	500	500	500	42	7400	-
1.75	0.55	9.6	540	1	310.7	IE5	BF30Z-..S5E06MA4	0.48	1.6	3.2	9.6	11.5	540	540	540	540	540	42	7400	-
1.75	0.55	8.7	590	0.95	341.8	IE5	BF30Z-..S5E06MA4	0.43	1.4	2.9	8.7	10.5	590	590	590	590	590	42	7400	-
1.75	0.55	7.9	650	0.87	375.1	IE5	BF30Z-..S5E06MA4	0.39	1.3	2.6	7.9	9.5	650	650	650	650	650	42	7400	-
1.75	0.55	17.5	295	3	171.2	IE5	BF40Z-..S5E06MA4	0.85	2.9	5.8	17.5	21	295	295	295	295	295	53	10600	-
1.75	0.55	15.5	325	2.7	188.3	IE5	BF40Z-..S5E06MA4	0.75	2.6	5.3	15.5	19	325	325	325	325	325	53	10600	-
1.75	0.55	14.5	350	2.5	202.2	IE5	BF40Z-..S5E06MA4	0.7	2.4	4.9	14.5	17.5	350	350	350	350	350	53	10600	-
1.75	0.55	13	385	2.3	222.4	IE5	BF40Z-..S5E06MA4	0.65	2.2	4.4	13	16	385	385	385	385	385	53	10600	-
1.75	0.55	11.5	440	2	253.2	IE5	BF40Z-..S5E06MA4	0.55	1.9	3.9	11.5	14	440	440	440	440	440	53	10600	-
1.75	0.55	10.5	485	1.8	278.5	IE5	BF40Z-..S5E06MA4	0.5	1.7	3.5	10.5	12.5	485	485	485	485	485	53	10600	-
1.75	0.55	10	510	1.7	295.1	IE5	BF40Z-..S5E06MA4	0.5	1.6	3.3	10	12	510	510	510	510	510	53	10600	-
1.75	0.55	9.2	560	1.6	324.7	IE5	BF40Z-..S5E06MA4	0.46	1.5	3	9.2	11	560	560	560	560	560	53	10600	-
1.75	0.55	8.6	600	1.5	346.8	IE5	BF40Z-..S5E06MA4	0.43	1.4	2.8	8.6	10	600	600	600	600	600	53	10600	-
1.75	0.55	7.8	660	1.3	381.5	IE5	BF40Z-..S5E06MA4	0.39	1.3	2.6	7.8	9.4	660	660	660	660	660	53	10600	-
1.75	0.55	7.1	730	1.2	417.3	IE5	BF40Z-..S5E06MA4	0.35	1.1	2.3	7.1	8.6	730	730	730	730	730	53	10600	-
1.75	0.55	6.5	800	1.1	459.1	IE5	BF40Z-..S5E06MA4	0.32	1	2.1	6.5	7.8	800	800	800	800	800	53	10600	-
1.75	0.55	5.8	900	1	514.6	IE5	BF40Z-..S5E06MA4	0.29	0.95	1.9	5.8	6.9	900	900	900	900	900	53	10600	-
1.75	0.55	5.2	990	0.91	566.1	IE5	BF40Z-..S5E06MA4	0.26	0.85	1.7	5.2	6.3	990	990	990	990	990	53	10600	-
1.75	0.55	5	1040	0.96	597.3	IE5	BF40G10-..S5E06MA4	0.25	0.8	1.6	5	6	1040	1040	1040	1040	1040	58	10600	-
1.75	0.55	12	430	3	247.5	IE5	BF50Z-..S5E06MA4	0.6	2	4	12	14.5	430	430	430	430	430	82	13600	-
1.75	0.55	10.5	480	2.7	276.8	IE5	BF50Z-..S5E06MA4	0.5	1.8	3.6	10.5	13	480	480	480	480	480	82	13600	-
1.75	0.																			

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.75 Nm (PN = 0.55 kW)



Mn [Nm]	Pn [kW]	n2 [1/min]	M2 [Nm]	fB [-]	i [:1]	IE- Classe	Type	Speed range n2 [1/min] at motor speed n1 [1/min]					Torque range M2 [Nm] at motor speed n1 [1/min]					m [kg]	FrN [N]	FrV [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.75	0.55	0.7	7100	0.8	4090	IE5	BF70G20-..S5E06MA4	0.036	0.12	0.24	0.7	0.85	7100	7100	7100	7100	7100	212	16100	47700

MN = 2.4 Nm (PN = 0.75 kW)




Mn [Nm]	Pn [kW]	n2 [1/min]	M2 [Nm]	fB [-]	i [:1]	IE- Classe	Type	Speed range n2 [1/min] at motor speed n1 [1/min]					Torque range M2 [Nm] at motor speed n1 [1/min]					m [kg]	FrN [N]	FrV [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	245	28.5	2.6	12.07	IE5	BF06-..S5E06LA4	12	41	82	245	295	28.5	28.5	28.5	28.5	28.5	12	2000	-
2.4	0.75	245	28.5	2.6	12.07	IE3	BF06-..SPE06MA4	12	41	82	245	295	21.5	24	26.5	28.5	28.5	12	2000	-
2.4	0.75	210	34	2.5	14.21	IE5	BF06-..S5E06LA4	10.5	35	70	210	250	34	34	34	34	34	12	2100	-
2.4	0.75	210	34	2.5	14.21	IE3	BF06-..SPE06MA4	10.5	35	70	210	250	25.5	28	31	34	34	12	2100	-
2.4	0.75	176	40.5	2.3	16.99	IE5	BF06-..S5E06LA4	8.8	29	58	176	210	40.5	40.5	40.5	40.5	40.5	12	2500	-
2.4	0.75	176	40.5	2.3	16.99	IE3	BF06-..SPE06MA4	8.8	29	58	176	210	30.5	33.5	37	40.5	40.5	12	2500	-
2.4	0.75	146	49	1.9	20.42	IE5	BF06-..S5E06LA4	7.3	24	48.5	146	176	49	49	49	49	49	12	2700	-
2.4	0.75	146	49	1.9	20.42	IE3	BF06-..SPE06MA4	7.3	24	48.5	146	176	36.5	40.5	44.5	49	49	12	2700	-
2.4	0.75	112	64	1.5	26.76	IE5	BF06-..S5E06LA4	5.6	18.5	37	112	134	64	64	64	64	64	12	3000	-
2.4	0.75	112	64	1.5	26.76	IE3	BF06-..SPE06MA4	5.6	18.5	37	112	134	48	53	58	64	64	12	3000	-
2.4	0.75	95	75	1.3	31.5	IE5	BF06-..S5E06LA4	4.7	15.5	31.5	95	114	75	75	75	75	75	12	3200	-
2.4	0.75	95	75	1.3	31.5	IE3	BF06-..SPE06MA4	4.7	15.5	31.5	95	114	56	63	69	75	75	12	3200	-
2.4	0.75	79	90	1.1	37.69	IE5	BF06-..S5E06LA4	3.9	13	26.5	79	95	90	90	90	90	90	12	3500	-
2.4	0.75	79	90	1.1	37.69	IE3	BF06-..SPE06MA4	3.9	13	26.5	79	95	67	75	82	90	90	12	3500	-
2.4	0.75	65	110	0.86	46.14	IE5	BF06-..S5E06LA4	3.2	10.5	21.5	65	78	110	110	110	110	110	12	3800	-
2.4	0.75	65	110	0.86	46.14	IE3	BF06-..SPE06MA4	3.2	10.5	21.5	65	78	83	92	101	110	110	12	3800	-
2.4	0.75	82	86	2.8	36.15	IE5	BF10-..S5E06LA4	4.1	13.5	27.5	82	99	86	86	86	86	86	23	3800	-
2.4	0.75	82	86	2.8	36.15	IE3	BF10-..SPE06MA4	4.1	13.5	27.5	82	99	65	72	79	86	86	23	3800	-
2.4	0.75	75	95	2.5	39.75	IE5	BF10-..S5E06LA4	3.7	12.5	25	75	90	95	95	95	95	23	3950	-	
2.4	0.75	75	95	2.5	39.75	IE3	BF10-..SPE06MA4	3.7	12.5	25	75	90	71	79	87	95	95	23	3950	-
2.4	0.75	69	103	2.3	43.06	IE5	BF10-..S5E06LA4	3.4	11.5	23	69	83	103	103	103	103	103	23	4100	-
2.4	0.75	69	103	2.3	43.06	IE3	BF10-..SPE06MA4	3.4	11.5	23	69	83	77	86	94	103	103	23	4100	-
2.4	0.75	63	113	2.1	47.35	IE5	BF10-..S5E06LA4	3.1	10.5	21	63	76	113	113	113	113	113	23	4250	-
2.4	0.75	63	113	2.1	47.35	IE3	BF10-..SPE06MA4	3.1	10.5	21	63	76	85	94	104	113	113	23	4250	-
2.4	0.75	58	123	2	51.28	IE5	BF10-..S5E06LA4	2.9	9.7	19.5	58	70	123	123	123	123	123	23	4400	-
2.4	0.75	58	123	2	51.28	IE3	BF10-..SPE06MA4	2.9	9.7	19.5	58	70	92	102	112	123	123	23	4400	-
2.4	0.75	53	135	1.8	56.39	IE5	BF10-..S5E06LA4	2.6	8.8	17.5	53	63	135	135	135	135	135	23	4550	-
2.4	0.75	53	135	1.8	56.39	IE3	BF10-..SPE06MA4	2.6	8.8	17.5	53	63	101	112	124	135	135	23	4550	-
2.4	0.75	48.5	147	1.6	61.55	IE5	BF10-..S5E06LA4	2.4	8.1	16	48.5	58	147	147	147	147	147	23	4700	-
2.4	0.75	48.5	147	1.6	61.55	IE3	BF10-..SPE06MA4	2.4	8.1	16	48.5	58	110	123	135	147	147	23	4700	-
2.4	0.75	44	162	1.5	67.69	IE5	BF10-..S5E06LA4	2.2	7.3	14.5	44	53	162	162	162	162	162	23	4900	-
2.4	0.75	44	162	1.5	67.69	IE3	BF10-..SPE06MA4	2.2	7.3	14.5	44	53	121	135	148	162	162	23	4900	-
2.4	0.75	38.5	186	1.3	77.55	IE5	BF10-..S5E06LA4	1.9	6.4	12.5	38.5	46	186	186	186	186	186	23	5100	-
2.4	0.75	38.5	186	1.3	77.55	IE3	BF10-..SPE06MA4	1.9	6.4	12.5	38.5	46	139	155	170	186	186	23	5100	-
2.4	0.75	35	200	1.2	85.27	IE5	BF10-..S5E06LA4	1.7	5.8	11.5	35	42	200	200	200	200	200	23	5300	-
2.4	0.75	35	200	1.2	85.27	IE3	BF10-..SPE06MA4	1.7	5.8	11.5	35	42	153	170	187	200	200	23	5300	-
2.4	0.75	32.5	215	1.1	90.91	IE5	BF10-..S5E06LA4	1.6	5.4	10.5	32.5	39.5	215	215	215	215	215	23	5400	-
2.4	0.75	32.5	215	1.1	90.91	IE3	BF10-..SPE06MA4	1.6	5.4	10.5	32.5	39.5	163	181	200	215	215	23	5400	-
2.4	0.75	30	235	1	99.97	IE5	BF10-..S5E06LA4	1.5	5	10	30	36	235	235	235	235	235	23	5600	-
2.4	0.75	30	235	1	99.97	IE3	BF10-..SPE06MA4	1.5	5	10	30	36	179	199	215	235	235	23	5600	-
2.4	0.75	26.5	265	0.89	112.3	IE5	BF10-..S5E06LA4	1.3	4.4	8.9	26.5	32	265	265	265	265	265	23	5900	-
2.4	0.75	26.5	265	0.89	112.3	IE3	BF10-..SPE06MA4	1.3	4.4	8.9	26.5	32	200	220	245	265	265	23	5900	-
2.4	0.75	24	295	0.81	123.5	IE5	BF10-..S5E06LA4	1.2	4	8	24	29	295	295	295	295	295	23	6100	-
2.4	0.75	24	295	0.81	123.5	IE3	BF10-..SPE06MA4	1.2	4	8	24	29	220	245	270	295	295	23	6100	-
2.4	0.75	51	139	3	58.24	IE5	BF20-..S5E06LA4	2.5	8.5	17	51	61	139	139	139	139	139	30	5600	-
2.4	0.75	51	139	3	58.24	IE3	BF20-..SPE06MA4	2.5	8.5	17	51	61	104	116	128	139	139	30	5600	-
2.4	0.75	46.5	153	2.7	64.08	IE5	BF20-..S5E06LA4	2.3	7.8	15.5	46.5	56	153	153	153	153	153	30	5900	-
2.4	0.75	46.5	153	2.7	64.08	IE3	BF20-..SPE06MA4	2.3	7.8	15.5	46.5	56	115	128	140	153	153	30	5900	-
2.4	0.75	43	167	2.5	69.7	IE5	BF20-..S5E06LA4	2.1	7.1	14	43	51	167	167	167					

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.75 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	18	390	1.1	164.3	IE5	BF20Z-..S5E06LA4	0.9	3	6	18	21.5	390	390	390	390	390	31	7900	-
2.4	0.75	18	390	1.1	164.3	IE3	BF20Z-..SPE06MA4	0.9	3	6	18	21.5	295	325	360	390	390	31	7900	-
2.4	0.75	16.5	430	0.97	180.8	IE5	BF20Z-..S5E06LA4	0.8	2.7	5.5	16.5	19.5	430	430	430	430	430	31	7900	-
2.4	0.75	16.5	430	0.97	180.8	IE3	BF20Z-..SPE06MA4	0.8	2.7	5.5	16.5	19.5	325	360	395	430	430	31	7900	-
2.4	0.75	15	470	0.89	197.1	IE5	BF20Z-..S5E06LA4	0.75	2.5	5	15	18	470	470	470	470	470	31	7900	-
2.4	0.75	15	470	0.89	197.1	IE3	BF20Z-..SPE06MA4	0.75	2.5	5	15	18	350	390	430	470	470	31	7900	-
2.4	0.75	13.5	520	0.81	216.9	IE5	BF20Z-..S5E06LA4	0.65	2.3	4.6	13.5	16.5	520	520	520	520	520	31	7900	-
2.4	0.75	13.5	520	0.81	216.9	IE3	BF20Z-..SPE06MA4	0.65	2.3	4.6	13.5	16.5	390	430	475	520	520	31	7900	-
2.4	0.75	37.5	190	3	79.34	IE5	BF30-..S5E06LA4	1.8	6.3	12.5	37.5	45	190	190	190	190	190	40	5900	-
2.4	0.75	37.5	190	3	79.34	IE3	BF30-..SPE06MA4	1.8	6.3	12.5	37.5	45	142	158	174	190	190	40	5900	-
2.4	0.75	34	205	2.7	87.08	IE5	BF30-..S5E06LA4	1.7	5.7	11	34	41	205	205	205	205	205	40	6200	-
2.4	0.75	34	205	2.7	87.08	IE3	BF30-..SPE06MA4	1.7	5.7	11	34	41	156	174	191	205	205	40	6200	-
2.4	0.75	31	225	2.5	95.79	IE5	BF30-..S5E06LA4	1.5	5.2	10	31	37.5	225	225	225	225	225	40	6400	-
2.4	0.75	31	225	2.5	95.79	IE3	BF30-..SPE06MA4	1.5	5.2	10	31	37.5	172	191	210	225	225	40	6400	-
2.4	0.75	27.5	255	2.2	107.6	IE5	BF30-..S5E06LA4	1.3	4.6	9.2	27.5	33	255	255	255	255	255	40	6700	-
2.4	0.75	27.5	255	2.2	107.6	IE3	BF30-..SPE06MA4	1.3	4.6	9.2	27.5	33	193	215	235	255	255	40	6700	-
2.4	0.75	25	280	2	118.3	IE5	BF30-..S5E06LA4	1.2	4.2	8.4	25	30	280	280	280	280	280	40	7000	-
2.4	0.75	25	280	2	118.3	IE3	BF30-..SPE06MA4	1.2	4.2	8.4	25	30	210	235	260	280	280	40	7000	-
2.4	0.75	24	295	1.9	124.7	IE5	BF30-..S5E06LA4	1.2	4	8	24	28.5	295	295	295	295	295	40	7100	-
2.4	0.75	24	295	1.9	124.7	IE3	BF30-..SPE06MA4	1.2	4	8	24	28.5	220	245	270	295	295	40	7100	-
2.4	0.75	21.5	325	1.7	137.1	IE5	BF30-..S5E06LA4	1	3.6	7.2	21.5	26	325	325	325	325	325	40	7400	-
2.4	0.75	21.5	325	1.7	137.1	IE3	BF30-..SPE06MA4	1	3.6	7.2	21.5	26	245	270	300	325	325	40	7400	-
2.4	0.75	19.5	360	1.6	150.7	IE5	BF30Z-..S5E06LA4	0.95	3.3	6.6	19.5	23.5	360	360	360	360	360	42	7400	-
2.4	0.75	19.5	360	1.6	150.7	IE3	BF30Z-..SPE06MA4	0.95	3.3	6.6	19.5	23.5	270	300	330	360	360	42	7400	-
2.4	0.75	18	395	1.4	165.8	IE5	BF30Z-..S5E06LA4	0.9	3	6	18	21.5	395	395	395	395	395	42	7400	-
2.4	0.75	18	395	1.4	165.8	IE3	BF30Z-..SPE06MA4	0.9	3	6	18	21.5	295	330	360	395	395	42	7400	-
2.4	0.75	16.5	420	1.3	176.6	IE5	BF30Z-..S5E06LA4	0.8	2.8	5.6	16.5	20	420	420	420	420	420	42	7400	-
2.4	0.75	16.5	420	1.3	176.6	IE3	BF30Z-..SPE06MA4	0.8	2.8	5.6	16.5	20	315	350	385	420	420	42	7400	-
2.4	0.75	15	465	1.2	194.3	IE5	BF30Z-..S5E06LA4	0.75	2.5	5.1	15	18.5	465	465	465	465	465	42	7400	-
2.4	0.75	15	465	1.2	194.3	IE3	BF30Z-..SPE06MA4	0.75	2.5	5.1	15	18.5	345	385	425	465	465	42	7400	-
2.4	0.75	13	530	1.1	224.8	IE5	BF30Z-..S5E06LA4	0.65	2.2	4.4	13	16	530	530	530	530	530	42	7400	-
2.4	0.75	13	530	1.1	224.8	IE3	BF30Z-..SPE06MA4	0.65	2.2	4.4	13	16	400	445	490	530	530	42	7400	-
2.4	0.75	12	590	0.96	247.3	IE5	BF30Z-..S5E06LA4	0.6	2	4	12	14.5	590	590	590	590	590	42	7400	-
2.4	0.75	12	590	0.96	247.3	IE3	BF30Z-..SPE06MA4	0.6	2	4	12	14.5	445	490	540	590	590	42	7400	-
2.4	0.75	11	630	0.9	263.5	IE5	BF30Z-..S5E06LA4	0.55	1.8	3.7	11	13.5	630	630	630	630	630	42	7400	-
2.4	0.75	11	630	0.9	263.5	IE3	BF30Z-..SPE06MA4	0.55	1.8	3.7	11	13.5	470	520	570	630	630	42	7400	-
2.4	0.75	10	690	0.82	289.8	IE5	BF30Z-..S5E06LA4	0.5	1.7	3.4	10	12	690	690	690	690	690	42	7400	-
2.4	0.75	10	690	0.82	289.8	IE3	BF30Z-..SPE06MA4	0.5	1.7	3.4	10	12	520	570	630	690	690	42	7400	-
2.4	0.75	21	335	2.7	141.4	IE5	BF40Z-..S5E06LA4	1	3.5	7	21	25	335	335	335	335	335	53	10600	-
2.4	0.75	21	335	2.7	141.4	IE3	BF40Z-..SPE06MA4	1	3.5	7	21	25	250	280	310	335	335	53	10600	-
2.4	0.75	19	370	2.4	155.6	IE5	BF40Z-..S5E06LA4	0.95	3.2	6.4	19	23	370	370	370	370	370	53	10600	-
2.4	0.75	19	370	2.4	155.6	IE3	BF40Z-..SPE06MA4	0.95	3.2	6.4	19	23	280	310	340	370	370	53	10600	-
2.4	0.75	17.5	410	2.2	171.2	IE5	BF40Z-..S5E06LA4	0.85	2.9	5.8	17.5	21	410	410	410	410	410	53	10600	-
2.4	0.75	17.5	410	2.2	171.2	IE3	BF40Z-..SPE06MA4	0.85	2.9	5.8	17.5	21	305	340	375	410	410	53	10600	-
2.4	0.75	15.5	450	2	188.3	IE5	BF40Z-..S5E06LA4	0.75	2.6	5.3	15.5	19	450	450	450	450	450	53	10600	-
2.4	0.75	15.5	450	2	188.3	IE3	BF40Z-..SPE06MA4	0.75	2.6	5.3	15.5	19	335	375	410	450	450	53	10600	-
2.4	0.75	14.5	485	1.9	202.2	IE5	BF40Z-..S5E06LA4	0.7	2.4	4.9	14.5	17.5	485	485	485	485	485	53	10600	-
2.4	0.75	14.5	485	1.9	202.2	IE3	BF40Z-..SPE06MA4	0.7	2.4	4.9	14.5	17.5	360	400	440	485	485	53	10600	-
2.4	0.75	13	530	1.7	222.4	IE5	BF40Z-..S5E06LA4	0.65	2.2	4.4	13	16	400	440	485	530	530	53	10600	-
2.4	0.75	11.5	600	1.5	252.3	IE5	BF40Z-..S5E06LA4	0.55	1.9	3.9	11.5	14	600	600	600	600	600	53	10600	-
2.4	0.75	11.5	600	1.5	252.3	IE3	BF40Z-..SPE06MA4	0.55	1.9	3.9	11.5	14	455	500	550	600	600	53	10600	-
2.4	0.75	10.5	660	1.3	278.5	IE5	BF40Z-..S5E06LA4	0.5	1.7	3.5	10.5	12.5	660	660	660	660	660	53	10600	-
2.4	0.75	10.5	660	1.3	278.5	IE3	BF40Z-..SPE06MA4	0.5	1.7	3.5	10.5	12.5	500	550	610	660	660	53	10600	-
2.4	0.75	10	700	1.3	295.1	IE5	BF40Z-..S5E06LA4	0.5	1.6	3.3	10	12	700	700	700	700	700	53	10600	-
2.4	0.75	10	700	1.3	295.1	IE3	BF40Z-..SPE06MA4	0.5												

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.75 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	7.6	940	1.4	392.8	IE3	BF50Z-../SPE06MA4	0.38	1.2	2.5	7.6	9.1	700	780	860	940	940	82	13600	-
2.4	0.75	6.8	1050	1.2	439.3	IE5	BF50Z-../S5E06LA4	0.34	1.1	2.2	6.8	8.1	1050	1050	1050	1050	1050	82	13600	-
2.4	0.75	6.8	1050	1.2	439.3	IE3	BF50Z-../SPE06MA4	0.34	1.1	2.2	6.8	8.1	790	870	960	1050	1050	82	13600	-
2.4	0.75	6	1190	1.1	496.4	IE5	BF50Z-../S5E06LA4	0.3	1	2	6	7.2	1190	1190	1190	1190	1190	82	13600	-
2.4	0.75	6	1190	1.1	496.4	IE3	BF50Z-../SPE06MA4	0.3	1	2	6	7.2	890	990	1090	1190	1190	82	13600	-
2.4	0.75	5.4	1330	0.98	555.2	IE5	BF50Z-../S5E06LA4	0.27	0.9	1.8	5.4	6.4	1330	1330	1330	1330	1330	82	13600	-
2.4	0.75	5.4	1330	0.98	555.2	IE3	BF50Z-../SPE06MA4	0.27	0.9	1.8	5.4	6.4	990	1110	1220	1330	1330	82	13600	-
2.4	0.75	5.3	1330	1	555.9	IE5	BF50G10-../S5E06LA4	0.26	0.85	1.7	5.3	6.4	1330	1330	1330	1330	1330	86	13600	-
2.4	0.75	5.3	1330	1	555.9	IE3	BF50G10-../SPE06MA4	0.26	0.85	1.7	5.3	6.4	1000	1110	1220	1330	1330	86	13600	-
2.4	0.75	4.4	1630	0.86	680.9	IE5	BF50G10-../S5E06LA4	0.22	0.7	1.4	4.4	5.2	1630	1630	1630	1630	1630	86	13600	-
2.4	0.75	4.4	1630	0.86	680.9	IE3	BF50G10-../SPE06MA4	0.22	0.7	1.4	4.4	5.2	1220	1360	1490	1630	1630	86	13600	-
2.4	0.75	5.2	1360	1.8	569.3	IE5	BF60G20-../S5E06LA4	0.26	0.85	1.7	5.2	6.3	1360	1360	1360	1360	1360	134	15300	43300
2.4	0.75	5.2	1360	1.8	569.3	IE3	BF60G20-../SPE06MA4	0.26	0.85	1.7	5.2	6.3	1020	1130	1250	1360	1360	134	15300	43300
2.4	0.75	4.3	1650	1.5	689	IE5	BF60G20-../S5E06LA4	0.21	0.7	1.4	4.3	5.2	1650	1650	1650	1650	1650	134	15300	43300
2.4	0.75	4.3	1650	1.5	689	IE3	BF60G20-../SPE06MA4	0.21	0.7	1.4	4.3	5.2	1240	1370	1510	1650	1650	134	15300	43300
2.4	0.75	3.6	1950	1.3	813.2	IE5	BF60G20-../S5E06LA4	0.18	0.6	1.2	3.6	4.4	1950	1950	1950	1950	1950	134	15300	43300
2.4	0.75	3.6	1950	1.3	813.2	IE3	BF60G20-../SPE06MA4	0.18	0.6	1.2	3.6	4.4	1460	1620	1780	1950	1950	134	15300	43300
2.4	0.75	3.1	2250	1.1	937.6	IE5	BF60G20-../S5E06LA4	0.15	0.5	1	3.1	3.8	2250	2250	2250	2250	2250	134	15300	43300
2.4	0.75	3.1	2250	1.1	937.6	IE3	BF60G20-../SPE06MA4	0.15	0.5	1	3.1	3.8	1680	1870	2050	2250	2250	134	15300	43300
2.4	0.75	2.4	2900	0.86	1211	IE5	BF60G20-../S5E06LA4	0.12	0.41	0.8	2.4	2.9	2900	2900	2900	2900	2900	134	15300	43300
2.4	0.75	2.4	2900	0.86	1211	IE3	BF60G20-../SPE06MA4	0.12	0.41	0.8	2.4	2.9	2150	2400	2650	2900	2900	134	15300	43300
2.4	0.75	3.4	2050	2.7	872.1	IE5	BF70G20-../S5E06LA4	0.17	0.55	1.1	3.4	4.1	2050	2050	2050	2050	2050	212	16100	47700
2.4	0.75	3.4	2050	2.7	872.1	IE3	BF70G20-../SPE06MA4	0.17	0.55	1.1	3.4	4.1	1560	1740	1910	2050	2050	212	16100	47700
2.4	0.75	2.9	2400	2.3	1017	IE5	BF70G20-../S5E06LA4	0.14	0.49	0.95	2.9	3.5	2400	2400	2400	2400	2400	212	16100	47700
2.4	0.75	2.9	2400	2.3	1017	IE3	BF70G20-../SPE06MA4	0.14	0.49	0.95	2.9	3.5	1830	2000	2200	2400	2400	212	16100	47700
2.4	0.75	2.1	3300	1.7	1390	IE5	BF70G20-../S5E06LA4	0.1	0.35	0.7	2.1	2.5	3300	3300	3300	3300	3300	212	16100	47700
2.4	0.75	2.1	3300	1.7	1390	IE3	BF70G20-../SPE06MA4	0.1	0.35	0.7	2.1	2.5	2500	2750	3050	3300	3300	212	16100	47700
2.4	0.75	1.8	3850	1.5	1621	IE5	BF70G20-../S5E06LA4	0.09	0.3	0.6	1.8	2.2	3850	3850	3850	3850	3850	212	16100	47700
2.4	0.75	1.8	3850	1.5	1621	IE3	BF70G20-../SPE06MA4	0.09	0.3	0.6	1.8	2.2	2900	3200	3550	3850	3850	212	16100	47700
2.4	0.75	1.5	4550	1.2	1912	IE5	BF70G20-../S5E06LA4	0.075	0.26	0.5	1.5	1.8	4550	4550	4550	4550	4550	212	16100	47700
2.4	0.75	1.5	4550	1.2	1912	IE3	BF70G20-../SPE06MA4	0.075	0.26	0.5	1.5	1.8	3400	3800	4200	4550	4550	212	16100	47700
2.4	0.75	1.2	5800	0.97	2448	IE5	BF70G20-../S5E06LA4	0.06	0.2	0.4	1.2	1.4	5800	5800	5800	5800	5800	212	16100	47700
2.4	0.75	1.2	5800	0.97	2448	IE3	BF70G20-../SPE06MA4	0.06	0.2	0.4	1.2	1.4	4400	4850	5300	5800	5800	212	16100	47700
2.4	0.75	1	6800	0.83	2849	IE5	BF70G20-../S5E06LA4	0.05	0.17	0.35	1	1.2	6800	6800	6800	6800	6800	212	16100	47700
2.4	0.75	1	6800	0.83	2849	IE3	BF70G20-../SPE06MA4	0.05	0.17	0.35	1	1.2	5100	5600	6200	6800	6800	212	16100	47700

MN = 3.5 Nm (PN = 1.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
3.5	1.1	390	26.5	2.5	7.66	IE4	BF06-..../S4E06LA4	19.5	65	130	390	465	19.1	22	26.5	26.5	26.5	12	1800	-
3.5	1.1	325	32	2.2	9.21	IE4	BF06-..../S4E06LA4	16	54	108	325	390	23	26.5	32	32	32	12	1900	-
3.5	1.1	245	42	1.8	12.07	IE4	BF06-..../S4E06LA4	12	41	82	245	295	30	35	42	42	42	12	2000	-
3.5	1.1	210	49.5	1.7	14.21	IE4	BF06-..../S4E06LA4	10.5	35	70	210	250	35.5	41	49.5	49.5	49.5	12	2100	-
3.5	1.1	176	59	1.6	16.99	IE4	BF06-..../S4E06LA4	8.8	29	58	176	210	42	49	59	59	59	12	2500	-
3.5	1.1	146	71	1.3	20.42	IE4	BF06-..../S4E06LA4	7.3	24	48.5	146	176	51	59	71	71	71	12	2700	-
3.5	1.1	112	93	1	26.76	IE4	BF06-..../S4E06LA4	5.6	18.5	37	112	134	66	77	93	93	93	12	3000	-
3.5	1.1	95	110	0.86	31.5	IE4	BF06-..../S4E06LA4	4.7	15.5	31.5	95	114	78	90	109	109	109	12	3200	-
3.5	1.1	128	81	2.9	23.28	IE4	BF10-..../S4E06LA4	6.4	21	42.5	128	154	58	67	81	81	81	23	3200	-
3.5	1.1	117	89	2.7	25.6	IE4	BF10-..../S4E06LA4	5.8	19.5	39</										

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$


MN = 3.5 Nm (PN = 1.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
3.5	1.1	29.5	350	1.2	100.2	IE4	BF20-../S4E06LA4	1.4	4.9	9.9	29.5	35.5	250	290	350	350	350	30	7000	-
3.5	1.1	27	385	1.1	110.2	IE4	BF20-../S4E06LA4	1.3	4.5	9	27	32.5	275	315	385	385	385	30	7300	-
3.5	1.1	24	430	0.97	123.5	IE4	BF20-../S4E06LA4	1.2	4	8	24	29	305	355	430	430	430	30	7600	-
3.5	1.1	22	475	0.88	135.9	IE4	BF20-../S4E06LA4	1.1	3.6	7.3	22	26	335	390	475	475	475	30	7900	-
3.5	1.1	21	490	0.85	141.2	IE4	BF20Z-../S4E06LA4	1	3.5	7	21	25	350	405	490	490	490	31	7900	-
3.5	1.1	52	200	2.8	57.41	IE4	BF30-../S4E06LA4	2.6	8.7	17	52	62	143	166	200	200	200	40	5200	-
3.5	1.1	49	210	2.7	61.17	IE4	BF30-../S4E06LA4	2.4	8.1	16	49	58	152	177	210	210	210	40	5300	-
3.5	1.1	44.5	235	2.4	67.28	IE4	BF30-../S4E06LA4	2.2	7.4	14.5	44.5	53	168	195	235	235	235	40	5500	-
3.5	1.1	41.5	250	2.3	72.13	IE4	BF30-../S4E06LA4	2	6.9	13.5	41.5	49.5	180	205	250	250	250	40	5700	-
3.5	1.1	37.5	275	2.1	79.34	IE4	BF30-../S4E06LA4	1.8	6.3	12.5	37.5	45	198	230	275	275	275	40	5900	-
3.5	1.1	34	300	1.9	87.08	IE4	BF30-../S4E06LA4	1.7	5.7	11	34	41	215	250	300	300	300	40	6200	-
3.5	1.1	31	335	1.7	95.79	IE4	BF30-../S4E06LA4	1.5	5.2	10	31	37.5	235	275	335	335	335	40	6400	-
3.5	1.1	27.5	375	1.5	107.6	IE4	BF30-../S4E06LA4	1.3	4.6	9.2	27.5	33	265	310	375	375	375	40	6700	-
3.5	1.1	25	410	1.4	118.3	IE4	BF30-../S4E06LA4	1.2	4.2	8.4	25	30	295	340	410	410	410	40	7000	-
3.5	1.1	24	435	1.3	124.7	IE4	BF30-../S4E06LA4	1.2	4	8	24	28.5	310	360	435	435	435	40	7100	-
3.5	1.1	21.5	475	1.2	137.1	IE4	BF30-../S4E06LA4	1	3.6	7.2	21.5	26	340	395	475	475	475	40	7400	-
3.5	1.1	19.5	520	1.1	150.7	IE4	BF30Z-../S4E06LA4	0.95	3.3	6.6	19.5	23.5	375	435	520	520	520	42	7400	-
3.5	1.1	18	580	0.98	165.8	IE4	BF30Z-../S4E06LA4	0.9	3	6	18	21.5	410	480	580	580	580	42	7400	-
3.5	1.1	16.5	610	0.92	176.6	IE4	BF30Z-../S4E06LA4	0.8	2.8	5.6	16.5	20	440	510	610	610	610	42	7400	-
3.5	1.1	15	680	0.84	194.3	IE4	BF30Z-../S4E06LA4	0.75	2.5	5.1	15	18.5	485	560	680	680	680	42	7400	-
3.5	1.1	21	490	1.8	141.4	IE4	BF40Z-../S4E06LA4	1	3.5	7	21	25	350	410	490	490	490	53	10600	-
3.5	1.1	19	540	1.7	155.6	IE4	BF40Z-../S4E06LA4	0.95	3.2	6.4	19	23	385	450	540	540	540	53	10600	-
3.5	1.1	17.5	590	1.5	171.2	IE4	BF40Z-../S4E06LA4	0.85	2.9	5.8	17.5	21	425	495	590	590	590	53	10600	-
3.5	1.1	15.5	650	1.4	188.3	IE4	BF40Z-../S4E06LA4	0.75	2.6	5.3	15.5	19	470	540	650	650	650	53	10600	-
3.5	1.1	14.5	700	1.3	202.2	IE4	BF40Z-../S4E06LA4	0.7	2.4	4.9	14.5	17.5	500	580	700	700	700	53	10600	-
3.5	1.1	13	770	1.2	222.4	IE4	BF40Z-../S4E06LA4	0.65	2.2	4.4	13	16	550	640	770	770	770	53	10600	-
3.5	1.1	11.5	880	1	253.2	IE4	BF40Z-../S4E06LA4	0.55	1.9	3.9	11.5	14	630	730	880	880	880	53	10600	-
3.5	1.1	10.5	970	0.92	278.5	IE4	BF40Z-../S4E06LA4	0.5	1.7	3.5	10.5	12.5	690	800	970	970	970	53	10600	-
3.5	1.1	10	1030	0.87	295.1	IE4	BF40Z-../S4E06LA4	0.5	1.6	3.3	10	12	730	850	1030	1030	1030	53	10600	-
3.5	1.1	21.5	480	2.7	138.1	IE4	BF50Z-../S4E06LA4	1	3.6	7.2	21.5	26	345	400	480	480	480	82	13600	-
3.5	1.1	19	540	2.4	154.5	IE4	BF50Z-../S4E06LA4	0.95	3.2	6.4	19	23	385	445	540	540	540	82	13600	-
3.5	1.1	16	640	2	183.5	IE4	BF50Z-../S4E06LA4	0.8	2.7	5.4	16	19.5	455	530	640	640	640	82	13600	-
3.5	1.1	14.5	710	1.8	205.2	IE4	BF50Z-../S4E06LA4	0.7	2.4	4.8	14.5	17.5	510	590	710	710	710	82	13600	-
3.5	1.1	12	860	1.5	247.5	IE4	BF50Z-../S4E06LA4	0.6	2	4	12	14.5	610	710	860	860	860	82	13600	-
3.5	1.1	10.5	960	1.3	276.8	IE4	BF50Z-../S4E06LA4	0.5	1.8	3.6	10.5	13	690	800	960	960	960	82	13600	-
3.5	1.1	9.4	1100	1.2	316.6	IE4	BF50Z-../S4E06LA4	0.47	1.5	3.1	9.4	11	790	910	1100	1100	1100	82	13600	-
3.5	1.1	8.4	1230	1	354	IE4	BF50Z-../S4E06LA4	0.42	1.4	2.8	8.4	10	880	1020	1230	1230	1230	82	13600	-
3.5	1.1	7.6	1370	0.95	392.8	IE4	BF50Z-../S4E06LA4	0.38	1.2	2.5	7.6	9.1	980	1130	1370	1370	1370	82	13600	-
3.5	1.1	6.8	1530	0.85	439.3	IE4	BF50Z-../S4E06LA4	0.34	1.1	2.2	6.8	8.1	1090	1270	1530	1530	1530	82	13600	-
3.5	1.1	5.2	1990	1.3	569.3	IE4	BF60G20-../S4E06LA4	0.26	0.85	1.7	5.2	6.3	1420	1650	1990	1990	1990	134	15300	43300
3.5	1.1	4.3	2400	1	689	IE4	BF60G20-../S4E06LA4	0.21	0.7	1.4	4.3	5.2	1720	1990	2400	2400	2400	134	15300	43300
3.5	1.1	3.6	2800	0.88	813.2	IE4	BF60G20-../S4E06LA4	0.18	0.6	1.2	3.6	4.4	2000	2350	2800	2800	2800	134	15300	43300
3.5	1.1	5.1	2000	2.8	577.5	IE4	BF70G20-../S4E06LA4	0.25	0.85	1.7	5.1	6.2	1440	1670	2000	2000	2000	212	16100	47700
3.5	1.1	4.4	2350	2.4	673.6	IE4	BF70G20-../S4E06LA4	0.22	0.7	1.4	4.4	5.3	1680	1950	2350	2350	2350	212	16100	47700
3.5	1.1	3.4	3050	1.9	872.1	IE4	BF70G20-../S4E06LA4	0.17	0.55	1.1	3.4	4.1	2150	2500	3050	3050	3050	212	16100	47700
3.5	1.1	2.9	3550	1.6	1017	IE4	BF70G20-../S4E06LA4	0.14	0.49	0.95	2.9	3.5	2500	2900	3550	3550	3550	212	16100	47700
3.5	1.1	2.1	4850	1.2	1390	IE4	BF70G20-../S4E06LA4	0.1	0.35	0.7	2.1	2.5	3450	4000	4850	4850	4850	212	16100	47700
3.5	1.1	1.8	5600	1	1621	IE4	BF70G20-../S4E06LA4	0.09	0.3	0.6	1.8	2.2	4050	4700	5600	5600	5600	212	16100	47700
3.5	1.1	1.5	6600	0.85	1912	IE4	BF70G20-../S4E06LA4	0.075	0.26	0.5	1.5	1.8	4750	5500	6600	6600	6600	212	16100	47700
3.5	1.1	199	75	2.4	15.04	IE5	BF10-../S5E08MA4	9.9	33	66	199	235	75	75	75	75	75	27	2800	-
5	1.55	390	38	1.8	7.66	IE5	BF10-../S5E08MA4	8.2	27	54	164	197	91	91	91	91	91	27	2900	-
5	1.55	149	100	2.4	20.05	IE5	BF10-../S5E08MA4	7.4	24.5	49.5	149	179	100	100	100	100	100	27	3000	-
5	1.55	128	116	2.1	23.28	IE5	BF10-../S5E08MA4	6.4	21	42.5	128	154	116	116	116	116	116	27	3200	-
5	1.55	117	128	1.9	25.6	IE5	BF10													

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$




MN = 5 Nm (PN = 1.55 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
5	1.55	69	215	1.1	43.06	IE5	BF10-..S5E08MA4	3.4	11.5	23	69	83	215	215	215	215	215	27	4100	-
5	1.55	63	235	1	47.35	IE5	BF10-..S5E08MA4	3.1	10.5	21	63	76	235	235	235	235	235	27	4250	-
5	1.55	58	255	0.94	51.28	IE5	BF10-..S5E08MA4	2.9	9.7	19.5	58	70	255	255	255	255	255	27	4400	-
5	1.55	53	280	0.85	56.39	IE5	BF10-..S5E08MA4	2.6	8.8	17.5	53	63	280	280	280	280	280	27	4550	-
5	1.55	108	138	3	27.62	IE5	BF20-..S5E08MA4	5.4	18	36	108	130	138	138	138	138	138	33	4150	-
5	1.55	98	152	2.8	30.4	IE5	BF20-..S5E08MA4	4.9	16	32.5	98	118	152	152	152	152	152	33	4400	-
5	1.55	92	162	2.6	32.58	IE5	BF20-..S5E08MA4	4.6	15	30.5	92	110	162	162	162	162	162	33	4450	-
5	1.55	83	179	2.3	35.85	IE5	BF20-..S5E08MA4	4.1	13.5	27.5	83	100	179	179	179	179	179	33	4650	-
5	1.55	71	205	2	41.72	IE5	BF20-..S5E08MA4	3.5	11.5	23.5	71	86	205	205	205	205	205	33	4950	-
5	1.55	65	225	1.8	45.9	IE5	BF20-..S5E08MA4	3.2	10.5	21.5	65	78	225	225	225	225	225	33	5100	-
5	1.55	61	240	1.7	48.56	IE5	BF20-..S5E08MA4	3	10	20.5	61	74	240	240	240	240	240	33	5200	-
5	1.55	56	265	1.6	53.43	IE5	BF20-..S5E08MA4	2.8	9.3	18.5	56	67	265	265	265	265	265	33	5500	-
5	1.55	51	290	1.4	58.24	IE5	BF20-..S5E08MA4	2.5	8.5	17	51	61	290	290	290	290	290	33	5600	-
5	1.55	46.5	320	1.3	64.08	IE5	BF20-..S5E08MA4	2.3	7.8	15.5	46.5	56	320	320	320	320	320	33	5900	-
5	1.55	43	345	1.2	69.7	IE5	BF20-..S5E08MA4	2.1	7.1	14	43	51	345	345	345	345	345	33	6100	-
5	1.55	39	380	1.1	76.69	IE5	BF20-..S5E08MA4	1.9	6.5	13	39	46.5	380	380	380	380	380	33	6300	-
5	1.55	34	435	0.96	87.31	IE5	BF20-..S5E08MA4	1.7	5.7	11	34	41	435	435	435	435	435	33	6600	-
5	1.55	31	480	0.87	96.08	IE5	BF20-..S5E08MA4	1.5	5.2	10	31	37	480	480	480	480	480	33	6900	-
5	1.55	29.5	500	0.84	100.2	IE5	BF20-..S5E08MA4	1.4	4.9	9.9	29.5	35.5	500	500	500	500	500	33	7000	-
5	1.55	77	192	3	38.49	IE5	BF30-..S5E08MA4	3.8	12.5	25.5	77	93	192	192	192	192	192	43	4400	-
5	1.55	73	205	2.8	41.01	IE5	BF30-..S5E08MA4	3.6	12	24	73	87	205	205	205	205	205	43	4500	-
5	1.55	66	225	2.5	45.1	IE5	BF30-..S5E08MA4	3.3	11	22	66	79	225	225	225	225	225	43	4700	-
5	1.55	57	260	2.2	52.2	IE5	BF30-..S5E08MA4	2.8	9.5	19	57	68	260	260	260	260	260	43	5000	-
5	1.55	52	285	2	57.41	IE5	BF30-..S5E08MA4	2.6	8.7	17	52	62	285	285	285	285	285	43	5200	-
5	1.55	49	305	1.9	61.17	IE5	BF30-..S5E08MA4	2.4	8.1	16	49	58	305	305	305	305	305	43	5300	-
5	1.55	44.5	335	1.7	67.28	IE5	BF30-..S5E08MA4	2.2	7.4	14.5	44.5	53	335	335	335	335	335	43	5500	-
5	1.55	41.5	360	1.6	72.13	IE5	BF30-..S5E08MA4	2	6.9	13.5	41.5	49.5	360	360	360	360	360	43	5700	-
5	1.55	37.5	395	1.4	79.34	IE5	BF30-..S5E08MA4	1.8	6.3	12.5	37.5	45	395	395	395	395	395	43	5900	-
5	1.55	34	435	1.3	87.08	IE5	BF30-..S5E08MA4	1.7	5.7	11	34	41	435	435	435	435	435	43	6200	-
5	1.55	31	475	1.2	95.79	IE5	BF30-..S5E08MA4	1.5	5.2	10	31	37.5	475	475	475	475	475	43	6400	-
5	1.55	27.5	530	1.1	107.6	IE5	BF30-..S5E08MA4	1.3	4.6	9.2	27.5	33	530	530	530	530	530	43	6700	-
5	1.55	25	590	0.96	118.3	IE5	BF30-..S5E08MA4	1.2	4.2	8.4	25	30	590	590	590	590	590	43	7000	-
5	1.55	24	620	0.91	124.7	IE5	BF30-..S5E08MA4	1.2	4	8	24	28.5	620	620	620	620	620	43	7100	-
5	1.55	21.5	680	0.83	137.1	IE5	BF30-..S5E08MA4	1	3.6	7.2	21.5	26	680	680	680	680	680	43	7400	-
5	1.55	48.5	305	2.9	61.25	IE5	BF40-..S5E08MA4	2.4	8.1	16	48.5	58	305	305	305	305	305	53	7600	-
5	1.55	44.5	335	2.7	67.38	IE5	BF40-..S5E08MA4	2.2	7.4	14.5	44.5	53	335	335	335	335	335	53	8000	-
5	1.55	42	355	2.5	71.4	IE5	BF40-..S5E08MA4	2.1	7	14	42	50	355	355	355	355	355	53	8100	-
5	1.55	38	390	2.3	78.55	IE5	BF40-..S5E08MA4	1.9	6.3	12.5	38	45.5	390	390	390	390	390	53	8500	-
5	1.55	35.5	415	2.1	83.91	IE5	BF40-..S5E08MA4	1.7	5.9	11.5	35.5	42.5	415	415	415	415	415	53	8700	-
5	1.55	32	460	1.9	92.31	IE5	BF40-..S5E08MA4	1.6	5.4	10.5	32	38.5	460	460	460	460	460	53	9100	-
5	1.55	29.5	500	1.8	101	IE5	BF40-..S5E08MA4	1.4	4.9	9.9	29.5	35.5	500	500	500	500	500	53	9400	-
5	1.55	27	550	1.6	111.1	IE5	BF40-..S5E08MA4	1.3	4.5	9	27	32	550	550	550	550	550	53	9800	-
5	1.55	24	620	1.4	124.5	IE5	BF40-..S5E08MA4	1.2	4	8	24	28.5	620	620	620	620	620	53	10200	-
5	1.55	21.5	680	1.3	137	IE5	BF40-..S5E08MA4	1	3.6	7.2	21.5	26	680	680	680	680	680	53	10600	-
5	1.55	21	700	1.3	141.4	IE5	BF40Z-..S5E08MA4	1	3.5	7	21	25	700	700	700	700	700	56	10600	-
5	1.55	19	770	1.2	155.6	IE5	BF40Z-..S5E08MA4	0.95	3.2	6.4	19	23	770	770	770	770	770	56	10600	-
5	1.55	17.5	850	1.1	171.2	IE5	BF40Z-..S5E08MA4	0.85	2.9	5.8	17.5	21	850	850	850	850	850	56	10600	-
5	1.55	15.5	940	0.96	188.3	IE5	BF40Z-..S5E08MA4	0.75	2.6	5.3	15.5	19	940	940	940	940	940	56	10600	-
5	1.55	14.5	1010	0.89	202.2	IE5	BF40Z-..S5E08MA4	0.7	2.4	4.9	14.5	17.5	1020	1020	1020	1020	1020	56	10600	-
5	1.55	12	1230	1.1	247.5	IE5	BF50Z-..S5E08MA4	0.6	2	4	12	14.5	1230	1230	1230	1230	1230	56	13600	-
5	1.55	10.5	1380	0.94	276.8	IE5	BF50Z-..S5E08MA4	0.5	1.8	3.6	10.5	13	1380	1380	1380	1380	1380	56	13600	-
5	1.55	9.4	1580	0.82	316.6	IE5	BF50Z-..S5E08MA4	0.47	1.5	3.1	9.4	11	1580	1580	1580	1580	1580	56	13600	-
5	1.55	17.5	840	2.7	169.2	IE5	BF60Z-..S5E08MA4	0.85	2.9	5.9	17.5	21	840	840	840	840	840	130	15300	43300
5	1.55	15.5	930	2.5	187.7	IE5	BF60Z-..S5E08MA4	0.75	2.6	5.3	15.5	19	930	930	930	930	930	130	15300	43300
5	1.55	13.5	1100	2.1	221.4	IE5	BF60Z-..S5E08MA4	0.65	2.2	4.5	13.5	16	1100	1100	1100	1100	1100	130	15300	43300
5																				

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 1.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
5	1.55	5.7	2600	2.2	524.1	IE5	BF70G20-..S5E08MA4	0.28	0.95	1.9	5.7	6.8	2600	2600	2600	2600	2600	216	16100	47700
5	1.55	5.1	2850	2	577.5	IE5	BF70G20-..S5E08MA4	0.25	0.85	1.7	5.1	6.2	2850	2850	2850	2850	2850	216	16100	47700
5	1.55	4.4	3350	1.7	673.6	IE5	BF70G20-..S5E08MA4	0.22	0.7	1.4	4.4	5.3	3350	3350	3350	3350	3350	216	16100	47700
5	1.55	3.4	4350	1.3	872.1	IE5	BF70G20-..S5E08MA4	0.17	0.55	1.1	3.4	4.1	4350	4350	4350	4350	4350	216	16100	47700
5	1.55	2.9	5000	1.1	1017	IE5	BF70G20-..S5E08MA4	0.14	0.49	0.95	2.9	3.5	5000	5000	5000	5000	5000	216	16100	47700
5	1.55	2.1	6900	0.82	1390	IE5	BF70G20-..S5E08MA4	0.1	0.35	0.7	2.1	2.5	6900	6900	6900	6900	6900	216	16100	47700
5	1.55	3.8	3850	2.7	770.6	IE5	BF80Z-..S5E08MA4	0.19	0.6	1.2	3.8	4.6	3850	3850	3850	3850	3850	334	39600	75000
5	1.55	3.4	4350	2.4	874.6	IE5	BF80Z-..S5E08MA4	0.17	0.55	1.1	3.4	4.1	4350	4350	4350	4350	4350	334	39600	75000
5	1.55	3	4950	2.1	990.4	IE5	BF80Z-..S5E08MA4	0.15	0.5	1	3	3.6	4950	4950	4950	4950	4950	334	39600	75000
5	1.55	2.6	5600	1.9	1124	IE5	BF80Z-..S5E08MA4	0.13	0.44	0.85	2.6	3.2	5600	5600	5600	5600	5600	334	39600	75000
5	1.55	2.2	6600	1.6	1329	IE5	BF80G40-..S5E08MA4	0.11	0.37	0.75	2.2	2.7	6600	6600	6600	6600	6600	340	39600	75000
5	1.55	2	7400	1.4	1491	IE5	BF80G40-..S5E08MA4	0.1	0.33	0.65	2	2.4	7400	7400	7400	7400	7400	340	39600	75000
5	1.55	1.7	8400	1.2	1693	IE5	BF80G40-..S5E08MA4	0.085	0.29	0.55	1.7	2.1	8400	8400	8400	8400	8400	340	39600	75000
5	1.55	1.4	10200	1	2051	IE5	BF80G40-..S5E08MA4	0.07	0.24	0.48	1.4	1.7	10200	10200	10200	10200	10200	340	39600	75000
5	1.55	1.2	12100	0.87	2422	IE5	BF80G40-..S5E08MA4	0.06	0.2	0.41	1.2	1.4	12100	12100	12100	12100	12100	340	39600	75000
5	1.55	2	7200	2.6	1444	IE5	BF90G50-..S5E08MA4	0.1	0.34	0.65	2	2.4	7200	7200	7200	7200	7200	610	42800	120000
5	1.55	1.7	8300	2.2	1678	IE5	BF90G50-..S5E08MA4	0.085	0.29	0.55	1.7	2.1	8300	8300	8300	8300	8300	610	42800	120000
5	1.55	1.6	9300	2	1867	IE5	BF90G50-..S5E08MA4	0.08	0.26	0.5	1.6	1.9	9300	9300	9300	9300	9300	610	42800	120000
5	1.55	1.3	10700	1.7	2154	IE5	BF90G50-..S5E08MA4	0.065	0.23	0.46	1.3	1.6	10700	10700	10700	10700	10700	610	42800	120000
5	1.55	1.1	13200	1.4	2656	IE5	BF90G50-..S5E08MA4	0.055	0.18	0.37	1.1	1.3	13200	13200	13200	13200	13200	610	42800	120000
5	1.55	1	14700	1.3	2952	IE5	BF90G50-..S5E08MA4	0.05	0.16	0.33	1	1.2	14700	14700	14700	14700	14700	610	42800	120000
5	1.55	0.9	16400	1.1	3286	IE5	BF90G50-..S5E08MA4	0.045	0.15	0.3	0.9	1	16400	16400	16400	16400	16400	610	42800	120000
5	1.55	0.8	18200	1	3644	IE5	BF90G50-..S5E08MA4	0.041	0.13	0.27	0.8	0.95	18200	18200	18200	18200	18200	610	42800	120000
5	1.55	0.65	21500	0.85	4366	IE5	BF90G50-..S5E08MA4	0.034	0.11	0.22	0.65	0.8	21500	21500	21500	21500	21500	610	42800	120000

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	520	40	1.5	5.72	IE4	BF06-..S4E08MA4	26	87	174	520	620	28.5	33.5	40	40	40	16	1600	-
7	2.2	520	40	1.5	5.72	IE5	BF06-..S5E08LA4	26	87	174	520	620	37	40	40	40	40	17	1600	-
7	2.2	390	53	1.3	7.66	IE4	BF06-..S4E08MA4	19.5	65	130	390	465	38	45	53	53	53	16	1800	-
7	2.2	390	53	1.3	7.66	IE5	BF06-..S5E08LA4	19.5	65	130	390	465	49.5	53	53	53	53	17	1800	-
7	2.2	325	64	1.1	9.21	IE4	BF06-..S4E08MA4	16	54	108	325	390	46	54	64	64	64	16	1900	-
7	2.2	325	64	1.1	9.21	IE5	BF06-..S5E08LA4	16	54	108	325	390	59	64	64	64	64	17	1900	-
7	2.2	245	84	0.89	12.07	IE4	BF06-..S4E08MA4	12	41	82	245	295	60	71	84	84	84	16	2000	-
7	2.2	245	84	0.89	12.07	IE5	BF06-..S5E08LA4	12	41	82	245	295	78	84	84	84	84	17	2000	-
7	2.2	210	99	0.85	14.21	IE4	BF06-..S4E08MA4	10.5	35	70	210	250	71	83	99	99	99	16	2100	-
7	2.2	210	99	0.85	14.21	IE5	BF06-..S5E08LA4	10.5	35	70	210	250	92	99	99	99	99	17	2100	-
7	2.2	176	118	0.8	16.99	IE4	BF06-..S4E08MA4	8.8	29	58	176	210	84	100	118	118	118	16	2500	-
7	2.2	176	118	0.8	16.99	IE5	BF06-..S5E08LA4	8.8	29	58	176	210	110	118	118	118	118	17	2500	-
7	2.2	395	53	2.9	7.58	IE4	BF10-..S4E08MA4	19.5	65	131	395	470	37.5	44.5	53	53	53	27	2200	-
7	2.2	395	53	2.9	7.58	IE5	BF10-..S5E08LA4	19.5	65	131	395	470	49	53	53	53	53	28	2200	-
7	2.2	305	67	2.6	9.69	IE4	BF10-..S4E08MA4	15	51	103	305	370	48	57	67	67	67	27	2350	-
7	2.2	305	67	2.6	9.69	IE5	BF10-..S5E08LA4	15	51	103	305	370	62	67	67	67	67	28	2350	-
7	2.2	250	82	2.2	11.84	IE4	BF10-..S4E08MA4	12.5	42	84	250	300	59	69	82	82	82	27	2500	-
7	2.2	250	82	2.2	11.84	IE5	BF10-..S5E08LA4	12.5	42	84	250	300	76	82	82	82	82	28	2500	-
7	2.2	199	105	1.7	15.04	IE4	BF10-..S4E08MA4	9.9	33	66	199	235	75	88	105	105	105	27	2800	-
7	2.2	199	105	1.7	15.04	IE5	BF10-..S5E08LA4	9.9	33	66	199	235	97	105	105	105	105	28	2800	-
7	2.2	164	127	1.9	18.23	IE4	BF10-..S4E08MA4	8.2	27	54	164	197	91	107	127	127	127	27	2900	-
7	2.2	164	127	1.9	18.23	IE5	BF10-..S5E08LA4	8.2	27	54	164	197	118	127	127	127	127	28</		

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	136	154	2.6	22.04	IE5	BF20.../S5E08LA4	6.8	22.5	45	136	163	143	154	154	154	154	35	3800	-
7	2.2	123	169	2.4	24.25	IE4	BF20.../S4E08MA4	6.1	20.5	41	123	148	121	143	169	169	169	33	3950	-
7	2.2	123	169	2.4	24.25	IE5	BF20.../S5E08LA4	6.1	20.5	41	123	148	157	169	169	169	169	35	3950	-
7	2.2	108	193	2.2	27.62	IE4	BF20.../S4E08MA4	5.4	18	36	108	130	138	162	193	193	193	33	4150	-
7	2.2	108	193	2.2	27.62	IE5	BF20.../S5E08LA4	5.4	18	36	108	130	179	193	193	193	193	35	4150	-
7	2.2	98	210	2	30.4	IE4	BF20.../S4E08MA4	4.9	16	32.5	98	118	152	179	210	210	210	33	4400	-
7	2.2	98	210	2	30.4	IE5	BF20.../S5E08LA4	4.9	16	32.5	98	118	197	210	210	210	210	35	4400	-
7	2.2	92	225	1.8	32.58	IE4	BF20.../S4E08MA4	4.6	15	30.5	92	110	162	192	225	225	225	33	4450	-
7	2.2	92	225	1.8	32.58	IE5	BF20.../S5E08LA4	4.6	15	30.5	92	110	210	225	225	225	225	35	4450	-
7	2.2	83	250	1.7	35.85	IE4	BF20.../S4E08MA4	4.1	13.5	27.5	83	100	179	210	250	250	250	33	4650	-
7	2.2	83	250	1.7	35.85	IE5	BF20.../S5E08LA4	4.1	13.5	27.5	83	100	230	250	250	250	250	35	4650	-
7	2.2	71	290	1.4	41.72	IE4	BF20.../S4E08MA4	3.5	11.5	23.5	71	86	270	290	290	290	290	33	4950	-
7	2.2	71	290	1.4	41.72	IE5	BF20.../S5E08LA4	3.5	11.5	23.5	71	86	270	290	290	290	290	35	4950	-
7	2.2	65	320	1.3	45.9	IE4	BF20.../S4E08MA4	3.2	10.5	21.5	65	78	225	270	320	320	320	33	5100	-
7	2.2	65	320	1.3	45.9	IE5	BF20.../S5E08LA4	3.2	10.5	21.5	65	78	295	320	320	320	320	35	5100	-
7	2.2	61	335	1.2	48.56	IE4	BF20.../S4E08MA4	3	10	20.5	61	74	240	285	335	335	335	33	5200	-
7	2.2	61	335	1.2	48.56	IE5	BF20.../S5E08LA4	3	10	20.5	61	74	315	335	335	335	335	35	5200	-
7	2.2	56	370	1.1	53.43	IE4	BF20.../S4E08MA4	2.8	9.3	18.5	56	67	265	315	370	370	370	33	5500	-
7	2.2	56	370	1.1	53.43	IE5	BF20.../S5E08LA4	2.8	9.3	18.5	56	67	345	370	370	370	370	35	5500	-
7	2.2	51	405	1	58.24	IE4	BF20.../S4E08MA4	2.5	8.5	17	51	61	290	340	405	405	405	33	5600	-
7	2.2	51	405	1	58.24	IE5	BF20.../S5E08LA4	2.5	8.5	17	51	61	375	405	405	405	405	35	5600	-
7	2.2	46.5	445	0.94	64.08	IE4	BF20.../S4E08MA4	2.3	7.8	15.5	46.5	56	320	375	445	445	445	33	5900	-
7	2.2	46.5	445	0.94	64.08	IE5	BF20.../S5E08LA4	2.3	7.8	15.5	46.5	56	415	445	445	445	445	35	5900	-
7	2.2	43	485	0.86	69.7	IE4	BF20.../S4E08MA4	2.1	7.1	14	43	51	345	410	485	485	485	33	6100	-
7	2.2	43	485	0.86	69.7	IE5	BF20.../S5E08LA4	2.1	7.1	14	43	51	450	485	485	485	485	35	6100	-
7	2.2	106	197	2.9	28.23	IE4	BF30.../S4E08MA4	5.3	17.5	35	106	127	141	166	197	197	197	43	3800	-
7	2.2	106	197	2.9	28.23	IE5	BF30.../S5E08LA4	5.3	17.5	35	106	127	183	197	197	197	197	45	3800	-
7	2.2	96	215	2.6	31.05	IE4	BF30.../S4E08MA4	4.8	16	32	96	115	155	183	215	215	215	43	4000	-
7	2.2	96	215	2.6	31.05	IE5	BF30.../S5E08LA4	4.8	16	32	96	115	200	215	215	215	215	45	4000	-
7	2.2	85	245	2.3	35	IE4	BF30.../S4E08MA4	4.2	14	28.5	85	102	175	205	245	245	245	43	4200	-
7	2.2	85	245	2.3	35	IE5	BF30.../S5E08LA4	4.2	14	28.5	85	102	225	245	245	245	245	45	4200	-
7	2.2	77	265	2.1	38.49	IE4	BF30.../S4E08MA4	3.8	12.5	25.5	77	93	192	225	265	265	265	43	4400	-
7	2.2	77	265	2.1	38.49	IE5	BF30.../S5E08LA4	3.8	12.5	25.5	77	93	250	265	265	265	265	45	4400	-
7	2.2	73	285	2	41.01	IE4	BF30.../S4E08MA4	3.6	12	24	73	87	205	240	285	285	285	43	4500	-
7	2.2	73	285	2	41.01	IE5	BF30.../S5E08LA4	3.6	12	24	73	87	265	285	285	285	285	45	4500	-
7	2.2	66	315	1.8	45.1	IE4	BF30.../S4E08MA4	3.3	11	22	66	79	225	265	315	315	315	43	4700	-
7	2.2	66	315	1.8	45.1	IE5	BF30.../S5E08LA4	3.3	11	22	66	79	290	315	315	315	315	45	4700	-
7	2.2	57	365	1.6	52.2	IE4	BF30.../S4E08MA4	2.8	9.5	19	57	68	260	305	365	365	365	43	5000	-
7	2.2	57	365	1.6	52.2	IE5	BF30.../S5E08LA4	2.8	9.5	19	57	68	335	365	365	365	365	45	5000	-
7	2.2	52	400	1.4	57.41	IE4	BF30.../S4E08MA4	2.6	8.7	17	52	62	285	335	400	400	400	43	5200	-
7	2.2	52	400	1.4	57.41	IE5	BF30.../S5E08LA4	2.6	8.7	17	52	62	370	400	400	400	400	45	5200	-
7	2.2	49	425	1.3	61.17	IE4	BF30.../S4E08MA4	2.4	8.1	16	49	58	305	360	425	425	425	43	5300	-
7	2.2	49	425	1.3	61.17	IE5	BF30.../S5E08LA4	2.4	8.1	16	49	58	395	425	425	425	425	45	5300	-
7	2.2	44.5	470	1.2	67.28	IE4	BF30.../S4E08MA4	2.2	7.4	14.5	44.5	53	335	395	470	470	470	43	5500	-
7	2.2	44.5	470	1.2	67.28	IE5	BF30.../S5E08LA4	2.2	7.4	14.5	44.5	53	435	470	470	470	470	45	5500	-
7	2.2	41.5	500	1.1	72.13	IE4	BF30.../S4E08MA4	2	6.9	13.5	41.5	49.5	360	425	500	500	500	43	5700	-
7	2.2	41.5	500	1.1	72.13	IE5	BF30.../S5E08LA4	2	6.9	13.5	41.5	49.5	465	500	500	500	500	45	5700	-
7	2.2	37.5	550	1	79.34	IE4	BF30.../S4E08MA4	1.8	6.3	12.5	37.5	45	395	465	550	550	550	43	5900	-
7	2.2	37.5	550	1	79.34	IE5	BF30.../S5E08LA4	1.8	6.3	12.5	37.5	45	510	550	550	550	550	45	5900	-
7	2.2	34	600	0.94	87.08	IE4	BF30.../S4E08MA4	1.7	5.7	11	34	41	435	510	600	600	600	43	6200	-
7	2.2	34	600	0.94	87.08	IE5	BF30.../S5E08LA4	1.7	5.7	11	34	41	560	600	600	600	600	45	6200	-
7	2.2	31	670	0.85	95.79	IE4	BF30.../S4E08MA4	1.5	5.2	10	31	37.5	475	560	670	670	670	43	6400	-
7	2.2	31	670	0.85	95.79	IE5	BF30.../S5E08LA4	1.5	5.2	10	31	37.5	620	670	670	670	670	45	6400	-
7	2.2	65	315	2.8	45.56	IE4	BF40.../S4E08MA4	3.2	10.5	21.5	65	79	225	265	315	315	315	53	6800	-
7	2.2	65	315	2.8	45.56	IE5	BF40.../S5E08LA4	3.2	10.5	21.5	65	79	295	315	315	315	315	54	6800	-
7	2.2	61	340	2.6	48.92	IE4	BF40.../S4E08MA4	3	10	20	61	73	240	285	340	340	340	53	7000	-
7																				

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	21	980	0.91	141.4	IE5	BF40Z-..S5E08LA4	1	3.5	7	21	25	910	980	980	980	980	58	10600	-
7	2.2	19	1080	0.83	155.6	IE4	BF40Z-..S4E08MA4	0.95	3.2	6.4	19	23	770	910	1080	1080	1080	56	10600	-
7	2.2	19	1080	0.83	155.6	IE5	BF40Z-..S5E08LA4	0.95	3.2	6.4	19	23	1010	1080	1080	1080	1080	58	10600	-
7	2.2	47	445	2.9	63.59	IE4	BF50-..S4E08MA4	2.3	7.8	15.5	47	56	315	375	445	445	445	81	9800	-
7	2.2	47	445	2.9	63.59	IE5	BF50-..S5E08LA4	2.3	7.8	15.5	47	56	410	445	445	445	445	83	9800	-
7	2.2	41	500	2.6	72.72	IE4	BF50-..S4E08MA4	2	6.8	13.5	41	49.5	360	425	500	500	500	81	10700	-
7	2.2	41	500	2.6	72.72	IE5	BF50-..S5E08LA4	2	6.8	13.5	41	49.5	470	500	500	500	500	83	10700	-
7	2.2	36.5	560	2.3	81.33	IE4	BF50-..S4E08MA4	1.8	6.1	12	36.5	44	405	475	560	560	560	81	11300	-
7	2.2	36.5	560	2.3	81.33	IE5	BF50-..S5E08LA4	1.8	6.1	12	36.5	44	520	560	560	560	560	83	11300	-
7	2.2	33	630	2.1	90.24	IE4	BF50-..S4E08MA4	1.6	5.5	11	33	39.5	450	530	630	630	630	81	11800	-
7	2.2	33	630	2.1	90.24	IE5	BF50-..S5E08LA4	1.6	5.5	11	33	39.5	580	630	630	630	630	83	11800	-
7	2.2	29.5	700	1.8	100.9	IE4	BF50-..S4E08MA4	1.4	4.9	9.9	29.5	35.5	500	590	700	700	700	81	12300	-
7	2.2	29.5	700	1.8	100.9	IE5	BF50-..S5E08LA4	1.4	4.9	9.9	29.5	35.5	650	700	700	700	700	83	12300	-
7	2.2	26	790	1.6	114	IE4	BF50-..S4E08MA4	1.3	4.3	8.7	26	31.5	570	670	790	790	790	81	12900	-
7	2.2	26	790	1.6	114	IE5	BF50-..S5E08LA4	1.3	4.3	8.7	26	31.5	740	790	790	790	790	83	12900	-
7	2.2	23.5	890	1.5	127.5	IE4	BF50-..S4E08MA4	1.1	3.9	7.8	23.5	28	630	750	890	890	890	81	13600	-
7	2.2	23.5	890	1.5	127.5	IE5	BF50-..S5E08LA4	1.1	3.9	7.8	23.5	28	820	890	890	890	890	83	13600	-
7	2.2	21.5	960	1.3	138.1	IE4	BF50Z-..S4E08MA4	1	3.6	7.2	21.5	26	690	810	960	960	960	86	13600	-
7	2.2	21.5	960	1.3	138.1	IE5	BF50Z-..S5E08LA4	1	3.6	7.2	21.5	26	890	960	960	960	960	88	13600	-
7	2.2	19	1080	1.2	154.5	IE4	BF50Z-..S4E08MA4	0.95	3.2	6.4	19	23	770	910	1080	1080	1080	86	13600	-
7	2.2	19	1080	1.2	154.5	IE5	BF50Z-..S5E08LA4	0.95	3.2	6.4	19	23	1000	1080	1080	1080	1080	88	13600	-
7	2.2	16	1280	1	183.5	IE4	BF50Z-..S4E08MA4	0.8	2.7	5.4	16	19.5	910	1080	1280	1280	1280	86	13600	-
7	2.2	16	1280	1	183.5	IE5	BF50Z-..S5E08LA4	0.8	2.7	5.4	16	19.5	1190	1280	1280	1280	1280	88	13600	-
7	2.2	14.5	1430	0.91	205.2	IE4	BF50Z-..S4E08MA4	0.7	2.4	4.8	14.5	17.5	1020	1210	1430	1430	1430	86	13600	-
7	2.2	14.5	1430	0.91	205.2	IE5	BF50Z-..S5E08LA4	0.7	2.4	4.8	14.5	17.5	1330	1430	1430	1430	1430	88	13600	-
7	2.2	21	980	2.3	140.8	IE4	BF60Z-..S4E08MA4	1	3.5	7.1	21	25.5	700	830	980	980	980	130	15300	43300
7	2.2	21	980	2.3	140.8	IE5	BF60Z-..S5E08LA4	1	3.5	7.1	21	25.5	910	980	980	980	980	131	15300	43300
7	2.2	17.5	1180	1.9	169.2	IE4	BF60Z-..S4E08MA4	0.85	2.9	5.9	17.5	21	840	990	1180	1180	1180	130	15300	43300
7	2.2	17.5	1180	1.9	169.2	IE5	BF60Z-..S5E08LA4	0.85	2.9	5.9	17.5	21	1090	1180	1180	1180	1180	131	15300	43300
7	2.2	15.5	1310	1.8	187.7	IE4	BF60Z-..S4E08MA4	0.75	2.6	5.3	15.5	19	930	1100	1310	1310	1310	130	15300	43300
7	2.2	15.5	1310	1.8	187.7	IE5	BF60Z-..S5E08LA4	0.75	2.6	5.3	15.5	19	1220	1310	1310	1310	1310	131	15300	43300
7	2.2	13.5	1540	1.5	221.4	IE4	BF60Z-..S4E08MA4	0.65	2.2	4.5	13.5	16	1100	1300	1540	1540	1540	130	15300	43300
7	2.2	13.5	1540	1.5	221.4	IE5	BF60Z-..S5E08LA4	0.65	2.2	4.5	13.5	16	1430	1540	1540	1540	1540	131	15300	43300
7	2.2	12	1710	1.3	245.6	IE4	BF60Z-..S4E08MA4	0.6	2	4	12	14.5	1220	1440	1710	1710	1710	130	15300	43300
7	2.2	12	1710	1.3	245.6	IE5	BF60Z-..S5E08LA4	0.6	2	4	12	14.5	1590	1710	1710	1710	1710	131	15300	43300
7	2.2	10	2050	1.1	293.4	IE4	BF60Z-..S4E08MA4	0.5	1.7	3.4	10	12	1460	1730	2050	2050	2050	130	15300	43300
7	2.2	9.2	2250	1	325.6	IE4	BF60Z-..S4E08MA4	0.46	1.5	3	9.2	11	1620	1920	2250	2250	2250	130	15300	43300
7	2.2	7.8	2650	0.86	380	IE4	BF60Z-..S4E08MA4	0.39	1.3	2.6	7.8	9.4	1900	2200	2650	2650	2650	130	15300	43300
7	2.2	7.8	2650	0.86	380	IE5	BF60Z-..S5E08LA4	0.39	1.3	2.6	7.8	9.4	2450	2650	2650	2650	2650	131	15300	43300
7	2.2	11.5	1810	2.9	258.7	IE4	BF70Z-..S4E08MA4	0.55	1.9	3.8	11.5	13.5	1290	1520	1810	1810	1810	218	16100	47700
7	2.2	11.5	1810	2.9	258.7	IE5	BF70Z-..S5E08LA4	0.55	1.9	3.8	11.5	13.5	1680	1810	1810	1810	1810	220	16100	47700
7	2.2	9.9	2100	2.5	301.8	IE4	BF70Z-..S4E08MA4	0.49	1.6	3.3	9.9	11.5	1500	1780	2100	2100	2100	218	16100	47700
7	2.2	9.9	2100	2.5	301.8	IE5	BF70Z-..S5E08LA4	0.49	1.6	3.3	9.9	11.5	1960	2100	2100	2100	2100	220	16100	47700
7	2.2	8.7	2350	2.2	341.7	IE4	BF70Z-..S4E08MA4	0.43	1.4	2.9	8.7	10.5	1700	2000	2350	2350	2350	218	16100	47700
7	2.2	8.7	2350	2.2	341.7	IE5	BF70Z-..S5E08LA4	0.43	1.4	2.9	8.7	10.5	2200	2350	2350	2350	2350	220	16100	47700
7	2.2	7.5	2750	1.9	398.7	IE4	BF70Z-..S4E08MA4	0.37	1.2	2.5	7.5	9	1990	2350	2750	2750	2750	218	16100	47700
7	2.2	6.8	3050	1.7	439.2	IE4	BF70Z-..S4E08MA4	0.34	1.1	2.2	6.8	8.1	2150	2550	3050	3050	3050	218	16100	47700
7	2.2	6.8	3050	1.7	439.2	IE5	BF70Z-..S5E08LA4	0.34	1.1	2.2	6.8	8.1	2850	3050	3050	3050	3050	220	16100	47700
7	2.2	5.8	3550	1.4	512.4	IE4	BF70Z-..S4E08MA4	0.29	0.95	1.9	5.8	7	2550	3000	3550	3550	3550	218	16100	47700
7	2.2	5.8	3550	1.4	512.4	IE5	BF70Z-..S5E08LA4	0.29	0.95	1.9	5.8	7	3300	3550	3550	3550	3550	220	16100	47700
7	2.2	5.7	3650	1.6	524.1	IE4	BF70G20-..S4E08MA4	0.28	0.95	1.9	5.7	6.8	2600	3050	3650	3650	3650	216	16100	47700
7	2.2	5.7	3650	1.6	524.1	IE5	BF70G20-..S5E08LA4	0.28	0.95	1.9	5.7	6.8	3400	3650	3650	3650	3650	217	16100	47700
7	2.2	5.1	4000	1.4	577.5	IE4	BF70G20-..S4E08MA4	0.25	0.85	1.7	5.1	6.2	2850	3400	4000	4				

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	2.2	9300	1.1	1329	IE5	BF80G40-..S5E08LA4	0.11	0.37	0.75	2.2	2.7	8600	9300	9300	9300	9300	341	39600	75000
7	2.2	2	10400	1	1491	IE4	BF80G40-..S4E08MA4	0.1	0.33	0.65	2	2.4	7400	8700	10400	10400	10400	340	39600	75000
7	2.2	2	10400	1	1491	IE5	BF80G40-..S5E08LA4	0.1	0.33	0.65	2	2.4	9600	10400	10400	10400	10400	341	39600	75000
7	2.2	1.7	11800	0.89	1693	IE4	BF80G40-..S4E08MA4	0.085	0.29	0.55	1.7	2.1	8400	9900	11800	11800	11800	340	39600	75000
7	2.2	1.7	11800	0.89	1693	IE5	BF80G40-..S5E08LA4	0.085	0.29	0.55	1.7	2.1	11000	11800	11800	11800	11800	341	39600	75000
7	2.2	3	6800	2.7	976.1	IE4	BF90G50-..S4E08MA4	0.15	0.5	1	3	3.6	4850	5700	6800	6800	6800	610	42800	120000
7	2.2	3	6800	2.7	976.1	IE5	BF90G50-..S5E08LA4	0.15	0.5	1	3	3.6	6300	6800	6800	6800	6800	612	42800	120000
7	2.2	2.8	7300	2.5	1043	IE4	BF90G50-..S4E08MA4	0.14	0.47	0.95	2.8	3.4	5200	6100	7300	7300	7300	610	42800	120000
7	2.2	2.8	7300	2.5	1043	IE5	BF90G50-..S5E08LA4	0.14	0.47	0.95	2.8	3.4	6700	7300	7300	7300	7300	612	42800	120000
7	2.2	2.4	8400	2.2	1204	IE4	BF90G50-..S4E08MA4	0.12	0.41	0.8	2.4	2.9	6000	7100	8400	8400	8400	610	42800	120000
7	2.2	2.4	8400	2.2	1204	IE5	BF90G50-..S5E08LA4	0.12	0.41	0.8	2.4	2.9	7800	8400	8400	8400	8400	612	42800	120000
7	2.2	2	10100	1.8	1444	IE4	BF90G50-..S4E08MA4	0.1	0.34	0.65	2	2.4	7200	8500	10100	10100	10100	610	42800	120000
7	2.2	2	10100	1.8	1444	IE5	BF90G50-..S5E08LA4	0.1	0.34	0.65	2	2.4	9300	10100	10100	10100	10100	612	42800	120000
7	2.2	1.7	11700	1.6	1678	IE4	BF90G50-..S4E08MA4	0.085	0.29	0.55	1.7	2.1	8300	9900	11700	11700	11700	610	42800	120000
7	2.2	1.7	11700	1.6	1678	IE5	BF90G50-..S5E08LA4	0.085	0.29	0.55	1.7	2.1	10900	11700	11700	11700	11700	612	42800	120000
7	2.2	1.6	13000	1.4	1867	IE4	BF90G50-..S4E08MA4	0.08	0.26	0.5	1.6	1.9	9300	10000	13000	13000	13000	610	42800	120000
7	2.2	1.6	13000	1.4	1867	IE5	BF90G50-..S5E08LA4	0.08	0.26	0.5	1.6	1.9	12100	13000	13000	13000	13000	612	42800	120000
7	2.2	1.3	15000	1.2	2154	IE4	BF90G50-..S4E08MA4	0.065	0.23	0.46	1.3	1.6	10700	12700	15000	15000	15000	610	42800	120000
7	2.2	1.3	15000	1.2	2154	IE5	BF90G50-..S5E08LA4	0.065	0.23	0.46	1.3	1.6	14000	15000	15000	15000	15000	612	42800	120000
7	2.2	1.1	18500	1	2656	IE4	BF90G50-..S4E08MA4	0.055	0.18	0.37	1.1	1.3	13200	15600	18500	18500	18500	610	42800	120000
7	2.2	1	20500	0.9	2952	IE4	BF90G50-..S5E08LA4	0.05	0.16	0.33	1	1.2	14700	17400	20500	20500	20500	610	42800	120000
7	2.2	1	20500	0.9	2952	IE5	BF90G50-..S5E08LA4	0.05	0.16	0.33	1	1.2	19100	20500	20500	20500	20500	612	42800	120000
7	2.2	0.9	23000	0.8	3286	IE4	BF90G50-..S4E08MA4	0.045	0.15	0.3	0.9	1	16400	19300	23000	23000	23000	610	42800	120000
7	2.2	0.9	23000	0.8	3286	IE5	BF90G50-..S5E08LA4	0.045	0.15	0.3	0.9	1	21000	23000	23000	23000	23000	612	42800	120000

MN = 10 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
10	3.1	520	57	1.1	5.72	IE3	BF06-..SPE08LA4	26	87	174	520	620	37	45.5	57	57	57	17	1600	-
10	3.1	390	76	0.89	7.66	IE3	BF06-..SPE08LA4	19.5	65	130	390	465	49.5	61	76	76	76	17	1800	-
10	3.1	530	56	2.5	5.6	IE3	BF10-..SPE08LA4	26.5	89	178	530	640	36	44.5	56	56	56	28	1950	-
10	3.1	395	75	2	7.58	IE3	BF10-..SPE08LA4	19.5	65	131	395	470	49	60	75	75	75	28	2200	-
10	3.1	305	96	1.8	9.69	IE3	BF10-..SPE08LA4	15	51	103	305	370	62	77	96	96	96	28	2350	-
10	3.1	250	118	1.5	11.84	IE3	BF10-..SPE08LA4	12.5	42	84	250	300	76	94	118	118	118	28	2500	-
10	3.1	199	150	1.2	15.04	IE3	BF10-..SPE08LA4	9.9	33	66	199	235	97	120	150	150	150	28	2800	-
10	3.1	164	182	1.3	18.23	IE3	BF10-..SPE08LA4	8.2	27	54	164	197	118	145	182	182	182	28	2900	-
10	3.1	149	200	1.2	20.05	IE3	BF10-..SPE08LA4	7.4	24.5	49.5	149	179	130	160	200	200	200	28	3000	-
10	3.1	128	230	1	23.28	IE3	BF10-..SPE08LA4	6.4	21	42.5	128	154	151	186	230	230	230	28	3200	-
10	3.1	117	255	0.94	25.6	IE3	BF10-..SPE08LA4	5.8	19.5	39	117	140	166	200	255	255	255	28	3350	-
10	3.1	105	280	0.84	28.47	IE3	BF10-..SPE08LA4	5.2	17.5	35	105	126	185	225	280	280	280	28	3450	-
10	3.1	375	80	2.8	8	IE3	BF20-..SPE08LA4	18.5	62	125	375	450	52	64	80	80	80	35	2850	-
10	3.1	285	105	2.4	10.51	IE3	BF20-..SPE08LA4	14	47.5	95	285	340	68	84	105	105	105	35	3100	-
10	3.1	225	131	2.2	13.18	IE3	BF20-..SPE08LA4	11	37.5	75	225	270	85	105	131	131	131	35	3300	-
10	3.1	193	155	2	15.54	IE3	BF20-..SPE08LA4	9.6	32	64	193	230	101	124	155	155	155	35	3450	-
10	3.1	178	167	2.1	16.77	IE3	BF20-..SPE08LA4	8.9	29.5	59	178	210	109	134	167	167	167	35	3500	-
10	3.1	162	184	2	18.45	IE3	BF20-..SPE08LA4	8.1	27	54	162	195	119	147	184	184	184	35	3600	-
10	3.1	136	220	1.8	22.04	IE3	BF20-..SPE08LA4	6.8	22.5	45	136	163	143	176	220	220	220	35	3800	-
10	3.1	123	240	1.6	24.25	IE3	BF20-..SPE08LA4	6.1	20.5	41	123	148	157	194	240	240	240	35	3950	-
10	3.1	108	275	1.5	27.62	IE3	BF20-..SPE08LA4	5.4	18	36	108	130	179	220	275	275	275	35	4150	-
10	3.1	98	300	1.4	30.4	IE3	BF20-..SPE08LA4	4.9	16	3										

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
10	3.1	44.5	670	0.85	67.28	IE3	BF30-../SPE08LA4	2.2	7.4	14.5	44.5	53	435	530	670	670	670	45	5500	-
10	3.1	111	265	2.9	26.86	IE3	BF40-../SPE08LA4	5.5	18.5	37	111	134	174	210	265	265	265	54	5600	-
10	3.1	101	295	2.7	29.55	IE3	BF40-../SPE08LA4	5	16.5	33.5	101	121	192	235	295	295	295	54	5800	-
10	3.1	87	340	2.5	34.21	IE3	BF40-../SPE08LA4	4.3	14.5	29	87	105	220	270	340	340	340	54	6000	-
10	3.1	79	375	2.4	37.64	IE3	BF40-../SPE08LA4	3.9	13	26.5	79	95	240	300	375	375	375	54	6200	-
10	3.1	72	410	2.2	41.42	IE3	BF40-../SPE08LA4	3.6	12	24	72	86	265	330	410	410	410	54	6500	-
10	3.1	65	455	2	45.56	IE3	BF40-../SPE08LA4	3.2	10.5	21.5	65	79	295	360	455	455	455	54	6800	-
10	3.1	61	485	1.8	48.92	IE3	BF40-../SPE08LA4	3	10	20	61	73	315	390	485	485	485	54	7000	-
10	3.1	55	530	1.7	53.82	IE3	BF40-../SPE08LA4	2.7	9.2	18.5	55	66	345	430	530	530	530	54	7200	-
10	3.1	48.5	610	1.5	61.25	IE3	BF40-../SPE08LA4	2.4	8.1	16	48.5	58	395	490	610	610	610	54	7600	-
10	3.1	44.5	670	1.3	67.38	IE3	BF40-../SPE08LA4	2.2	7.4	14.5	44.5	53	435	530	670	670	670	54	8000	-
10	3.1	42	710	1.3	71.4	IE3	BF40-../SPE08LA4	2.1	7	14	42	50	460	570	710	710	710	54	8100	-
10	3.1	38	780	1.1	78.55	IE3	BF40-../SPE08LA4	1.9	6.3	12.5	38	45.5	510	620	780	780	780	54	8500	-
10	3.1	35.5	830	1.1	83.91	IE3	BF40-../SPE08LA4	1.7	5.9	11.5	35.5	42.5	540	670	830	830	830	54	8700	-
10	3.1	32	920	0.97	92.31	IE3	BF40-../SPE08LA4	1.6	5.4	10.5	32	38.5	600	730	920	920	920	54	9100	-
10	3.1	29.5	1010	0.89	101	IE3	BF40-../SPE08LA4	1.4	4.9	9.9	29.5	35.5	650	800	1010	1010	1010	54	9400	-
10	3.1	27	1110	0.81	111.1	IE3	BF40-../SPE08LA4	1.3	4.5	9	27	32	720	880	1110	1110	1110	54	9800	-
10	3.1	63	470	2.8	47.14	IE3	BF50-../SPE08LA4	3.1	10.5	21	63	76	305	375	470	470	470	83	8900	-
10	3.1	52	560	2.3	56.86	IE3	BF50-../SPE08LA4	2.6	8.7	17.5	52	63	365	450	560	560	560	83	9300	-
10	3.1	47	630	2	63.59	IE3	BF50-../SPE08LA4	2.3	7.8	15.5	47	56	410	500	630	630	630	83	9800	-
10	3.1	41	720	1.8	72.72	IE3	BF50-../SPE08LA4	2	6.8	13.5	41	49.5	470	580	720	720	720	83	10700	-
10	3.1	36.5	810	1.6	81.33	IE3	BF50-../SPE08LA4	1.8	6.1	12	36.5	44	520	650	810	810	810	83	11300	-
10	3.1	33	900	1.4	90.24	IE3	BF50-../SPE08LA4	1.6	5.5	11	33	39.5	580	720	900	900	900	83	11800	-
10	3.1	29.5	1000	1.3	100.9	IE3	BF50-../SPE08LA4	1.4	4.9	9.9	29.5	35.5	650	800	1000	1000	1000	83	12300	-
10	3.1	26	1140	1.1	114	IE3	BF50-../SPE08LA4	1.3	4.3	8.7	26	31.5	740	910	1140	1140	1140	83	12900	-
10	3.1	23.5	1270	1	127.5	IE3	BF50-../SPE08LA4	1.1	3.9	7.8	23.5	28	820	1020	1270	1270	1270	83	13600	-
10	3.1	21.5	1380	0.94	138.1	IE3	BF50Z-../SPE08LA4	1	3.6	7.2	21.5	26	890	1100	1380	1380	1380	83	13600	-
10	3.1	19	1540	0.84	154.5	IE3	BF50Z-../SPE08LA4	0.95	3.2	6.4	19	23	1000	1230	1540	1540	1540	88	13600	-
10	3.1	21	1400	1.6	140.8	IE3	BF60Z-../SPE08LA4	1	3.5	7.1	21	25.5	910	1120	1400	1400	1400	131	15300	43300
10	3.1	17.5	1690	1.4	169.2	IE3	BF60Z-../SPE08LA4	0.85	2.9	5.9	17.5	21	1090	1350	1690	1690	1690	131	15300	43300
10	3.1	15.5	1870	1.2	187.7	IE3	BF60Z-../SPE08LA4	0.75	2.6	5.3	15.5	19	1220	1500	1870	1870	1870	131	15300	43300
10	3.1	13.5	2200	1	221.4	IE3	BF60Z-../SPE08LA4	0.65	2.2	4.5	13.5	16	1430	1770	2200	2200	2200	131	15300	43300
10	3.1	12	2450	0.94	245.6	IE3	BF60Z-../SPE08LA4	0.6	2	4	12	14.5	1590	1960	2450	2450	2450	131	15300	43300
10	3.1	16.5	1790	2.9	179.7	IE3	BF70Z-../SPE08LA4	0.8	2.7	5.5	16.5	20	1160	1430	1790	1790	1790	220	16100	47700
10	3.1	15	1990	2.6	199.7	IE3	BF70Z-../SPE08LA4	0.75	2.5	5	15	18	1290	1590	1990	1990	1990	220	16100	47700
10	3.1	12.5	2300	2.2	233	IE3	BF70Z-../SPE08LA4	0.6	2.1	4.2	12.5	15	1510	1860	2300	2300	2300	220	16100	47700
10	3.1	11.5	2550	2	258.7	IE3	BF70Z-../SPE08LA4	0.55	1.9	3.8	11.5	13.5	1680	2050	2550	2550	2550	220	16100	47700
10	3.1	9.9	3000	1.7	301.8	IE3	BF70Z-../SPE08LA4	0.49	1.6	3.3	9.9	11.5	1960	2400	3000	3000	3000	220	16100	47700
10	3.1	8.7	3400	1.5	341.7	IE3	BF70Z-../SPE08LA4	0.43	1.4	2.9	8.7	10.5	2200	2700	3400	3400	3400	220	16100	47700
10	3.1	7.5	3950	1.3	398.7	IE3	BF70Z-../SPE08LA4	0.37	1.2	2.5	7.5	9	2550	3150	3950	3950	3950	220	16100	47700
10	3.1	6.8	4350	1.2	439.2	IE3	BF70Z-../SPE08LA4	0.34	1.1	2.2	6.8	8.1	2850	3500	4350	4350	4350	220	16100	47700
10	3.1	5.8	5100	1	512.4	IE3	BF70Z-../SPE08LA4	0.29	0.95	1.9	5.8	7	3300	4050	5100	5100	5100	220	16100	47700
10	3.1	5.7	5200	1.1	524.1	IE3	BF70G20-../SPE08LA4	0.28	0.95	1.9	5.7	6.8	3400	4150	5200	5200	5200	217	16100	47700
10	3.1	5.1	5700	0.99	577.5	IE3	BF70G20-../SPE08LA4	0.25	0.85	1.7	5.1	6.2	3750	4600	5700	5700	5700	217	16100	47700
10	3.1	4.4	6700	0.85	673.6	IE3	BF70G20-../SPE08LA4	0.22	0.7	1.4	4.4	5.3	4350	5300	6700	6700	6700	217	16100	47700
10	3.1	8.6	3450	3	347.3	IE3	BF80Z-../SPE08LA4	0.43	1.4	2.8	8.6	10	2250	2750	3450	3450	3450	336	39600	75000
10	3.1	7.6	3900	2.7	394.2	IE3	BF80Z-../SPE08LA4	0.38	1.2	2.5	7.6	9.1	2550	3150	3900	3900	3900	336	39600	75000
10	3.1	6.6	4500	2.3	450.4	IE3	BF80Z-../SPE08LA4	0.33	1.1	2.2	6.6	7.9	2900	3600	4500	4500	4500	336	39600	75000
10	3.1	5.8	5100	2.1	511.2	IE3	BF80Z-../SPE08LA4	0.29	0.95	1.9	5.8	7	3300	4050	5100	5100	5100	336	39600	75000
10	3.1	5.1	5800	1.8	583.4	IE3	BF80Z-../SPE08LA4	0.25	0.85	1.7	5.1	6.1	3750	4650	5800	5800	5800	336	39600	75000
10	3.1	4.5	6600	1.6	662.1	IE3	BF80Z-../SPE08LA4	0.22	0.75	1.5	4.5	5.4	4300	5200	6600	6600	6600	336	39600	75000
10	3.1	3.8	7700	1.4	770.6	IE3	BF80Z-../SPE08LA4	0.19	0.6	1.2	3.8	4.6	5000	6100	7700	7700	7700	336	39600	75000
10	3.1	3.4	8700	1.2	874.6	IE3	BF80Z-../SPE08LA4	0.17	0.55	1.1	3.4	4.1	5600	6900	8700	8700	8700	336		

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 13 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
13	4	250	153	1.2	11.84	IE4	BF10-..S4E09SA4	12.5	42	84	250	300	100	118	153	153	153	32	2500	-
13	4	199	195	0.94	15.04	IE4	BF10-..S4E09SA4	9.9	33	66	199	235	127	150	195	195	195	32	2800	-
13	4	164	235	1	18.23	IE4	BF10-..S4E09SA4	8.2	27	54	164	197	154	182	235	235	235	32	2900	-
13	4	149	260	0.92	20.05	IE4	BF10-..S4E09SA4	7.4	24.5	49.5	149	179	170	200	260	260	260	32	3000	-
13	4	495	78	2.5	6.04	IE4	BF20-..S4E09SA4	24.5	82	165	495	590	51	60	78	78	78	38	2550	-
13	4	375	104	2.1	8	IE4	BF20-..S4E09SA4	18.5	62	125	375	450	68	80	104	104	104	38	2850	-
13	4	285	136	1.9	10.51	IE4	BF20-..S4E09SA4	14	47.5	95	285	340	89	105	136	136	136	38	3100	-
13	4	225	171	1.7	13.18	IE4	BF20-..S4E09SA4	11	37.5	75	225	270	112	131	171	171	171	38	3300	-
13	4	193	200	1.5	15.54	IE4	BF20-..S4E09SA4	9.6	32	64	193	230	132	155	200	200	200	38	3450	-
13	4	178	215	1.7	16.77	IE4	BF20-..S4E09SA4	8.9	29.5	59	178	210	142	167	215	215	215	38	3500	-
13	4	162	235	1.5	18.45	IE4	BF20-..S4E09SA4	8.1	27	54	162	195	156	184	235	235	235	38	3600	-
13	4	136	285	1.4	22.04	IE4	BF20-..S4E09SA4	6.8	22.5	45	136	163	187	220	285	285	285	38	3800	-
13	4	123	315	1.3	24.25	IE4	BF20-..S4E09SA4	6.1	20.5	41	123	148	205	240	315	315	315	38	3950	-
13	4	108	355	1.2	27.62	IE4	BF20-..S4E09SA4	5.4	18	36	108	130	230	275	355	355	355	38	4150	-
13	4	98	395	1.1	30.4	IE4	BF20-..S4E09SA4	4.9	16	32.5	98	118	255	300	395	395	395	38	4400	-
13	4	92	420	0.99	32.58	IE4	BF20-..S4E09SA4	4.6	15	30.5	92	110	275	325	420	420	420	38	4450	-
13	4	83	465	0.9	35.85	IE4	BF20-..S4E09SA4	4.1	13.5	27.5	83	100	300	355	465	465	465	38	4650	-
13	4	370	104	2.7	8.07	IE4	BF30-..S4E09SA4	18.5	61	123	370	445	68	80	104	104	104	49	2650	-
13	4	300	129	2.5	9.99	IE4	BF30-..S4E09SA4	15	50	100	300	360	84	99	129	129	129	49	2850	-
13	4	230	167	2.2	12.91	IE4	BF30-..S4E09SA4	11.5	38.5	77	230	275	109	129	167	167	167	49	3050	-
13	4	187	205	1.9	16	IE4	BF30-..S4E09SA4	9.3	31	62	187	225	136	160	205	205	205	49	3250	-
13	4	169	225	2.1	17.65	IE4	BF30-..S4E09SA4	8.4	28	56	169	200	150	176	225	225	225	49	3300	-
13	4	154	250	2	19.41	IE4	BF30-..S4E09SA4	7.7	25.5	51	154	185	164	194	250	250	250	49	3400	-
13	4	137	280	1.8	21.85	IE4	BF30-..S4E09SA4	6.8	22.5	45.5	137	164	185	215	280	280	280	49	3500	-
13	4	124	310	1.8	24.03	IE4	BF30-..S4E09SA4	6.2	20.5	41.5	124	149	200	240	310	310	310	49	3600	-
13	4	106	365	1.6	28.23	IE4	BF30-..S4E09SA4	5.3	17.5	35	106	127	235	280	365	365	365	49	3800	-
13	4	96	400	1.4	31.05	IE4	BF30-..S4E09SA4	4.8	16	32	96	115	260	310	400	400	400	49	4000	-
13	4	85	455	1.3	35	IE4	BF30-..S4E09SA4	4.2	14	28.5	85	102	295	350	455	455	455	49	4200	-
13	4	77	500	1.1	38.49	IE4	BF30-..S4E09SA4	3.8	12.5	25.5	77	93	325	380	500	500	500	49	4400	-
13	4	73	530	1.1	41.01	IE4	BF30-..S4E09SA4	3.6	12	24	73	87	345	410	530	530	530	49	4500	-
13	4	66	580	0.97	45.1	IE4	BF30-..S4E09SA4	3.3	11	22	66	79	380	450	580	580	580	49	4700	-
13	4	57	670	0.84	52.2	IE4	BF30-..S4E09SA4	2.8	9.5	19	57	68	440	520	670	670	670	49	5000	-
13	4	250	153	3	11.79	IE4	BF40-..S4E09SA4	12.5	42	84	250	305	100	117	153	153	153	58	4450	-
13	4	199	195	2.7	15.02	IE4	BF40-..S4E09SA4	9.9	33	66	199	235	127	150	195	195	195	58	4800	-
13	4	172	225	2.8	17.35	IE4	BF40-..S4E09SA4	8.6	28.5	57	172	205	147	173	225	225	225	58	4950	-
13	4	157	245	2.7	19.09	IE4	BF40-..S4E09SA4	7.8	26	52	157	188	162	190	245	245	245	58	5100	-
13	4	138	280	2.5	21.6	IE4	BF40-..S4E09SA4	6.9	23	46	138	166	183	215	280	280	280	58	5200	-
13	4	126	305	2.4	23.77	IE4	BF40-..S4E09SA4	6.3	21	42	126	151	200	235	305	305	305	58	5400	-
13	4	111	345	2.2	26.86	IE4	BF40-..S4E09SA4	5.5	18.5	37	111	134	225	265	345	345	345	58	5600	-
13	4	101	380	2.1	29.55	IE4	BF40-..S4E09SA4	5	16.5	33.5	101	121	250	295	380	380	380	58	5800	-
13	4	87	440	1.9	34.21	IE4	BF40-..S4E09SA4	4.3	14.5	29	87	105	290	340	440	440	440	58	6000	-
13	4	79	485	1.8	37.64	IE4	BF40-..S4E09SA4	3.9	13	26.5	79	95	315	375	485	485	485	58	6200	-
13	4	72	530	1.7	41.42	IE4	BF40-..S4E09SA4	3.6	12	24	72	86	350	410	530	530	530	58	6500	-
13	4	65	590	1.5	45.56	IE4	BF40-..S4E09SA4	3.2	10.5	21.5	65	79	385	455	590	590	590	58	6800	-
13	4	61	630	1.4	48.92	IE4	BF40-..S4E09SA4	3	10	20	61	73	415	485	630	630	630	58	7000	-
13	4	55	690	1.3	53.82	IE4	BF40-..S4E09SA4	2.7	9.2	18.5	55	66	455	530	690	690	690	58	7200	-
13	4	48.5	790	1.1	61.25	IE4	BF40-..S4E09SA4	2.4	8.1	16	48.5	58	520	610	790	790	790	58	7600	-
13	4	44.5	870	1	67.38	IE4	BF40-..S4E09SA4	2.2	7.4	14.5	44.5	53	570	670	870	870	870	58	8000	-
13	4	42	920	0.97	71.4	IE4	BF40-..S4E09SA4	2.1	7	14	42	50	600	710	920	920	920	58	8100	-
13	4	38	1020	0.88	78.55	IE4	BF40-..S4E09SA4	1.9	6.3	12.5	38	45.5	660	780	1020	1020	1020	58	8500	-
13	4	35.5	1090	0.83	83.91	IE4	BF40-..S4E09SA4	1.7	5.9	11.5	35.5	42.5	710	830	1090	1090	1090	58	8700	-
13	4	84	460	2.8	35.49	IE4	BF50-..S4E09SA4	4.2	14	28	84	101	300	350	460	460	460	86	7800	-
13	4	71	540	2.4	42.15	IE4	BF50-..S4E09SA4	3.5	11.5	23.5	71	85	355	420	540	540	540	86	8500	-
13	4	63	610	2.1	47.14	IE4	BF50-..S4E09SA4	3.1	10.5	21	63	76	400	470	610	610	610	86	8900	-
13	4	52	730	1.8	56.86	IE4	BF50-..S4E09SA4	2.6	8.7	17.5	52	63	480	560	730	730	730	86	9300	-
13	4	47	820	1.6	63.59	IE4	BF50-..S4E09SA4	2.3	7.8	15.5	47	56	540	630	820	820	820	86	9800	-
13	4	41	940	1																

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 13 Nm (PN = 4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
13	4	12.5	3000	1.7	233	IE4	BF70Z-..S4E09SA4	0.6	2.1	4.2	12.5	15	1980	2300	3000	3000	3000	223	16100	47700
13	4	11.5	3350	1.5	258.7	IE4	BF70Z-..S4E09SA4	0.55	1.9	3.8	11.5	13.5	2150	2550	3350	3350	3350	223	16100	47700
13	4	9.9	3900	1.3	301.8	IE4	BF70Z-..S4E09SA4	0.49	1.6	3.3	9.9	11.5	2550	3000	3900	3900	3900	223	16100	47700
13	4	8.7	4400	1.2	341.7	IE4	BF70Z-..S4E09SA4	0.43	1.4	2.9	8.7	10.5	2900	3400	4400	4400	4400	223	16100	47700
13	4	7.5	5100	1	398.7	IE4	BF70Z-..S4E09SA4	0.37	1.2	2.5	7.5	9	3350	3950	5100	5100	5100	223	16100	47700
13	4	6.8	5700	0.91	439.2	IE4	BF70Z-..S4E09SA4	0.34	1.1	2.2	6.8	8.1	3700	4350	5700	5700	5700	223	16100	47700
13	4	5.7	6800	0.84	524.1	IE4	BF70G20-..S4E09SA4	0.28	0.95	1.9	5.7	6.8	4450	5200	6800	6800	6800	221	16100	47700
13	4	11	3450	2.7	269.1	IE4	BF80-..S4E09SA4	0.55	1.8	3.7	11	13	2250	2650	3450	3450	3450	299	39600	75000
13	4	10	3750	2.8	291.7	IE4	BF80Z-..S4E09SA4	0.5	1.7	3.4	10	12	2450	2900	3750	3750	3750	340	39600	75000
13	4	8.6	4500	2.3	347.3	IE4	BF80Z-..S4E09SA4	0.43	1.4	2.8	8.6	10	2950	3450	4500	4500	4500	340	39600	75000
13	4	7.6	5100	2	394.2	IE4	BF80Z-..S4E09SA4	0.38	1.2	2.5	7.6	9.1	3350	3900	5100	5100	5100	340	39600	75000
13	4	6.6	5800	1.8	450.4	IE4	BF80Z-..S4E09SA4	0.33	1.1	2.2	6.6	7.9	3800	4500	5800	5800	5800	340	39600	75000
13	4	5.8	6600	1.6	511.2	IE4	BF80Z-..S4E09SA4	0.29	0.95	1.9	5.8	7	4300	5100	6600	6600	6600	340	39600	75000
13	4	5.1	7500	1.4	583.4	IE4	BF80Z-..S4E09SA4	0.25	0.85	1.7	5.1	6.1	4950	5800	7500	7500	7500	340	39600	75000
13	4	4.5	8600	1.2	662.1	IE4	BF80Z-..S4E09SA4	0.22	0.75	1.5	4.5	5.4	5600	6600	8600	8600	8600	340	39600	75000
13	4	3.8	10000	1	770.6	IE4	BF80Z-..S4E09SA4	0.19	0.6	1.2	3.8	4.6	6500	7700	10000	10000	10000	340	39600	75000
13	4	3.4	11300	0.92	874.6	IE4	BF80Z-..S4E09SA4	0.17	0.55	1.1	3.4	4.1	7400	8700	11300	11300	11300	340	39600	75000
13	4	3	12800	0.82	990.4	IE4	BF80Z-..S4E09SA4	0.15	0.5	1	3	3.6	8400	9900	12800	12800	12800	340	39600	75000
13	4	5.8	6600	2.8	508.5	IE4	BF90Z-..S4E09SA4	0.29	0.95	1.9	5.8	7	4300	5000	6600	6600	6600	604	42800	120000
13	4	5	7600	2.4	591.1	IE4	BF90Z-..S4E09SA4	0.25	0.8	1.6	5	6	5000	5900	7600	7600	7600	604	42800	120000
13	4	4.5	8500	2.2	658.1	IE4	BF90Z-..S4E09SA4	0.22	0.75	1.5	4.5	5.4	5500	6500	8500	8500	8500	604	42800	120000
13	4	3.9	9800	1.9	759	IE4	BF90Z-..S4E09SA4	0.19	0.65	1.3	3.9	4.7	6400	7500	9800	9800	9800	604	42800	120000
13	4	3.5	10900	1.7	845.1	IE4	BF90Z-..S4E09SA4	0.17	0.55	1.1	3.5	4.2	7100	8400	10900	10900	10900	604	42800	120000
13	4	3	12600	1.5	976.1	IE4	BF90G50-..S4E09SA4	0.15	0.5	1	3	3.6	8200	9700	12600	12600	12600	616	42800	120000
13	4	2.8	13500	1.4	1043	IE4	BF90G50-..S4E09SA4	0.14	0.47	0.95	2.8	3.4	8800	10400	13500	13500	13500	616	42800	120000
13	4	2.4	15600	1.2	1204	IE4	BF90G50-..S4E09SA4	0.12	0.41	0.8	2.4	2.9	10200	12000	15600	15600	15600	616	42800	120000
13	4	2	18700	0.99	1444	IE4	BF90G50-..S4E09SA4	0.1	0.34	0.65	2	2.4	12200	14400	18700	18700	18700	616	42800	120000
13	4	1.7	21500	0.85	1678	IE4	BF90G50-..S4E09SA4	0.085	0.29	0.55	1.7	2.1	14200	16700	21500	21500	21500	616	42800	120000


MN = 17.5 Nm (PN = 5.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
17.5	5.5	530	98	1.4	5.6	IE5	BF10-..S5E09XA4	26.5	89	178	530	640	72	89	98	98	98	40	1950	-
17.5	5.5	395	132	1.2	7.58	IE5	BF10-..S5E09XA4	19.5	65	131	395	470	98	121	132	132	132	40	2200	-
17.5	5.5	305	169	1	9.69	IE5	BF10-..S5E09XA4	15	51	103	305	370	125	155	169	169	169	40	2350	-
17.5	5.5	250	205	0.88	11.84	IE5	BF10-..S5E09XA4	12.5	42	84	250	300	153	189	205	205	205	40	2500	-
17.5	5.5	495	105	1.9	6.04	IE5	BF20-..S5E09XA4	24.5	82	165	495	590	78	96	105	105	105	46	2550	-
17.5	5.5	375	140	1.6	8	IE5	BF20-..S5E09XA4	18.5	62	125	375	450	104	128	140	140	140	46	2850	-
17.5	5.5	285	183	1.4	10.51	IE5	BF20-..S5E09XA4	14	47.5	95	285	340	136	168	183	183	183	46	3100	-
17.5	5.5	225	230	1.2	13.18	IE5	BF20-..S5E09XA4	11	37.5	75	225	270	171	210	230	230	230	46	3300	-
17.5	5.5	193	270	1.1	15.54	IE5	BF20-..S5E09XA4	9.6	32	64	193	230	200	245	270	270	270	46	3450	-
17.5	5.5	178	290	1.2	16.77	IE5	BF20-..S5E09XA4	8.9	29.5	59	178	210	215	265	290	290	290	46	3500	-
17.5	5.5	162	320	1.1	18.45	IE5	BF20-..S5E09XA4	8.1	27	54	162	195	235	295	320	320	320	46	3600	-
17.5	5.5	136	385	1	22.04	IE5	BF20-..S5E09XA4	6.8	22.5	45	136	163	285	350	385	385	385	46	3800	-
17.5	5.5	123	420	0.94	24.25	IE5	BF20-..S5E09XA4	6.1	20.5	41	123	148	315	385	420	420	420	46	3950	-
17.5	5.5	108	480	0.87	27.62	IE5	BF20-..S5E09XA4	5.4	18	36	108	130	355	440	480	480	480	46	4150	-
17.5	5.5	470	110	2.4	6.34	IE4	BF30-..S4E11SA6	23.5	78	157	470	560	110	110	110	110	110	66	2400	-
17.5	5.5	470	110	2.4	6.34	IE5	BF30-..S5E09XA4	23.5	78	157	470	560	82	101	110	110	110	57	2400	-
17.5	5.5	370	141	2	8.07	IE4	BF30-..S4E11SA6	18.5	61	123	370	445	141	141	141	141	141	66	2650	-
17.5	5.5	370	141	2	8.07	IE5	BF30-..S													

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$




MN = 17.5 Nm (PN = 5.5 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [>1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
17.5	5.5	77	670	0.85	38.49	IE5	BF30.../S5E09XA4	3.8	12.5	25.5	77	93	500	610	670	670	670	57	4400	-
17.5	5.5	390	133	2.7	7.62	IE4	BF40.../S4E11SA6	19.5	65	131	390	470	133	133	133	133	133	80	3900	-
17.5	5.5	390	133	2.7	7.62	IE5	BF40.../S5E09XA4	19.5	65	131	390	470	99	121	133	133	133	66	3900	-
17.5	5.5	315	165	2.5	9.48	IE4	BF40.../S4E11SA6	15.5	52	105	315	375	165	165	165	165	165	80	4150	-
17.5	5.5	315	165	2.5	9.48	IE5	BF40.../S5E09XA4	15.5	52	105	315	375	123	151	165	165	165	66	4150	-
17.5	5.5	250	205	2.3	11.79	IE4	BF40.../S4E11SA6	12.5	42	84	250	305	205	205	205	205	205	80	4450	-
17.5	5.5	250	205	2.3	11.79	IE5	BF40.../S5E09XA4	12.5	42	84	250	305	153	188	205	205	205	66	4450	-
17.5	5.5	199	260	2	15.02	IE4	BF40.../S4E11SA6	9.9	33	66	199	235	260	260	260	260	260	80	4800	-
17.5	5.5	199	260	2	15.02	IE5	BF40.../S5E09XA4	9.9	33	66	199	235	195	240	260	260	260	66	4800	-
17.5	5.5	172	300	2.1	17.35	IE4	BF40.../S4E11SA6	8.6	28.5	57	172	205	300	300	300	300	300	80	4950	-
17.5	5.5	172	300	2.1	17.35	IE5	BF40.../S5E09XA4	8.6	28.5	57	172	205	225	275	300	300	300	66	4950	-
17.5	5.5	157	330	2	19.09	IE4	BF40.../S4E11SA6	7.8	26	52	157	188	330	330	330	330	330	80	5100	-
17.5	5.5	157	330	2	19.09	IE5	BF40.../S5E09XA4	7.8	26	52	157	188	245	305	330	330	330	66	5100	-
17.5	5.5	138	375	1.9	21.6	IE4	BF40.../S4E11SA6	6.9	23	46	138	166	375	375	375	375	375	80	5200	-
17.5	5.5	138	375	1.9	21.6	IE5	BF40.../S5E09XA4	6.9	23	46	138	166	280	345	375	375	375	66	5200	-
17.5	5.5	126	415	1.8	23.77	IE4	BF40.../S4E11SA6	6.3	21	42	126	151	415	415	415	415	415	80	5400	-
17.5	5.5	126	415	1.8	23.77	IE5	BF40.../S5E09XA4	6.3	21	42	126	151	305	380	415	415	415	66	5400	-
17.5	5.5	111	470	1.6	26.86	IE4	BF40.../S4E11SA6	5.5	18.5	37	111	134	470	470	470	470	470	80	5600	-
17.5	5.5	111	470	1.6	26.86	IE5	BF40.../S5E09XA4	5.5	18.5	37	111	134	345	425	470	470	470	66	5600	-
17.5	5.5	101	510	1.5	29.55	IE4	BF40.../S4E11SA6	5	16.5	33.5	101	121	510	510	510	510	510	80	5800	-
17.5	5.5	101	510	1.5	29.55	IE5	BF40.../S5E09XA4	5	16.5	33.5	101	121	380	470	510	510	510	66	5800	-
17.5	5.5	87	590	1.4	34.21	IE4	BF40.../S4E11SA6	4.3	14.5	29	87	105	590	590	590	590	590	80	6000	-
17.5	5.5	87	590	1.4	34.21	IE5	BF40.../S5E09XA4	4.3	14.5	29	87	105	440	540	590	590	590	66	6000	-
17.5	5.5	79	650	1.4	37.64	IE4	BF40.../S4E11SA6	3.9	13	26.5	79	95	650	650	650	650	650	80	6200	-
17.5	5.5	79	650	1.4	37.64	IE5	BF40.../S5E09XA4	3.9	13	26.5	79	95	485	600	650	650	650	66	6200	-
17.5	5.5	72	720	1.2	41.42	IE4	BF40.../S4E11SA6	3.6	12	24	72	86	720	720	720	720	720	80	6500	-
17.5	5.5	72	720	1.2	41.42	IE5	BF40.../S5E09XA4	3.6	12	24	72	86	530	660	720	720	720	66	6500	-
17.5	5.5	65	790	1.1	45.56	IE4	BF40.../S4E11SA6	3.2	10.5	21.5	65	79	790	790	790	790	790	80	6800	-
17.5	5.5	65	790	1.1	45.56	IE5	BF40.../S5E09XA4	3.2	10.5	21.5	65	79	590	720	790	790	790	66	6800	-
17.5	5.5	61	850	1.1	48.92	IE4	BF40.../S4E11SA6	3	10	20	61	73	850	850	850	850	850	80	7000	-
17.5	5.5	61	850	1.1	48.92	IE5	BF40.../S5E09XA4	3	10	20	61	73	630	780	850	850	850	66	7000	-
17.5	5.5	55	940	0.96	53.82	IE4	BF40.../S4E11SA6	2.7	9.2	18.5	55	66	940	940	940	940	940	80	7200	-
17.5	5.5	55	940	0.96	53.82	IE5	BF40.../S5E09XA4	2.7	9.2	18.5	55	66	690	860	940	940	940	66	7200	-
17.5	5.5	48.5	1070	0.84	61.25	IE5	BF40.../S5E09XA4	2.4	8.1	16	48.5	58	790	980	1070	1070	1070	66	7600	-
17.5	5.5	129	400	2.7	23.14	IE4	BF50.../S4E11SA6	6.4	21.5	43	129	155	400	400	400	400	400	110	6800	-
17.5	5.5	129	400	2.7	23.14	IE5	BF50.../S5E09XA4	6.4	21.5	43	129	155	300	370	400	400	400	94	6800	-
17.5	5.5	115	450	2.6	25.88	IE4	BF50.../S4E11SA6	5.7	19	38.5	115	139	450	450	450	450	450	110	7100	-
17.5	5.5	115	450	2.6	25.88	IE5	BF50.../S5E09XA4	5.7	19	38.5	115	139	335	410	450	450	450	94	7100	-
17.5	5.5	94	550	2.3	31.73	IE4	BF50.../S4E11SA6	4.7	15.5	31.5	94	113	550	550	550	550	550	110	7500	-
17.5	5.5	94	550	2.3	31.73	IE5	BF50.../S5E09XA4	4.7	15.5	31.5	94	113	410	500	550	550	550	94	7500	-
17.5	5.5	84	620	2.1	35.49	IE4	BF50.../S4E11SA6	4.2	14	28	84	101	620	620	620	620	620	110	7800	-
17.5	5.5	84	620	2.1	35.49	IE5	BF50.../S5E09XA4	4.2	14	28	84	101	460	560	620	620	620	94	7800	-
17.5	5.5	71	730	1.8	42.15	IE4	BF50.../S4E11SA6	3.5	11.5	23.5	71	85	730	730	730	730	730	110	8500	-
17.5	5.5	71	730	1.8	42.15	IE5	BF50.../S5E09XA4	3.5	11.5	23.5	71	85	540	670	730	730	730	94	8500	-
17.5	5.5	63	820	1.6	47.14	IE4	BF50.../S4E11SA6	3.1	10.5	21	63	76	820	820	820	820	820	110	8900	-
17.5	5.5	63	820	1.6	47.14	IE5	BF50.../S5E09XA4	3.1	10.5	21	63	76	610	750	820	820	820	94	8900	-
17.5	5.5	52	990	1.3	56.86	IE4	BF50.../S4E11SA6	2.6	8.7	17.5	52	63	990	990	990	990	990	110	9300	-
17.5	5.5	52	990	1.3	56.86	IE5	BF50.../S5E09XA4	2.6	8.7	17.5	52	63	730	900	990	990	990	94	9300	-
17.5	5.5	47	1110	1.2	63.59	IE4	BF50.../S4E11SA6	2.3	7.8	15.5	47	56	1110	1110	1110	1110	1110	110	9800	-
17.5	5.5	47	1110	1.2	63.59	IE5	BF50.../S5E09XA4	2.3	7.8	15.5	47	56	820	1010	1110	1110	1110	94	9800	-
17.5	5.5	41	1270	1	72.72	IE4	BF50.../S4E11SA6	2	6.8	13.5	41	49.5	1270	1270	1270	1270	1270	110	10700	-
17.5	5.5	41	1270	1	72.72	IE5	BF50.../S5E09XA4	2	6.8	13.5	41	49.5	940	1160	1270	1270	1270	94	10700	-
17.5	5.5	36.5	1420	0.91	81.33	IE4	BF50.../S4E11SA6	1.8	6.1	12	36.5	44	1420	1420	1420	1420	1420	110	11300	-
17.5	5.5	36.5	1420	0.91	81.33	IE5	BF50.../S5E09XA4	1.8	6.1	12	36.5	44	1050	1300	1420	1420	1420	94	11300	-
17.5	5.5	33	1570	0.82	90.24	IE4	BF50.../S4E11SA6	1.6	5.5	11	33									

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 17.5 Nm (PN = 5.5 kW)




Mn	Pn	n2	M2	fB	i	IE-Classe	Type	Speed range n2 [1/min]					Torque range M2 [Nm]					m	Fm	Frn	FrV
								at motor speed n1 [1/min]					at motor speed n1 [1/min]								
[Nm]	[kW]	[1/min]	[Nm]	[--]	[:1]			150	500	1000	3000	3600	150	500	1000	3000	3600	[kg]	[N]	[N]	
17.5	5.5	28.5	1840	2.8	105.2	IE4	BF70.../S4E11SA6	1.4	4.7	9.5	28.5	34	1840	1840	1840	1840	1840	220	14700	45100	
17.5	5.5	28.5	1840	2.8	105.2	IE5	BF70.../S5E09XA4	1.4	4.7	9.5	28.5	34	1360	1680	1840	1840	1840	210	14700	45100	
17.5	5.5	24	2100	2.4	122.7	IE4	BF70.../S4E11SA6	1.2	4	8.1	24	29	2100	2100	2100	2100	2100	220	16100	47700	
17.5	5.5	24	2100	2.4	122.7	IE5	BF70.../S5E09XA4	1.2	4	8.1	24	29	1590	1960	2100	2100	2100	210	16100	47700	
17.5	5.5	22.5	2300	2.2	133	IE4	BF70Z.../S4E11SA6	1.1	3.7	7.5	22.5	27	2300	2300	2300	2300	2300	247	16100	47700	
17.5	5.5	22.5	2300	2.2	133	IE5	BF70Z.../S5E09XA4	1.1	3.7	7.5	22.5	27	1720	2100	2300	2300	2300	231	16100	47700	
17.5	5.5	19	2650	1.9	154	IE4	BF70Z.../S4E11SA6	0.95	3.2	6.4	19	23	2650	2650	2650	2650	2650	247	16100	47700	
17.5	5.5	19	2650	1.9	154	IE5	BF70Z.../S5E09XA4	0.95	3.2	6.4	19	23	2000	2450	2650	2650	2650	231	16100	47700	
17.5	5.5	16.5	3100	1.7	179.7	IE4	BF70Z.../S4E11SA6	0.8	2.7	5.5	16.5	20	3100	3100	3100	3100	3100	247	16100	47700	
17.5	5.5	16.5	3100	1.7	179.7	IE5	BF70Z.../S5E09XA4	0.8	2.7	5.5	16.5	20	2300	2850	3100	3100	3100	231	16100	47700	
17.5	5.5	15	3450	1.5	199.7	IE4	BF70Z.../S4E11SA6	0.75	2.5	5	15	18	3450	3450	3450	3450	3450	247	16100	47700	
17.5	5.5	15	3450	1.5	199.7	IE5	BF70Z.../S5E09XA4	0.75	2.5	5	15	18	2550	3150	3450	3450	3450	231	16100	47700	
17.5	5.5	12.5	4050	1.3	233	IE4	BF70Z.../S4E11SA6	0.6	2.1	4.2	12.5	15	4050	4050	4050	4050	4050	247	16100	47700	
17.5	5.5	12.5	4050	1.3	233	IE5	BF70Z.../S5E09XA4	0.6	2.1	4.2	12.5	15	3000	3700	4050	4050	4050	231	16100	47700	
17.5	5.5	11.5	4500	1.1	258.7	IE4	BF70Z.../S4E11SA6	0.55	1.9	3.8	11.5	13.5	4500	4500	4500	4500	4500	247	16100	47700	
17.5	5.5	11.5	4500	1.1	258.7	IE5	BF70Z.../S5E09XA4	0.55	1.9	3.8	11.5	13.5	3350	4100	4500	4500	4500	231	16100	47700	
17.5	5.5	9.9	5200	0.98	301.8	IE4	BF70Z.../S4E11SA6	0.49	1.6	3.3	9.9	11.5	5200	5200	5200	5200	5200	247	16100	47700	
17.5	5.5	9.9	5200	0.98	301.8	IE5	BF70Z.../S5E09XA4	0.49	1.6	3.3	9.9	11.5	3900	4800	5200	5200	5200	231	16100	47700	
17.5	5.5	8.7	5900	0.87	341.7	IE4	BF70Z.../S4E11SA6	0.43	1.4	2.9	8.7	10.5	5900	5900	5900	5900	5900	247	16100	47700	
17.5	5.5	8.7	5900	0.87	341.7	IE5	BF70Z.../S5E09XA4	0.43	1.4	2.9	8.7	10.5	4400	5400	5900	5900	5900	231	16100	47700	
17.5	5.5	16	3200	2.9	184.5	IE4	BF80.../S4E11SA6	0.8	2.7	5.4	16	19.5	3200	3200	3200	3200	3200	316	31800	75000	
17.5	5.5	16	3200	2.9	184.5	IE5	BF80.../S5E09XA4	0.8	2.7	5.4	16	19.5	2350	2950	3200	3200	3200	307	31800	75000	
17.5	5.5	14	3650	2.6	209.4	IE4	BF80.../S4E11SA6	0.7	2.3	4.7	14	17	3650	3650	3650	3650	3650	316	34300	75000	
17.5	5.5	14	3650	2.6	209.4	IE5	BF80.../S5E09XA4	0.7	2.3	4.7	14	17	2700	3350	3650	3650	3650	307	34300	75000	
17.5	5.5	12.5	4100	2.3	237.1	IE4	BF80.../S4E11SA6	0.6	2.1	4.2	12.5	15	4100	4100	4100	4100	4100	316	36900	75000	
17.5	5.5	12.5	4100	2.3	237.1	IE5	BF80.../S5E09XA4	0.6	2.1	4.2	12.5	15	3050	3750	4100	4100	4100	307	36900	75000	
17.5	5.5	11	4700	2	269.1	IE4	BF80.../S4E11SA6	0.55	1.8	3.7	11	13	4700	4700	4700	4700	4700	316	39600	75000	
17.5	5.5	11	4700	2	269.1	IE5	BF80.../S5E09XA4	0.55	1.8	3.7	11	13	3450	4300	4700	4700	4700	307	39600	75000	
17.5	5.5	10	5100	2.1	291.7	IE4	BF80Z.../S4E11SA6	0.5	1.7	3.4	10	12	5100	5100	5100	5100	5100	363	39600	75000	
17.5	5.5	10	5100	2.1	291.7	IE5	BF80Z.../S5E09XA4	0.5	1.7	3.4	10	12	3750	4650	5100	5100	5100	348	39600	75000	
17.5	5.5	8.6	6000	1.7	347.3	IE4	BF80Z.../S4E11SA6	0.43	1.4	2.8	8.6	10	6000	6000	6000	6000	6000	363	39600	75000	
17.5	5.5	8.6	6000	1.7	347.3	IE5	BF80Z.../S5E09XA4	0.43	1.4	2.8	8.6	10	4500	5500	6000	6000	6000	348	39600	75000	
17.5	5.5	7.6	6800	1.5	394.2	IE4	BF80Z.../S4E11SA6	0.38	1.2	2.5	7.6	9.1	6800	6800	6800	6800	6800	363	39600	75000	
17.5	5.5	7.6	6800	1.5	394.2	IE5	BF80Z.../S5E09XA4	0.38	1.2	2.5	7.6	9.1	5100	6300	6800	6800	6800	348	39600	75000	
17.5	5.5	6.6	7800	1.3	450.4	IE4	BF80Z.../S4E11SA6	0.33	1.1	2.2	6.6	7.9	7800	7800	7800	7800	7800	363	39600	75000	
17.5	5.5	6.6	7800	1.3	450.4	IE5	BF80Z.../S5E09XA4	0.33	1.1	2.2	6.6	7.9	5800	7200	7800	7800	7800	348	39600	75000	
17.5	5.5	5.8	8900	1.2	511.2	IE4	BF80Z.../S4E11SA6	0.29	0.95	1.9	5.8	7	8900	8900	8900	8900	8900	363	39600	75000	
17.5	5.5	5.8	8900	1.2	511.2	IE5	BF80Z.../S5E09XA4	0.29	0.95	1.9	5.8	7	6600	8100	8900	8900	8900	348	39600	75000	
17.5	5.5	5.1	10200	1	583.4	IE4	BF80Z.../S4E11SA6	0.25	0.85	1.7	5.1	6.1	10200	10200	10200	10200	10200	363	39600	75000	
17.5	5.5	5.1	10200	1	583.4	IE5	BF80Z.../S5E09XA4	0.25	0.85	1.7	5.1	6.1	7500	9300	10200	10200	10200	348	39600	75000	
17.5	5.5	4.5	11500	0.91	662.1	IE4	BF80Z.../S4E11SA6	0.22	0.75	1.5	4.5	5.4	11500	11500	11500	11500	11500	363	39600	75000	
17.5	5.5	4.5	11500	0.91	662.1	IE5	BF80Z.../S5E09XA4	0.22	0.75	1.5	4.5	5.4	8600	10500	11500	11500	11500	348	39600	75000	
17.5	5.5	7.8	6600	2.8	382.6	IE4	BF90Z.../S4E11SA6	0.39	1.3	2.6	7.8	9.4	6600	6600	6600	6600	6600	629	42800	120000	
17.5	5.5	7.8	6600	2.8	382.6	IE5	BF90Z.../S5E09XA4	0.39	1.3	2.6	7.8	9.4	4950	6100	6600	6600	6600	612	42800	120000	
17.5	5.5	6.5	7900	2.3	456.7	IE4	BF90Z.../S4E11SA6	0.32	1	2.1	6.5	7.8	7900	7900	7900	7900	7900	629	42800	120000	
17.5	5.5	6.5	7900	2.3	456.7	IE5	BF90Z.../S5E09XA4	0.32	1	2.1	6.5	7.8	5900	7300	7900	7900	7900	612	42800	120000	
17.5	5.5	5.8	8800	2.1	508.5	IE4	BF90Z.../S4E11SA6	0.29	0.95	1.9	5.8	7	8800	8800	8800	8800	8800	629	42800	120000	
17.5	5.5	5.8	8800	2.1	508.5	IE5	BF90Z.../S5E09XA4	0.29	0.95	1.9	5.8	7	6600	8100	8800	8800	8800	612	42800	120000	
17.5	5.5	5	10300	1.8	591.1	IE4	BF90Z.../S4E11SA6	0.25	0.8	1.6	5	6	10300	10300	10300	10300	10300	629	42800	120000	
17																					

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 20 Nm (PN = 6.3 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [>1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
20	6.3	225	260	1.1	13.18	IE5	BF20-..S5E09XA4	11	37.5	75	225	270	171	210	260	260	230	46	3300	-
20	6.3	193	310	0.98	15.54	IE5	BF20-..S5E09XA4	9.6	32	64	193	230	200	245	310	310	270	46	3450	-
20	6.3	178	335	1.1	16.77	IE5	BF20-..S5E09XA4	8.9	29.5	59	178	210	215	265	335	335	290	46	3500	-
20	6.3	162	365	1	18.45	IE5	BF20-..S5E09XA4	8.1	27	54	162	195	235	295	365	365	320	46	3600	-
20	6.3	136	440	0.9	22.04	IE5	BF20-..S5E09XA4	6.8	22.5	45	136	163	285	350	440	440	385	46	3800	-
20	6.3	123	485	0.82	24.25	IE5	BF20-..S5E09XA4	6.1	20.5	41	123	148	315	385	485	485	420	46	3950	-
20	6.3	470	126	2.1	6.34	IE5	BF30-..S5E09XA4	23.5	78	157	470	560	82	101	126	126	110	57	2400	-
20	6.3	370	161	1.8	8.07	IE5	BF30-..S5E09XA4	18.5	61	123	370	445	104	129	161	161	141	57	2650	-
20	6.3	300	199	1.6	9.99	IE5	BF30-..S5E09XA4	15	50	100	300	360	129	159	199	199	174	57	2850	-
20	6.3	230	255	1.4	12.91	IE5	BF30-..S5E09XA4	11.5	38.5	77	230	275	167	205	255	255	225	57	3050	-
20	6.3	187	320	1.3	16	IE5	BF30-..S5E09XA4	9.3	31	62	187	225	205	255	320	320	280	57	3250	-
20	6.3	169	350	1.3	17.65	IE5	BF30-..S5E09XA4	8.4	28	56	169	200	225	280	350	350	305	57	3300	-
20	6.3	154	385	1.3	19.41	IE5	BF30-..S5E09XA4	7.7	25.5	51	154	185	250	310	385	385	335	57	3400	-
20	6.3	137	435	1.2	21.85	IE5	BF30-..S5E09XA4	6.8	22.5	45.5	137	164	280	345	435	435	380	57	3500	-
20	6.3	124	480	1.1	24.03	IE5	BF30-..S5E09XA4	6.2	20.5	41.5	124	149	310	380	480	480	420	57	3600	-
20	6.3	106	560	1	28.23	IE5	BF30-..S5E09XA4	5.3	17.5	35	106	127	365	450	560	560	490	57	3800	-
20	6.3	96	620	0.92	31.05	IE5	BF30-..S5E09XA4	4.8	16	32	96	115	400	495	620	620	540	57	4000	-
20	6.3	85	700	0.81	35	IE5	BF30-..S5E09XA4	4.2	14	28.5	85	102	455	560	700	700	610	57	4200	-
20	6.3	510	117	2.9	5.87	IE5	BF40-..S5E09XA4	25.5	85	170	510	610	76	93	117	117	102	66	3550	-
20	6.3	390	152	2.4	7.62	IE5	BF40-..S5E09XA4	19.5	65	131	390	470	99	121	152	152	133	66	3900	-
20	6.3	315	189	2.2	9.48	IE5	BF40-..S5E09XA4	15.5	52	105	315	375	123	151	189	189	165	66	4150	-
20	6.3	250	235	2	11.79	IE5	BF40-..S5E09XA4	12.5	42	84	250	305	153	188	235	235	205	66	4450	-
20	6.3	199	300	1.7	15.02	IE5	BF40-..S5E09XA4	9.9	33	66	199	235	195	240	300	300	260	66	4800	-
20	6.3	172	345	1.8	17.35	IE5	BF40-..S5E09XA4	8.6	28.5	57	172	205	225	275	345	345	300	66	4950	-
20	6.3	157	380	1.7	19.09	IE5	BF40-..S5E09XA4	7.8	26	52	157	188	245	305	380	380	330	66	5100	-
20	6.3	138	430	1.6	21.6	IE5	BF40-..S5E09XA4	6.9	23	46	138	166	280	345	430	430	375	66	5200	-
20	6.3	126	475	1.5	23.77	IE5	BF40-..S5E09XA4	6.3	21	42	126	151	305	380	475	475	415	66	5400	-
20	6.3	111	530	1.4	26.86	IE5	BF40-..S5E09XA4	5.5	18.5	37	111	134	345	425	530	530	470	66	5600	-
20	6.3	101	590	1.4	29.55	IE5	BF40-..S5E09XA4	5	16.5	33.5	101	121	380	470	590	590	510	66	5800	-
20	6.3	87	680	1.2	34.21	IE5	BF40-..S5E09XA4	4.3	14.5	29	87	105	440	540	680	680	590	66	6000	-
20	6.3	79	750	1.2	37.64	IE5	BF40-..S5E09XA4	3.9	13	26.5	79	95	485	600	750	750	650	66	6200	-
20	6.3	72	820	1.1	41.42	IE5	BF40-..S5E09XA4	3.6	12	24	72	86	530	660	820	820	720	66	6500	-
20	6.3	65	910	0.99	45.56	IE5	BF40-..S5E09XA4	3.2	10.5	21.5	65	79	590	720	910	910	790	66	6800	-
20	6.3	61	970	0.92	48.92	IE5	BF40-..S5E09XA4	3	10	20	61	73	630	780	970	970	850	66	7000	-
20	6.3	55	1070	0.84	53.82	IE5	BF40-..S5E09XA4	2.7	9.2	18.5	55	66	690	860	1070	1070	940	66	7200	-
20	6.3	200	290	2.7	14.65	IE5	BF50-..S5E09XA4	10	34	68	200	245	190	230	290	290	255	94	6100	-
20	6.3	129	460	2.4	23.14	IE5	BF50-..S5E09XA4	6.4	21.5	43	129	155	300	370	460	460	400	94	6800	-
20	6.3	115	510	2.2	25.88	IE5	BF50-..S5E09XA4	5.7	19	38.5	115	139	335	410	510	510	450	94	7100	-
20	6.3	94	630	2	31.73	IE5	BF50-..S5E09XA4	4.7	15.5	31.5	94	113	410	500	630	630	550	94	7500	-
20	6.3	84	700	1.8	35.49	IE5	BF50-..S5E09XA4	4.2	14	28	84	101	460	560	700	700	620	94	7800	-
20	6.3	71	840	1.5	42.15	IE5	BF50-..S5E09XA4	3.5	11.5	23.5	71	85	540	670	840	840	730	94	8500	-
20	6.3	63	940	1.4	47.14	IE5	BF50-..S5E09XA4	3.1	10.5	21	63	76	610	750	940	940	820	94	8900	-
20	6.3	52	1130	1.1	56.86	IE5	BF50-..S5E09XA4	2.6	8.7	17.5	52	63	730	900	1130	1130	990	94	9300	-
20	6.3	47	1270	1	63.59	IE5	BF50-..S5E09XA4	2.3	7.8	15.5	47	56	820	1010	1270	1270	1110	94	9800	-
20	6.3	41	1450	0.89	72.72	IE5	BF50-..S5E09XA4	2	6.8	13.5	41	49.5	940	1160	1450	1450	1270	94	10700	-
20	6.3	36.5	1620	0.8	81.33	IE5	BF50-..S5E09XA4	1.8	6.1	12	36.5	44	1050	1300	1620	1620	1420	94	11300	-
20	6.3	96	620	3	31.2	IE5	BF60-..S5E09XA4	4.8	16	32	96	115	405	495	620	620	540	124	8800	24900
20	6.3	86	690	2.9	34.62	IE5	BF60-..S5E09XA4	4.3	14	28.5	86	103	450	550	690	690	600	124	9100	25700
20	6.3	72	830	2.5	41.6	IE5	BF60-..S5E09XA4	3.6	12	24	72	86	540	660	830	830	720	124	9600	27100
20	6.3	64	920	2.4	46.16	IE5	BF60-..S5E09XA4	3.2	10.5	21.5	64	77	600	730	920	920	800	124	9900	28000
20	6.3	55	1080	2.1	54.44	IE5	BF60-..S5E09XA4	2.7	9.1	18	55	66	700	870	1080	1080	950	124	10500	29700
20	6.3	49.5	1200	1.9	60.4	IE5	BF60-..S5E09XA4	2.4	8.2	16.5	49.5	59	780	960	1200	1200	1050	124	11100	31400
20	6.3	41.5	1440	1.6	72.15	IE5	BF60-..S5E09XA4	2	6.9	13.5	41.5	49.5	930	1150	1440	1440	1260	124	12000	34000
20	6.3	37	1600	1.4	80.05	IE5	BF60-..S5E09XA4	1.8	6.2	12	37	44.5	1040	1280	1600	1600	1400	124	12600	35600
20	6.3	32	1860	1.2	93.44	IE5	BF60-..S5E09XA4	1.6	5.3	10.5	32	38.5	1210	1490	1860	1860	1630	124		

BF-series shaft-mounted geared motors


Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 20 Nm (PN = 6.3 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
20	6.3	7.6	7800	1.3	394.2	IE5	BF80Z-../S5E09XA4	0.38	1.2	2.5	7.6	9.1	5100	6300	7800	7800	6800	348	39600	75000
20	6.3	6.6	9000	1.2	450.4	IE5	BF80Z-../S5E09XA4	0.33	1.1	2.2	6.6	7.9	5800	7200	9000	9000	7800	348	39600	75000
20	6.3	5.8	10200	1	511.2	IE5	BF80Z-../S5E09XA4	0.29	0.95	1.9	5.8	7	6600	8100	10200	10200	8900	348	39600	75000
20	6.3	5.1	11600	0.9	583.4	IE5	BF80Z-../S5E09XA4	0.25	0.85	1.7	5.1	6.1	7500	9300	11600	11600	10200	348	39600	75000
20	6.3	8.7	6800	2.7	343.6	IE5	BF90Z-../S5E09XA4	0.43	1.4	2.9	8.7	10	4450	5400	6800	6800	6000	612	42800	120000
20	6.3	7.8	7600	2.4	382.6	IE5	BF90Z-../S5E09XA4	0.39	1.3	2.6	7.8	9.4	4950	6100	7600	7600	6600	612	42800	120000
20	6.3	6.5	9100	2	456.7	IE5	BF90Z-../S5E09XA4	0.32	1	2.1	6.5	7.8	5900	7300	9100	9100	7900	612	42800	120000
20	6.3	5.8	10100	1.8	508.5	IE5	BF90Z-../S5E09XA4	0.29	0.95	1.9	5.8	7	6600	8100	10100	10100	8800	612	42800	120000
20	6.3	5	11800	1.6	591.1	IE5	BF90Z-../S5E09XA4	0.25	0.8	1.6	5	6	7600	9400	11800	11800	10300	612	42800	120000
20	6.3	4.5	13100	1.4	658.1	IE5	BF90Z-../S5E09XA4	0.22	0.75	1.5	4.5	5.4	8500	10500	13100	13100	11500	612	42800	120000
20	6.3	3.9	15100	1.2	759	IE5	BF90Z-../S5E09XA4	0.19	0.65	1.3	3.9	4.7	9800	12100	15100	15100	13200	612	42800	120000
20	6.3	3.5	16900	1.1	845.1	IE5	BF90Z-../S5E09XA4	0.17	0.55	1.1	3.5	4.2	10900	13500	16900	16900	14700	612	42800	120000
20	6.3	3	19500	0.95	976.1	IE5	BF90G50-../S5E09XA4	0.15	0.5	1	3	3.6	12600	15600	19500	19500	17000	624	42800	120000
20	6.3	2.8	20500	0.89	1043	IE5	BF90G50-../S5E09XA4	0.14	0.47	0.95	2.8	3.4	13500	16600	20500	20500	18200	624	42800	120000

MN = 24 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
24	7.5	470	152	1.7	6.34	IE4	BF30-../S4E11SA6	23.5	78	157	470	560	120	136	152	152	152	66	2400	-	
24	7.5	470	152	1.7	6.34	IE5	BF30-../S5E11MA6	23.5	78	157	470	560	152	152	152	152	152	66	2400	-	
24	7.5	370	193	1.5	8.07	IE4	BF30-../S4E11SA6	18.5	61	123	370	445	153	173	193	193	193	66	2650	-	
24	7.5	370	193	1.5	8.07	IE5	BF30-../S5E11MA6	18.5	61	123	370	445	193	193	193	193	193	66	2650	-	
24	7.5	300	235	1.3	9.99	IE4	BF30-../S4E11SA6	15	50	100	300	360	189	210	235	235	235	66	2850	-	
24	7.5	300	235	1.3	9.99	IE5	BF30-../S5E11MA6	15	50	100	300	360	235	235	235	235	235	66	2850	-	
24	7.5	230	305	1.2	12.91	IE4	BF30-../S4E11SA6	11.5	38.5	77	230	275	245	275	305	305	305	66	3050	-	
24	7.5	230	305	1.2	12.91	IE5	BF30-../S5E11MA6	11.5	38.5	77	230	275	305	305	305	305	305	66	3050	-	
24	7.5	187	380	1.1	16	IE4	BF30-../S4E11SA6	9.3	31	62	187	225	300	340	380	380	380	66	3250	-	
24	7.5	187	380	1.1	16	IE5	BF30-../S5E11MA6	9.3	31	62	187	225	380	380	380	380	380	66	3250	-	
24	7.5	169	420	1.1	17.65	IE4	BF30-../S4E11SA6	8.4	28	56	169	200	335	375	420	420	420	66	3300	-	
24	7.5	169	420	1.1	17.65	IE5	BF30-../S5E11MA6	8.4	28	56	169	200	420	420	420	420	420	66	3300	-	
24	7.5	154	465	1.1	19.41	IE4	BF30-../S4E11SA6	7.7	25.5	51	154	185	365	415	465	465	465	66	3400	-	
24	7.5	154	465	1.1	19.41	IE5	BF30-../S5E11MA6	7.7	25.5	51	154	185	465	465	465	465	465	66	3400	-	
24	7.5	137	520	0.99	21.85	IE4	BF30-../S4E11SA6	6.8	22.5	45.5	137	164	415	465	520	520	520	66	3500	-	
24	7.5	137	520	0.99	21.85	IE5	BF30-../S5E11MA6	6.8	22.5	45.5	137	164	520	520	520	520	520	66	3500	-	
24	7.5	124	570	0.95	24.03	IE4	BF30-../S4E11SA6	6.2	20.5	41.5	124	149	455	510	570	570	570	66	3600	-	
24	7.5	124	570	0.95	24.03	IE5	BF30-../S5E11MA6	6.2	20.5	41.5	124	149	570	570	570	570	570	66	3600	-	
24	7.5	106	670	0.84	28.23	IE4	BF30-../S4E11SA6	5.3	17.5	35	106	127	530	600	670	670	670	66	3800	-	
24	7.5	106	670	0.84	28.23	IE5	BF30-../S5E11MA6	5.3	17.5	35	106	127	670	670	670	670	670	66	3800	-	
24	7.5	510	140	2.4	5.87	IE4	BF40-../S4E11SA6	25.5	85	170	510	610	111	126	140	140	140	80	3550	-	
24	7.5	510	140	2.4	5.87	IE5	BF40-../S5E11MA6	25.5	85	170	510	610	140	140	140	140	140	80	3550	-	
24	7.5	390	182	2	7.62	IE4	BF40-../S4E11SA6	19.5	65	131	390	470	144	163	182	182	182	80	3900	-	
24	7.5	390	182	2	7.62	IE5	BF40-../S5E11MA6	19.5	65	131	390	470	182	182	182	182	182	80	3900	-	
24	7.5	315	225	1.8	9.48	IE4	BF40-../S4E11SA6	15.5	52	105	315	375	180	200	225	225	225	80	4150	-	
24	7.5	315	225	1.8	9.48	IE5	BF40-../S5E11MA6	15.5	52	105	315	375	225	225	225	225	225	80	4150	-	
24	7.5	250	280	1.6	11.79	IE4	BF40-../S4E11SA6	12.5	42	84	250	305	220	250	280	280	280	80	4450	-	
24	7.5	250	280	1.6	11.79	IE5	BF40-../S5E11MA6	12.5	42	84	250	305	280	280	280	280	280	80	4450	-	
24	7.5	199	360	1.4	15.02	IE4	BF40-../S4E11SA6	9.9	33	66	199	235	285	320	360	360	360	360	80	4800	-
24	7.5	199	360	1.4	15.02	IE5	BF40-../S5E11MA6	9.9	33	66	199	235	360	360	360	360	360	80	4800	-	
24	7.5	172	415	1.5	17.35	IE4	BF40-../S4E11SA6	8.6	28.5	57	172	205	325	370	415	415	415	80	4950	-	
24	7.5	172	415	1.5	17.35	IE5	BF40-../S5E11MA6	8.6	28.5	57	172	205	415	415	415	415	415	80	4950	-	
24	7.5																				

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 24 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
24	7.5	200	350	2.2	14.65	IE4	BF50-..S4E11SA6	10	34	68	200	245	275	310	350	350	350	110	6100	-
24	7.5	200	350	2.2	14.65	IE5	BF50-..S5E11MA6	10	34	68	200	245	350	350	350	350	350	110	6100	-
24	7.5	179	400	2.4	16.7	IE4	BF50-..S4E11SA6	8.9	29.5	59	179	215	315	355	400	400	400	110	6200	-
24	7.5	179	400	2.4	16.7	IE5	BF50-..S5E11MA6	8.9	29.5	59	179	215	400	400	400	400	400	110	6200	-
24	7.5	160	445	2.2	18.68	IE4	BF50-..S4E11SA6	8	26.5	53	160	192	350	400	445	445	445	110	6400	-
24	7.5	160	445	2.2	18.68	IE5	BF50-..S5E11MA6	8	26.5	53	160	192	445	445	445	445	445	110	6400	-
24	7.5	129	550	2	23.14	IE4	BF50-..S4E11SA6	6.4	21.5	43	129	155	435	495	550	550	550	110	6800	-
24	7.5	129	550	2	23.14	IE5	BF50-..S5E11MA6	6.4	21.5	43	129	155	550	550	550	550	550	110	6800	-
24	7.5	115	620	1.9	25.88	IE4	BF50-..S4E11SA6	5.7	19	38.5	115	139	490	550	620	620	620	110	7100	-
24	7.5	115	620	1.9	25.88	IE5	BF50-..S5E11MA6	5.7	19	38.5	115	139	620	620	620	620	620	110	7100	-
24	7.5	94	760	1.7	31.73	IE4	BF50-..S4E11SA6	4.7	15.5	31.5	94	113	600	680	760	760	760	110	7500	-
24	7.5	94	760	1.7	31.73	IE5	BF50-..S5E11MA6	4.7	15.5	31.5	94	113	760	760	760	760	760	110	7500	-
24	7.5	84	850	1.5	35.49	IE4	BF50-..S4E11SA6	4.2	14	28	84	101	670	760	850	850	850	110	7800	-
24	7.5	84	850	1.5	35.49	IE5	BF50-..S5E11MA6	4.2	14	28	84	101	850	850	850	850	850	110	7800	-
24	7.5	71	1010	1.3	42.15	IE4	BF50-..S4E11SA6	3.5	11.5	23.5	71	85	800	900	1010	1010	1010	110	8500	-
24	7.5	71	1010	1.3	42.15	IE5	BF50-..S5E11MA6	3.5	11.5	23.5	71	85	1010	1010	1010	1010	1010	110	8500	-
24	7.5	63	1130	1.1	47.14	IE4	BF50-..S4E11SA6	3.1	10.5	21	63	76	890	1010	1130	1130	1130	110	8900	-
24	7.5	63	1130	1.1	47.14	IE5	BF50-..S5E11MA6	3.1	10.5	21	63	76	1130	1130	1130	1130	1130	110	8900	-
24	7.5	52	1360	0.95	56.86	IE4	BF50-..S4E11SA6	2.6	8.7	17.5	52	63	1080	1220	1360	1360	1360	110	9300	-
24	7.5	52	1360	0.95	56.86	IE5	BF50-..S5E11MA6	2.6	8.7	17.5	52	63	1360	1360	1360	1360	1360	110	9300	-
24	7.5	47	1520	0.85	63.59	IE4	BF50-..S4E11SA6	2.3	7.8	15.5	47	56	1200	1360	1520	1520	1520	110	9800	-
24	7.5	47	1520	0.85	63.59	IE5	BF50-..S5E11MA6	2.3	7.8	15.5	47	56	1520	1520	1520	1520	1520	110	9800	-
24	7.5	132	540	3	22.58	IE4	BF60-..S4E11SA6	6.6	22	44	132	159	425	485	540	540	540	141	8000	22600
24	7.5	132	540	3	22.58	IE5	BF60-..S5E11MA6	6.6	22	44	132	159	540	540	540	540	540	141	8000	22600
24	7.5	119	600	2.9	25.05	IE4	BF60-..S4E11SA6	5.9	19.5	39.5	119	143	475	530	600	600	600	141	8200	23200
24	7.5	119	600	2.9	25.05	IE5	BF60-..S5E11MA6	5.9	19.5	39.5	119	143	600	600	600	600	600	141	8200	23200
24	7.5	96	740	2.5	31.2	IE4	BF60-..S4E11SA6	4.8	16	32	96	115	590	670	740	740	740	141	8800	24900
24	7.5	96	740	2.5	31.2	IE5	BF60-..S5E11MA6	4.8	16	32	96	115	740	740	740	740	740	141	8800	24900
24	7.5	86	830	2.4	34.62	IE4	BF60-..S4E11SA6	4.3	14	28.5	86	103	650	740	830	830	830	141	9100	25700
24	7.5	86	830	2.4	34.62	IE5	BF60-..S5E11MA6	4.3	14	28.5	86	103	830	830	830	830	830	141	9100	25700
24	7.5	72	990	2.1	41.6	IE4	BF60-..S4E11SA6	3.6	12	24	72	86	790	890	990	990	990	141	9600	27100
24	7.5	72	990	2.1	41.6	IE5	BF60-..S5E11MA6	3.6	12	24	72	86	990	990	990	990	990	141	9600	27100
24	7.5	64	1100	2	46.16	IE4	BF60-..S4E11SA6	3.2	10.5	21.5	64	77	870	990	1100	1100	1100	141	9900	28000
24	7.5	64	1100	2	46.16	IE5	BF60-..S5E11MA6	3.2	10.5	21.5	64	77	1100	1100	1100	1100	1100	141	9900	28000
24	7.5	55	1300	1.8	54.44	IE4	BF60-..S4E11SA6	2.7	9.1	18	55	66	1030	1170	1300	1300	1300	141	10500	29700
24	7.5	55	1300	1.8	54.44	IE5	BF60-..S5E11MA6	2.7	9.1	18	55	66	1300	1300	1300	1300	1300	141	10500	29700
24	7.5	49.5	1440	1.6	60.4	IE4	BF60-..S4E11SA6	2.4	8.2	16.5	49.5	59	1140	1290	1440	1440	1440	141	11100	31400
24	7.5	49.5	1440	1.6	60.4	IE5	BF60-..S5E11MA6	2.4	8.2	16.5	49.5	59	1440	1440	1440	1440	1440	141	11100	31400
24	7.5	41.5	1730	1.3	72.15	IE4	BF60-..S5E11MA6	2	6.9	13.5	41.5	49.5	1730	1730	1730	1730	1730	141	12000	34000
24	7.5	37	1920	1.2	80.05	IE4	BF60-..S4E11SA6	1.8	6.2	12	37	44.5	1720	1920	1920	1920	1920	141	12600	35600
24	7.5	32	2200	1	93.44	IE4	BF60-..S4E11SA6	1.6	5.3	10.5	32	38.5	1770	2000	2200	2200	2200	141	13500	38200
24	7.5	32	2200	1	93.44	IE5	BF60-..S5E11MA6	1.6	5.3	10.5	32	38.5	2200	2200	2200	2200	2200	141	13500	38200
24	7.5	28.5	2450	0.92	103.7	IE4	BF60-..S4E11SA6	1.4	4.8	9.6	28.5	34.5	1970	2200	2450	2450	2450	141	14100	39900
24	7.5	28.5	2450	0.92	103.7	IE5	BF60-..S5E11MA6	1.4	4.8	9.6	28.5	34.5	2450	2450	2450	2450	2450	141	14100	39900
24	7.5	26.5	2700	0.85	113.1	IE4	BF60-..S4E11SA6	1.3	4.4	8.8	26.5	31.5	2100	2400	2700	2700	2700	141	14600	41300
24	7.5	26.5	2700	0.85	113.1	IE5	BF60-..S5E11MA6	1.3	4.4	8.8	26.5	31.5	2700	2700	2700	2700	2700	141	14600	41300
24	7.5	41.5	1730	3	72.26	IE4	BF70-..S4E11SA6	2	6.9	13.5	41.5	49.5	1370	1550	1730	1730	1730	220	12000	39600
24	7.5	41.5	1730	3	72.26	IE5	BF70-..S5E11MA6	2	6.9	13.5	41.5	49.5	1730	1730	1730	1730	1730	220	12000	39600
24	7.5	36.5	1960	2.6	81.82	IE4	BF70-..S4E11SA6	1.8	6.1	12	36.5	43.5	1550	1750	1960	1960	1960	220	12800	41300
24	7.5	36.5	1960	2.6	81.82	IE5	BF70-..S5E11MA6	1.8	6.1	12	36.5	43.5	1960	1960	1960	1960	1960	220	12800	41300
24	7.5	31	2250	2.3	95.46	IE4	BF70-..S4E11SA6	1.5	5.2	10	31	37.5	2250	2250	2250	2250	2250	220	14000	43700
24	7.5	28.5	2500	2.1	105.2	IE4	BF70-..S4E11SA6	1.4	4.7	9.5	28.5	34	1990	2250	2500	2500	2500	220	14700	45100
24	7.5	28.5	2500	2.1	105.2	IE5	BF70-..S5E11MA6	1.4	4.7	9.5	28.5	34	2500	2500	2500	2500	2500	220	14700	45100
24	7.5</td																			

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 24 Nm (PN = 7.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
24	7.5	12.5	5600	1.7	237.1	IE5	BF80-..S5E11MA6	0.6	2.1	4.2	12.5	15	5600	5600	5600	5600	5600	316	36900	75000
24	7.5	11	6400	1.5	269.1	IE4	BF80-..S4E11SA6	0.55	1.8	3.7	11	13	5100	5700	6400	6400	6400	316	39600	75000
24	7.5	11	6400	1.5	269.1	IE5	BF80-..S5E11MA6	0.55	1.8	3.7	11	13	6400	6400	6400	6400	6400	316	39600	75000
24	7.5	10	7000	1.5	291.7	IE4	BF80Z-..S4E11SA6	0.5	1.7	3.4	10	12	5500	6200	7000	7000	7000	363	39600	75000
24	7.5	10	7000	1.5	291.7	IE5	BF80Z-..S5E11MA6	0.5	1.7	3.4	10	12	7000	7000	7000	7000	7000	363	39600	75000
24	7.5	8.6	8300	1.3	347.3	IE4	BF80Z-..S4E11SA6	0.43	1.4	2.8	8.6	10	6500	7400	8300	8300	8300	363	39600	75000
24	7.5	8.6	8300	1.3	347.3	IE5	BF80Z-..S5E11MA6	0.43	1.4	2.8	8.6	10	8300	8300	8300	8300	8300	363	39600	75000
24	7.5	7.6	9400	1.1	394.2	IE4	BF80Z-..S4E11SA6	0.38	1.2	2.5	7.6	9.1	7400	8400	9400	9400	9400	363	39600	75000
24	7.5	7.6	9400	1.1	394.2	IE5	BF80Z-..S5E11MA6	0.38	1.2	2.5	7.6	9.1	9400	9400	9400	9400	9400	363	39600	75000
24	7.5	6.6	10800	0.97	450.4	IE4	BF80Z-..S4E11SA6	0.33	1.1	2.2	6.6	7.9	8500	9600	10800	10800	10800	363	39600	75000
24	7.5	6.6	10800	0.97	450.4	IE5	BF80Z-..S5E11MA6	0.33	1.1	2.2	6.6	7.9	10800	10800	10800	10800	10800	363	39600	75000
24	7.5	5.8	12200	0.86	511.2	IE4	BF80Z-..S4E11SA6	0.29	0.95	1.9	5.8	7	9700	10900	12200	12200	12200	363	39600	75000
24	7.5	5.8	12200	0.86	511.2	IE5	BF80Z-..S5E11MA6	0.29	0.95	1.9	5.8	7	12200	12200	12200	12200	12200	363	39600	75000
24	7.5	12.5	5500	3	232.6	IE4	BF90-..S4E11SA6	0.6	2.1	4.2	12.5	15	4400	5000	5500	5500	5500	569	39900	118300
24	7.5	12.5	5500	3	232.6	IE5	BF90-..S5E11MA6	0.6	2.1	4.2	12.5	15	5500	5500	5500	5500	5500	569	39900	118300
24	7.5	11.5	6200	2.7	259	IE4	BF90-..S4E11SA6	0.55	1.9	3.8	11.5	13.5	4900	5500	6200	6200	6200	569	42800	120000
24	7.5	11.5	6200	2.7	259	IE5	BF90-..S5E11MA6	0.55	1.9	3.8	11.5	13.5	6200	6200	6200	6200	6200	569	42800	120000
24	7.5	11	6400	2.9	269.8	IE4	BF90Z-..S4E11SA6	0.55	1.8	3.7	11	13	5100	5800	6400	6400	6400	629	42800	120000
24	7.5	11	6400	2.9	269.8	IE5	BF90Z-..S5E11MA6	0.55	1.8	3.7	11	13	6400	6400	6400	6400	6400	629	42800	120000
24	7.5	9.9	7200	2.6	300.4	IE4	BF90Z-..S4E11SA6	0.49	1.6	3.3	9.9	11.5	5700	6400	7200	7200	7200	629	42800	120000
24	7.5	8.7	8200	2.2	343.6	IE4	BF90Z-..S4E11SA6	0.43	1.4	2.9	8.7	10	6500	7300	8200	8200	8200	629	42800	120000
24	7.5	8.7	8200	2.2	343.6	IE5	BF90Z-..S5E11MA6	0.43	1.4	2.9	8.7	10	8200	8200	8200	8200	8200	629	42800	120000
24	7.5	7.8	9100	2	382.6	IE4	BF90Z-..S4E11SA6	0.39	1.3	2.6	7.8	9.4	7200	8200	9100	9100	9100	629	42800	120000
24	7.5	7.8	9100	2	382.6	IE5	BF90Z-..S5E11MA6	0.39	1.3	2.6	7.8	9.4	9100	9100	9100	9100	9100	629	42800	120000
24	7.5	6.5	10900	1.7	456.7	IE4	BF90Z-..S4E11SA6	0.32	1	2.1	6.5	7.8	8600	9800	10900	10900	10900	629	42800	120000
24	7.5	6.5	10900	1.7	456.7	IE5	BF90Z-..S5E11MA6	0.32	1	2.1	6.5	7.8	10900	10900	10900	10900	10900	629	42800	120000
24	7.5	5.8	12200	1.5	508.5	IE4	BF90Z-..S4E11SA6	0.29	0.95	1.9	5.8	7	9600	10900	12200	12200	12200	629	42800	120000
24	7.5	5.8	12200	1.5	508.5	IE5	BF90Z-..S5E11MA6	0.29	0.95	1.9	5.8	7	12200	12200	12200	12200	12200	629	42800	120000
24	7.5	5	14100	1.3	591.1	IE4	BF90Z-..S4E11SA6	0.25	0.8	1.6	5	6	11200	12700	14100	14100	14100	629	42800	120000
24	7.5	5	14100	1.3	591.1	IE5	BF90Z-..S5E11MA6	0.25	0.8	1.6	5	6	14100	14100	14100	14100	14100	629	42800	120000
24	7.5	4.5	15700	1.2	658.1	IE4	BF90Z-..S4E11SA6	0.22	0.75	1.5	4.5	5.4	12500	14100	15700	15700	15700	629	42800	120000
24	7.5	4.5	15700	1.2	658.1	IE5	BF90Z-..S5E11MA6	0.22	0.75	1.5	4.5	5.4	15700	15700	15700	15700	15700	629	42800	120000
24	7.5	3.9	18200	1	759	IE4	BF90Z-..S4E11SA6	0.19	0.65	1.3	3.9	4.7	14400	16300	18200	18200	18200	629	42800	120000
24	7.5	3.9	18200	1	759	IE5	BF90Z-..S5E11MA6	0.19	0.65	1.3	3.9	4.7	18200	18200	18200	18200	18200	629	42800	120000
24	7.5	3.5	20000	0.91	845.1	IE4	BF90Z-..S4E11SA6	0.17	0.55	1.1	3.5	4.2	16000	18100	20000	20000	20000	629	42800	120000
24	7.5	3.5	20000	0.91	845.1	IE5	BF90Z-..S5E11MA6	0.17	0.55	1.1	3.5	4.2	20000	20000	20000	20000	20000	629	42800	120000


MN = 30 Nm (PN = 9.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	470	190	1.4	6.34	IE5	BF40-..S5E11LA6	23.5	78	157	470	560	190	190	190	190	190	78	2400	-
30	9.5	470	190	1.4	6.34	IE5	BF40-..S5E11MA6	23.5	78	157	470	560	168	190	190	190	190	66	2400	-
30	9.5	370	240	1.2	8.07	IE5	BF40-..S5E11LA6	18.5	61	123	370	445	240	240	240	240	240	78	2650	-
30	9.5	370	240	1.2	8.07	IE5	BF40-..S5E11MA6	18.5	61	123	370	445	210	240	240	240	240	66	2650	-
30	9.5	300	295	1.1	9.99	IE5	BF40-..S5E11LA6	15	50	100	300	360	295	295	295	295	295	78	2850	-
30	9.5	300	295	1.1	9.99	IE5	BF40-..S5E11MA6	15	50	100	300	360	260	295	295	295	295	66	2850	-
30	9.5	230	385	0.94	12.91	IE5	BF40-..S5E11LA6	11.5	38.5	77	230	275	340	385	385	385	385	3050	-	
30	9.5	187	480	0.84	16	IE5	BF40-..S5E11LA6	9.3	31	62	187	225	480	480	480	480	480	78	3250	-
30	9.5	187	480	0.84	16	IE5	BF4													

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$




MN = 30 Nm (PN = 9.5 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	111	800	0.96	26.86	IE5	BF40-..S5E11LA6	5.5	18.5	37	111	134	800	800	800	800	800	92	5600	-
30	9.5	111	800	0.96	26.86	IE5	BF40-..S5E11MA6	5.5	18.5	37	111	134	710	800	800	800	800	80	5600	-
30	9.5	101	880	0.9	29.55	IE5	BF40-..S5E11LA6	5	16.5	33.5	101	121	880	880	880	880	880	92	5800	-
30	9.5	101	880	0.9	29.55	IE5	BF40-..S5E11MA6	5	16.5	33.5	101	121	780	880	880	880	880	80	5800	-
30	9.5	87	1020	0.83	34.21	IE5	BF40-..S5E11LA6	4.3	14.5	29	87	105	1020	1020	1020	1020	1020	92	6000	-
30	9.5	87	1020	0.83	34.21	IE5	BF40-..S5E11MA6	4.3	14.5	29	87	105	900	1020	1020	1020	1020	80	6000	-
30	9.5	385	230	2.4	7.71	IE5	BF50-..S5E11LA6	19	64	129	385	465	230	230	230	230	230	122	5100	-
30	9.5	385	230	2.4	7.71	IE5	BF50-..S5E11MA6	19	64	129	385	465	200	230	230	230	230	110	5100	-
30	9.5	280	320	2.1	10.68	IE5	BF50-..S5E11LA6	14	46.5	93	280	335	320	320	320	320	320	122	5600	-
30	9.5	280	320	2.1	10.68	IE5	BF50-..S5E11MA6	14	46.5	93	280	335	280	320	320	320	320	110	5600	-
30	9.5	200	435	1.8	14.65	IE5	BF50-..S5E11LA6	10	34	68	200	245	435	435	435	435	435	122	6100	-
30	9.5	200	435	1.8	14.65	IE5	BF50-..S5E11MA6	10	34	68	200	245	385	435	435	435	435	110	6100	-
30	9.5	179	500	1.9	16.7	IE5	BF50-..S5E11LA6	8.9	29.5	59	179	215	500	500	500	500	500	122	6200	-
30	9.5	179	500	1.9	16.7	IE5	BF50-..S5E11MA6	8.9	29.5	59	179	215	440	500	500	500	500	110	6200	-
30	9.5	160	560	1.8	18.68	IE5	BF50-..S5E11LA6	8	26.5	53	160	192	560	560	560	560	560	122	6400	-
30	9.5	160	560	1.8	18.68	IE5	BF50-..S5E11MA6	8	26.5	53	160	192	495	560	560	560	560	110	6400	-
30	9.5	129	690	1.6	23.14	IE5	BF50-..S5E11LA6	6.4	21.5	43	129	155	690	690	690	690	690	122	6800	-
30	9.5	129	690	1.6	23.14	IE5	BF50-..S5E11MA6	6.4	21.5	43	129	155	610	690	690	690	690	110	6800	-
30	9.5	115	770	1.5	25.88	IE5	BF50-..S5E11LA6	5.7	19	38.5	115	139	770	770	770	770	770	122	7100	-
30	9.5	115	770	1.5	25.88	IE5	BF50-..S5E11MA6	5.7	19	38.5	115	139	680	770	770	770	770	110	7100	-
30	9.5	94	950	1.3	31.73	IE5	BF50-..S5E11LA6	4.7	15.5	31.5	94	113	950	950	950	950	950	122	7500	-
30	9.5	94	950	1.3	31.73	IE5	BF50-..S5E11MA6	4.7	15.5	31.5	94	113	840	950	950	950	950	110	7500	-
30	9.5	84	1060	1.2	35.49	IE5	BF50-..S5E11LA6	4.2	14	28	84	101	1060	1060	1060	1060	1060	122	7800	-
30	9.5	84	1060	1.2	35.49	IE5	BF50-..S5E11MA6	4.2	14	28	84	101	940	1060	1060	1060	1060	110	7800	-
30	9.5	71	1260	1	42.15	IE5	BF50-..S5E11LA6	3.5	11.5	23.5	71	85	1260	1260	1260	1260	1260	122	8500	-
30	9.5	71	1260	1	42.15	IE5	BF50-..S5E11MA6	3.5	11.5	23.5	71	85	1110	1260	1260	1260	1260	110	8500	-
30	9.5	63	1410	0.92	47.14	IE5	BF50-..S5E11LA6	3.1	10.5	21	63	76	1410	1410	1410	1410	1410	122	8900	-
30	9.5	63	1410	0.92	47.14	IE5	BF50-..S5E11MA6	3.1	10.5	21	63	76	1240	1410	1410	1410	1410	110	8900	-
30	9.5	210	425	2.8	14.24	IE5	BF60-..S5E11LA6	10.5	35	70	210	250	425	425	425	425	425	153	7100	20000
30	9.5	210	425	2.8	14.24	IE5	BF60-..S5E11MA6	10.5	35	70	210	250	375	425	425	425	425	141	7100	20000
30	9.5	176	500	2.8	16.96	IE5	BF60-..S5E11LA6	8.8	29	58	176	210	500	500	500	500	500	153	7300	20600
30	9.5	176	500	2.8	16.96	IE5	BF60-..S5E11MA6	8.8	29	58	176	210	445	500	500	500	500	141	7300	20600
30	9.5	159	560	2.7	18.81	IE5	BF60-..S5E11LA6	7.9	26.5	53	159	191	560	560	560	560	560	153	7600	21500
30	9.5	159	560	2.7	18.81	IE5	BF60-..S5E11MA6	7.9	26.5	53	159	191	495	560	560	560	560	141	7600	21500
30	9.5	132	670	2.4	22.58	IE5	BF60-..S5E11LA6	6.6	22	44	132	159	670	670	670	670	670	153	8000	22600
30	9.5	132	670	2.4	22.58	IE5	BF60-..S5E11MA6	6.6	22	44	132	159	590	670	670	670	670	141	8000	22600
30	9.5	119	750	2.3	25.05	IE5	BF60-..S5E11LA6	5.9	19.5	39.5	119	143	750	750	750	750	750	153	8200	23200
30	9.5	119	750	2.3	25.05	IE5	BF60-..S5E11MA6	5.9	19.5	39.5	119	143	660	750	750	750	750	141	8200	23200
30	9.5	96	930	2	31.2	IE5	BF60-..S5E11LA6	4.8	16	32	96	115	930	930	930	930	930	153	8800	24900
30	9.5	96	930	2	31.2	IE5	BF60-..S5E11MA6	4.8	16	32	96	115	820	930	930	930	930	141	8800	24900
30	9.5	86	1030	1.9	34.62	IE5	BF60-..S5E11LA6	4.3	14	28.5	86	103	1030	1030	1030	1030	1030	153	9100	25700
30	9.5	86	1030	1.9	34.62	IE5	BF60-..S5E11MA6	4.3	14	28.5	86	103	910	1030	1030	1030	1030	141	9100	25700
30	9.5	72	1240	1.7	41.6	IE5	BF60-..S5E11LA6	3.6	12	24	72	86	1240	1240	1240	1240	1240	153	9600	27100
30	9.5	72	1240	1.7	41.6	IE5	BF60-..S5E11MA6	3.6	12	24	72	86	1100	1240	1240	1240	1240	141	9600	27100
30	9.5	64	1380	1.6	46.16	IE5	BF60-..S5E11LA6	3.2	10.5	21.5	64	77	1380	1380	1380	1380	1380	153	9900	28000
30	9.5	64	1380	1.6	46.16	IE5	BF60-..S5E11MA6	3.2	10.5	21.5	64	77	1220	1380	1380	1380	1380	141	9900	28000
30	9.5	55	1630	1.4	54.44	IE5	BF60-..S5E11LA6	2.7	9.1	18	55	66	1630	1630	1630	1630	1630	153	10500	29700
30	9.5	55	1630	1.4	54.44	IE5	BF60-..S5E11MA6	2.7	9.1	18	55	66	1440	1630	1630	1630	1630	141	10500	29700
30	9.5	49.5	1810	1.3	60.4	IE5	BF60-..S5E11LA6	2.4	8.2	16.5	49.5	59	1810	1810	1810	1810	1810	153	11100	31400
30	9.5	41.5	2150	1.1	72.15	IE5	BF60-..S5E11MA6	2	6.9	13.5	41.5	49.5	2150	2150	2150	2150	2150	153	12000	34000
30	9.5	41.5	2150	1.1	72.15	IE5	BF60-..S5E11MA6	2	6.9	13.5	41.5	49.5	1910	2150	2150	2150	2150	141	12000	34000
30	9.5	37	2400	0.96	80.05	IE5	BF60-..S5E11LA6	1.8	6.2	12	37	44.5	2400	2400	2400	2400	2400	153	12600	35600
30	9.5	37	2400	0.96	80.05	IE5	BF60-..S5E11MA6	1.8	6.2	12	37	44.5	2100	2400	2400	2400	2400	141	12600	35600
30	9.5	32	2800	0.82	93.44	IE5	BF60-..S5E11LA6	1.6	5.3	10.5	32	38.5	2800	280						

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 30 Nm (PN = 9.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	24.5	3650	2.6	122.4	IE5	BF80-..S5E11LA6	1.2	4	8.1	24.5	29	3650	3650	3650	3650	3650	328	24500	75000
30	9.5	24.5	3650	2.6	122.4	IE5	BF80-..S5E11MA6	1.2	4	8.1	24.5	29	3200	3650	3650	3650	3650	316	24500	75000
30	9.5	21	4150	2.3	139.7	IE5	BF80-..S5E11LA6	1	3.5	7.1	21	25.5	4150	4150	4150	4150	4150	328	26700	75000
30	9.5	21	4150	2.3	139.7	IE5	BF80-..S5E11MA6	1	3.5	7.1	21	25.5	3700	4150	4150	4150	4150	316	26700	75000
30	9.5	18.5	4750	2	158.5	IE5	BF80-..S5E11LA6	0.9	3.1	6.3	18.5	22.5	4750	4750	4750	4750	4750	328	29000	75000
30	9.5	18.5	4750	2	158.5	IE5	BF80-..S5E11MA6	0.9	3.1	6.3	18.5	22.5	4200	4750	4750	4750	4750	316	29000	75000
30	9.5	16	5500	1.7	184.5	IE5	BF80-..S5E11LA6	0.8	2.7	5.4	16	19.5	5500	5500	5500	5500	5500	328	31800	75000
30	9.5	16	5500	1.7	184.5	IE5	BF80-..S5E11MA6	0.8	2.7	5.4	16	19.5	4850	5500	5500	5500	5500	316	31800	75000
30	9.5	14	6200	1.5	209.4	IE5	BF80-..S5E11LA6	0.7	2.3	4.7	14	17	6200	6200	6200	6200	6200	328	34300	75000
30	9.5	14	6200	1.5	209.4	IE5	BF80-..S5E11MA6	0.7	2.3	4.7	14	17	5500	6200	6200	6200	6200	316	34300	75000
30	9.5	12.5	7100	1.3	237.1	IE5	BF80-..S5E11LA6	0.6	2.1	4.2	12.5	15	7100	7100	7100	7100	7100	328	36900	75000
30	9.5	12.5	7100	1.3	237.1	IE5	BF80-..S5E11MA6	0.6	2.1	4.2	12.5	15	6200	7100	7100	7100	7100	316	36900	75000
30	9.5	11	8000	1.2	269.1	IE5	BF80-..S5E11LA6	0.55	1.8	3.7	11	13	8000	8000	8000	8000	8000	328	39600	75000
30	9.5	11	8000	1.2	269.1	IE5	BF80-..S5E11MA6	0.55	1.8	3.7	11	13	7100	8000	8000	8000	8000	316	39600	75000
30	9.5	10	8700	1.2	291.7	IE5	BF80Z-..S5E11LA6	0.5	1.7	3.4	10	12	8700	8700	8700	8700	8700	375	39600	75000
30	9.5	10	8700	1.2	291.7	IE5	BF80Z-..S5E11MA6	0.5	1.7	3.4	10	12	7700	8700	8700	8700	8700	363	39600	75000
30	9.5	8.6	10400	1	347.3	IE5	BF80Z-..S5E11LA6	0.43	1.4	2.8	8.6	10	10400	10400	10400	10400	10400	375	39600	75000
30	9.5	8.6	10400	1	347.3	IE5	BF80Z-..S5E11MA6	0.43	1.4	2.8	8.6	10	9200	10400	10400	10400	10400	363	39600	75000
30	9.5	7.6	11800	0.89	394.2	IE5	BF80Z-..S5E11LA6	0.38	1.2	2.5	7.6	9.1	11800	11800	11800	11800	11800	375	39600	75000
30	9.5	7.6	11800	0.89	394.2	IE5	BF80Z-..S5E11MA6	0.38	1.2	2.5	7.6	9.1	10400	11800	11800	11800	11800	363	39600	75000
30	9.5	15	5900	2.8	198.8	IE5	BF90-..S5E11LA6	0.75	2.5	5	15	18	5900	5900	5900	5900	5900	581	36000	111300
30	9.5	15	5900	2.8	198.8	IE5	BF90-..S5E11MA6	0.75	2.5	5	15	18	5200	5900	5900	5900	5900	569	36000	111300
30	9.5	12.5	6900	2.4	232.6	IE5	BF90-..S5E11LA6	0.6	2.1	4.2	12.5	15	6900	6900	6900	6900	6900	581	39900	111300
30	9.5	12.5	6900	2.4	232.6	IE5	BF90-..S5E11MA6	0.6	2.1	4.2	12.5	15	6100	6900	6900	6900	6900	569	39900	111300
30	9.5	11.5	7700	2.2	259	IE5	BF90-..S5E11LA6	0.55	1.9	3.8	11.5	13.5	7700	7700	7700	7700	7700	581	42800	120000
30	9.5	11.5	7700	2.2	259	IE5	BF90-..S5E11MA6	0.55	1.9	3.8	11.5	13.5	6800	7700	7700	7700	7700	569	42800	120000
30	9.5	11	8000	2.3	269.8	IE5	BF90Z-..S5E11LA6	0.55	1.8	3.7	11	13	8000	8000	8000	8000	8000	641	42800	120000
30	9.5	11	8000	2.3	269.8	IE5	BF90Z-..S5E11MA6	0.55	1.8	3.7	11	13	7100	8000	8000	8000	8000	629	42800	120000
30	9.5	9.9	9000	2.1	300.4	IE5	BF90Z-..S5E11LA6	0.49	1.6	3.3	9.9	11.5	9000	9000	9000	9000	9000	641	42800	120000
30	9.5	9.9	9000	2.1	300.4	IE5	BF90Z-..S5E11MA6	0.49	1.6	3.3	9.9	11.5	7900	9000	9000	9000	9000	629	42800	120000
30	9.5	8.7	10300	1.8	343.6	IE5	BF90Z-..S5E11LA6	0.43	1.4	2.9	8.7	10	10300	10300	10300	10300	10300	641	42800	120000
30	9.5	8.7	10300	1.8	343.6	IE5	BF90Z-..S5E11MA6	0.43	1.4	2.9	8.7	10	9100	10300	10300	10300	10300	629	42800	120000
30	9.5	7.8	11400	1.6	382.6	IE5	BF90Z-..S5E11LA6	0.39	1.3	2.6	7.8	9.4	11400	11400	11400	11400	11400	641	42800	120000
30	9.5	7.8	11400	1.6	382.6	IE5	BF90Z-..S5E11MA6	0.39	1.3	2.6	7.8	9.4	10100	11400	11400	11400	11400	629	42800	120000
30	9.5	6.5	13700	1.4	456.7	IE5	BF90Z-..S5E11LA6	0.32	1	2.1	6.5	7.8	13700	13700	13700	13700	13700	641	42800	120000
30	9.5	6.5	13700	1.4	456.7	IE5	BF90Z-..S5E11MA6	0.32	1	2.1	6.5	7.8	12100	13700	13700	13700	13700	629	42800	120000
30	9.5	5.8	15200	1.2	508.5	IE5	BF90Z-..S5E11LA6	0.29	0.95	1.9	5.8	7	15200	15200	15200	15200	15200	641	42800	120000
30	9.5	5.8	15200	1.2	508.5	IE5	BF90Z-..S5E11MA6	0.29	0.95	1.9	5.8	7	13400	15200	15200	15200	15200	629	42800	120000
30	9.5	5	17700	1	591.1	IE5	BF90Z-..S5E11LA6	0.25	0.8	1.6	5	6	17700	17700	17700	17700	17700	641	42800	120000
30	9.5	5	17700	1	591.1	IE5	BF90Z-..S5E11MA6	0.25	0.8	1.6	5	6	15600	17700	17700	17700	17700	629	42800	120000
30	9.5	4.5	19700	0.94	658.1	IE5	BF90Z-..S5E11LA6	0.22	0.75	1.5	4.5	5.4	19700	19700	19700	19700	19700	641	42800	120000
30	9.5	4.5	19700	0.94	658.1	IE5	BF90Z-..S5E11MA6	0.22	0.75	1.5	4.5	5.4	17400	19700	19700	19700	19700	629	42800	120000
30	9.5	3.9	22500	0.81	759	IE5	BF90Z-..S5E11LA6	0.19	0.65	1.3	3.9	4.7	22500	22500	22500	22500	22500	641	42800	120000
30	9.5	3.9	22500	0.81	759	IE5	BF90Z-..S5E11MA6	0.19	0.65	1.3	3.9	4.7	20000	22500	22500	22500	22500	629	42800	120000

MN = 35 Nm (PN = 11 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000					

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 11 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]		
								150	500	1000	3000	3600	150	500	1000	3000	3600					
35	11	126	830	0.88	23.77	IE5	BF40-..S5E11LA6	6.3	21	42	126	151	830	830	830	830	830	92	5400	-		
35	11	111	940	0.82	26.86	IE4	BF40-..S4E11MA6	5.5	18.5	37	111	134	710	800	940	940	940	80	5600	-		
35	11	111	940	0.82	26.86	IE5	BF40-..S5E11LA6	5.5	18.5	37	111	134	940	940	940	940	940	92	5600	-		
35	11	550	188	2.6	5.38	IE4	BF50-..S4E11MA6	27.5	92	185	550	660	142	161	188	188	188	110	4500	-		
35	11	550	188	2.6	5.38	IE5	BF50-..S5E11LA6	27.5	92	185	550	660	188	188	188	188	188	122	4500	-		
35	11	385	265	2.1	7.71	IE4	BF50-..S4E11MA6	19	64	129	385	465	200	230	265	265	265	110	5100	-		
35	11	385	265	2.1	7.71	IE5	BF50-..S5E11LA6	19	64	129	385	465	265	265	265	265	265	122	5100	-		
35	11	280	370	1.8	10.68	IE4	BF50-..S4E11MA6	14	46.5	93	280	335	280	320	370	370	370	110	5600	-		
35	11	280	370	1.8	10.68	IE5	BF50-..S5E11LA6	14	46.5	93	280	335	370	370	370	370	370	122	5600	-		
35	11	200	510	1.5	14.65	IE4	BF50-..S4E11MA6	10	34	68	200	245	385	435	510	510	510	110	6100	-		
35	11	200	510	1.5	14.65	IE5	BF50-..S5E11LA6	10	34	68	200	245	510	510	510	510	510	122	6100	-		
35	11	179	580	1.6	16.7	IE4	BF50-..S4E11MA6	8.9	29.5	59	179	215	440	500	580	580	580	110	6200	-		
35	11	179	580	1.6	16.7	IE5	BF50-..S5E11LA6	8.9	29.5	59	179	215	580	580	580	580	580	122	6200	-		
35	11	160	650	1.5	18.68	IE4	BF50-..S4E11MA6	8	26.5	53	160	192	495	560	650	650	650	110	6400	-		
35	11	160	650	1.5	18.68	IE5	BF50-..S5E11LA6	8	26.5	53	160	192	650	650	650	650	650	122	6400	-		
35	11	129	800	1.4	23.14	IE4	BF50-..S4E11MA6	6.4	21.5	43	129	155	610	690	800	800	800	110	6800	-		
35	11	129	800	1.4	23.14	IE5	BF50-..S5E11LA6	6.4	21.5	43	129	155	800	800	800	800	800	122	6800	-		
35	11	115	900	1.3	25.88	IE4	BF50-..S4E11MA6	5.7	19	38.5	115	139	680	770	900	900	900	110	7100	-		
35	11	115	900	1.3	25.88	IE5	BF50-..S5E11LA6	5.7	19	38.5	115	139	900	900	900	900	900	122	7100	-		
35	11	94	1110	1.1	31.73	IE4	BF50-..S4E11MA6	4.7	15.5	31.5	94	113	1110	1110	1110	1110	1110	110	7500	-		
35	11	94	1110	1.1	31.73	IE5	BF50-..S5E11LA6	4.7	15.5	31.5	94	113	940	1060	1240	1240	1240	122	7500	-		
35	11	84	1240	1	35.49	IE4	BF50-..S4E11MA6	4.2	14	28	84	101	940	1060	1240	1240	1240	110	7800	-		
35	11	84	1240	1	35.49	IE5	BF50-..S5E11LA6	4.2	14	28	84	101	1240	1240	1240	1240	1240	122	7800	-		
35	11	71	1470	0.88	42.15	IE4	BF50-..S4E11MA6	3.5	11.5	23.5	71	85	1470	1470	1470	1470	1470	110	8500	-		
35	11	71	1470	0.88	42.15	IE5	BF50-..S5E11LA6	3.5	11.5	23.5	71	85	1470	1470	1470	1470	1470	122	8500	-		
35	11	290	360	2.8	10.31	IE4	BF60-..S4E11MA6	14.5	48	96	290	345	270	305	360	360	360	141	6500	18400		
35	11	290	360	2.8	10.31	IE5	BF60-..S5E11LA6	14.5	48	96	290	345	360	360	360	360	360	153	6500	18400		
35	11	210	495	2.4	14.24	IE4	BF60-..S4E11MA6	10.5	35	70	210	250	375	425	495	495	495	141	7100	20000		
35	11	210	495	2.4	14.24	IE5	BF60-..S5E11LA6	10.5	35	70	210	250	495	495	495	495	495	153	7100	20000		
35	11	176	590	2.4	16.96	IE4	BF60-..S4E11MA6	8.8	29	58	176	210	445	500	590	590	590	141	7300	20600		
35	11	176	590	2.4	16.96	IE5	BF60-..S5E11LA6	8.8	29	58	176	210	590	590	590	590	590	153	7300	20600		
35	11	159	650	2.3	18.81	IE4	BF60-..S4E11MA6	7.9	26.5	53	159	191	495	560	650	650	650	141	7600	21500		
35	11	159	650	2.3	18.81	IE5	BF60-..S5E11LA6	7.9	26.5	53	159	191	650	650	650	650	650	153	7600	21500		
35	11	132	790	2.1	22.58	IE4	BF60-..S4E11MA6	6.6	22	44	132	159	590	670	790	790	790	141	8000	22600		
35	11	132	790	2.1	22.58	IE5	BF60-..S5E11LA6	6.6	22	44	132	159	790	790	790	790	790	153	8000	22600		
35	11	119	870	2	25.05	IE4	BF60-..S4E11MA6	5.9	19.5	39.5	119	143	660	750	870	870	870	141	8200	23200		
35	11	119	870	2	25.05	IE5	BF60-..S5E11LA6	5.9	19.5	39.5	119	143	870	870	870	870	870	153	8200	23200		
35	11	96	1090	1.7	31.2	IE4	BF60-..S5E11LA6	4.8	16	32	96	115	820	930	1090	1090	1090	1090	1090	141	8800	24900
35	11	86	1210	1.6	34.62	IE4	BF60-..S4E11MA6	4.3	14	28.5	86	103	910	1030	1210	1210	1210	141	9100	25700		
35	11	86	1210	1.6	34.62	IE5	BF60-..S5E11LA6	4.3	14	28.5	86	103	1210	1210	1210	1210	1210	153	9100	25700		
35	11	72	1450	1.4	41.6	IE4	BF60-..S4E11MA6	3.6	12	24	72	86	1100	1240	1450	1450	1450	141	9600	27100		
35	11	72	1450	1.4	41.6	IE5	BF60-..S5E11LA6	3.6	12	24	72	86	1450	1450	1450	1450	1450	153	9600	27100		
35	11	64	1610	1.4	46.16	IE4	BF60-..S4E11MA6	3.2	10.5	21.5	64	77	1610	1610	1610	1610	1610	141	9900	28000		
35	11	64	1610	1.4	46.16	IE5	BF60-..S5E11LA6	3.2	10.5	21.5	64	77	1610	1610	1610	1610	1610	153	9900	28000		
35	11	55	1900	1.2	54.44	IE4	BF60-..S4E11MA6	2.7	9.1	18	55	66	1440	1630	1900	1900	1900	141	10500	29700		
35	11	55	1900	1.2	54.44	IE5	BF60-..S5E11LA6	2.7	9.1	18	55	66	1900	1900	1900	1900	1900	153	10500	29700		
35	11	49.5	2100	1.1	60.4	IE4	BF60-..S4E11MA6	2.4	8.2	16.5	49.5	59	1600	1810	2100	2100	2100	141	11100	31400		
35	11	49.5	2100	1.1	60.4	IE5	BF60-..S5E11LA6	2.4	8.2	16.5	49.5	59	2100	2100	2100	2100	2100	153	11100	31400		
35	11	41.5	2500	0.91	72.15	IE4	BF60-..S4E11MA6	2	6.9	13.5	41.5	49.5	1910	2150	2500	2500	2500	141	12000	34000		
35	11	41.5	2500	0.91	72.15	IE5	BF60-..S5E11LA6	2	6.9	13.5	41.5	49.5	2500	2500	2500	2500	2500	153	12000	34000		
35	11	37	2800	0.82	80.05	IE4	BF60-..S4E11MA6	1.8	6.2	12	37	44.5	2100	2400	2800	2800	2800	141	12600	35600		
35	11	37	2800	0.82	80.05	IE5	BF60-..S5E11LA6	1.8	6.2	12	37	44.5	2800	2800	2800	2800	2800	153	12600	35600		
35	11	53	1950	2.7	55.79	IE4	BF70-..S4E11MA6	2.6	8.9	17.5	53	64	1470	1670	1950	1950	1950	220	10200	36000		
35	11	53	1950	2.7	55.79	IE5	BF70-..S5E11LA6	2.6	8.9	17.5	53	64	1950	1950	1							

BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 11 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
35	11	24.5	4250	2.2	122.4	IE5	BF80.../S5E11LA6	1.2	4	8.1	24.5	29	4250	4250	4250	4250	4250	328	24500	75000
35	11	21	4850	1.9	139.7	IE4	BF80.../S4E11MA6	1	3.5	7.1	21	25.5	3700	4150	4850	4850	4850	316	26700	75000
35	11	21	4850	1.9	139.7	IE5	BF80.../S5E11LA6	1	3.5	7.1	21	25.5	4850	4850	4850	4850	4850	328	26700	75000
35	11	18.5	5500	1.7	158.5	IE4	BF80.../S4E11MA6	0.9	3.1	6.3	18.5	22.5	4200	4750	5500	5500	5500	316	29000	75000
35	11	18.5	5500	1.7	158.5	IE5	BF80.../S5E11LA6	0.9	3.1	6.3	18.5	22.5	5500	5500	5500	5500	5500	328	29000	75000
35	11	16	6400	1.5	184.5	IE4	BF80.../S4E11MA6	0.8	2.7	5.4	16	19.5	4850	5500	6400	6400	6400	316	31800	75000
35	11	16	6400	1.5	184.5	IE5	BF80.../S5E11LA6	0.8	2.7	5.4	16	19.5	6400	6400	6400	6400	6400	328	31800	75000
35	11	14	7300	1.3	209.4	IE4	BF80.../S4E11MA6	0.7	2.3	4.7	14	17	5500	6200	7300	7300	7300	316	34300	75000
35	11	14	7300	1.3	209.4	IE5	BF80.../S5E11LA6	0.7	2.3	4.7	14	17	7300	7300	7300	7300	7300	328	34300	75000
35	11	12.5	8200	1.1	237.1	IE4	BF80.../S4E11MA6	0.6	2.1	4.2	12.5	15	6200	7100	8200	8200	8200	316	36900	75000
35	11	12.5	8200	1.1	237.1	IE5	BF80.../S5E11LA6	0.6	2.1	4.2	12.5	15	8200	8200	8200	8200	8200	328	36900	75000
35	11	11	9400	1	269.1	IE4	BF80.../S4E11MA6	0.55	1.8	3.7	11	13	7100	8000	9400	9400	9400	316	39600	75000
35	11	11	9400	1	269.1	IE5	BF80.../S5E11LA6	0.55	1.8	3.7	11	13	9400	9400	9400	9400	9400	328	39600	75000
35	11	10	10200	1	291.7	IE4	BF80Z.../S4E11MA6	0.5	1.7	3.4	10	12	7700	8700	10200	10200	10200	363	39600	75000
35	11	10	10200	1	291.7	IE5	BF80Z.../S5E11LA6	0.5	1.7	3.4	10	12	10200	10200	10200	10200	10200	375	39600	75000
35	11	8.6	12100	0.86	347.3	IE4	BF80Z.../S4E11MA6	0.43	1.4	2.8	8.6	10	9200	10400	12100	12100	12100	363	39600	75000
35	11	8.6	12100	0.86	347.3	IE5	BF80Z.../S5E11LA6	0.43	1.4	2.8	8.6	10	12100	12100	12100	12100	12100	375	39600	75000
35	11	16.5	6200	2.7	178.6	IE4	BF90.../S4E11MA6	0.8	2.7	5.5	16.5	20	4700	5300	6200	6200	6200	569	33400	106700
35	11	16.5	6200	2.7	178.6	IE5	BF90.../S5E11LA6	0.8	2.7	5.5	16.5	20	6200	6200	6200	6200	6200	581	33400	106700
35	11	15	6900	2.4	198.8	IE4	BF90.../S4E11MA6	0.75	2.5	5	15	18	5200	5900	6900	6900	6900	569	36000	111300
35	11	15	6900	2.4	198.8	IE5	BF90.../S5E11LA6	0.75	2.5	5	15	18	6900	6900	6900	6900	6900	581	36000	111300
35	11	12.5	8100	2.1	232.6	IE4	BF90.../S4E11MA6	0.6	2.1	4.2	12.5	15	6100	6900	8100	8100	8100	569	39900	118300
35	11	12.5	8100	2.1	232.6	IE5	BF90.../S5E11LA6	0.6	2.1	4.2	12.5	15	8100	8100	8100	8100	8100	581	39900	118300
35	11	11.5	9000	1.9	259	IE4	BF90.../S4E11MA6	0.55	1.9	3.8	11.5	13.5	6800	7700	9000	9000	9000	569	42800	120000
35	11	11.5	9000	1.9	259	IE5	BF90.../S5E11LA6	0.55	1.9	3.8	11.5	13.5	9000	9000	9000	9000	9000	581	42800	120000
35	11	11	9400	2	269.8	IE4	BF90Z.../S4E11MA6	0.55	1.8	3.7	11	13	7100	8000	9400	9400	9400	629	42800	120000
35	11	11	9400	2	269.8	IE5	BF90Z.../S5E11LA6	0.55	1.8	3.7	11	13	9400	9400	9400	9400	9400	641	42800	120000
35	11	9.9	10500	1.8	300.4	IE4	BF90Z.../S4E11MA6	0.49	1.6	3.3	9.9	11.5	7900	9000	10500	10500	10500	629	42800	120000
35	11	9.9	10500	1.8	300.4	IE5	BF90Z.../S5E11LA6	0.49	1.6	3.3	9.9	11.5	10500	10500	10500	10500	10500	641	42800	120000
35	11	8.7	12000	1.5	343.6	IE4	BF90Z.../S4E11MA6	0.43	1.4	2.9	8.7	10	9100	10300	12000	12000	12000	629	42800	120000
35	11	8.7	12000	1.5	343.6	IE5	BF90Z.../S5E11LA6	0.43	1.4	2.9	8.7	10	12000	12000	12000	12000	12000	641	42800	120000
35	11	7.8	13300	1.4	382.6	IE4	BF90Z.../S4E11MA6	0.39	1.3	2.6	7.8	9.4	10100	11400	13300	13300	13300	629	42800	120000
35	11	7.8	13300	1.4	382.6	IE5	BF90Z.../S5E11LA6	0.39	1.3	2.6	7.8	9.4	13300	13300	13300	13300	13300	641	42800	120000
35	11	6.5	15900	1.2	456.7	IE4	BF90Z.../S4E11MA6	0.32	1	2.1	6.5	7.8	12100	13700	15900	15900	15900	629	42800	120000
35	11	6.5	15900	1.2	456.7	IE5	BF90Z.../S5E11LA6	0.32	1	2.1	6.5	7.8	15900	15900	15900	15900	15900	641	42800	120000
35	11	5.8	17700	1	508.5	IE4	BF90Z.../S4E11MA6	0.29	0.95	1.9	5.8	7	13400	15200	17700	17700	17700	629	42800	120000
35	11	5.8	17700	1	508.5	IE5	BF90Z.../S5E11LA6	0.29	0.95	1.9	5.8	7	17700	17700	17700	17700	17700	641	42800	120000
35	11	5	20500	0.89	591.1	IE4	BF90Z.../S4E11MA6	0.25	0.8	1.6	5	6	15600	17700	20500	20500	20500	629	42800	120000
35	11	5	20500	0.89	591.1	IE5	BF90Z.../S5E11LA6	0.25	0.8	1.6	5	6	20500	20500	20500	20500	20500	641	42800	120000
35	11	4.5	23000	0.8	658.1	IE4	BF90Z.../S4E11MA6	0.22	0.75	1.5	4.5	5.4	17400	19700	23000	23000	23000	629	42800	120000
35	11	4.5	23000	0.8	658.1	IE5	BF90Z.../S5E11LA6	0.22	0.75	1.5	4.5	5.4	23000	23000	23000	23000	23000	641	42800	120000

MN = 48 Nm (PN = 15 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
48	15	470	300	0.86	6.34	IE5	BF30.../S5E11LA6	23.5	78	157	470	560	220	250	300	300	250	78	2400	-	
48	15	510	280	1.2	5.87	IE5	BF40.../S5E11LA6	25.5	85	170	510	610	205	230	280	280	230	92	3550	-	
48	15	390	365	1	7.62	IE5	BF40.../S5E11LA6	19.5	65	131	390	470	265	300	365	365	300	92	3900	-	
48	15	315	455	0.91																	


BF-series shaft-mounted geared motors

Selection - shaft-mounted geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 48 Nm (PN = 15 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
48	15	55	2600	0.88	54.44	IE5	BF60-..S5E11LA6	2.7	9.1	18	55	66	1900	2150	2600	2600	2150	153	10500	29700
48	15	81	1770	2.9	36.88	IE5	BF70-..S5E11LA6	4	13.5	27	81	97	1290	1470	1770	1770	1470	232	7900	31100
48	15	69	2050	2.5	43.02	IE5	BF70-..S5E11LA6	3.4	11.5	23	69	83	1500	1720	2050	2050	1720	232	8700	32800
48	15	62	2250	2.3	47.82	IE5	BF70-..S5E11LA6	3.1	10	20.5	62	75	1670	1910	2250	2250	1910	232	9100	34000
48	15	53	2650	1.9	55.79	IE5	BF70-..S5E11LA6	2.6	8.9	17.5	53	64	1950	2200	2650	2650	2200	232	10200	36000
48	15	48	2950	1.7	61.94	IE5	BF70-..S5E11LA6	2.4	8	16	48	58	2150	2450	2950	2950	2450	232	10800	37400
48	15	41.5	3450	1.5	72.26	IE5	BF70-..S5E11LA6	2	6.9	13.5	41.5	49.5	2500	2850	3450	3450	2850	232	12000	39600
48	15	36.5	3900	1.3	81.82	IE5	BF70-..S5E11LA6	1.8	6.1	12	36.5	43.5	2850	3250	3900	3900	3250	232	12800	41300
48	15	31	4550	1.1	95.46	IE5	BF70-..S5E11LA6	1.5	5.2	10	31	37.5	3300	3800	4550	4550	3800	232	14000	43700
48	15	28.5	5000	1	105.2	IE5	BF70-..S5E11LA6	1.4	4.7	9.5	28.5	34	3650	4200	5000	5000	4200	232	14700	45100
48	15	24	5800	0.88	122.7	IE5	BF70-..S5E11LA6	1.2	4	8.1	24	29	4250	4900	5800	5800	4900	232	16100	47700
48	15	22.5	6300	0.81	133	IE5	BF70Z-..S5E11LA6	1.1	3.7	7.5	22.5	27	4650	5300	6300	6300	5300	258	16100	47700
48	15	42.5	3350	2.8	69.86	IE5	BF80-..S5E11LA6	2.1	7.1	14	42.5	51	2400	2750	3350	3350	2750	328	15900	60600
48	15	36	3950	2.4	83.16	IE5	BF80-..S5E11LA6	1.8	6	12	36	43	2900	3300	3950	3950	3300	328	18400	65100
48	15	31.5	4500	2.1	94.38	IE5	BF80-..S5E11LA6	1.5	5.2	10.5	31.5	38	3300	3750	4500	4500	3750	328	20300	68500
48	15	27.5	5100	1.8	107.9	IE5	BF80-..S5E11LA6	1.3	4.6	9.2	27.5	33	3750	4300	5100	5100	4300	328	22400	72300
48	15	24.5	5800	1.6	122.4	IE5	BF80-..S5E11LA6	1.2	4	8.1	24.5	29	4250	4850	5800	5800	4850	328	24500	75000
48	15	21	6700	1.4	139.7	IE5	BF80-..S5E11LA6	1	3.5	7.1	21	25.5	4850	5500	6700	6700	5500	328	26700	75000
48	15	18.5	7600	1.2	158.5	IE5	BF80-..S5E11LA6	0.9	3.1	6.3	18.5	22.5	5500	6300	7600	7600	6300	328	29000	75000
48	15	16	8800	1.1	184.5	IE5	BF80-..S5E11LA6	0.8	2.7	5.4	16	19.5	6400	7300	8800	8800	7300	328	31800	75000
48	15	14	10000	0.95	209.4	IE5	BF80-..S5E11LA6	0.7	2.3	4.7	14	17	7300	8300	10000	10000	8300	328	34300	75000
48	15	12.5	11300	0.83	237.1	IE5	BF80-..S5E11LA6	0.6	2.1	4.2	12.5	15	8200	9400	11300	11300	9400	328	36900	75000
48	15	25	5700	2.9	119.7	IE5	BF90-..S5E11LA6	1.2	4.1	8.3	25	30	4150	4750	5700	5700	4750	581	24500	90800
48	15	21.5	6600	2.5	139.1	IE5	BF90-..S5E11LA6	1	3.5	7.1	21.5	25.5	4850	5500	6600	6600	5500	581	27700	96300
48	15	19	7400	2.3	154.8	IE5	BF90-..S5E11LA6	0.95	3.2	6.4	19	23	5400	6100	7400	7400	6100	581	30100	100800
48	15	16.5	8500	2	178.6	IE5	BF90-..S5E11LA6	0.8	2.7	5.5	16.5	20	6200	7100	8500	8500	7100	581	33400	106700
48	15	15	9500	1.8	198.8	IE5	BF90-..S5E11LA6	0.75	2.5	5	15	18	6900	7900	9500	9500	7900	581	36000	111300
48	15	12.5	11100	1.5	232.6	IE5	BF90-..S5E11LA6	0.6	2.1	4.2	12.5	15	8100	9300	11100	11100	9300	581	39900	118300
48	15	11.5	12400	1.4	259	IE5	BF90-..S5E11LA6	0.55	1.9	3.8	11.5	13.5	9000	10300	12400	12400	10300	581	42800	120000
48	15	11	12900	1.4	269.8	IE5	BF90Z-..S5E11LA6	0.55	1.8	3.7	11	13	9400	10700	12900	12900	10700	641	42800	120000
48	15	9.9	14400	1.3	300.4	IE5	BF90Z-..S5E11LA6	0.49	1.6	3.3	9.9	11.5	10500	12000	14400	14400	12000	641	42800	120000
48	15	8.7	16400	1.1	343.6	IE5	BF90Z-..S5E11LA6	0.43	1.4	2.9	8.7	10	12000	13700	16400	16400	13700	641	42800	120000
48	15	7.8	18300	1	382.6	IE5	BF90Z-..S5E11LA6	0.39	1.3	2.6	7.8	9.4	13300	15300	18300	18300	15300	641	42800	120000
48	15	6.5	21500	0.84	456.7	IE5	BF90Z-..S5E11LA6	0.32	1	2.1	6.5	7.8	15900	18200	21500	21500	18200	641	42800	120000

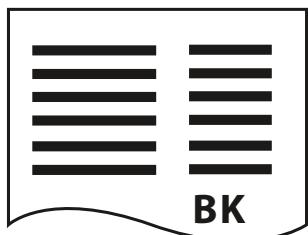

8

BK-series bevel-geared motors - Selection

Description of bevel-gear units	209
Sizes	209
Bauer service factors (f_B) for bevel-geared motors	209
Continuous operation without switching frequency $Z \leq 1/h$	209
Switching duty	209
Bauer Service factor	209
Explanation of shock classification	210
Key to abbreviations	210
Selection tables, bevel-geared motors	210
Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$	211
Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$	233

Energy Efficient Geared Motors

AC Variable Speed

BK-series bevel-gear motors

Description of bevel-gear units

Sizes

Bauer BK-series bevel-gear motors are normally supplied in ten frame sizes and with torques of 80 to 18,500 Nm. Higher torques are available on request. The gear unit is accommodated in a sturdy cast housing.

Bauer service factors (f_B) for bevel-gear motors

Of the numerous factors influencing the total loading of a gear unit, the most important include:

- Mean torque (rated torque)
- Daily operating hours
- Severity of torque peaks (shock classification)
- Frequency of torque peaks (switching duty)

These factors can be represented in a simplified and practical manner by service factors. The tables and explanations below attempt to provide an objective description of the shock classification, rather than a classification of the driven machinery. Experience has shown that, in addition to the torque shocks caused by the driven machinery (M_d/M_N), above all the power transmission components (clutches, chains etc.) plus the mass ratios play a decisive role in this.

See Bauer special imprint SD32 for more information.

Continuous operation without switching frequency $Z \leq 1/h$

Factor f_1 for shock classification and operating time

Shock classification	Operating hours per day t_d	>4 h	>8 h	>16 h
		≤ 8 h	≤ 16 h	≤ 24 h
I		0.8	1.0	1.2
II		1.05	1.25	1.45
III		1.45	1.55	1.7

Switching duty

Factor f_2 for shock classification and switching frequency

Switching frequency in single-shift operation $t_d \leq 8$ h/d

Shock classification	$1 < Z \leq 100$	$100 < Z \leq 1000$	$1000 < Z$
I	0.95	1.1	1.15
II	1.2	1.35	1.4
III	1.55	1.6	1.6

Switching frequency in multiple-shift operation $t_d > 8$ h/d

Shock classification	$1 < Z \leq 100$	$100 < Z \leq 1000$	$1000 < Z$
I	1.3	1.45	1.5
II	1.5	1.6	1.65
III	1.75	1.8	1.8

Bauer Service factor

Bauer service factor $f_B = f_1$ or $f_B = f_2$

For example: Shock classification II for $Z = 100$ switching operations per hour and multiple-shift operation yields a service factor $f_B = f_2 = 1.5$

BK-series bevel-gear motors

Description of bevel-gear units

Explanation of shock classification

Shock classification I:

Uniform without shock loads. All the following requirements must be satisfied:

- $Fl \leq 1.3$
- $M_x/M_N \leq 1.0$
- Shock-absorbing power transmission components (e.g. highly resilient, zero-play coupling, $\varphi_N \geq 5^\circ$)

Shock classification II:

Moderate shock loads. At least one of the following conditions applies:

- $1.3 < Fl \leq 4$
- $1 < M_x/M_N \leq 1.6$
- Shock-neutral power transmission components (e.g. gear wheels, zero-play rigid coupling or resilient coupling with $\varphi_N < 5^\circ$)

Shock classification III:

Heavy shock loads. At least one of the following conditions applies:

- $Fl > 4$
- $1.6 < M_x/M_N \leq 2.0$
- Shock-amplifying power transmission components (e.g. coupling with play or chain drive)


Key to abbreviations

Z	Switching duty number of switching operations per hour
t_d	Daily operating time in hours (h/d)
Fl	Factor of inertia $Fl = (J_{ext} + J_{rot})/J_{rot}$
J_{ext}	Mass moment of inertia of the machine to be driven, in relation to the motor's rotor shaft (kgm^2)
J_{rot}	Mass moment of inertia of the motor rotor (kgm^2)
M_x	Highest impact torque above the static torque which can occur during normal operation or in emergency situations
M_N	Required static load torque for the application
M_x/M_N	Relative torque - Factor
φ_N	Torsional offset of the resilient coupling under rated torque

Selection tables, bevel-gear motors

Key to abbreviations

P	Rated output
n_2	Rated speed of the output shaft
i	Gear reduction ratio
M_2	Rated torque at the output shaft
f_B	Bauer service factor
F_{RN}	Maximum permissible radial force with normal bearings
F_{RV}	Maximum permissible radial force with reinforced bearings in each case with standard solid shaft (Code -.1 and -.2)

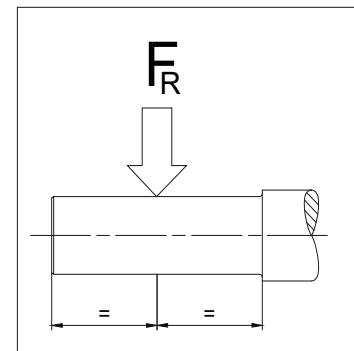

Use the selection tables to determine the size of geared motor required. The codes clearly define the Type of gear unit and output shaft (see chapter 12 "dimensional drawing bevel-gear motors").


Motor power overload protection

Motor-power ratings, particularly in conjunction with four-stage and multi-stage gear units, are more than ample in some instances. Consequently, and in much the same way as with low-power motors, rated current is not a measure of gear loading and cannot be used to protect the gear unit against overloading. It is advisable to provide gears at risk from excessive load or blockage with a protective mechanism (e. g., slip clutch, slip hub, shear pin or an alternative).

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 0.76 Nm (PN = 12 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
0.76	12	31	32	2.5	47.78	IE4	BK06-../S4E04SA4-1	3.1	10	20.5	31	37.5	32	32	32	32	32	7.6	1500	-
0.76	12	27.5	36.5	1.8	54.38	IE4	BK06-../S4E04SA4-1	2.7	9.1	18	27.5	33	36.5	36.5	36.5	36.5	36.5	7.6	1600	-
0.76	12	23.5	42.5	1.5	63.33	IE4	BK06-../S4E04SA4-1	2.3	7.8	15.5	23.5	28	42.5	42.5	42.5	42.5	42.5	7.6	1700	-
0.76	12	12	77	1.8	120.3	IE4	BK10Z-../S4E04SA4-1	1.2	4.1	8.3	12	14.5	77	77	77	77	77	21	7000	-
0.76	12	10	91	1.8	143.2	IE4	BK10Z-../S4E04SA4-1	1	3.4	6.9	10	12.5	91	91	91	91	91	21	7000	-
0.76	12	8.7	107	1.9	170.6	IE4	BK10Z-../S4E04SA4-1	0.85	2.9	5.8	8.7	10.5	107	107	107	107	107	21	7000	-
0.76	12	7.3	127	1.6	204.7	IE4	BK10Z-../S4E04SA4-1	0.7	2.4	4.8	7.3	8.7	127	127	127	127	127	21	7000	-
0.76	12	5.8	160	1.2	257.9	IE4	BK10Z-../S4E04SA4-1	0.55	1.9	3.8	5.8	6.9	160	160	160	160	160	21	7000	-
0.76	12	4.9	186	0.99	302.4	IE4	BK10Z-../S4E04SA4-1	0.49	1.6	3.3	4.9	5.9	186	186	186	186	186	21	7000	-
0.76	12	4.3	210	1	343.2	IE4	BK10G06-../S4E04SA4-1	0.43	1.4	2.9	4.3	5.2	210	210	210	210	210	25	7000	-
0.76	12	3.6	250	0.87	410.8	IE4	BK10G06-../S4E04SA4-1	0.36	1.2	2.4	3.6	4.3	250	250	250	250	250	25	7000	-
0.76	12	8.6	109	3	173.4	IE4	BK20Z-../S4E04SA4-1	0.85	2.8	5.7	8.6	10	109	109	109	109	109	31	8700	9000
0.76	12	7.2	129	2.6	207.5	IE4	BK20Z-../S4E04SA4-1	0.7	2.4	4.8	7.2	8.6	129	129	129	129	129	31	8700	9000
0.76	12	5.7	161	2	259.9	IE4	BK20Z-../S4E04SA4-1	0.55	1.9	3.8	5.7	6.9	161	161	161	161	161	31	8700	9000
0.76	12	5	183	1.7	298.2	IE4	BK20Z-../S4E04SA4-1	0.5	1.6	3.3	5	6	183	183	183	183	183	31	8700	9000
0.76	12	4	220	1.3	367.7	IE4	BK20Z-../S4E04SA4-1	0.4	1.3	2.7	4	4.8	220	220	220	220	220	31	8700	9000
0.76	12	4.1	220	1.6	359.1	IE4	BK20G06-../S4E04SA4-1	0.41	1.3	2.7	4.1	5	220	220	220	220	220	34	8700	9000
0.76	12	3.4	260	1.4	429.7	IE4	BK20G06-../S4E04SA4-1	0.34	1.1	2.3	3.4	4.1	260	260	260	260	260	34	8700	9000
0.76	12	3.1	290	1.2	480.4	IE4	BK20G06-../S4E04SA4-1	0.31	1	2	3.1	3.7	290	290	290	290	290	34	8700	9000
0.76	12	2.8	315	1.1	524.5	IE4	BK20G06-../S4E04SA4-1	0.28	0.95	1.9	2.8	3.4	315	315	315	315	315	34	8700	9000
0.76	12	2.3	375	0.95	630	IE4	BK20G06-../S4E04SA4-1	0.23	0.75	1.5	2.3	2.8	375	375	375	375	375	34	8700	9000
0.76	12	1.9	450	0.8	757	IE4	BK20G06-../S4E04SA4-1	0.19	0.65	1.3	1.9	2.3	450	450	450	450	450	34	8700	9000
0.76	12	3.1	285	1.7	471.5	IE4	BK30G06-../S4E04SA4-1	0.31	1	2.1	3.1	3.8	285	285	285	285	285	40	11200	12000
0.76	12	2.6	340	1.4	567	IE4	BK30G06-../S4E04SA4-1	0.26	0.85	1.7	2.6	3.1	340	340	340	340	340	40	11200	12000
0.76	12	2.2	390	1.2	652.5	IE4	BK30G06-../S4E04SA4-1	0.22	0.75	1.5	2.2	2.7	390	390	390	390	390	40	11200	12000
0.76	12	2	440	1.1	743	IE4	BK30G06-../S4E04SA4-1	0.2	0.65	1.3	2	2.4	440	440	440	440	440	40	11200	12000
0.76	12	1.8	480	1	810.9	IE4	BK30G06-../S4E04SA4-1	0.18	0.6	1.2	1.8	2.2	480	480	480	480	480	40	11200	12000
0.76	12	1.5	560	0.87	954.1	IE4	BK30G06-../S4E04SA4-1	0.15	0.5	1	1.5	1.8	560	560	560	560	560	40	11200	12000

MN = 1 Nm (PN = 0.157 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1	0.157	45	29.5	2.7	33.33	IE2	BK06-../SHE04SA4-1	4.5	15	30	45	54	22.5	25	29.5	29.5	29.5	7.6	1320	-
1	0.157	39	34	2.3	38.18	IE2	BK06-../SHE04SA4-1	3.9	13	26	39	47	26	29	34	34	34	7.6	1380	-
1	0.157	31	42.5	1.9	47.78	IE2	BK06-../SHE04SA4-1	3.1	10	20.5	31	37.5	32	36	42.5	42.5	42.5	7.6	1500	-
1	0.157	27.5	48	1.4	54.38	IE2	BK06-../SHE04SA4-1	2.7	9.1	18	27.5	33	36.5	41	48	48	48	7.6	1600	-
1	0.157	23.5	56	1.1	63.33	IE2	BK06-../SHE04SA4-1	2.3	7.8	15.5	23.5	28	42.5	47.5	56	56	56	7.6	1700	-
1	0.157	12	102	1.3	120.3	IE2	BK10Z-../SHE04SA4-1	1.2	4.1	8.3	12	14.5	77	86	102	102	102	21	7000	-
1	0.157	10	120	1.4	143.2	IE2	BK10Z-../SHE04SA4-1	1	3.4	6.9	10	12.5	91	102	120	120	120	21	7000	-
1	0.157	8.7	141	1.4	170.6	IE2	BK10Z-../SHE04SA4-1	0.85	2.9	5.8	8.7	10.5	107	120	141	141	141	21	7000	-
1	0.157	7.3	167	1.2	204.7	IE2	BK10Z-../SHE04SA4-1	0.7	2.4	4.8	7.3	8.7	127	142	167	167	167	21	7000	-
1	0.157	5.8	210	0.95	257.9	IE2	BK10Z-../SHE04SA4-1	0.55	1.9	3.8	5.8	6.9	160	179	210	210	210	21	7000	-
1	0.157	15	83	2.8	96.99	IE2	BK20Z-../SHE04SA4-1	1.5	5.1	10	15	18.5	63	70	83	83	83	31	8700	9000
1	0.157	10	121	2.7	144.5	IE2	BK20Z-../SHE04SA4-1	1	3.4	6.9	10	12	92	103	121	121	121	31	8700	9000
1	0.157	8.6	143	2.3	173.4	IE2	BK20Z-../SHE04SA4-1	0.85	2.8	5.7	8.6	10	109	122	143	143	143	31	8700	9000
1	0.157	7.2	170	1.9	207.5	IE2	BK20Z-../SHE04SA4-1	0.7	2.4	4.8	7.2	8.6	129	144	170	170	170	31	8700	9000
1	0.157	5.7	210	1.5	259.9	IE2	BK20Z-../SHE04SA4-1	0.55	1.9	3.8	5.7	6.9	161	181	210	210	210	31	8700	9000
1	0.157	5	240	1.3	298.2	IE2	BK20Z-../SHE04SA4-1	0.5	1.6	3.3	5	6	183	205	240	240	240	31	8700	9000
1	0.157	4	290	0.99	367.7	IE2	BK20Z-../SHE04SA4-1	0.4	1.3	2.7	4	4.8	220	250	290	290	290	31	8700	9000
1	0.157	3.4	345	1	429.7	IE2	BK20G06-../SHE04SA4-1	0.34	1.1	2.3	3.4	4.1	260	290	345	345	345	34	8700	9000
1	0.157																			

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.3	0.2	39	44.5	1.8	38.18	IE5	BK06-..S5E06MA4	3.9	13	26	39	47	44.5	44.5	44.5	44.5	44.5	11	1380	-
1.3	0.2	31	55	1.4	47.78	IE5	BK06-..S5E06MA4	3.1	10	20.5	31	37.5	55	55	55	55	55	11	1500	-
1.3	0.2	27.5	62	1.1	54.38	IE5	BK06-..S5E06MA4	2.7	9.1	18	27.5	33	62	62	62	62	62	11	1600	-
1.3	0.2	23.5	73	0.87	63.33	IE5	BK06-..S5E06MA4	2.3	7.8	15.5	23.5	28	73	73	73	73	73	11	1700	-
1.3	0.2	24	71	2.8	61.68	IE5	BK10-..S5E06MA4	2.4	8.1	16	24	29	71	71	71	71	71	23	7000	-
1.3	0.2	20.5	82	2.4	72.31	IE5	BK10-..S5E06MA4	2	6.9	13.5	20.5	24.5	82	82	82	82	82	23	7000	-
1.3	0.2	16.5	100	1.8	89.3	IE5	BK10-..S5E06MA4	1.6	5.5	11	16.5	20	100	100	100	100	100	23	7000	-
1.3	0.2	14.5	113	1.4	102.5	IE5	BK10-..S5E06MA4	1.4	4.8	9.7	14.5	17.5	113	113	113	113	113	23	7000	-
1.3	0.2	12	132	1	120.3	IE5	BK10Z-..S5E06MA4	1.2	4.1	8.3	12	14.5	132	132	132	132	132	24	7000	-
1.3	0.2	10	156	1	143.2	IE5	BK10Z-..S5E06MA4	1	3.4	6.9	10	12.5	156	156	156	156	156	24	7000	-
1.3	0.2	8.7	184	1.1	170.6	IE5	BK10Z-..S5E06MA4	0.85	2.9	5.8	8.7	10.5	184	184	184	184	184	24	7000	-
1.3	0.2	7.3	215	0.92	204.7	IE5	BK10Z-..S5E06MA4	0.7	2.4	4.8	7.3	8.7	215	215	215	215	215	24	7000	-
1.3	0.2	13.5	121	2.6	108.6	IE5	BK20-..S5E06MA4	1.3	4.6	9.2	13.5	16.5	121	121	121	121	121	33	8700	9000
1.3	0.2	15	108	2.1	96.99	IE5	BK20Z-..S5E06MA4	1.5	5.1	10	15	18.5	108	108	108	108	108	34	8700	9000
1.3	0.2	12	137	2.4	124.2	IE5	BK20Z-..S5E06MA4	1.2	4	8	12	14	137	137	137	137	137	34	8700	9000
1.3	0.2	10	157	2.1	144.5	IE5	BK20Z-..S5E06MA4	1	3.4	6.9	10	12	157	157	157	157	157	34	8700	9000
1.3	0.2	8.6	187	1.8	173.4	IE5	BK20Z-..S5E06MA4	0.85	2.8	5.7	8.6	10	187	187	187	187	187	34	8700	9000
1.3	0.2	7.2	220	1.5	207.5	IE5	BK20Z-..S5E06MA4	0.7	2.4	4.8	7.2	8.6	220	220	220	220	220	34	8700	9000
1.3	0.2	5.7	275	1.2	259.9	IE5	BK20Z-..S5E06MA4	0.55	1.9	3.8	5.7	6.9	275	275	275	275	275	34	8700	9000
1.3	0.2	5	310	0.99	298.2	IE5	BK20Z-..S5E06MA4	0.5	1.6	3.3	5	6	310	310	310	310	310	34	8700	9000
1.3	0.2	4.1	375	0.95	359.1	IE5	BK20G06-..S5E06MA4	0.41	1.3	2.7	4.1	5	375	375	375	375	375	38	8700	9000
1.3	0.2	3.4	445	0.8	429.7	IE5	BK20G06-..S5E06MA4	0.34	1.1	2.3	3.4	4.1	445	445	445	445	445	38	8700	9000
1.3	0.2	10	158	2.8	145.1	IE5	BK30Z-..S5E06MA4	1	3.4	6.8	10	12	158	158	158	158	158	41	11200	12000
1.3	0.2	8.1	199	2.3	184.8	IE5	BK30Z-..S5E06MA4	0.8	2.7	5.4	8.1	9.7	199	199	199	199	199	41	11200	12000
1.3	0.2	6.9	230	1.9	216.5	IE5	BK30Z-..S5E06MA4	0.65	2.3	4.6	6.9	8.3	230	230	230	230	230	41	11200	12000
1.3	0.2	5.8	270	1.7	255.3	IE5	BK30Z-..S5E06MA4	0.55	1.9	3.9	5.8	7	270	270	270	270	270	41	11200	12000
1.3	0.2	4.8	325	1.2	308.3	IE5	BK30Z-..S5E06MA4	0.48	1.6	3.2	4.8	5.8	325	325	325	325	325	41	11200	12000
1.3	0.2	3.9	400	1	380.7	IE5	BK30Z-..S5E06MA4	0.39	1.3	2.6	3.9	4.7	400	400	400	400	400	41	11200	12000
1.3	0.2	3.3	455	0.83	441.3	IE5	BK30Z-..S5E06MA4	0.33	1.1	2.2	3.3	4	455	455	455	455	455	41	11200	12000
1.3	0.2	3.1	490	1	471.5	IE5	BK30G06-..S5E06MA4	0.31	1	2.1	3.1	3.8	490	490	490	490	490	44	11200	12000
1.3	0.2	2.6	580	0.84	567	IE5	BK30G06-..S5E06MA4	0.26	0.85	1.7	2.6	3.1	580	580	580	580	580	44	11200	12000
1.3	0.2	6	255	3	246.6	IE5	BK40Z-..S5E06MA4	0.6	2	4	6	7.2	255	255	255	255	255	64	11700	17000
1.3	0.2	5.1	305	2.2	289.8	IE5	BK40Z-..S5E06MA4	0.5	1.7	3.4	5.1	6.2	305	305	305	305	305	64	11700	17000
1.3	0.2	4.3	365	1.6	348.7	IE5	BK40Z-..S5E06MA4	0.43	1.4	2.8	4.3	5.1	365	365	365	365	365	64	11700	17000
1.3	0.2	3.4	445	1.3	430	IE5	BK40Z-..S5E06MA4	0.34	1.1	2.3	3.4	4.1	445	445	445	445	445	64	11700	17000
1.3	0.2	3	500	1.7	487.3	IE5	BK40G10-..S5E06MA4	0.3	1	2	3	3.6	500	500	500	500	500	68	11700	17000
1.3	0.2	2.7	550	1.5	540	IE5	BK40G10-..S5E06MA4	0.27	0.9	1.8	2.7	3.3	550	550	550	550	550	68	11700	17000
1.3	0.2	2.2	670	1.3	660.2	IE5	BK40G10-..S5E06MA4	0.22	0.75	1.5	2.2	2.7	670	670	670	670	670	68	11700	17000
1.3	0.2	1.9	770	1.1	756.7	IE5	BK40G10-..S5E06MA4	0.19	0.65	1.3	1.9	2.3	770	770	770	770	770	68	11700	17000
1.3	0.2	1.7	850	1	838.4	IE5	BK40G10-..S5E06MA4	0.17	0.55	1.1	1.7	2.1	850	850	850	850	850	68	11700	17000
1.3	0.2	1.5	1000	0.84	998.3	IE5	BK40G10-..S5E06MA4	0.15	0.5	1	1.5	1.8	1000	1000	1000	1000	1000	68	11700	17000
1.3	0.2	4.5	345	2.9	328.2	IE5	BK50Z-..S5E06MA4	0.45	1.5	3	4.5	5.4	345	345	345	345	345	92	14100	26000
1.3	0.2	3.6	430	1.9	414.8	IE5	BK50Z-..S5E06MA4	0.36	1.2	2.4	3.6	4.3	430	430	430	430	430	92	14100	26000
1.3	0.2	3.2	485	2.4	465.1	IE5	BK50G10-..S5E06MA4	0.32	1	2.1	3.2	3.8	485	485	485	485	485	96	14100	111000
1.3	0.2	2.9	530	2.2	513.4	IE5	BK50G10-..S5E06MA4	0.29	0.95	1.9	2.9	3.5	530	530	530	530	530	96	14100	111000
1.3	0.2	2.6	580	2	568.6	IE5	BK50G10-..S5E06MA4	0.26	0.85	1.7	2.6	3.1	580	580	580	580	580	96	14100	111000
1.3	0.2	2.3	670	1.7	651.7	IE5	BK50G10-..S5E06MA4	0.23	0.75	1.5	2.3	2.7	670	670	670	670	670	96	14100	111000
1.3	0.2	2	730	1.6	722.2	IE5	BK50G10-..S5E06MA4	0.2	0.65	1.3	2	2.4	730	730	730	730	730	96	14100	111000
1.3	0.2	1.7	870	1.3	859.8	IE5	BK50G10-..S5E06MA4	0.17	0.55	1.1	1.7	2	870	870	870	870	870	96	14100	111000
1.3	0.2	1.4	1030	1.1	1024	IE5	BK50G10-..S5E06MA4	0.14	0.48	0.95	1.4	1.7	1030	1030	1030	1030	1030	96	14100	111000
1.3	0.2	1.2	1230	0.93	1230	IE5	BK50G10-..S5E06MA4	0.12	0.4	0.8	1.2	1.4	1230	1230	1230	1230	1230	96	14100	111000
1.3	0.2	1	1390	0.83	1398	IE5	BK50G10-..S5E06MA4	0.1	0.35	0.7	1	1.2	1390	1390	1390	1390	1390	96	14100	111000
1.3	0.2	1.9	970	2.6	752.1	IE5	BK60G20-..S5E06MA4	0.19	0.65	1.3	1.9	2.3	970	970	970	970	970	123	16600	34000
1.3	0.2																			

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.6 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.6	0.25	69	31	2.6	21.54	IE4	BK06-..S4E06MA4	6.9	23	46	69	83	31	31	31	31	31	11	1150	-
1.6	0.25	56	37.5	2.1	26.36	IE4	BK06-..S4E06MA4	5.6	18.5	37.5	56	68	37.5	37.5	37.5	37.5	37.5	11	1230	-
1.6	0.25	45	47.5	1.7	33.33	IE4	BK06-..S4E06MA4	4.5	15	30	45	54	47.5	47.5	47.5	47.5	47.5	11	1320	-
1.6	0.25	39	54	1.5	38.18	IE4	BK06-..S4E06MA4	3.9	13	26	39	47	54	54	54	54	54	11	1380	-
1.6	0.25	31	68	1.2	47.78	IE4	BK06-..S4E06MA4	3.1	10	20.5	31	37.5	68	68	68	68	68	11	1500	-
1.6	0.25	27.5	77	0.88	54.38	IE4	BK06-..S4E06MA4	2.7	9.1	18	27.5	33	77	77	77	77	77	11	1600	-
1.6	0.25	30.5	69	2.9	48.96	IE4	BK10-..S4E06MA4	3	10	20	30.5	36.5	69	69	69	69	69	23	6400	-
1.6	0.25	24	87	2.3	61.68	IE4	BK10-..S4E06MA4	2.4	8.1	16	24	29	87	87	87	87	87	23	7000	-
1.6	0.25	20.5	101	2	72.31	IE4	BK10-..S4E06MA4	2	6.9	13.5	20.5	24.5	101	101	101	101	101	23	7000	-
1.6	0.25	16.5	124	1.4	89.3	IE4	BK10-..S4E06MA4	1.6	5.5	11	16.5	20	124	124	124	124	124	23	7000	-
1.6	0.25	14.5	139	1.1	102.5	IE4	BK10-..S4E06MA4	1.4	4.8	9.7	14.5	17.5	139	139	139	139	139	23	7000	-
1.6	0.25	12	163	0.84	120.3	IE4	BK10Z-..S4E06MA4	1.2	4.1	8.3	12	14.5	163	163	163	163	163	24	7000	-
1.6	0.25	10	192	0.85	143.2	IE4	BK10Z-..S4E06MA4	1	3.4	6.9	10	12.5	192	192	192	192	192	24	7000	-
1.6	0.25	8.7	225	0.88	170.6	IE4	BK10Z-..S4E06MA4	0.85	2.9	5.8	8.7	10.5	225	225	225	225	225	24	7000	-
1.6	0.25	17	122	2.7	88.12	IE4	BK20-..S4E06MA4	1.7	5.6	11	17	20	122	122	122	122	122	33	8000	9000
1.6	0.25	13.5	149	2.1	108.6	IE4	BK20-..S4E06MA4	1.3	4.6	9.2	13.5	16.5	149	149	149	149	149	33	8700	9000
1.6	0.25	15	133	1.7	96.99	IE4	BK20Z-..S4E06MA4	1.5	5.1	10	15	18.5	133	133	133	133	133	34	8700	9000
1.6	0.25	12	168	2	124.2	IE4	BK20Z-..S4E06MA4	1.2	4	8	12	14	168	168	168	168	168	34	8700	9000
1.6	0.25	10	194	1.7	144.5	IE4	BK20Z-..S4E06MA4	1	3.4	6.9	10	12	194	194	194	194	194	34	8700	9000
1.6	0.25	8.6	230	1.4	173.4	IE4	BK20Z-..S4E06MA4	0.85	2.8	5.7	8.6	10	230	230	230	230	230	34	8700	9000
1.6	0.25	7.2	270	1.2	207.5	IE4	BK20Z-..S4E06MA4	0.7	2.4	4.8	7.2	8.6	270	270	270	270	270	34	8700	9000
1.6	0.25	5.7	340	0.97	259.9	IE4	BK20Z-..S4E06MA4	0.55	1.9	3.8	5.7	6.9	340	340	340	340	340	34	8700	9000
1.6	0.25	5	385	0.8	298.2	IE4	BK20Z-..S4E06MA4	0.5	1.6	3.3	5	6	385	385	385	385	385	34	8700	9000
1.6	0.25	12	168	2.7	123.9	IE4	BK30Z-..S4E06MA4	1.2	4	8	12	14.5	168	168	168	168	168	41	11200	12000
1.6	0.25	10	195	2.3	145.1	IE4	BK30Z-..S4E06MA4	1	3.4	6.8	10	12	195	195	195	195	195	41	11200	12000
1.6	0.25	8.1	245	1.8	184.8	IE4	BK30Z-..S4E06MA4	0.8	2.7	5.4	8.1	9.7	245	245	245	245	245	41	11200	12000
1.6	0.25	6.9	280	1.6	216.5	IE4	BK30Z-..S4E06MA4	0.65	2.3	4.6	6.9	8.3	280	280	280	280	280	41	11200	12000
1.6	0.25	5.8	330	1.3	255.3	IE4	BK30Z-..S4E06MA4	0.55	1.9	3.9	5.8	7	330	330	330	330	330	41	11200	12000
1.6	0.25	4.8	400	0.95	308.3	IE4	BK30Z-..S4E06MA4	0.48	1.6	3.2	4.8	5.8	400	400	400	400	400	41	11200	12000
1.6	0.25	3.9	490	0.81	380.7	IE4	BK30Z-..S4E06MA4	0.39	1.3	2.6	3.9	4.7	490	490	490	490	490	41	11200	12000
1.6	0.25	3.1	600	0.81	471.5	IE4	BK30G06-..S4E06MA4	0.31	1	2.1	3.1	3.8	600	600	600	600	600	44	11200	12000
1.6	0.25	7	275	2.8	211.5	IE4	BK40Z-..S4E06MA4	0.7	2.3	4.7	7	8.5	275	275	275	275	275	64	11700	17000
1.6	0.25	6	315	2.4	246.6	IE4	BK40Z-..S4E06MA4	0.6	2	4	6	7.2	315	315	315	315	315	64	11700	17000
1.6	0.25	5.1	375	1.8	289.8	IE4	BK40Z-..S4E06MA4	0.5	1.7	3.4	5.1	6.2	375	375	375	375	375	64	11700	17000
1.6	0.25	4.3	450	1.3	348.7	IE4	BK40Z-..S4E06MA4	0.43	1.4	2.8	4.3	5.1	450	450	450	450	450	64	11700	17000
1.6	0.25	3.4	550	1	430	IE4	BK40Z-..S4E06MA4	0.34	1.1	2.3	3.4	4.1	550	550	550	550	550	64	11700	17000
1.6	0.25	3	620	1.4	487.3	IE4	BK40G10-..S4E06MA4	0.3	1	2	3	3.6	620	620	620	620	620	68	11700	17000
1.6	0.25	2.7	680	1.2	540	IE4	BK40G10-..S4E06MA4	0.27	0.9	1.8	2.7	3.3	680	680	680	680	680	68	11700	17000
1.6	0.25	2.2	830	1	660.2	IE4	BK40G10-..S4E06MA4	0.22	0.75	1.5	2.2	2.7	830	830	830	830	830	68	11700	17000
1.6	0.25	1.9	950	0.89	756.7	IE4	BK40G10-..S4E06MA4	0.19	0.65	1.3	1.9	2.3	950	950	950	950	950	68	11700	17000
1.6	0.25	1.7	1050	0.81	838.4	IE4	BK40G10-..S4E06MA4	0.17	0.55	1.1	1.7	2.1	1050	1050	1050	1050	1050	68	11700	17000
1.6	0.25	4.5	425	2.4	328.2	IE4	BK50Z-..S4E06MA4	0.45	1.5	3	4.5	5.4	425	425	425	425	425	92	14100	26000
1.6	0.25	3.6	530	1.6	414.8	IE4	BK50Z-..S4E06MA4	0.36	1.2	2.4	3.6	4.3	530	530	530	530	530	92	14100	26000
1.6	0.25	3.2	590	1.9	465.1	IE4	BK50G10-..S4E06MA4	0.32	1	2.1	3.2	3.8	590	590	590	590	590	96	14100	111000
1.6	0.25	2.9	650	1.8	513.4	IE4	BK50G10-..S4E06MA4	0.29	0.95	1.9	2.9	3.5	650	650	650	650	650	96	14100	111000
1.6	0.25	2.6	720	1.6	568.6	IE4	BK50G10-..S4E06MA4	0.26	0.85	1.7	2.6	3.1	720	720	720	720	720	96	14100	111000
1.6	0.25	2.3	820	1.4	651.7	IE4	BK50G10-..S4E06MA4	0.23	0.75	1.5	2.3	2.7	820	820	820	820	820	96	14100	111000
1.6	0.25	2	910	1.3	722.2	IE4	BK50G10-..S4E06MA4	0.2	0.65	1.3	2	2.4	910	910	910	910	910	96	14100	111000
1.6	0.25	1.7	1070	1.1	859.8	IE4	BK50G10-..S4E06MA4	0.17	0.55	1.1	1.7	2	1070	1070	1070	1070	1070	96	14100	111000
1.6	0.25	1.4	1270	0.9	1024	IE4	BK50G10-..S4E06MA4	0.14	0.48	0.95	1.4	1.7	1270	1270	1270	1270	1270	96	14100	111000
1.6	0.25	2.4	990	2.5	621.5	IE4	BK60G20-..S4E06MA4	0.24	0.8	1.6	2.4	2.8	990	990	990	990	990	123	16600	34000
1.6	0.25	1.9	1200	2.1	752.1	IE4	BK60G20-..S4E06MA4	0.19	0.65	1.3	1.9	2.3	1200	1200	1200	1200	1200	123	16600	34000
1.6	0.25	1.6	1420	1.8	887.8	IE4	BK60G20-..S4E06MA4	0.16	0.55	1.1	1.6	2	1420	1420	1420	1420	1420	123	16600	3400

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.37 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	1500	1800	150	500	1000	1500	1800				
2.4	0.37	98	33	2.4	15.29	IE4	BK06-..S4E06LA4	9.8	32.5	65	98	117	33	33	33	33	33	11	1020	-	
2.4	0.37	98	33	2.4	15.29	IE1	BK06-..SSE06MA4	9.8	32.5	65	98	117	25	27.5	30.5	33	33	11	1020	-	
2.4	0.37	83	38.5	2.1	18	IE4	BK06-..S4E06LA4	8.3	27.5	55	83	100	38.5	38.5	38.5	38.5	38.5	11	1080	-	
2.4	0.37	83	38.5	2.1	18	IE1	BK06-..SSE06MA4	8.3	27.5	55	83	100	29	32	35.5	38.5	38.5	11	1080	-	
2.4	0.37	69	46.5	1.7	21.54	IE4	BK06-..S4E06LA4	6.9	23	46	69	83	46.5	46.5	46.5	46.5	46.5	11	1150	-	
2.4	0.37	69	46.5	1.7	21.54	IE1	BK06-..SSE06MA4	6.9	23	46	69	83	34.5	38.5	42.5	46.5	46.5	11	1150	-	
2.4	0.37	56	56	1.4	26.36	IE4	BK06-..S4E06LA4	5.6	18.5	37.5	56	68	56	56	56	56	56	11	1230	-	
2.4	0.37	56	56	1.4	26.36	IE1	BK06-..SSE06MA4	5.6	18.5	37.5	56	68	42.5	47	52	56	56	11	1230	-	
2.4	0.37	45	71	1.1	33.33	IE4	BK06-..S4E06LA4	4.5	15	30	45	54	71	71	71	71	71	11	1320	-	
2.4	0.37	45	71	1.1	33.33	IE1	BK06-..SSE06MA4	4.5	15	30	45	54	53	59	65	71	71	11	1320	-	
2.4	0.37	39	82	0.97	38.18	IE4	BK06-..S4E06LA4	3.9	13	26	39	47	82	82	82	82	82	11	1380	-	
2.4	0.37	39	82	0.97	38.18	IE1	BK06-..SSE06MA4	3.9	13	26	39	47	61	68	75	82	82	11	1380	-	
2.4	0.37	43.5	73	2.7	34.25	IE4	BK10-..SSE06MA4	4.3	14.5	29	43.5	52	55	61	67	73	73	23	5600	-	
2.4	0.37	43.5	73	2.7	34.25	IE4	BK10-..S4E06LA4	4.3	14.5	29	43.5	52	73	73	73	73	73	23	5600	-	
2.4	0.37	36.5	88	2.3	40.79	IE1	BK10-..SSE06MA4	3.6	12	24.5	36.5	44	66	73	80	88	88	88	23	6000	-
2.4	0.37	36.5	88	2.3	40.79	IE4	BK10-..S4E06LA4	3.6	12	24.5	36.5	44	88	88	88	88	88	23	6000	-	
2.4	0.37	30.5	104	1.9	48.96	IE4	BK10-..S4E06LA4	3	10	20	30.5	36.5	104	104	104	104	104	23	6400	-	
2.4	0.37	30.5	104	1.9	48.96	IE1	BK10-..SSE06MA4	3	10	20	30.5	36.5	78	87	95	104	104	23	6400	-	
2.4	0.37	24	131	1.5	61.68	IE4	BK10-..S4E06LA4	2.4	8.1	16	24	29	131	131	131	131	131	23	7000	-	
2.4	0.37	24	131	1.5	61.68	IE1	BK10-..SSE06MA4	2.4	8.1	16	24	29	98	109	120	131	131	23	7000	-	
2.4	0.37	20.5	152	1.3	72.31	IE1	BK10-..SSE06MA4	2	6.9	13.5	20.5	24.5	114	127	139	152	152	23	7000	-	
2.4	0.37	20.5	152	1.3	72.31	IE4	BK10-..S4E06LA4	2	6.9	13.5	20.5	24.5	152	152	152	152	152	23	7000	-	
2.4	0.37	16.5	186	0.95	89.3	IE4	BK10-..S4E06LA4	1.6	5.5	11	16.5	20	186	186	186	186	186	23	7000	-	
2.4	0.37	16.5	186	0.95	89.3	IE1	BK10-..SSE06MA4	1.6	5.5	11	16.5	20	139	155	170	186	186	23	7000	-	
2.4	0.37	29	109	3	51.22	IE4	BK20-..S4E06LA4	2.9	9.7	19.5	29	35	109	109	109	109	109	33	6300	9000	
2.4	0.37	29	109	3	51.22	IE1	BK20-..SSE06MA4	2.9	9.7	19.5	29	35	82	91	100	109	109	33	6300	9000	
2.4	0.37	24	130	2.5	61.3	IE1	BK20-..SSE06MA4	2.4	8.1	16	24	29	98	109	120	130	130	33	6500	9000	
2.4	0.37	24	130	2.5	61.3	IE4	BK20-..S4E06LA4	2.4	8.1	16	24	29	130	130	130	130	130	33	6500	9000	
2.4	0.37	19.5	162	2	76.79	IE1	BK20-..SSE06MA4	1.9	6.5	13	19.5	23	121	135	148	162	162	33	7500	9000	
2.4	0.37	19.5	162	2	76.79	IE4	BK20-..S4E06LA4	1.9	6.5	13	19.5	23	162	162	162	162	162	33	7500	9000	
2.4	0.37	17	183	1.8	88.12	IE4	BK20-..S4E06LA4	1.7	5.6	11	17	20	183	183	183	183	183	33	8000	9000	
2.4	0.37	17	183	1.8	88.12	IE1	BK20-..SSE06MA4	1.7	5.6	11	17	20	137	153	168	183	183	33	8000	9000	
2.4	0.37	13.5	220	1.4	108.6	IE1	BK20-..SSE06MA4	1.3	4.6	9.2	13.5	16.5	168	186	205	220	220	33	8700	9000	
2.4	0.37	13.5	220	1.4	108.6	IE4	BK20-..S4E06LA4	1.3	4.6	9.2	13.5	16.5	220	220	220	220	220	33	8700	9000	
2.4	0.37	15	200	1.1	96.99	IE1	BK20Z-..SSE06MA4	1.5	5.1	10	15	18.5	150	166	183	200	200	34	8700	9000	
2.4	0.37	15	200	1.1	96.99	IE4	BK20Z-..S4E06LA4	1.5	5.1	10	15	18.5	200	200	200	200	200	34	8700	9000	
2.4	0.37	12	250	1.3	124.2	IE4	BK20Z-..S4E06LA4	1.2	4	8	12	14	250	250	250	250	250	34	8700	9000	
2.4	0.37	12	250	1.3	124.2	IE1	BK20Z-..SSE06MA4	1.2	4	8	12	14	190	210	230	250	250	34	8700	9000	
2.4	0.37	10	290	1.1	144.5	IE1	BK20Z-..SSE06MA4	1	3.4	6.9	10	12	215	240	265	290	290	34	8700	9000	
2.4	0.37	10	290	1.1	144.5	IE4	BK20Z-..S4E06LA4	1	3.4	6.9	10	12	290	290	290	290	290	34	8700	9000	
2.4	0.37	8.6	345	0.96	173.4	IE4	BK20Z-..S4E06LA4	0.85	2.8	5.7	8.6	10	345	345	345	345	345	34	8700	9000	
2.4	0.37	8.6	345	0.96	173.4	IE1	BK20Z-..SSE06MA4	0.85	2.8	5.7	8.6	10	255	285	315	345	345	34	8700	9000	
2.4	0.37	7.2	405	0.81	207.5	IE4	BK20Z-..S4E06LA4	0.7	2.4	4.8	7.2	8.6	405	405	405	405	405	34	8700	9000	
2.4	0.37	7.2	405	0.81	207.5	IE1	BK20Z-..SSE06MA4	0.7	2.4	4.8	7.2	8.6	305	340	370	405	405	34	8700	9000	
2.4	0.37	20.5	149	3	71.56	IE4	BK30-..S4E06LA4	2	6.9	13.5	20.5	25	149	149	149	149	149	39	9700	12000	
2.4	0.37	20.5	149	3	71.56	IE1	BK30-..SSE06MA4	2	6.9	13.5	20.5	25	112	124	136	149	149	39	9700	12000	
2.4	0.37	16.5	182	2.5	88.38	IE4	BK30-..S4E06LA4	1.6	5.6	11	16.5	20	182	182	182	182	182	39	10600	12000	
2.4	0.37	16.5	182	2.5	88.38	IE1	BK30-..SSE06MA4	1.6	5.6	11	16.5	20	136	152	167	182	182	39	10600	12000	
2.4	0.37	14.5	205	2.2	102.4	IE4	BK30-..S4E06LA4	1.4	4.8	9.7	14.5	17.5	205	205	205	205	205	39	11200	12000	
2.4	0.37	14.5	205	2.2	102.4	IE1	BK30-..SSE06MA4	1.4	4.8	9.7	14.5	17.5	156	174	191	205	205	39	11200	12000	
2.4	0.37	12	250	1.8	123.9	IE1	BK30Z-..SSE06MA4	1.2	4	8	12	14.5	189	210	230	250	250	41	11200	12000	
2.4	0.37	12	250	1.8	123.9	IE4	BK30Z-..S4E06LA4	1.2	4	8	12	14.5	250	250	250	250	250	41	11200	12000	
2.4	0.37	10	290	1.5	145.1	IE1	BK30Z-..SSE06MA4	1	3.4	6.8	10	12	215	240	265	290	290	41	11200	12000	
2.4	0.37	8.1	365	1.2	184.8	IE4	BK30Z-..S4E06LA4	0.8	2.7	5.4	8.1	9.7	365	365	365	365	365	41	11200	12000	
2.4	0.37	8.1	365	1.2	184.8	IE1	BK30Z-..SSE06MA4	0.8	2.												

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.37 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.4	0.37	5.6	510	2	264.5	IE4	BK50Z-../S4E06LA4	0.55	1.8	3.7	5.6	6.8	510	510	510	510	510	92	14100	26000
2.4	0.37	5.6	510	2	264.5	IE1	BK50Z-../SSE06MA4	0.55	1.8	3.7	5.6	6.8	385	425	470	510	510	92	14100	26000
2.4	0.37	4.5	630	1.6	328.2	IE4	BK50Z-../S4E06LA4	0.45	1.5	3	4.5	5.4	630	630	630	630	630	92	14100	26000
2.4	0.37	4.5	630	1.6	328.2	IE1	BK50Z-../SSE06MA4	0.45	1.5	3	4.5	5.4	475	530	580	630	630	92	14100	26000
2.4	0.37	3.6	790	1.1	414.8	IE1	BK50Z-../SSE06MA4	0.36	1.2	2.4	3.6	4.3	590	660	730	790	790	92	14100	26000
2.4	0.37	3.6	790	1.1	414.8	IE4	BK50Z-../S4E06LA4	0.36	1.2	2.4	3.6	4.3	790	790	790	790	790	92	14100	26000
2.4	0.37	3.2	890	1.3	465.1	IE4	BK50G10-../S4E06LA4	0.32	1	2.1	3.2	3.8	890	890	890	890	890	96	14100	111000
2.4	0.37	3.2	890	1.3	465.1	IE1	BK50G10-../SSE06MA4	0.32	1	2.1	3.2	3.8	670	740	820	890	890	96	14100	111000
2.4	0.37	2.9	980	1.2	513.4	IE4	BK50G10-../S4E06LA4	0.29	0.95	1.9	2.9	3.5	980	980	980	980	980	96	14100	111000
2.4	0.37	2.9	980	1.2	513.4	IE1	BK50G10-../SSE06MA4	0.29	0.95	1.9	2.9	3.5	730	820	900	980	980	96	14100	111000
2.4	0.37	2.6	1080	1.1	568.6	IE1	BK50G10-../SSE06MA4	0.26	0.85	1.7	2.6	3.1	810	900	990	1080	1080	96	14100	111000
2.4	0.37	2.6	1080	1.1	568.6	IE4	BK50G10-../S4E06LA4	0.26	0.85	1.7	2.6	3.1	1080	1080	1080	1080	1080	96	14100	111000
2.4	0.37	2.3	1230	0.93	651.7	IE4	BK50G10-../S4E06LA4	0.23	0.75	1.5	2.3	2.7	1230	1230	1230	1230	1230	96	14100	111000
2.4	0.37	2.3	1230	0.93	651.7	IE1	BK50G10-../SSE06MA4	0.23	0.75	1.5	2.3	2.7	920	1030	1130	1230	1230	96	14100	111000
2.4	0.37	2	1360	0.84	722.2	IE1	BK50G10-../SSE06MA4	0.2	0.65	1.3	2	2.4	1020	1130	1250	1360	1360	96	14100	111000
2.4	0.37	2	1360	0.84	722.2	IE4	BK50G10-../S4E06LA4	0.2	0.65	1.3	2	2.4	1360	1360	1360	1360	1360	96	14100	111000
2.4	0.37	2.4	1490	1.7	621.5	IE4	BK60G20-../S4E06LA4	0.24	0.8	1.6	2.4	2.8	1490	1490	1490	1490	1490	123	16600	34000
2.4	0.37	2.4	1490	1.7	621.5	IE1	BK60G20-../SSE06MA4	0.24	0.8	1.6	2.4	2.8	1110	1240	1360	1490	1490	123	16600	34000
2.4	0.37	1.9	1800	1.4	752.1	IE1	BK60G20-../SSE06MA4	0.19	0.65	1.3	1.9	2.3	1350	1500	1650	1800	1800	123	16600	34000
2.4	0.37	1.9	1800	1.4	752.1	IE4	BK60G20-../S4E06LA4	0.19	0.65	1.3	1.9	2.3	1800	1800	1800	1800	1800	123	16600	34000
2.4	0.37	1.6	2100	1.2	887.8	IE1	BK60G20-../SSE06MA4	0.16	0.55	1.1	1.6	2	1590	1770	1950	2100	2100	123	16600	34000
2.4	0.37	1.6	2100	1.2	887.8	IE4	BK60G20-../S4E06LA4	0.16	0.55	1.1	1.6	2	2100	2100	2100	2100	2100	123	16600	34000
2.4	0.37	1.4	2400	1	1016	IE1	BK60G20-../SSE06MA4	0.14	0.49	0.95	1.4	1.7	1820	2000	2200	2400	2400	123	16600	34000
2.4	0.37	1.4	2400	1	1016	IE4	BK60G20-../S4E06LA4	0.14	0.49	0.95	1.4	1.7	2400	2400	2400	2400	2400	123	16600	34000
2.4	0.37	1.7	2000	2.8	847.7	IE4	BK70G20-../S4E06LA4	0.17	0.55	1.1	1.7	2.1	2000	2000	2000	2000	2000	201	24100	50000
2.4	0.37	1.7	2000	2.8	847.7	IE1	BK70G20-../SSE06MA4	0.17	0.55	1.1	1.7	2.1	1520	1690	1860	2000	2000	201	24100	50000
2.4	0.37	1.5	2300	2.5	964.6	IE4	BK70G20-../S4E06LA4	0.15	0.5	1	1.5	1.8	2300	2300	2300	2300	2300	201	24100	50000
2.4	0.37	1.5	2300	2.5	964.6	IE1	BK70G20-../SSE06MA4	0.15	0.5	1	1.5	1.8	1730	1920	2100	2300	2300	201	24100	50000
2.4	0.37	1.3	2700	2.1	1139	IE1	BK70G20-../SSE06MA4	0.13	0.43	0.85	1.3	1.5	2050	2250	2500	2700	2700	201	24100	50000
2.4	0.37	1.3	2700	2.1	1139	IE4	BK70G20-../S4E06LA4	0.13	0.43	0.85	1.3	1.5	2700	2700	2700	2700	2700	201	24100	50000
2.4	0.37	1.1	3050	1.9	1280	IE4	BK70G20-../S4E06LA4	0.11	0.39	0.75	1.1	1.4	3050	3050	3050	3050	3050	201	24100	50000
2.4	0.37	1.1	3050	1.9	1280	IE1	BK70G20-../SSE06MA4	0.11	0.39	0.75	1.1	1.4	2300	2550	2800	3050	3050	201	24100	50000
2.4	0.37	1	3450	1.6	1457	IE4	BK70G20-../S4E06LA4	0.1	0.34	0.65	1	1.2	3450	3450	3450	3450	3450	201	24100	50000
2.4	0.37	1	3450	1.6	1457	IE1	BK70G20-../SSE06MA4	0.1	0.34	0.65	1	1.2	2600	2900	3200	3450	3450	201	24100	50000
2.4	0.37	0.85	4050	1.4	1696	IE1	BK70G20-../SSE06MA4	0.085	0.29	0.55	0.85	1	3050	3350	3700	4050	4050	201	24100	50000
2.4	0.37	0.85	4050	1.4	1696	IE4	BK70G20-../S4E06LA4	0.085	0.29	0.55	0.85	1	4050	4050	4050	4050	4050	201	24100	50000
2.4	0.37	0.7	4850	1.2	2040	IE1	BK70G20-../SSE06MA4	0.07	0.24	0.49	0.7	0.85	3650	4050	4450	4850	4850	201	24100	50000
2.4	0.37	0.7	4850	1.2	2040	IE4	BK70G20-../S4E06LA4	0.07	0.24	0.49	0.7	0.85	4850	4850	4850	4850	4850	201	24100	50000
2.4	0.37	0.55	6100	0.92	2578	IE1	BK70G20-../SSE06MA4	0.055	0.19	0.38	0.55	0.65	4600	5100	5600	6100	6100	201	24100	50000
2.4	0.37	0.55	6100	0.92	2578	IE4	BK70G20-../S4E06LA4	0.055	0.19	0.38	0.55	0.65	6100	6100	6100	6100	6100	201	24100	50000

MN = 2.6 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	128	27.5	2.9	11.67	IE4	BK06-../S4E06LA4	12.5	42.5	85	128	154	26.5	27.5	27.5	27.5	27.5	11	930	-
2.6	0.4	98	36	2.2	15.29	IE4	BK06-../S4E06LA4	9.8	32.5	65	98	117	34.5	36	36	36	36	11	1020	-
2.6	0.4	83	42	1.9	18	IE4	BK06-../S4E06LA4	8.3	27.5	55	83	100	40.5	42	42	42	42	11	1080	-
2.6	0.4	69	50	1.6	21.54	IE4	BK06-../S4E06LA4	6.9	23	46	69	83	48	50						

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.6 Nm (PN = 0.4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	10	315	1.4	145.1	IE4	BK30Z-../S4E06LA4	1	3.4	6.8	10	12	300	315	315	315	315	41	11200	12000
2.6	0.4	8.1	395	1.1	184.8	IE4	BK30Z-../S4E06LA4	0.8	2.7	5.4	8.1	9.7	380	395	395	395	395	41	11200	12000
2.6	0.4	6.9	460	0.97	216.5	IE4	BK30Z-../S4E06LA4	0.65	2.3	4.6	6.9	8.3	440	460	460	460	460	41	11200	12000
2.6	0.4	5.8	540	0.83	255.3	IE4	BK30Z-../S4E06LA4	0.55	1.9	3.9	5.8	7	520	540	540	540	540	41	11200	12000
2.6	0.4	12.5	260	3	118.2	IE4	BK40Z-../S4E06LA4	1.2	4.2	8.4	12.5	15	250	260	260	260	260	64	11700	17000
2.6	0.4	10	310	2.5	143	IE4	BK40Z-../S4E06LA4	1	3.4	6.9	10	12.5	300	310	310	310	310	64	11700	17000
2.6	0.4	8.8	360	2.1	169	IE4	BK40Z-../S4E06LA4	0.85	2.9	5.9	8.8	10.5	350	360	360	360	360	64	11700	17000
2.6	0.4	7	450	1.7	211.5	IE4	BK40Z-../S4E06LA4	0.7	2.3	4.7	7	8.5	430	450	450	450	450	64	11700	17000
2.6	0.4	6	510	1.5	246.6	IE4	BK40Z-../S4E06LA4	0.6	2	4	6	7.2	495	510	510	510	510	64	11700	17000
2.6	0.4	5.1	610	1.1	289.8	IE4	BK40Z-../S4E06LA4	0.5	1.7	3.4	5.1	6.2	580	610	610	610	610	64	11700	17000
2.6	0.4	3	1010	0.84	487.3	IE4	BK40G10-../S4E06LA4	0.3	1	2	3	3.6	970	1010	1010	1010	1010	68	11700	17000
2.6	0.4	7.2	440	2.4	206.8	IE4	BK50Z-../S4E06LA4	0.7	2.4	4.8	7.2	8.7	420	440	440	440	440	92	14100	26000
2.6	0.4	5.6	550	1.9	264.5	IE4	BK50Z-../S4E06LA4	0.55	1.8	3.7	5.6	6.8	530	550	550	550	550	92	14100	26000
2.6	0.4	4.5	690	1.5	328.2	IE4	BK50Z-../S4E06LA4	0.45	1.5	3	4.5	5.4	660	690	690	690	690	92	14100	26000
2.6	0.4	3.6	860	0.97	414.8	IE4	BK50Z-../S4E06LA4	0.36	1.2	2.4	3.6	4.3	820	860	860	860	860	92	14100	26000
2.6	0.4	3.2	970	1.2	465.1	IE4	BK50G10-../S4E06LA4	0.32	1	2.1	3.2	3.8	930	970	970	970	970	96	14100	111000
2.6	0.4	2.9	1060	1.1	513.4	IE4	BK50G10-../S4E06LA4	0.29	0.95	1.9	2.9	3.5	1020	1060	1060	1060	1060	96	14100	111000
2.6	0.4	2.6	1170	0.98	568.6	IE4	BK50G10-../S4E06LA4	0.26	0.85	1.7	2.6	3.1	1130	1170	1170	1170	1170	96	14100	111000
2.6	0.4	2.3	1340	0.86	651.7	IE4	BK50G10-../S4E06LA4	0.23	0.75	1.5	2.3	2.7	1280	1340	1340	1340	1340	96	14100	111000
2.6	0.4	2.4	1610	1.5	621.5	IE4	BK60G20-../S4E06LA4	0.24	0.8	1.6	2.4	2.8	1550	1610	1610	1610	1610	123	16600	34000
2.6	0.4	1.9	1950	1.3	752.1	IE4	BK60G20-../S4E06LA4	0.19	0.65	1.3	1.9	2.3	1880	1950	1950	1950	1950	123	16600	34000
2.6	0.4	1.6	2300	1.1	887.8	IE4	BK60G20-../S4E06LA4	0.16	0.55	1.1	1.6	2	2200	2300	2300	2300	2300	123	16600	34000
2.6	0.4	1.4	2600	0.95	1016	IE4	BK60G20-../S4E06LA4	0.14	0.49	0.95	1.4	1.7	2500	2600	2600	2600	2600	123	16600	34000
2.6	0.4	1.7	2200	2.6	847.7	IE4	BK70G20-../S4E06LA4	0.17	0.55	1.1	1.7	2.1	2100	2200	2200	2200	2200	201	24100	50000
2.6	0.4	1.5	2500	2.3	964.6	IE4	BK70G20-../S4E06LA4	0.15	0.5	1	1.5	1.8	2400	2500	2500	2500	2500	201	24100	50000
2.6	0.4	1.3	2950	1.9	1139	IE4	BK70G20-../S4E06LA4	0.13	0.43	0.85	1.3	1.5	2800	2950	2950	2950	2950	201	24100	50000
2.6	0.4	1.1	3300	1.7	1280	IE4	BK70G20-../S4E06LA4	0.11	0.39	0.75	1.1	1.4	3200	3300	3300	3300	3300	201	24100	50000
2.6	0.4	1	3750	1.5	1457	IE4	BK70G20-../S4E06LA4	0.1	0.34	0.65	1	1.2	3600	3750	3750	3750	3750	201	24100	50000
2.6	0.4	0.85	4400	1.3	1696	IE4	BK70G20-../S4E06LA4	0.085	0.29	0.55	0.85	1	4200	4400	4400	4400	4400	201	24100	50000
2.6	0.4	0.7	5300	1.1	2040	IE4	BK70G20-../S4E06LA4	0.07	0.24	0.49	0.7	0.85	5100	5300	5300	5300	5300	201	24100	50000
2.6	0.4	0.55	6700	0.85	2578	IE4	BK70G20-../S4E06LA4	0.055	0.19	0.38	0.55	0.65	6400	6700	6700	6700	6700	201	24100	50000

MN = 3.5 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
3.5	0.55	154	31	2.6	9.71	IE1	BK06-../SSE06LA4	15	51	102	154	185	22	25.5	31	31	31	11	880	-
3.5	0.55	128	37.5	2.1	11.67	IE1	BK06-../SSE06LA4	12.5	42.5	85	128	154	26.5	31	37.5	37.5	37.5	11	930	-
3.5	0.55	98	48.5	1.6	15.29	IE1	BK06-../SSE06LA4	9.8	32.5	65	98	117	34.5	40	48.5	48.5	48.5	11	1020	-
3.5	0.55	83	56	1.4	18	IE1	BK06-../SSE06LA4	8.3	27.5	55	83	100	40.5	46.5	56	56	56	11	1080	-
3.5	0.55	69	67	1.2	21.54	IE1	BK06-../SSE06LA4	6.9	23	46	69	83	48	56	67	67	67	11	1150	-
3.5	0.55	56	83	0.96	26.36	IE1	BK06-../SSE06LA4	5.6	18.5	37.5	56	68	59	68	83	83	83	11	1230	-
3.5	0.55	125	38	3	11.93	IE1	BK10-../SSE06LA4	12.5	41.5	83	125	150	27	31.5	38	38	38	23	3100	-
3.5	0.55	88	53	2.6	16.92	IE1	BK10-../SSE06LA4	8.8	29.5	59	88	106	38	44	53	53	53	23	3700	-
3.5	0.55	66	71	2.8	22.65	IE1	BK10-../SSE06LA4	6.6	22	44	66	79	50	59	71	71	71	23	4650	-
3.5	0.55	52	90	2.2	28.76	IE1	BK10-../SSE06LA4	5.2	17	34.5	52	62	64	75	90	90	90	23	5200	-
3.5	0.55	43.5	107	1.9	34.25	IE1	BK10-../SSE06LA4	4.3	14.5	29	43.5	52	77	89	107	107	107	23	5600	-
3.5	0.55	36.5	128	1.6	40.79	IE1	BK10-../SSE06LA4	3.6	12	24.5	36.5	44	91	106	128	128	128	23	6000	-
3.5	0.55	30.5	152	1.3	48.96	IE1	BK10-../SSE06LA4	3	10	20	30.5	36.5	108	126	152	152	152	23	6400	-
3.5	0.55	24	192	1	61.68	IE1	BK10-../SSE06LA4	2.4	8.1	16	24	29	137	159	192	192	192	23	7000	-
3.5	0.55	20.5	365	0.89	124.2	IE1	BK20Z-../SSE06LA4	2	6.9	13.5	20.5</									

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 3.5 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
3.5	0.55	8.8	490	1.6	169	IE1	BK40Z-../SSE06LA4	0.85	2.9	5.9	8.8	10.5	350	405	490	490	490	64	11700	17000
3.5	0.55	7	600	1.3	211.5	IE1	BK40Z-../SSE06LA4	0.7	2.3	4.7	7	8.5	430	500	600	600	600	64	11700	17000
3.5	0.55	6	690	1.1	246.6	IE1	BK40Z-../SSE06LA4	0.6	2	4	6	7.2	495	570	690	690	690	64	11700	17000
3.5	0.55	5.1	820	0.83	289.8	IE1	BK40Z-../SSE06LA4	0.5	1.7	3.4	5.1	6.2	580	680	820	820	820	64	11700	17000
3.5	0.55	9.7	445	2.4	153.3	IE1	BK50Z-../SSE06LA4	0.95	3.2	6.5	9.7	11.5	315	365	445	445	445	92	14100	26000
3.5	0.55	7.2	590	1.8	206.8	IE1	BK50Z-../SSE06LA4	0.7	2.4	4.8	7.2	8.7	420	490	590	590	590	92	14100	26000
3.5	0.55	5.6	740	1.4	264.5	IE1	BK50Z-../SSE06LA4	0.55	1.8	3.7	5.6	6.8	530	620	740	740	740	92	14100	26000
3.5	0.55	4.5	930	1.1	328.2	IE1	BK50Z-../SSE06LA4	0.45	1.5	3	4.5	5.4	660	770	930	930	930	92	14100	26000
3.5	0.55	3.2	1300	0.88	465.1	IE1	BK50G10-../SSE06LA4	0.32	1	2.1	3.2	3.8	930	1080	1300	1300	1300	96	14100	111000
3.5	0.55	2.9	1430	0.8	513.4	IE1	BK50G10-../SSE06LA4	0.29	0.95	1.9	2.9	3.5	1020	1190	1430	1430	1430	96	14100	111000
3.5	0.55	2.4	2150	1.1	621.5	IE1	BK60G20-../SSE06LA4	0.24	0.8	1.6	2.4	2.8	1550	1800	2150	2150	2150	123	16600	34000
3.5	0.55	1.9	2600	0.95	752.1	IE1	BK60G20-../SSE06LA4	0.19	0.65	1.3	1.9	2.3	1880	2150	2600	2600	2600	123	16600	34000
3.5	0.55	1.6	3100	0.8	887.8	IE1	BK60G20-../SSE06LA4	0.16	0.55	1.1	1.6	2	2200	2550	3100	3100	3100	123	16600	34000
3.5	0.55	1.7	2950	1.9	847.7	IE1	BK70G20-../SSE06LA4	0.17	0.55	1.1	1.7	2.1	2100	2450	2950	2950	2950	201	24100	50000
3.5	0.55	1.5	3350	1.7	964.6	IE1	BK70G20-../SSE06LA4	0.15	0.5	1	1.5	1.8	2400	2750	3350	3350	3350	201	24100	50000
3.5	0.55	1.3	3950	1.4	1139	IE1	BK70G20-../SSE06LA4	0.13	0.43	0.85	1.3	1.5	2800	3300	3950	3950	3950	201	24100	50000
3.5	0.55	1.1	4450	1.3	1280	IE1	BK70G20-../SSE06LA4	0.11	0.39	0.75	1.1	1.4	3200	3700	4450	4450	4450	201	24100	50000
3.5	0.55	1	5000	1.1	1457	IE1	BK70G20-../SSE06LA4	0.1	0.34	0.65	1	1.2	3600	4200	5000	5000	5000	201	24100	50000
3.5	0.55	0.85	5900	0.96	1696	IE1	BK70G20-../SSE06LA4	0.085	0.29	0.55	0.85	1	4200	4900	5900	5900	5900	201	24100	50000
3.5	0.55	0.7	7100	0.8	2040	IE1	BK70G20-../SSE06LA4	0.07	0.24	0.49	0.7	0.85	5100	5900	7100	7100	7100	201	24100	50000

MN = 5 Nm (PN = 0.78 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	205	33	2.2	7.25	IE4	BK06-../S4E08MA4	20.5	68	137	205	245	33	33	33	33	33	15	800	-
5	0.78	154	44.5	1.8	9.71	IE4	BK06-../S4E08MA4	15	51	102	154	185	44.5	44.5	44.5	44.5	44.5	15	880	-
5	0.78	128	53	1.5	11.67	IE4	BK06-../S4E08MA4	12.5	42.5	85	128	154	53	53	53	53	53	15	930	-
5	0.78	98	69	1.1	15.29	IE4	BK06-../S4E08MA4	9.8	32.5	65	98	117	69	69	69	69	69	15	1020	-
5	0.78	83	81	0.99	18	IE4	BK06-../S4E08MA4	8.3	27.5	55	83	100	81	81	81	81	81	15	1080	-
5	0.78	69	96	0.83	21.54	IE4	BK06-../S4E08MA4	6.9	23	46	69	83	96	96	96	96	96	15	1150	-
5	0.78	159	43	2.7	9.4	IE4	BK08-../S4E08MA4	15.5	53	106	159	191	43	43	43	43	43	27	2700	-
5	0.78	125	54	2.1	11.93	IE4	BK08-../S4E08MA4	12.5	41.5	83	125	150	54	54	54	54	54	27	3100	-
5	0.78	88	76	1.8	16.92	IE4	BK08-../S4E08MA4	8.8	29.5	59	88	106	76	76	76	76	76	27	3700	-
5	0.78	80	83	2.4	18.52	IE4	BK08-../S4E08MA4	8	26.5	53	80	97	83	83	83	83	83	27	4300	-
5	0.78	66	101	2	22.65	IE4	BK08-../S4E08MA4	6.6	22	44	66	79	101	101	101	101	101	27	4650	-
5	0.78	52	129	1.5	28.76	IE4	BK10-../S4E08MA4	5.2	17	34.5	52	62	129	129	129	129	129	27	5200	-
5	0.78	43.5	154	1.3	34.25	IE4	BK10-../S4E08MA4	4.3	14.5	29	43.5	52	154	154	154	154	154	27	5600	-
5	0.78	36.5	183	1.1	40.79	IE4	BK10-../S4E08MA4	3.6	12	24.5	36.5	44	183	183	183	183	183	27	6000	-
5	0.78	30.5	215	0.92	48.96	IE4	BK10-../S4E08MA4	3	10	20	30.5	36.5	215	215	215	215	215	27	6400	-
5	0.78	159	43	2.7	9.4	IE4	BK10-../S4E08MA4	15.5	53	106	159	191	43	43	43	43	43	27	2700	-
5	0.78	125	54	2.1	11.93	IE4	BK10-../S4E08MA4	12.5	41.5	83	125	150	54	54	54	54	54	27	3100	-
5	0.78	88	76	1.8	16.92	IE4	BK10-../S4E08MA4	8.8	29.5	59	88	106	76	76	76	76	76	27	3700	-
5	0.78	80	83	2.4	18.52	IE4	BK10-../S4E08MA4	8	26.5	53	80	97	83	83	83	83	83	27	4300	-
5	0.78	66	101	2	22.65	IE4	BK10-../S4E08MA4	6.6	22	44	66	79	101	101	101	101	101	27	4650	-
5	0.78	52	129	1.5	28.76	IE4	BK10-../S4E08MA4	5.2	17	34.5	52	62	129	129	129	129	129	27	5200	-
5	0.78	43.5	154	1.3	34.25	IE4	BK10-../S4E08MA4	4.3	14.5	29	43.5	52	154	154	154	154	154	27	5600	-
5	0.78	36.5	183	1.1	40.79	IE4	BK10-../S4E08MA4	3.6	12	24.5	36.5	44	183	183	183	183	183	27	6000	-
5	0.78	30.5	215	0.92	48.96	IE4	BK10-../S4E08MA4	3	10	20	30.5	36.5	215	215	215	215	215	27	6400	-
5	0.78	86	79	2.9	17.42	IE4	BK17-../S4E08MA4	8.6	28.5	57	86	103	79	79	79	79	79	36	3250	9000
5	0.78	61	109	3	24.29	IE4	BK17-../S4E08MA4	6.1	20.5	41	61	74	109	109	109	109	109	36	4500	9000
5	0.78	52	128	2.6	28.66	IE4	BK17-../S4E08MA4	5.2	17	34.5	52	62	128	128						

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 0.78 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	29.5	220	2	50.27	IE4	BK30-..S4E08MA4	2.9	9.9	19.5	29.5	35.5	220	220	220	220	220	42	8300	12000
5	0.78	25	260	1.7	59.27	IE4	BK30-..S4E08MA4	2.5	8.4	16.5	25	30	260	260	260	260	260	42	8900	12000
5	0.78	20.5	310	1.4	71.56	IE4	BK30-..S4E08MA4	2	6.9	13.5	20.5	25	310	310	310	310	310	42	9700	12000
5	0.78	16.5	380	1.2	88.38	IE4	BK30-..S4E08MA4	1.6	5.6	11	16.5	20	380	380	380	380	380	42	10600	12000
5	0.78	14.5	435	1	102.4	IE4	BK30-..S4E08MA4	1.4	4.8	9.7	14.5	17.5	435	435	435	435	435	42	11200	12000
5	0.78	12	520	0.85	123.9	IE4	BK30Z-..S4E08MA4	1.2	4	8	12	14.5	520	520	520	520	520	45	11200	12000
5	0.78	25	260	3	59.66	IE4	BK40-..S4E08MA4	2.5	8.3	16.5	25	30	260	260	260	260	260	63	9100	17000
5	0.78	21	300	2.6	70.11	IE4	BK40-..S4E08MA4	2.1	7.1	14	21	25.5	300	300	300	300	300	63	9800	17000
5	0.78	17.5	365	2.1	84.36	IE4	BK40-..S4E08MA4	1.7	5.9	11.5	17.5	21	365	365	365	365	365	63	10700	17000
5	0.78	14	440	1.8	104	IE4	BK40-..S4E08MA4	1.4	4.8	9.6	14	17	440	440	440	440	440	63	11700	17000
5	0.78	12.5	500	1.6	118.2	IE4	BK40Z-..S4E08MA4	1.2	4.2	8.4	12.5	15	500	500	500	500	500	67	11700	17000
5	0.78	10	600	1.3	143	IE4	BK40Z-..S4E08MA4	1	3.4	6.9	10	12.5	600	600	600	600	600	67	11700	17000
5	0.78	8.8	700	1.1	169	IE4	BK40Z-..S4E08MA4	0.85	2.9	5.9	8.8	10.5	700	700	700	700	700	67	11700	17000
5	0.78	7	860	0.9	211.5	IE4	BK40Z-..S4E08MA4	0.7	2.3	4.7	7	8.5	860	860	860	860	860	67	11700	17000
5	0.78	15.5	405	2.6	95.29	IE4	BK50-..S4E08MA4	1.5	5.2	10	15.5	18.5	405	405	405	405	405	91	14100	26000
5	0.78	12.5	490	2.1	115.4	IE4	BK50Z-..S4E08MA4	1.2	4.3	8.6	12.5	15.5	490	490	490	490	490	96	14100	26000
5	0.78	9.7	630	1.7	153.3	IE4	BK50Z-..S4E08MA4	0.95	3.2	6.5	9.7	11.5	630	630	630	630	630	96	14100	26000
5	0.78	7.2	840	1.2	206.8	IE4	BK50Z-..S4E08MA4	0.7	2.4	4.8	7.2	8.7	840	840	840	840	840	96	14100	26000
5	0.78	5.6	1070	0.98	264.5	IE4	BK50Z-..S4E08MA4	0.55	1.8	3.7	5.6	6.8	1070	1070	1070	1070	1070	96	14100	26000
5	0.78	9.7	760	3	153.7	IE4	BK60Z-..S4E08MA4	0.95	3.2	6.5	9.7	11.5	760	760	760	760	760	119	16600	34000
5	0.78	8.1	910	2.5	183.2	IE4	BK60Z-..S4E08MA4	0.8	2.7	5.4	8.1	9.8	910	910	910	910	910	119	16600	34000
5	0.78	7.3	1020	2.2	205	IE4	BK60Z-..S4E08MA4	0.7	2.4	4.8	7.3	8.7	1020	1020	1020	1020	1020	119	16600	34000
5	0.78	6.2	1190	1.9	239.7	IE4	BK60Z-..S4E08MA4	0.6	2	4.1	6.2	7.5	1190	1190	1190	1190	1190	119	16600	34000
5	0.78	5.5	1340	1.7	268.2	IE4	BK60Z-..S4E08MA4	0.55	1.8	3.7	5.5	6.7	1340	1340	1340	1340	1340	119	16600	34000
5	0.78	4.7	1580	1.4	317.7	IE4	BK60Z-..S4E08MA4	0.47	1.5	3.1	4.7	5.6	1580	1580	1580	1580	1580	119	16600	34000
5	0.78	4.2	1770	1.3	355.5	IE4	BK60Z-..S4E08MA4	0.42	1.4	2.8	4.2	5	1770	1770	1770	1770	1770	119	16600	34000
5	0.78	3.6	2050	1.1	411.5	IE4	BK60Z-..S4E08MA4	0.36	1.2	2.4	3.6	4.3	2050	2050	2050	2050	2050	119	16600	34000
5	0.78	3.2	2300	1	460.4	IE4	BK60Z-..S4E08MA4	0.32	1	2.1	3.2	3.9	2300	2300	2300	2300	2300	119	16600	34000
5	0.78	3	2450	0.92	498	IE4	BK60Z-..S4E08MA4	0.3	1	2	3	3.6	2450	2450	2450	2450	2450	119	16600	34000
5	0.78	2.6	2750	0.83	557.2	IE4	BK60Z-..S4E08MA4	0.26	0.85	1.7	2.6	3.2	2750	2750	2750	2750	2750	119	16600	34000
5	0.78	2.4	3100	0.8	621.5	IE4	BK60G20-..S4E08MA4	0.24	0.8	1.6	2.4	2.8	3100	3100	3100	3100	3100	126	16600	34000
5	0.78	3.9	1890	2.7	379.9	IE4	BK70Z-..S4E08MA4	0.39	1.3	2.6	3.9	4.7	1890	1890	1890	1890	1890	207	24100	50000
5	0.78	3.4	2150	2.4	432.1	IE4	BK70Z-..S4E08MA4	0.34	1.1	2.3	3.4	4.1	2150	2150	2150	2150	2150	207	24100	50000
5	0.78	2.9	2500	2.1	501.8	IE4	BK70Z-..S4E08MA4	0.29	0.95	1.9	2.9	3.5	2500	2500	2500	2500	2500	207	24100	50000
5	0.78	2.6	2850	1.8	570.8	IE4	BK70Z-..S4E08MA4	0.26	0.85	1.7	2.6	3.1	2850	2850	2850	2850	2850	207	24100	50000
5	0.78	2.3	3200	1.6	644.9	IE4	BK70Z-..S4E08MA4	0.23	0.75	1.5	2.3	2.7	3200	3200	3200	3200	3200	207	24100	50000
5	0.78	2	3650	1.4	733.6	IE4	BK70Z-..S4E08MA4	0.2	0.65	1.3	2	2.4	3650	3650	3650	3650	3650	207	24100	50000
5	0.78	1.7	4200	1.3	847.7	IE4	BK70G20-..S4E08MA4	0.17	0.55	1.1	1.7	2.1	4200	4200	4200	4200	4200	205	24100	50000
5	0.78	1.5	4800	1.2	964.6	IE4	BK70G20-..S4E08MA4	0.15	0.5	1	1.5	1.8	4800	4800	4800	4800	4800	205	24100	50000
5	0.78	1.3	5600	1	1139	IE4	BK70G20-..S4E08MA4	0.13	0.43	0.85	1.3	1.5	5600	5600	5600	5600	5600	205	24100	50000
5	0.78	1.1	6400	0.89	1280	IE4	BK70G20-..S4E08MA4	0.11	0.39	0.75	1.1	1.4	6400	6400	6400	6400	6400	205	24100	50000
5	0.78	1.9	3750	3	756.3	IE4	BK80G40-..S4E08MA4	0.19	0.65	1.3	1.9	2.3	3750	3750	3750	3750	3750	347	30000	75000
5	0.78	1.7	4200	2.7	847.2	IE4	BK80G40-..S4E08MA4	0.17	0.55	1.1	1.7	2.1	4200	4200	4200	4200	4200	347	30000	75000
5	0.78	1.5	4800	2.4	963	IE4	BK80G40-..S4E08MA4	0.15	0.5	1	1.5	1.8	4800	4800	4800	4800	4800	347	30000	75000
5	0.78	1.3	5300	2.1	1079	IE4	BK80G40-..S4E08MA4	0.13	0.46	0.9	1.3	1.6	5300	5300	5300	5300	5300	347	30000	75000
5	0.78	1.1	6500	1.8	1307	IE4	BK80G40-..S4E08MA4	0.11	0.38	0.75	1.1	1.3	6500	6500	6500	6500	6500	347	30000	75000
5	0.78	1	7100	1.6	1425	IE4	BK80G40-..S4E08MA4	0.1	0.35	0.7	1	1.2	7100	7100	7100	7100	7100	347	30000	75000
5	0.78	0.9	7900	1.5	1583	IE4	BK80G40-..S4E08MA4	0.09	0.31	0.6	0.9	1.1	7900	7900	7900	7900	7900	347	30000	75000
5	0.78	0.8	8800	1.3	1775	IE4	BK80G40-..S4E08MA4	0.08	0.28	0.55	0.8	1	8800	8800	8800	8800	8800	347	30000	75000
5	0.78	0.65	11000	1	2205	IE4	BK80G40-..S4E08MA4	0.065	0.22	0.45	0.65	0.8	11000	11000	11000	11000	11000	347	30000	75000
5	0.78	0.6	12200	0.94	2449	IE4	BK80G40-..S4E08MA4	0.06	0.2	0.4	0.6	0.7	12200	12200	12200	12200	12200	347	30000	75000
5	0.78	0.5	14000	0.82	2811	IE4	BK80G40-..S4E08MA4	0.05	0.17	0.35	0.5									

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 1.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	195	49	2.3	7.68	IE3	BK08-..SPE08LA4	19.5	65	130	195	230	45.5	49	49	49	49	28	2400	-
7	1.1	159	60	1.9	9.4	IE3	BK08-..SPE08LA4	15.5	53	106	159	191	56	60	60	60	60	28	2700	-
7	1.1	140	67	2.7	10.7	IE3	BK08-..SPE08LA4	14	46.5	93	140	168	62	67	67	67	67	28	3500	-
7	1.1	125	76	1.5	11.93	IE3	BK08-..SPE08LA4	12.5	41.5	83	125	150	71	76	76	76	76	28	3100	-
7	1.1	103	91	2.2	14.5	IE3	BK08-..SPE08LA4	10	34	68	103	124	84	91	91	91	91	28	3900	-
7	1.1	88	106	1.3	16.92	IE3	BK08-..SPE08LA4	8.8	29.5	59	88	106	98	106	106	106	106	28	3700	-
7	1.1	80	116	1.7	18.52	IE3	BK08-..SPE08LA4	8	26.5	53	80	97	108	116	116	116	116	28	4300	-
7	1.1	66	142	1.4	22.65	IE3	BK08-..SPE08LA4	6.6	22	44	66	79	132	142	142	142	142	28	4650	-
7	1.1	52	181	1.1	28.76	IE3	BK08-..SPE08LA4	5.2	17	34.5	52	62	168	181	181	181	181	28	5200	-
7	1.1	43.5	215	0.93	34.25	IE3	BK08-..SPE08LA4	4.3	14.5	29	43.5	52	200	215	215	215	215	28	5600	-
7	1.1	245	38.5	2.7	6.02	IE3	BK10-..SPE08LA4	24.5	83	166	245	295	35.5	38.5	38.5	38.5	38.5	28	2100	-
7	1.1	195	49	2.3	7.68	IE3	BK10-..SPE08LA4	19.5	65	130	195	230	45.5	49	49	49	49	28	2400	-
7	1.1	159	60	1.9	9.4	IE3	BK10-..SPE08LA4	15.5	53	106	159	191	56	60	60	60	60	28	2700	-
7	1.1	140	67	2.7	10.7	IE3	BK10-..SPE08LA4	14	46.5	93	140	168	62	67	67	67	67	28	3500	-
7	1.1	125	76	1.5	11.93	IE3	BK10-..SPE08LA4	12.5	41.5	83	125	150	71	76	76	76	76	28	3100	-
7	1.1	103	91	2.2	14.5	IE3	BK10-..SPE08LA4	10	34	68	103	124	84	91	91	91	91	28	3900	-
7	1.1	88	106	1.3	16.92	IE3	BK10-..SPE08LA4	8.8	29.5	59	88	106	98	106	106	106	106	28	3700	-
7	1.1	80	116	1.7	18.52	IE3	BK10-..SPE08LA4	8	26.5	53	80	97	108	116	116	116	116	28	4300	-
7	1.1	66	142	1.4	22.65	IE3	BK10-..SPE08LA4	6.6	22	44	66	79	132	142	142	142	142	28	4650	-
7	1.1	52	181	1.1	28.76	IE3	BK10-..SPE08LA4	5.2	17	34.5	52	62	168	181	181	181	181	28	5200	-
7	1.1	43.5	215	0.93	34.25	IE3	BK10-..SPE08LA4	4.3	14.5	29	43.5	52	200	215	215	215	215	28	5600	-
7	1.1	86	110	2.1	17.42	IE3	BK17-..SPE08LA4	8.6	28.5	57	86	103	103	110	110	110	110	38	3250	9000
7	1.1	77	122	2.7	19.39	IE3	BK17-..SPE08LA4	7.7	25.5	51	77	92	113	122	122	122	122	38	4050	9000
7	1.1	61	153	2.2	24.29	IE3	BK17-..SPE08LA4	6.1	20.5	41	61	74	142	153	153	153	153	38	4500	9000
7	1.1	52	180	1.8	28.66	IE3	BK17-..SPE08LA4	5.2	17	34.5	52	62	167	180	180	180	180	38	4850	9000
7	1.1	40.5	230	1.4	36.69	IE3	BK17-..SPE08LA4	4	13.5	27	40.5	49	210	230	230	230	230	38	5400	9000
7	1.1	35	265	1.2	42.7	IE3	BK17-..SPE08LA4	3.5	11.5	23	35	42	245	265	265	265	265	38	5800	9000
7	1.1	29	315	1	51.22	IE3	BK17-..SPE08LA4	2.9	9.7	19.5	29	35	295	315	315	315	315	38	6300	9000
7	1.1	24	380	0.86	61.3	IE3	BK17-..SPE08LA4	2.4	8.1	16	24	29	350	380	380	380	380	38	6500	9000
7	1.1	86	110	2.1	17.42	IE3	BK20-..SPE08LA4	8.6	28.5	57	86	103	103	110	110	110	110	38	3250	9000
7	1.1	77	122	2.7	19.39	IE3	BK20-..SPE08LA4	7.7	25.5	51	77	92	113	122	122	122	122	38	4050	9000
7	1.1	61	153	2.2	24.29	IE3	BK20-..SPE08LA4	6.1	20.5	41	61	74	142	153	153	153	153	38	4500	9000
7	1.1	52	180	1.8	28.66	IE3	BK20-..SPE08LA4	5.2	17	34.5	52	62	167	180	180	180	180	38	4850	9000
7	1.1	40.5	230	1.4	36.69	IE3	BK20-..SPE08LA4	4	13.5	27	40.5	49	210	230	230	230	230	38	5400	9000
7	1.1	35	265	1.2	42.7	IE3	BK20-..SPE08LA4	3.5	11.5	23	35	42	245	265	265	265	265	38	5800	9000
7	1.1	29	315	1	51.22	IE3	BK20-..SPE08LA4	2.9	9.7	19.5	29	35	295	315	315	315	315	38	6300	9000
7	1.1	24	380	0.86	61.3	IE3	BK20-..SPE08LA4	2.4	8.1	16	24	29	350	380	380	380	380	38	6500	9000
7	1.1	71	132	2.4	20.85	IE3	BK30-..SPE08LA4	7.1	23.5	47.5	71	86	123	132	132	132	132	44	5000	12000
7	1.1	52	181	2.5	28.76	IE3	BK30-..SPE08LA4	5.2	17	34.5	52	62	168	181	181	181	181	44	6500	12000
7	1.1	44.5	210	2.1	33.7	IE3	BK30-..SPE08LA4	4.4	14.5	29.5	44.5	53	197	210	210	210	210	44	7000	12000
7	1.1	34.5	265	1.7	42.89	IE3	BK30-..SPE08LA4	3.4	11.5	23	34.5	41.5	245	265	265	265	265	44	7800	12000
7	1.1	29.5	305	1.5	50.27	IE3	BK30-..SPE08LA4	2.9	9.9	19.5	29.5	35.5	285	305	305	305	305	44	8300	12000
7	1.1	25	365	1.2	59.27	IE3	BK30-..SPE08LA4	2.5	8.4	16.5	25	30	335	365	365	365	365	44	8900	12000
7	1.1	20.5	435	1	71.56	IE3	BK30-..SPE08LA4	2	6.9	13.5	20.5	25	400	435	435	435	435	44	9700	12000
7	1.1	16.5	530	0.85	88.38	IE3	BK30-..SPE08LA4	1.6	5.6	11	16.5	20	490	530	530	530	530	44	10600	12000
7	1.1	36.5	255	3	40.88	IE3	BK40-..SPE08LA4	3.6	12	24	36.5	44	235	255	255	255	255	64	7600	17000
7	1.1	29	315	2.5	51.18	IE3	BK40-..SPE08LA4	2.9	9.7	19.5	29	35	290	315	315	315	315	64	8400	17000
7	1.1	25	365	2.1	59.66	IE3	BK40-..SPE08LA4	2.5	8.3	16.5	25	30	340	365	365	365	365	64	9100	17000
7	1.1	21	425	1.8	70.11	IE3	BK40-..SPE08LA4	2.1	7.1	14	21	25.5	395	425	425	425	425	64	9800	17000
7	1.1	17.5	510	1.5	84.36	IE3	BK40-..SPE08LA4	1.7	5.9	11.5	17.5	21	475	510	510	510	510	64	10700	17000
7	1.1	14	610	1.3	104	IE3	BK40-..SPE08LA4	1.4	4.8	9.6	14	17	570	610	610	610	610	64	11700	17000
7	1.1	12.5	700	1.1	118.2	IE3	BK40Z-..SPE08LA4	1.2	4.2	8.4	12.5	15	650	700	700	700	700	64	11700	17000
7	1.1	10	840	0.93	143	IE3	BK40Z-..SPE08LA4	1	3.4	6.9	10	12.5	780	840	840	840	840	64	11700	17000
7	1.1	24.5	370	2.8	60.76	IE3	BK50-..SPE08LA4	2.4	8.2	16	24.5	29.5	345	370	370	370	370	93	11400	26000
7	1.1	19.5	455	2.3	75.4	IE3	BK50-..SPE08LA4	1.9	6.6	13	19.5	23.5	425	455	455	455	455	93	12600	26000
7	1.1	15.5	570	1.8	95.29	IE3	BK50-..SPE08LA4	1.5	5.2	10</td										

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 1.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	2	5100	1	733.6	IE3	BK70Z-../SPE08LA4	0.2	0.65	1.3	2	2.4	4750	5100	5100	5100	5100	208	24100	50000
7	1.1	1.7	5900	0.96	847.7	IE3	BK70G20-../SPE08LA4	0.17	0.55	1.1	1.7	2.1	5500	5900	5900	5900	5900	206	24100	50000
7	1.1	1.5	6700	0.84	964.6	IE3	BK70G20-../SPE08LA4	0.15	0.5	1	1.5	1.8	6200	6700	6700	6700	6700	206	24100	50000
7	1.1	2.4	4250	2.7	607.8	IE3	BK80G40-../SPE08LA4	0.24	0.8	1.6	2.4	2.9	3950	4250	4250	4250	4250	348	30000	75000
7	1.1	2.2	4750	2.4	680.9	IE3	BK80G40-../SPE08LA4	0.22	0.7	1.4	2.2	2.6	4400	4750	4750	4750	4750	348	30000	75000
7	1.1	1.9	5200	2.2	756.3	IE3	BK80G40-../SPE08LA4	0.19	0.65	1.3	1.9	2.3	4900	5200	5200	5200	5200	348	30000	75000
7	1.1	1.7	5900	1.9	847.2	IE3	BK80G40-../SPE08LA4	0.17	0.55	1.1	1.7	2.1	5500	5900	5900	5900	5900	348	30000	75000
7	1.1	1.5	6700	1.7	963	IE3	BK80G40-../SPE08LA4	0.15	0.5	1	1.5	1.8	6200	6700	6700	6700	6700	348	30000	75000
7	1.1	1.3	7500	1.5	1079	IE3	BK80G40-../SPE08LA4	0.13	0.46	0.9	1.3	1.6	7000	7500	7500	7500	7500	348	30000	75000
7	1.1	1.1	9100	1.3	1307	IE3	BK80G40-../SPE08LA4	0.11	0.38	0.75	1.1	1.3	8400	9100	9100	9100	9100	348	30000	75000
7	1.1	1	9900	1.2	1425	IE3	BK80G40-../SPE08LA4	0.1	0.35	0.7	1	1.2	9200	9900	9900	9900	9900	348	30000	75000
7	1.1	0.9	11000	1	1583	IE3	BK80G40-../SPE08LA4	0.09	0.31	0.6	0.9	1.1	10200	11000	11000	11000	11000	348	30000	75000
7	1.1	0.8	12400	0.93	1775	IE3	BK80G40-../SPE08LA4	0.08	0.28	0.55	0.8	1	11500	12400	12400	12400	12400	348	30000	75000
7	1.1	1.7	6100	3	882.3	IE3	BK90G50-../SPE08LA4	0.17	0.55	1.1	1.7	2	5700	6100	6100	6100	6100	621	49400	120000
7	1.1	1.4	7000	2.6	1008	IE3	BK90G50-../SPE08LA4	0.14	0.49	0.95	1.4	1.7	6500	7000	7000	7000	7000	621	49400	120000
7	1.1	1.3	7800	2.3	1127	IE3	BK90G50-../SPE08LA4	0.13	0.44	0.85	1.3	1.5	7300	7800	7800	7800	7800	621	49400	120000
7	1.1	1.1	9500	1.9	1363	IE3	BK90G50-../SPE08LA4	0.11	0.36	0.7	1.1	1.3	8800	9500	9500	9500	9500	621	49400	120000
7	1.1	0.9	11000	1.7	1579	IE3	BK90G50-../SPE08LA4	0.09	0.31	0.6	0.9	1.1	10200	11000	11000	11000	11000	621	49400	120000
7	1.1	0.8	12600	1.5	1803	IE3	BK90G50-../SPE08LA4	0.08	0.27	0.55	0.8	0.95	11700	12600	12600	12600	12600	621	49400	120000
7	1.1	0.7	14100	1.3	2016	IE3	BK90G50-../SPE08LA4	0.07	0.24	0.49	0.7	0.85	13100	14100	14100	14100	14100	621	49400	120000
7	1.1	0.5	19300	0.96	2764	IE3	BK90G50-../SPE08LA4	0.05	0.18	0.36	0.5	0.65	17900	19300	19300	19300	19300	621	49400	120000
7	1.1	0.48	21000	0.86	3065	IE3	BK90G50-../SPE08LA4	0.048	0.16	0.32	0.48	0.55	19900	21000	21000	21000	21000	621	49400	120000

MN = 10 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	205	66	1.1	7.25	IE1	BK06-../SSE08LA4	20.5	68	137	205	245	43	53	66	66	66	16	800	-
10	1.55	154	89	0.9	9.71	IE1	BK06-../SSE08LA4	15	51	102	154	185	58	71	89	89	89	16	880	-
10	1.55	335	40.5	2.3	4.44	IE1	BK08-../SSE08LA4	33.5	112	225	335	405	26.5	32.5	40.5	40.5	40.5	28	1900	-
10	1.55	245	55	1.9	6.02	IE1	BK08-../SSE08LA4	24.5	83	166	245	295	35.5	44	55	55	55	28	2100	-
10	1.55	195	70	1.6	7.68	IE1	BK08-../SSE08LA4	19.5	65	130	195	230	45.5	56	70	70	70	28	2400	-
10	1.55	159	86	1.3	9.4	IE1	BK08-../SSE08LA4	15.5	53	106	159	191	56	69	86	86	86	28	2700	-
10	1.55	140	96	1.9	10.7	IE1	BK08-../SSE08LA4	14	46.5	93	140	168	62	77	96	96	96	28	3500	-
10	1.55	125	109	1	11.93	IE1	BK08-../SSE08LA4	12.5	41.5	83	125	150	71	87	109	109	109	28	3100	-
10	1.55	125	109	1	11.93	IE1	BK08-../SSE08LA4	12.5	41.5	83	125	150	71	87	109	109	109	28	3100	-
10	1.55	103	130	1.5	14.5	IE1	BK10-../SSE08LA4	10	34	68	103	124	84	104	130	130	130	28	3900	-
10	1.55	103	130	1.5	14.5	IE4	BK10-../SSE08LA4	10	34	68	103	124	110	130	130	130	130	32	3900	-
10	1.55	88	152	0.89	16.92	IE4	BK10-../SSE08LA4	8.8	29.5	59	88	106	129	152	152	152	32	3700	-	
10	1.55	88	152	0.89	16.92	IE1	BK10-../SSE08LA4	8.8	29.5	59	88	106	98	121	152	152	152	28	3700	-
10	1.55	80	166	1.2	18.52	IE4	BK10-../SSE08LA4	8	26.5	53	80	97	141	166	166	166	166	32	4300	-
10	1.55	80	166	1.2	18.52	IE1	BK10-../SSE08LA4	8	26.5	53	80	97	108	133	166	166	166	28	4300	-
10	1.55	66	200	0.98	22.65	IE1	BK10-../SSE08LA4	6.6	22	44	66	79	132	163	200	200	200	28	4650	-
10	1.55	66	200	0.98	22.65	IE4	BK10-../SSE08LA4	6.6	22	44	66	79	173	200	200	200	200	32	4650	-
10	1.55	151	91	2.5	9.91	IE4	BK17-../S4E09SA4	15	50	100	151	181	77	91	91	91	91	42	1910	8300
10	1.55	151	91	2.5	9.91	IE1	BK17-../SSE08LA4	15	50	100	151	181	59	72	91	91	91	38	1910	8300
10	1.55	134	100	3	11.14	IE4	BK17-../S4E09SA4	13	44.5	89	134	161	85	100	100	100	100	42	3300	8100
10	1.55	134	100	3	11.14	IE1	BK17-../SSE08LA4	13	44.5	89	134	161	65	80	100	100	100	38	3300	8100
10	1.55	128	107	2.1	11.69	IE1	BK17-../SSE08LA4	12.5	42.5	85	128	153	69	86	107	107	107	38	2400	8800
10	1.55	128	107	2.1	11.69	IE4	BK17-../S4E09SA4	12.5	42.5	85	128	153	91	107	107	107	107	42	2400	8800
10	1.55	101	132	2.5	14.75	IE4	BK17-../S4E09SA4	10	33.5	67	101	122	112	132	132	132	132	42		

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 1.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	61	215	1.5	24.29	IE1	BK17-..SSE08LA4	6.1	20.5	41	61	74	142	174	215	215	38	4500	9000	
10	1.55	52	255	1.3	28.66	IE1	BK17-..SSE08LA4	5.2	17	34.5	52	62	167	205	255	255	38	4850	9000	
10	1.55	52	255	1.3	28.66	IE4	BK17-..S4E09SA4	5.2	17	34.5	52	62	215	255	255	255	42	4850	9000	
10	1.55	40.5	330	1	36.69	IE4	BK17-..S4E09SA4	4	13.5	27	40.5	49	280	330	330	330	42	5400	9000	
10	1.55	40.5	330	1	36.69	IE1	BK17-..SSE08LA4	4	13.5	27	40.5	49	210	260	330	330	38	5400	9000	
10	1.55	35	380	0.86	42.7	IE4	BK17-..S4E09SA4	3.5	11.5	23	35	42	325	380	380	380	42	5800	9000	
10	1.55	35	380	0.86	42.7	IE1	BK17-..SSE08LA4	3.5	11.5	23	35	42	245	305	380	380	38	5800	9000	
10	1.55	151	91	2.5	9.91	IE4	BK20-..S4E09SA4	15	50	100	151	181	77	91	91	91	42	1910	8300	
10	1.55	151	91	2.5	9.91	IE1	BK20-..SSE08LA4	15	50	100	151	181	59	72	91	91	38	1910	8300	
10	1.55	134	100	3	11.14	IE4	BK20-..S4E09SA4	13	44.5	89	134	161	85	100	100	100	42	3300	8100	
10	1.55	134	100	3	11.14	IE1	BK20-..SSE08LA4	13	44.5	89	134	161	65	80	100	100	38	3300	8100	
10	1.55	128	107	2.1	11.69	IE4	BK20-..S4E09SA4	12.5	42.5	85	128	153	91	107	107	107	42	2400	8800	
10	1.55	128	107	2.1	11.69	IE1	BK20-..SSE08LA4	12.5	42.5	85	128	153	69	86	107	107	38	2400	8800	
10	1.55	101	132	2.5	14.75	IE4	BK20-..S4E09SA4	10	33.5	67	101	122	112	132	132	132	42	3650	9000	
10	1.55	101	132	2.5	14.75	IE1	BK20-..SSE08LA4	10	33.5	67	101	122	86	106	132	132	38	3650	9000	
10	1.55	86	158	1.5	17.42	IE4	BK20-..S4E09SA4	8.6	28.5	57	86	103	134	158	158	42	3250	9000		
10	1.55	86	158	1.5	17.42	IE1	BK20-..SSE08LA4	8.6	28.5	57	86	103	126	158	158	38	3250	9000		
10	1.55	77	174	1.9	19.39	IE1	BK20-..SSE08LA4	7.7	25.5	51	77	92	113	139	174	174	42	4050	9000	
10	1.55	77	174	1.9	19.39	IE4	BK20-..S4E09SA4	7.7	25.5	51	77	92	148	174	174	42	4050	9000		
10	1.55	61	215	1.5	24.29	IE4	BK20-..S4E09SA4	6.1	20.5	41	61	74	185	215	215	215	42	4500	9000	
10	1.55	61	215	1.5	24.29	IE1	BK20-..SSE08LA4	6.1	20.5	41	61	74	142	174	215	215	38	4500	9000	
10	1.55	52	255	1.3	28.66	IE4	BK20-..S4E09SA4	5.2	17	34.5	52	62	215	255	255	255	42	4850	9000	
10	1.55	52	255	1.3	28.66	IE1	BK20-..SSE08LA4	5.2	17	34.5	52	62	167	205	255	255	38	4850	9000	
10	1.55	40.5	330	1	36.69	IE4	BK20-..S4E09SA4	4	13.5	27	40.5	49	280	330	330	330	42	5400	9000	
10	1.55	35	380	0.86	42.7	IE1	BK20-..SSE08LA4	3.5	11.5	23	35	42	245	305	380	380	38	5800	9000	
10	1.55	35	380	0.86	42.7	IE4	BK20-..S4E09SA4	3.5	11.5	23	35	42	325	380	380	380	42	5800	9000	
10	1.55	125	109	2.9	11.93	IE4	BK30-..S4E09SA4	12.5	41.5	83	125	150	93	109	109	109	48	3650	12000	
10	1.55	125	109	2.9	11.93	IE1	BK30-..SSE08LA4	12.5	41.5	83	125	150	71	87	109	109	44	3650	12000	
10	1.55	107	127	2.5	13.98	IE4	BK30-..S4E09SA4	10.5	35.5	71	107	128	108	127	127	127	48	4050	12000	
10	1.55	107	127	2.5	13.98	IE1	BK30-..SSE08LA4	10.5	35.5	71	107	128	82	101	127	127	44	4050	12000	
10	1.55	83	161	2.8	17.95	IE4	BK30-..S4E09SA4	8.3	27.5	55	83	100	137	161	161	161	48	5300	12000	
10	1.55	83	161	2.8	17.95	IE1	BK30-..SSE08LA4	8.3	27.5	55	83	100	105	129	161	161	44	5300	12000	
10	1.55	71	189	1.7	20.85	IE4	BK30-..S4E09SA4	7.1	23.5	47.5	71	86	161	189	189	189	48	5000	12000	
10	1.55	71	189	1.7	20.85	IE1	BK30-..SSE08LA4	7.1	23.5	47.5	71	86	123	151	189	189	44	5000	12000	
10	1.55	64	205	2.2	23.2	IE4	BK30-..S4E09SA4	6.4	21.5	43	64	77	177	205	205	205	48	5900	12000	
10	1.55	64	205	2.2	23.2	IE1	BK30-..SSE08LA4	6.4	21.5	43	64	77	135	167	205	205	44	5900	12000	
10	1.55	52	255	1.7	28.76	IE1	BK30-..SSE08LA4	5.2	17	34.5	52	62	168	205	255	255	44	6500	12000	
10	1.55	44.5	300	1.5	33.7	IE4	BK30-..S4E09SA4	4.4	14.5	29.5	44.5	53	255	300	300	300	48	7000	12000	
10	1.55	44.5	300	1.5	33.7	IE1	BK30-..SSE08LA4	4.4	14.5	29.5	44.5	53	197	240	300	300	44	7000	12000	
10	1.55	34.5	380	1.2	42.89	IE1	BK30-..SSE08LA4	3.4	11.5	23	34.5	41.5	245	305	380	380	44	7800	12000	
10	1.55	34.5	380	1.2	42.89	IE4	BK30-..S4E09SA4	3.4	11.5	23	34.5	41.5	320	380	380	380	48	7800	12000	
10	1.55	29.5	440	1	50.27	IE4	BK30-..S4E09SA4	2.9	9.9	19.5	29.5	35.5	375	440	440	440	48	8300	12000	
10	1.55	29.5	440	1	50.27	IE1	BK30-..SSE08LA4	2.9	9.9	19.5	29.5	35.5	285	350	440	440	44	8300	12000	
10	1.55	25	520	0.86	59.27	IE1	BK30-..SSE08LA4	2.5	8.4	16.5	25	30	335	415	520	520	44	8900	12000	
10	1.55	25	520	0.86	59.27	IE4	BK30-..S4E09SA4	2.5	8.4	16.5	25	30	440	520	520	520	48	8900	12000	
10	1.55	52	255	3	28.59	IE4	BK40-..S4E09SA4	5.2	17	34.5	52	62	215	255	255	255	68	6300	17000	
10	1.55	52	255	3	28.59	IE1	BK40-..SSE08LA4	5.2	17	34.5	52	62	167	205	255	255	64	6300	17000	
10	1.55	43	310	2.5	34.61	IE4	BK40-..S4E09SA4	4.3	14	28.5	43	52	260	310	310	310	68	6900	17000	
10	1.55	43	310	2.5	34.61	IE1	BK40-..SSE08LA4	4.3	14	28.5	43	52	200	245	310	310	64	6900	17000	
10	1.55	36.5	365	2.1	40.88	IE4	BK40-..S4E09SA4	3.6	12	24	36.5	44	310	365	365	365	68	7600	17000	
10	1.55	36.5	365	2.1	40.88	IE1	BK40-..SSE08LA4	3.6	12	24	36.5	44	235	290	365	365	64	7600	17000	
10	1.55	29	450	1.7	51.18	IE4	BK40-..S4E09SA4	2.9	9.7	19.5	29	35	380	450	450	450	68	8400	17000	
10	1.55	29	450	1.7	51.18	IE1	BK40-..SSE08LA4	2.9	9.7	19.5	29	35	290	360	450	450	64	8400	17000	
10	1.55	25	520	1.5	59.66	IE1	BK40-..SSE08LA4	2.5	8.3	16.5	25	30	340	420	520	520	64	9100	17000	
10	1.55	25	520	1.5	59.66	IE4	BK40-..S4E09SA4	2.5	8.3	16.5	25	30	445	520	520	520	68	9100	17000	
10	1.55	21	600	1.3	70.11	IE4	BK40-..S4E09SA4	2.1	7.1	14	21	25.5	510	600	600	600	68	9800	17000	
10	1.55	17.5	730	1.1	84.36	IE4	BK40-..S4E09SA4	1.7	5.9	11.5	17.5	21</								

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	14.5	1010	2.3	101.2	IE4	BK60-../S4E09SA4	1.4	4.9	9.8	14.5	17.5	860	1010	1010	1010	1010	105	13900	34000
10	1.55	13	1130	2	113.2	IE4	BK60-../S4E09SA4	1.3	4.4	8.8	13	15.5	960	1130	1130	1130	1130	105	15000	34000
10	1.55	12	1220	1.9	122.5	IE4	BK60-../S4E09SA4	1.2	4	8.1	12	14.5	1040	1220	1220	1220	1220	105	15500	34000
10	1.55	10.5	1370	1.7	137	IE4	BK60-../S4E09SA4	1	3.6	7.2	10.5	13	1160	1370	1370	1370	1370	105	16600	34000
10	1.55	9.7	1530	1.5	153.7	IE1	BK60Z-../SSE08LA4	0.95	3.2	6.5	9.7	11.5	990	1220	1530	1530	1530	120	16600	34000
10	1.55	9.7	1530	1.5	153.7	IE4	BK60Z-../S4E09SA4	0.95	3.2	6.5	9.7	11.5	1300	1530	1530	1530	1530	124	16600	34000
10	1.55	8.1	1830	1.3	183.2	IE1	BK60Z-../SSE08LA4	0.8	2.7	5.4	8.1	9.8	1190	1460	1830	1830	1830	120	16600	34000
10	1.55	8.1	1830	1.3	183.2	IE4	BK60Z-../S4E09SA4	0.8	2.7	5.4	8.1	9.8	1550	1830	1830	1830	1830	124	16600	34000
10	1.55	7.3	2050	1.1	205	IE4	BK60Z-../S4E09SA4	0.7	2.4	4.8	7.3	8.7	1740	2050	2050	2050	2050	124	16600	34000
10	1.55	7.3	2050	1.1	205	IE1	BK60Z-../SSE08LA4	0.7	2.4	4.8	7.3	8.7	1330	1640	2050	2050	2050	120	16600	34000
10	1.55	6.2	2350	0.96	239.7	IE1	BK60Z-../SSE08LA4	0.6	2	4.1	6.2	7.5	1550	1910	2350	2350	2350	120	16600	34000
10	1.55	6.2	2350	0.96	239.7	IE4	BK60Z-../S4E09SA4	0.6	2	4.1	6.2	7.5	2000	2350	2350	2350	2350	124	16600	34000
10	1.55	5.5	2650	0.86	268.2	IE4	BK60Z-../S4E09SA4	0.55	1.8	3.7	5.5	6.7	2250	2650	2650	2650	2650	124	16600	34000
10	1.55	5.5	2650	0.86	268.2	IE1	BK60Z-../SSE08LA4	0.55	1.8	3.7	5.5	6.7	1740	2100	2650	2650	2650	120	16600	34000
10	1.55	8.5	1750	3	175.7	IE4	BK70-../S4E09SA4	0.85	2.8	5.6	8.5	10	1490	1750	1750	1750	1750	191	24100	50000
10	1.55	7.8	1900	2.7	190.4	IE1	BK70Z-../SSE08LA4	0.75	2.6	5.2	7.8	9.4	1230	1520	1900	1900	1900	208	24100	50000
10	1.55	7.8	1900	2.7	190.4	IE4	BK70Z-../S4E09SA4	0.75	2.6	5.2	7.8	9.4	1610	1900	1900	1900	1900	212	24100	50000
10	1.55	6.6	2250	2.3	226.2	IE1	BK70Z-../SSE08LA4	0.65	2.2	4.4	6.6	7.9	1470	1800	2250	2250	2250	208	24100	50000
10	1.55	6.6	2250	2.3	226.2	IE4	BK70Z-../S4E09SA4	0.65	2.2	4.4	6.6	7.9	1920	2250	2250	2250	2250	212	24100	50000
10	1.55	5.8	2550	2	257.3	IE1	BK70Z-../SSE08LA4	0.55	1.9	3.8	5.8	6.9	2150	2550	2550	2550	2550	212	24100	50000
10	1.55	5.8	2550	2	257.3	IE4	BK70Z-../S4E09SA4	0.55	1.9	3.8	5.8	6.9	2450	2900	2900	2900	2900	212	24100	50000
10	1.55	5.1	2900	1.8	293.3	IE4	BK70Z-../S4E09SA4	0.5	1.7	3.4	5.1	6.1	2450	2900	2900	2900	2900	212	24100	50000
10	1.55	5.1	2900	1.8	293.3	IE1	BK70Z-../SSE08LA4	0.5	1.7	3.4	5.1	6.1	1900	2300	2900	2900	2900	208	24100	50000
10	1.55	4.4	3300	1.6	333.6	IE1	BK70Z-../SSE08LA4	0.44	1.4	2.9	4.4	5.3	2800	3300	3300	3300	3300	208	24100	50000
10	1.55	3.9	3750	1.4	379.9	IE4	BK70Z-../S4E09SA4	0.39	1.3	2.6	3.9	4.7	3200	3750	3750	3750	3750	212	24100	50000
10	1.55	3.9	3750	1.4	379.9	IE1	BK70Z-../SSE08LA4	0.39	1.3	2.6	3.9	4.7	2450	3000	3750	3750	3750	208	24100	50000
10	1.55	3.4	4300	1.2	432.1	IE4	BK70Z-../S4E09SA4	0.34	1.1	2.3	3.4	4.1	3650	4300	4300	4300	4300	212	24100	50000
10	1.55	3.4	4300	1.2	432.1	IE1	BK70Z-../SSE08LA4	0.34	1.1	2.3	3.4	4.1	2800	3450	4300	4300	4300	208	24100	50000
10	1.55	2.9	5000	1	501.8	IE4	BK70Z-../S4E09SA4	0.29	0.95	1.9	2.9	3.5	4250	5000	5000	5000	5000	212	24100	50000
10	1.55	2.9	5000	1	501.8	IE1	BK70Z-../SSE08LA4	0.29	0.95	1.9	2.9	3.5	3250	4000	5000	5000	5000	208	24100	50000
10	1.55	2.6	5700	0.91	570.8	IE4	BK70Z-../S4E09SA4	0.26	0.85	1.7	2.6	3.1	4850	5700	5700	5700	5700	212	24100	50000
10	1.55	2.6	5700	0.91	570.8	IE1	BK70Z-../SSE08LA4	0.26	0.85	1.7	2.6	3.1	3700	4550	5700	5700	5700	208	24100	50000
10	1.55	2.3	6400	0.81	644.9	IE4	BK70Z-../S4E09SA4	0.23	0.75	1.5	2.3	2.7	5400	6400	6400	6400	6400	212	24100	50000
10	1.55	2.3	6400	0.81	644.9	IE1	BK70Z-../SSE08LA4	0.23	0.75	1.5	2.3	2.7	4150	5100	6400	6400	6400	208	24100	50000
10	1.55	3.8	3850	3	389	IE4	BK80Z-../S4E09SA4	0.38	1.2	2.5	3.8	4.6	3300	3850	3850	3850	3850	341	30000	75000
10	1.55	3.4	4350	2.6	435.7	IE4	BK80Z-../S4E09SA4	0.34	1.1	2.2	3.4	4.1	3700	4350	4350	4350	4350	341	30000	75000
10	1.55	3	4950	2.3	499.5	IE4	BK80Z-../S4E09SA4	0.3	1	2	3	3.6	4200	4950	4950	4950	4950	341	30000	75000
10	1.55	2.6	5500	2.1	559.5	IE4	BK80Z-../S4E09SA4	0.26	0.85	1.7	2.6	3.2	4750	5500	5500	5500	5500	341	30000	75000
10	1.55	2.4	6000	1.9	607.8	IE4	BK80G40-../S4E09SA4	0.24	0.8	1.6	2.4	2.9	5100	6000	6000	6000	6000	352	30000	75000
10	1.55	2.4	6000	1.9	607.8	IE1	BK80G40-../SSE08LA4	0.24	0.8	1.6	2.4	2.9	3950	4850	6000	6000	6000	348	30000	75000
10	1.55	2.2	6800	1.7	680.9	IE1	BK80G40-../SSE08LA4	0.22	0.7	1.4	2.2	2.6	4400	5400	6800	6800	6800	348	30000	75000
10	1.55	2.2	6800	1.7	680.9	IE4	BK80G40-../S4E09SA4	0.22	0.7	1.4	2.2	2.6	5700	6800	6800	6800	6800	352	30000	75000
10	1.55	1.9	7500	1.5	756.3	IE4	BK80G40-../S4E09SA4	0.19	0.65	1.3	1.9	2.3	6400	7500	7500	7500	7500	352	30000	75000
10	1.55	1.7	8400	1.4	847.2	IE1	BK80G40-../SSE08LA4	0.17	0.55	1.1	1.7	2.1	5500	6700	8400	8400	8400	352	30000	75000
10	1.55	1.7	8400	1.4	847.2	IE4	BK80G40-../S4E09SA4	0.17	0.55	1.1	1.7	2.1	7200	8400	8400	8400	8400	352	30000	75000
10	1.55	1.5	9600	1.2	963	IE4	BK80G40-../SSE08LA4	0.15	0.5	1	1.5	1.8	8100	9600	9600	9600	9600	352	30000	75000
10	1.55	1.5	9600	1.2	963	IE1	BK80G40-../SSE08LA4	0.15	0.5	1	1.5	1.8	6200	7700	9600	9600	9600	348	30000	75000
10	1.55	1.3	10700	1.1	1079	IE1	BK80G40-../SSE08LA4	0.13	0.46	0.9	1.3	1.6	7000	8600	10700	10700	10700	348	30000	75000
10	1.55	1.3	10700	1.1	1079	IE4	BK80G40-../S4E09SA4	0.13	0.46	0.9	1.3	1.6	9100	10700	10700	10700	10700	352	30000	75000
10	1.55	1.1	13000	0.88	1307	IE1	BK80G40-../SSE08LA4	0.11	0.38	0.75	1.1	1.3	8400	10400	13000	13000	13000	348	30000	

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [-]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
								[1/min]	[1/min]	[1/min]	[1/min]	[1/min]	[1/min]	[1/min]	[1/min]	[1/min]	[1/min]			
14	2.2	335	57	1.7	4.44	IE2	BK10-..SHE09XA4	33.5	112	225	335	405	34.5	40.5	57	57	57	32	1900	-
14	2.2	335	57	1.7	4.44	IE5	BK10-..S5E09XA4	33.5	112	225	335	405	53	57	57	57	57	40	1900	-
14	2.2	245	77	1.4	6.02	IE5	BK10-..S5E09XA4	24.5	83	166	245	295	71	77	77	77	77	40	2100	-
14	2.2	245	77	1.4	6.02	IE2	BK10-..SHE09XA4	24.5	83	166	245	295	47	55	77	77	77	32	2100	-
14	2.2	195	98	1.2	7.68	IE5	BK10-..S5E09XA4	19.5	65	130	195	230	91	98	98	98	98	40	2400	-
14	2.2	195	98	1.2	7.68	IE2	BK10-..SHE09XA4	19.5	65	130	195	230	60	70	98	98	98	32	2400	-
14	2.2	159	121	0.95	9.4	IE5	BK10-..S5E09XA4	15.5	53	106	159	191	112	121	121	121	121	40	2700	-
14	2.2	159	121	0.95	9.4	IE2	BK10-..SHE09XA4	15.5	53	106	159	191	73	86	121	121	121	32	2700	-
14	2.2	140	134	1.3	10.7	IE5	BK10-..S5E09XA4	14	46.5	93	140	168	125	134	134	134	134	40	3500	-
14	2.2	140	134	1.3	10.7	IE2	BK10-..SHE09XA4	14	46.5	93	140	168	81	96	134	134	134	32	3500	-
14	2.2	103	182	1.1	14.5	IE5	BK10-..S5E09XA4	10	34	68	103	124	169	182	182	182	182	40	3900	-
14	2.2	103	182	1.1	14.5	IE2	BK10-..SHE09XA4	10	34	68	103	124	110	130	182	182	182	32	3900	-
14	2.2	80	230	0.86	18.52	IE2	BK10-..SHE09XA4	8	26.5	53	80	97	141	166	230	230	230	32	4300	-
14	2.2	80	230	0.86	18.52	IE5	BK10-..S5E09XA4	8	26.5	53	80	97	215	230	230	230	230	40	4300	-
14	2.2	245	77	2.8	6.02	IE5	BK17-..S5E09XA4	24.5	83	166	245	295	71	77	77	77	77	50	580	6800
14	2.2	245	77	2.8	6.02	IE2	BK17-..SHE09XA4	24.5	83	166	245	295	47	55	77	77	77	42	580	6800
14	2.2	189	101	2.3	7.91	IE2	BK17-..SHE09XA4	18.5	63	126	189	225	61	72	101	101	101	42	1330	7600
14	2.2	189	101	2.3	7.91	IE5	BK17-..S5E09XA4	18.5	63	126	189	225	94	101	101	101	101	50	1330	7600
14	2.2	151	127	1.8	9.91	IE5	BK17-..S5E09XA4	15	50	100	151	181	118	127	127	127	127	50	1910	8300
14	2.2	151	127	1.8	9.91	IE2	BK17-..SHE09XA4	15	50	100	151	181	77	91	127	127	127	42	1910	8300
14	2.2	134	140	2.1	11.14	IE5	BK17-..S5E09XA4	13	44.5	89	134	161	130	140	140	140	140	50	3300	8100
14	2.2	134	140	2.1	11.14	IE2	BK17-..SHE09XA4	13	44.5	89	134	161	85	100	140	140	140	42	3300	8100
14	2.2	128	150	1.5	11.69	IE2	BK17-..SHE09XA4	12.5	42.5	85	128	153	91	107	150	150	150	42	2400	8800
14	2.2	128	150	1.5	11.69	IE5	BK17-..S5E09XA4	12.5	42.5	85	128	153	139	150	150	150	150	50	2400	8800
14	2.2	101	185	1.8	14.75	IE5	BK17-..S5E09XA4	10	33.5	67	101	122	172	185	185	185	185	42	3650	9000
14	2.2	101	185	1.8	14.75	IE2	BK17-..SHE09XA4	10	33.5	67	101	122	112	132	185	185	185	42	3650	9000
14	2.2	86	220	1	17.42	IE2	BK17-..SHE09XA4	8.6	28.5	57	86	103	134	158	220	220	220	42	3250	9000
14	2.2	86	220	1	17.42	IE5	BK17-..S5E09XA4	8.6	28.5	57	86	103	205	220	220	220	220	50	3250	9000
14	2.2	77	240	1.4	19.39	IE5	BK17-..S5E09XA4	7.7	25.5	51	77	92	225	240	240	240	240	42	4050	9000
14	2.2	77	240	1.4	19.39	IE2	BK17-..SHE09XA4	7.7	25.5	51	77	92	148	174	240	240	240	42	4050	9000
14	2.2	61	305	1.1	24.29	IE2	BK17-..SHE09XA4	6.1	20.5	41	61	74	185	215	305	305	305	42	4500	9000
14	2.2	61	305	1.1	24.29	IE5	BK17-..S5E09XA4	6.1	20.5	41	61	74	280	305	305	305	305	50	4500	9000
14	2.2	52	360	0.91	28.66	IE2	BK17-..SHE09XA4	5.2	17	34.5	52	62	215	255	360	360	360	42	4850	9000
14	2.2	52	360	0.91	28.66	IE5	BK17-..S5E09XA4	5.2	17	34.5	52	62	335	360	360	360	360	50	4850	9000
14	2.2	245	77	2.7	6.02	IE2	BK20-..SHE09XA4	24.5	83	166	245	295	47	55	77	77	77	42	580	6800
14	2.2	245	77	2.7	6.02	IE5	BK20-..S5E09XA4	24.5	83	166	245	295	71	77	77	77	77	50	580	6800
14	2.2	189	101	2.3	7.91	IE2	BK20-..SHE09XA4	18.5	63	126	189	225	61	72	101	101	101	42	1330	7600
14	2.2	189	101	2.3	7.91	IE5	BK20-..S5E09XA4	18.5	63	126	189	225	94	101	101	101	101	50	1330	7600
14	2.2	151	127	1.8	9.91	IE5	BK20-..S5E09XA4	15	50	100	151	181	118	127	127	127	127	50	1910	8300
14	2.2	151	127	1.8	9.91	IE2	BK20-..SHE09XA4	15	50	100	151	181	77	91	127	127	127	42	1910	8300
14	2.2	134	140	2.1	11.14	IE5	BK20-..S5E09XA4	13	44.5	89	134	161	130	140	140	140	140	50	3300	8100
14	2.2	134	140	2.1	11.14	IE2	BK20-..SHE09XA4	13	44.5	89	134	161	85	100	140	140	140	42	3300	8100
14	2.2	128	150	1.5	11.69	IE2	BK20-..SHE09XA4	12.5	42.5	85	128	153	139	150	150	150	150	50	2400	8800
14	2.2	128	150	1.5	11.69	IE5	BK20-..S5E09XA4	12.5	42.5	85	128	153	91	107	150	150	150	42	2400	8800
14	2.2	101	185	1.8	14.75	IE2	BK20-..SHE09XA4	10	33.5	67	101	122	112	132	185	185	185	42	3650	9000
14	2.2	101	185	1.8	14.75	IE5	BK20-..S5E09XA4	10	33.5	67	101	122	172	185	185	185	185	50	3650	9000
14	2.2	86	220	1	17.42	IE5	BK20-..S5E09XA4	8.6	28.5	57	86	103	205	220	220	220	220	50	3250	9000
14	2.2	86	220	1	17.42	IE2	BK20-..SHE09XA4	8.6	28.5	57	86	103	134	158	220	220	220	42	3250	9000
14	2.2	77	240	1.4	19.39	IE2	BK20-..SHE09XA4	7.7	25.5	51	77	92	225	240	240	240	240	42	4050	9000
14	2.2	77	240	1.4	19.39	IE5	BK20-..S5E09XA4	7.7	25.5	51	77	92	148	174	240	240	240	50	4050	9000
14	2.2	61	305	1.1	24.29	IE5	BK20-..S5E09XA4	6.1	20.5	41	61	74	280	305	305	305	305	42	4500	9000
14	2.2	61	305	1.1	24.29	IE2	BK20-..SHE09XA4	6.1	20.5	41	61	74	185	215	305	305	305	42	4500	9000
14	2.2	52	360	0.91	28.66	IE2	BK20-..SHE09XA4	5.2	17	34.5	52	62	215	255	360	360	360	42	4850	9000
14	2.2	52	360	0.91	28.66	IE5	BK20-..S5E09XA4	5.2	17	34.5	52	62	335	360	360	360	360	50	4	

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	34.5	530	0.84	42.89	IE2	BK30-..//SHE09XA4	3.4	11.5	23	34.5	41.5	320	380	530	530	530	48	7800	12000
14	2.2	66	280	2.8	22.44	IE5	BK40-..//S5E09XA4	6.6	22	44.5	66	80	260	280	280	280	280	76	5500	16500
14	2.2	66	280	2.8	22.44	IE2	BK40-..//SHE09XA4	6.6	22	44.5	66	80	171	200	280	280	280	68	5500	16500
14	2.2	52	360	2.2	28.59	IE5	BK40-..//S5E09XA4	5.2	17	34.5	52	62	330	360	360	360	360	76	6300	17000
14	2.2	52	360	2.2	28.59	IE2	BK40-..//SHE09XA4	5.2	17	34.5	52	62	215	255	360	360	360	68	6300	17000
14	2.2	43	435	1.8	34.61	IE5	BK40-..//S5E09XA4	4.3	14	28.5	43	52	400	435	435	435	435	76	6900	17000
14	2.2	43	435	1.8	34.61	IE2	BK40-..//SHE09XA4	4.3	14	28.5	43	52	260	310	435	435	435	68	6900	17000
14	2.2	36.5	510	1.5	40.88	IE5	BK40-..//S5E09XA4	3.6	12	24	36.5	44	475	510	510	510	510	76	7600	17000
14	2.2	36.5	510	1.5	40.88	IE2	BK40-..//SHE09XA4	3.6	12	24	36.5	44	310	365	510	510	510	68	7600	17000
14	2.2	29	630	1.2	51.18	IE5	BK40-..//S5E09XA4	2.9	9.7	19.5	29	35	580	630	630	630	630	76	8400	17000
14	2.2	29	630	1.2	51.18	IE2	BK40-..//SHE09XA4	2.9	9.7	19.5	29	35	380	450	630	630	630	68	8400	17000
14	2.2	25	730	1.1	59.66	IE2	BK40-..//SHE09XA4	2.5	8.3	16.5	25	30	445	520	730	730	730	68	9100	17000
14	2.2	25	730	1.1	59.66	IE5	BK40-..//S5E09XA4	2.5	8.3	16.5	25	30	680	730	730	730	730	76	9100	17000
14	2.2	21	850	0.91	70.11	IE5	BK40-..//S5E09XA4	2.1	7.1	14	21	25.5	790	850	850	850	850	76	9800	17000
14	2.2	21	850	0.91	70.11	IE2	BK40-..//SHE09XA4	2.1	7.1	14	21	25.5	510	600	850	850	850	68	9800	17000
14	2.2	42.5	440	2.4	35.21	IE5	BK50-..//S5E09XA4	4.2	14	28	42.5	51	410	440	440	440	440	104	8700	23100
14	2.2	42.5	440	2.4	35.21	IE2	BK50-..//SHE09XA4	4.2	14	28	42.5	51	265	315	440	440	440	96	8700	23100
14	2.2	31.5	590	1.8	47.5	IE5	BK50-..//S5E09XA4	3.1	10.5	21	31.5	37.5	540	590	590	590	590	104	10100	25700
14	2.2	31.5	590	1.8	47.5	IE2	BK50-..//SHE09XA4	3.1	10.5	21	31.5	37.5	355	420	590	590	590	96	10100	25700
14	2.2	24.5	740	1.4	60.76	IE2	BK50-..//SHE09XA4	2.4	8.2	16	24.5	29.5	450	530	740	740	740	96	11400	26000
14	2.2	24.5	740	1.4	60.76	IE5	BK50-..//S5E09XA4	2.4	8.2	16	24.5	29.5	690	740	740	740	740	104	11400	26000
14	2.2	19.5	910	1.1	75.4	IE2	BK50-..//SHE09XA4	1.9	6.6	13	19.5	23.5	550	650	910	910	910	96	12600	26000
14	2.2	19.5	910	1.1	75.4	IE5	BK50-..//S5E09XA4	1.9	6.6	13	19.5	23.5	850	910	910	910	910	104	12600	26000
14	2.2	15.5	1140	0.92	95.29	IE2	BK50-..//SHE09XA4	1.5	5.2	10	15.5	18.5	690	810	1140	1140	1140	96	14100	26000
14	2.2	15.5	1140	0.92	95.29	IE5	BK50-..//S5E09XA4	1.5	5.2	10	15.5	18.5	1060	1140	1140	1140	1140	104	14100	26000
14	2.2	25	820	2.8	58.95	IE2	BK60-..//SHE09XA4	2.5	8.4	16.5	25	30.5	500	580	820	820	820	105	9900	31500
14	2.2	25	820	2.8	58.95	IE5	BK60-..//S5E09XA4	2.5	8.4	16.5	25	30.5	760	820	820	820	820	113	9900	31500
14	2.2	22.5	920	2.5	65.95	IE2	BK60-..//SHE09XA4	2.2	7.5	15	22.5	27	560	650	920	920	920	105	10900	33000
14	2.2	22.5	920	2.5	65.95	IE5	BK60-..//S5E09XA4	2.2	7.5	15	22.5	27	850	920	920	920	920	113	10900	33000
14	2.2	19	1090	2.1	78.13	IE5	BK60-..//S5E09XA4	1.9	6.3	12.5	19	23	1010	1090	1090	1090	1090	113	11900	34000
14	2.2	19	1090	2.1	78.13	IE2	BK60-..//SHE09XA4	1.9	6.3	12.5	19	23	660	780	1090	1090	1090	105	11900	34000
14	2.2	17	1220	1.9	87.41	IE2	BK60-..//SHE09XA4	1.7	5.7	11	17	20.5	740	870	1220	1220	1220	105	12900	34000
14	2.2	17	1220	1.9	87.41	IE5	BK60-..//S5E09XA4	1.7	5.7	11	17	20.5	1130	1220	1220	1220	1220	113	12900	34000
14	2.2	14.5	1410	1.6	101.2	IE5	BK60-..//S5E09XA4	1.4	4.9	9.8	14.5	17.5	1310	1410	1410	1410	1410	113	13900	34000
14	2.2	14.5	1410	1.6	101.2	IE2	BK60-..//SHE09XA4	1.4	4.9	9.8	14.5	17.5	860	1010	1410	1410	1410	105	13900	34000
14	2.2	13	1580	1.5	113.2	IE2	BK60-..//SHE09XA4	1.3	4.4	8.8	13	15.5	960	1130	1580	1580	1580	105	15000	34000
14	2.2	13	1580	1.5	113.2	IE5	BK60-..//S5E09XA4	1.3	4.4	8.8	13	15.5	1470	1580	1580	1580	1580	113	15000	34000
14	2.2	12	1710	1.3	122.5	IE2	BK60-..//SHE09XA4	1.2	4	8.1	12	14.5	1040	1220	1710	1710	1710	105	15500	34000
14	2.2	12	1710	1.3	122.5	IE5	BK60-..//S5E09XA4	1.2	4	8.1	12	14.5	1590	1710	1710	1710	1710	113	15500	34000
14	2.2	10.5	1910	1.2	137	IE5	BK60-..//S5E09XA4	1	3.6	7.2	10.5	13	1780	1910	1910	1910	1910	113	16600	34000
14	2.2	10.5	1910	1.2	137	IE2	BK60-..//SHE09XA4	1	3.6	7.2	10.5	13	1160	1370	1910	1910	1910	105	16600	34000
14	2.2	9.7	2150	1.1	153.7	IE2	BK60Z-..//SHE09SA4	0.95	3.2	6.5	9.7	11.5	1300	1530	2150	2150	2150	124	16600	34000
14	2.2	9.7	2150	1.1	153.7	IE5	BK60Z-..//S5E09XA4	0.95	3.2	6.5	9.7	11.5	1990	2150	2150	2150	2150	132	16600	34000
14	2.2	8.1	2550	0.9	183.2	IE5	BK60Z-..//S5E09XA4	0.8	2.7	5.4	8.1	9.8	2350	2550	2550	2550	2550	132	16600	34000
14	2.2	8.1	2550	0.9	183.2	IE2	BK60Z-..//SHE09SA4	0.8	2.7	5.4	8.1	9.8	1550	1830	2550	2550	2550	124	16600	34000
14	2.2	7.3	2850	0.8	205	IE2	BK60Z-..//SHE09SA4	0.7	2.4	4.8	7.3	8.7	1740	2050	2850	2850	2850	124	16600	34000
14	2.2	7.3	2850	0.8	205	IE5	BK60Z-..//S5E09XA4	0.7	2.4	4.8	7.3	8.7	2650	2850	2850	2850	2850	132	16600	34000
14	2.2	10.5	1910	2.7	136.7	IE5	BK70-..//S5E09XA4	1	3.6	7.3	10.5	13	1770	1910	1910	1910	1910	199	20700	50000
14	2.2	10.5	1910	2.7	136.7	IE2	BK70-..//SHE09XA4	1	3.6	7.3	10.5	13	1160	1360	1910	1910	1910	191	20700	50000
14	2.2	9.7	2150	2.4	154.4	IE5	BK70-..//S5E09XA4	0.95	3.2	6.4	9.7	11.5	2000	2150	2150	2150	2150	199	21900	50000
14	2.2	9.7	2150	2.4	154.4	IE2	BK70-..//SHE09XA4	0.95	3.2	6.4	9.7	11.5	1310	1540	2150	2150	2150	191	21900	50000
14	2.2	8.5	2450	2.1	175.7	IE2	BK70-..//SHE09XA4	0.85	2.8	5.6	8.5	10	1490	1750	2450	2450	2450	191	24100	50000
14	2.2	7.8	2650	2	190.4	IE2</td														

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	2.6	7800	1.5	559.5	IE5	BK80Z-../S5E09XA4	0.26	0.85	1.7	2.6	3.2	7200	7800	7800	7800	7800	349	30000	75000
14	2.2	2.6	7800	1.5	559.5	IE2	BK80Z-../SHE09SA4	0.26	0.85	1.7	2.6	3.2	4750	5500	7800	7800	7800	341	30000	75000
14	2.2	2.4	8500	1.4	607.8	IE5	BK80G40-../S5E09XA4	0.24	0.8	1.6	2.4	2.9	7900	8500	8500	8500	8500	360	30000	75000
14	2.2	2.4	8500	1.4	607.8	IE2	BK80G40-../SHE09SA4	0.24	0.8	1.6	2.4	2.9	5100	6000	8500	8500	8500	352	30000	75000
14	2.2	2.2	9500	1.2	680.9	IE2	BK80G40-../SHE09SA4	0.22	0.7	1.4	2.2	2.6	5700	6800	9500	9500	9500	352	30000	75000
14	2.2	2.2	9500	1.2	680.9	IE5	BK80G40-../S5E09XA4	0.22	0.7	1.4	2.2	2.6	8800	9500	9500	9500	9500	360	30000	75000
14	2.2	1.9	10500	1.1	756.3	IE5	BK80G40-../SHE09XA4	0.19	0.65	1.3	1.9	2.3	9800	10500	10500	10500	10500	360	30000	75000
14	2.2	1.9	10500	1.1	756.3	IE2	BK80G40-../SHE09SA4	0.19	0.65	1.3	1.9	2.3	6400	7500	10500	10500	10500	352	30000	75000
14	2.2	1.7	11800	0.97	847.2	IE2	BK80G40-../SHE09SA4	0.17	0.55	1.1	1.7	2.1	7200	8400	11800	11800	11800	352	30000	75000
14	2.2	1.7	11800	0.97	847.2	IE5	BK80G40-../S5E09XA4	0.17	0.55	1.1	1.7	2.1	11000	11800	11800	11800	11800	360	30000	75000
14	2.2	1.5	13400	0.85	963	IE2	BK80G40-../SHE09SA4	0.15	0.5	1	1.5	1.8	8100	9600	13400	13400	13400	352	30000	75000
14	2.2	1.5	13400	0.85	963	IE5	BK80G40-../S5E09XA4	0.15	0.5	1	1.5	1.8	12500	13400	13400	13400	13400	360	30000	75000
14	2.2	3.4	6000	3	435.3	IE5	BK90Z-../S5E09XA4	0.34	1.1	2.2	3.4	4.1	5600	6000	6000	6000	6000	622	49400	120000
14	2.2	3.4	6000	3	435.3	IE2	BK90Z-../SHE09SA4	0.34	1.1	2.2	3.4	4.1	3700	4350	6000	6000	6000	614	49400	120000
14	2.2	3	6900	2.6	499.2	IE5	BK90Z-../S5E09XA4	0.3	1	2	3	3.6	6400	6900	6900	6900	6900	622	49400	120000
14	2.2	3	6900	2.6	499.2	IE2	BK90Z-../SHE09SA4	0.3	1	2	3	3.6	4200	4950	6900	6900	6900	614	49400	120000
14	2.2	2.6	7800	2.4	558.5	IE5	BK90Z-../S5E09XA4	0.26	0.85	1.7	2.6	3.2	7200	7800	7800	7800	7800	622	49400	120000
14	2.2	2.6	7800	2.4	558.5	IE2	BK90Z-../SHE09SA4	0.26	0.85	1.7	2.6	3.2	4700	5500	7800	7800	7800	614	49400	120000
14	2.2	2.3	8900	2.1	637.7	IE2	BK90Z-../SHE09SA4	0.23	0.75	1.5	2.3	2.8	5400	6300	8900	8900	8900	614	49400	120000
14	2.2	2.3	8900	2.1	637.7	IE5	BK90Z-../S5E09XA4	0.23	0.75	1.5	2.3	2.8	8200	8900	8900	8900	8900	622	49400	120000
14	2.2	2.1	9900	1.9	713.5	IE5	BK90Z-../S5E09XA4	0.21	0.7	1.4	2.1	2.5	9200	9900	9900	9900	9900	622	49400	120000
14	2.2	2.1	9900	1.9	713.5	IE2	BK90Z-../SHE09SA4	0.21	0.7	1.4	2.1	2.5	6000	7100	9900	9900	9900	614	49400	120000
14	2.2	1.8	11400	1.6	821	IE5	BK90G50-../S5E09XA4	0.18	0.6	1.2	1.8	2.1	10600	11400	11400	11400	11400	633	49400	120000
14	2.2	1.8	11400	1.6	821	IE2	BK90G50-../SHE09SA4	0.18	0.6	1.2	1.8	2.1	6900	8200	11400	11400	11400	625	49400	120000
14	2.2	1.7	12300	1.5	882.3	IE5	BK90G50-../S5E09XA4	0.17	0.55	1.1	1.7	2	11400	12300	12300	12300	12300	633	49400	120000
14	2.2	1.7	12300	1.5	882.3	IE2	BK90G50-../SHE09SA4	0.17	0.55	1.1	1.7	2	7400	8800	12300	12300	12300	625	49400	120000
14	2.2	1.4	14100	1.3	1008	IE2	BK90G50-../SHE09SA4	0.14	0.49	0.95	1.4	1.7	8500	10000	14100	14100	14100	625	49400	120000
14	2.2	1.4	14100	1.3	1008	IE5	BK90G50-../S5E09XA4	0.14	0.49	0.95	1.4	1.7	13100	14100	14100	14100	14100	633	49400	120000
14	2.2	1.3	15700	1.2	1127	IE5	BK90G50-../S5E09XA4	0.13	0.44	0.85	1.3	1.5	14600	15700	15700	15700	15700	633	49400	120000
14	2.2	1.3	15700	1.2	1127	IE2	BK90G50-../SHE09SA4	0.13	0.44	0.85	1.3	1.5	9500	11200	15700	15700	15700	625	49400	120000
14	2.2	1.1	19000	0.97	1363	IE2	BK90G50-../SHE09SA4	0.11	0.36	0.7	1.1	1.3	11500	13600	19000	19000	19000	625	49400	120000
14	2.2	1.1	19000	0.97	1363	IE5	BK90G50-../S5E09XA4	0.11	0.36	0.7	1.1	1.3	17700	19000	19000	19000	19000	633	49400	120000
14	2.2	0.9	22000	0.84	1579	IE5	BK90G50-../S5E09XA4	0.09	0.31	0.6	0.9	1.1	20500	22000	22000	22000	22000	633	49400	120000
14	2.2	0.9	22000	0.84	1579	IE2	BK90G50-../SHE09SA4	0.09	0.31	0.6	0.9	1.1	13400	15700	22000	22000	22000	625	49400	120000

8

MN = 19 Nm (PN = 3 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
19	3	315	82	2.3	473	IE4	BK30-../S4E11SA6	31.5	105	210	315	380	82	82	82	82	82	65	1550	8800
19	3	245	105	2	60.2	IE4	BK30-../S4E11SA6	24.5	83	166	245	295	105	105	105	105	105	65	1690	9600
19	3	200	130	2	7.45	IE4	BK30-../S4E11SA6	20	67	134	200	240	130	130	130	130	130	65	2200	10400
19	3	155	168	1.9	9.63	IE4	BK30-../S4E11SA6	15.5	51	103	155	186	168	168	168	168	168	65	3150	11500
19	3	131	194	2.1	11.39	IE4	BK30-../S4E11SA6	13	43.5	87	131	158	194	194	194	194	194	65	4150	11000
19	3	125	205	1.5	11.93	IE4	BK30-../S4E11SA6	12.5	41.5	83	125	150	205	205	205	205	205	65	3650	12000
19	3	107	240	1.3	13.98	IE4	BK30-../S4E11SA6	10.5	35.5	71	107	128	240	240	240	240	240	65	4050	12000
19	3	103	245	1.8	14.5	IE4	BK30-../S4E11SA6	10	34	68	103	124	245	245	245	245	245	65	4900	12000
19	3	83	305	1.5	17.92	IE4	BK30-../S4E11SA6	8.3	27.5	55	83	100	305	305	305	305	305	65	5300	12000
19	3	64	395	1.1	23.2	IE4	BK30-../S4E11SA6	6.4	21.5	43	64	77	395	395</td						

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 19 Nm (PN = 3 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
19	3	16	1720	3	90.96	IE4	BK70-../S4E11SA6	1.6	5.4	10.5	16	19.5	1720	1720	1720	1720	1720	209	15300	49900
19	3	14	1960	2.6	103.5	IE4	BK70-../S4E11SA6	1.4	4.8	9.6	14	17	1960	1960	1960	1960	1960	209	17200	50000
19	3	12	2250	2.3	120.2	IE4	BK70-../S4E11SA6	1.2	4.1	8.3	12	14.5	2250	2250	2250	2250	2250	209	18600	50000
19	3	10.5	2550	2	136.7	IE4	BK70-../S4E11SA6	1	3.6	7.3	10.5	13	2550	2550	2550	2550	2550	209	20700	50000
19	3	9.7	2900	1.8	154.4	IE4	BK70-../S4E11SA6	0.95	3.2	6.4	9.7	11.5	2900	2900	2900	2900	2900	209	21900	50000
19	3	8.5	3300	1.6	175.7	IE4	BK70-../S4E11SA6	0.85	2.8	5.6	8.5	10	3300	3300	3300	3300	3300	209	24100	50000
19	3	7.8	3600	1.4	190.4	IE4	BK70Z-../S4E11SA6	0.75	2.6	5.2	7.8	9.4	3600	3600	3600	3600	3600	236	24100	50000
19	3	6.6	4250	1.2	226.2	IE4	BK70Z-../S4E11SA6	0.65	2.2	4.4	6.6	7.9	4250	4250	4250	4250	4250	236	24100	50000
19	3	5.8	4850	1.1	257.3	IE4	BK70Z-../S4E11SA6	0.55	1.9	3.8	5.8	6.9	4850	4850	4850	4850	4850	236	24100	50000
19	3	5.1	5500	0.93	293.3	IE4	BK70Z-../S4E11SA6	0.5	1.7	3.4	5.1	6.1	5500	5500	5500	5500	5500	236	24100	50000
19	3	4.4	6300	0.82	333.6	IE4	BK70Z-../S4E11SA6	0.44	1.4	2.9	4.4	5.3	6300	6300	6300	6300	6300	236	24100	50000
19	3	7.5	3750	3	198.9	IE4	BK80Z-../S4E11SA6	0.75	2.5	5	7.5	9	3750	3750	3750	3750	3750	366	30000	75000
19	3	6.6	4250	2.7	226.1	IE4	BK80Z-../S4E11SA6	0.65	2.2	4.4	6.6	7.9	4250	4250	4250	4250	4250	366	30000	75000
19	3	5.9	4800	2.4	253.3	IE4	BK80Z-../S4E11SA6	0.55	1.9	3.9	5.9	7.1	4800	4800	4800	4800	4800	366	30000	75000
19	3	4.9	5700	2	300.6	IE4	BK80Z-../S4E11SA6	0.49	1.6	3.3	4.9	5.9	5700	5700	5700	5700	5700	366	30000	75000
19	3	4.4	6300	1.8	336.7	IE4	BK80Z-../S4E11SA6	0.44	1.4	2.9	4.4	5.3	6300	6300	6300	6300	6300	366	30000	75000
19	3	3.8	7300	1.6	389	IE4	BK80Z-../S4E11SA6	0.38	1.2	2.5	3.8	4.6	7300	7300	7300	7300	7300	366	30000	75000
19	3	3.4	8200	1.4	435.7	IE4	BK80Z-../S4E11SA6	0.34	1.1	2.2	3.4	4.1	8200	8200	8200	8200	8200	366	30000	75000
19	3	3	9400	1.2	499.5	IE4	BK80Z-../S4E11SA6	0.3	1	2	3	3.6	9400	9400	9400	9400	9400	366	30000	75000
19	3	2.6	10600	1.1	559.5	IE4	BK80Z-../S4E11SA6	0.26	0.85	1.7	2.6	3.2	10600	10600	10600	10600	10600	366	30000	75000
19	3	2.4	11500	1	607.8	IE4	BK80G40-../S4E11SA6	0.24	0.8	1.6	2.4	2.9	11500	11500	11500	11500	11500	374	30000	75000
19	3	2.2	12900	0.89	680.9	IE4	BK80G40-../S4E11SA6	0.22	0.7	1.4	2.2	2.6	12900	12900	12900	12900	12900	374	30000	75000
19	3	1.9	14300	0.8	756.3	IE4	BK80G40-../S4E11SA6	0.19	0.65	1.3	1.9	2.3	14300	14300	14300	14300	14300	374	30000	75000
19	3	4.5	6200	2.9	330.7	IE4	BK90Z-../S4E11SA6	0.45	1.5	3	4.5	5.4	6200	6200	6200	6200	6200	632	49400	120000
19	3	3.8	7300	2.5	389.1	IE4	BK90Z-../S4E11SA6	0.38	1.2	2.5	3.8	4.6	7300	7300	7300	7300	7300	632	49400	120000
19	3	3.4	8200	2.2	435.3	IE4	BK90Z-../S4E11SA6	0.34	1.1	2.2	3.4	4.1	8200	8200	8200	8200	8200	632	49400	120000
19	3	3	9400	2	499.2	IE4	BK90Z-../S4E11SA6	0.3	1	2	3	3.6	9400	9400	9400	9400	9400	632	49400	120000
19	3	2.6	10600	1.7	558.5	IE4	BK90Z-../S4E11SA6	0.26	0.85	1.7	2.6	3.2	10600	10600	10600	10600	10600	632	49400	120000
19	3	2.3	12100	1.5	637.7	IE4	BK90Z-../S4E11SA6	0.23	0.75	1.5	2.3	2.8	12100	12100	12100	12100	12100	632	49400	120000
19	3	2.1	13500	1.4	713.5	IE4	BK90Z-../S4E11SA6	0.21	0.7	1.4	2.1	2.5	13500	13500	13500	13500	13500	632	49400	120000
19	3	1.8	15500	1.2	821	IE4	BK90G50-../S4E11SA6	0.18	0.6	1.2	1.8	2.1	15500	15500	15500	15500	15500	648	49400	120000
19	3	1.7	16700	1.1	882.3	IE4	BK90G50-../S4E11SA6	0.17	0.55	1.1	1.7	2	16700	16700	16700	16700	16700	648	49400	120000
19	3	1.4	19100	0.97	1008	IE4	BK90G50-../S4E11SA6	0.14	0.49	0.95	1.4	1.7	19100	19100	19100	19100	19100	648	49400	120000
19	3	1.3	21000	0.86	1127	IE4	BK90G50-../S4E11SA6	0.13	0.44	0.85	1.3	1.5	21000	21000	21000	21000	21000	648	49400	120000

MN = 20 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
20	3.1	335	81	1.2	4.44	IE3	BK10-../SPE09XA4	33.5	112	225	335	405	53	65	81	81	81	40	1900	-
20	3.1	245	110	0.95	6.02	IE3	BK10-../SPE09XA4	24.5	83	166	245	295	71	88	110	110	110	40	2100	-
20	3.1	195	141	0.81	7.68	IE3	BK10-../SPE09XA4	19.5	65	130	195	230	91	113	141	141	141	40	2400	-
20	3.1	140	192	0.94	10.7	IE3	BK10-../SPE09XA4	14	46.5	93	140	168	125	154	192	192	192	40	3500	-
20	3.1	330	83	2.3	4.54	IE3	BK17-../SPE09XA4	33	110	220	330	395	54	66	83	83	83	50	520	6100
20	3.1	245	110	1.9	6.02	IE3	BK17-../SPE09XA4	24.5	83	166	245	295	71	88	110	110	110	50	580	6800
20	3.1	189	145	1.6	7.91	IE3	BK17-../SPE09XA4	18.5	63	126	189	225	94	116	145	145	145	50	1330	7600
20	3.1	151	182	1.3	9.91	IE3	BK17-../SPE09XA4	15	50	100	151	181	118	145	182	182	182	50	1910	8300
20	3.1	134	200	1.5	11.14	IE3	BK17-../SPE09XA4	13	44.5	89	134	161	130	160	200	200	200	50	3300	8100
20	3.1	128	215	1.1	11.69	IE3	BK17-../SPE09XA4	12.5	42.5	85	128	153	139	172	215	215	215	50	2400	8800
20	3.1	101	265	1.2	14.75	IE3	BK17-../SPE09XA4	10	33.5	67	101	122	172	210	265					

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 20 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
20	3.1	161	171	2.9	9.31	IE3	BK40-..SPE09XA4	16	53	107	161	193	111	137	171	171	171	76	1040	11200
20	3.1	126	215	2.2	11.86	IE3	BK40-..SPE09XA4	12.5	42	84	126	151	141	174	215	215	215	76	1770	12200
20	3.1	103	260	3	14.5	IE3	BK40-..SPE09XA4	10	34	68	103	124	169	205	260	260	260	76	4500	14300
20	3.1	83	320	2.4	18.05	IE3	BK40-..SPE09XA4	8.3	27.5	55	83	99	210	255	320	320	320	76	4900	15300
20	3.1	66	400	1.9	22.44	IE3	BK40-..SPE09XA4	6.6	22	44.5	66	80	260	320	400	400	400	76	5500	16500
20	3.1	52	510	1.5	28.59	IE3	BK40-..SPE09XA4	5.2	17	34.5	52	62	330	410	510	510	510	76	6300	17000
20	3.1	43	620	1.3	34.61	IE3	BK40-..SPE09XA4	4.3	14	28.5	43	52	400	495	620	620	620	76	6900	17000
20	3.1	36.5	730	1.1	40.88	IE3	BK40-..SPE09XA4	3.6	12	24	36.5	44	475	580	730	730	730	76	7600	17000
20	3.1	29	900	0.87	51.18	IE3	BK40-..SPE09XA4	2.9	9.7	19.5	29	35	580	720	900	900	900	76	8400	17000
20	3.1	83	325	2.2	17.92	IE3	BK50-..SPE09XA4	8.3	27.5	55	83	100	210	260	325	325	325	104	4600	16800
20	3.1	77	345	3	19.33	IE3	BK50-..SPE09XA4	7.7	25.5	51	77	93	225	275	345	345	345	104	6900	19200
20	3.1	56	475	2.2	26.51	IE3	BK50-..SPE09XA4	5.6	18.5	37.5	56	67	310	380	475	475	475	104	7800	21200
20	3.1	42.5	630	1.7	35.21	IE3	BK50-..SPE09XA4	4.2	14	28	42.5	51	410	500	630	630	630	104	8700	23100
20	3.1	31.5	840	1.2	47.5	IE3	BK50-..SPE09XA4	3.1	10.5	21	31.5	37.5	540	670	840	840	840	104	10100	25700
20	3.1	24.5	1060	0.98	60.76	IE3	BK50-..SPE09XA4	2.4	8.2	16	24.5	29.5	690	850	1060	1060	1060	104	11400	26000
20	3.1	19.5	1310	0.8	75.4	IE3	BK50-..SPE09XA4	1.9	6.6	13	19.5	23.5	850	1040	1310	1310	1310	104	12600	26000
20	3.1	39.5	750	3	37.8	IE3	BK60-..SPE09XA4	3.9	13	26	39.5	47.5	490	600	750	750	750	113	7300	26500
20	3.1	33	900	2.6	45.05	IE3	BK60-..SPE09XA4	3.3	11	22	33	39.5	580	720	900	900	900	113	8200	28300
20	3.1	29.5	1000	2.3	50.4	IE3	BK60-..SPE09XA4	2.9	9.9	19.5	29.5	35.5	650	800	1000	1000	1000	113	9100	29800
20	3.1	25	1170	2	58.95	IE3	BK60-..SPE09XA4	2.5	8.4	16.5	25	30.5	760	940	1170	1170	1170	113	9900	31500
20	3.1	22.5	1310	1.7	65.95	IE3	BK60-..SPE09XA4	2.2	7.5	15	22.5	27	850	1050	1310	1310	1310	113	10900	33000
20	3.1	19	1560	1.5	78.13	IE3	BK60-..SPE09XA4	1.9	6.3	12.5	19	23	1010	1250	1560	1560	1560	113	11900	34000
20	3.1	17	1740	1.3	87.41	IE3	BK60-..SPE09XA4	1.7	5.7	11	17	20.5	1130	1390	1740	1740	1740	113	12900	34000
20	3.1	14.5	2000	1.1	101.2	IE3	BK60-..SPE09XA4	1.4	4.9	9.8	14.5	17.5	1310	1610	2000	2000	2000	113	13900	34000
20	3.1	13	2250	1	113.2	IE3	BK60-..SPE09XA4	1.3	4.4	8.8	13	15.5	1470	1810	2250	2250	2250	113	15000	34000
20	3.1	12	2450	0.94	122.5	IE3	BK60-..SPE09XA4	1.2	4	8.1	12	14.5	1590	1960	2450	2450	2450	113	15500	34000
20	3.1	10.5	2700	0.84	137	IE3	BK60-..SPE09XA4	1	3.6	7.2	10.5	13	1780	2150	2700	2700	2700	113	16600	34000
20	3.1	16	1810	2.9	90.96	IE3	BK70-..SPE09XA4	1.6	5.4	10.5	16	19.5	1180	1450	1810	1810	1810	199	15300	49900
20	3.1	14	2050	2.5	103.5	IE3	BK70-..SPE09XA4	1.4	4.8	9.6	14	17	1340	1650	2050	2050	2050	199	17200	50000
20	3.1	12	2400	2.2	120.2	IE3	BK70-..SPE09XA4	1.2	4.1	8.3	12	14.5	1560	1920	2400	2400	2400	199	18600	50000
20	3.1	10.5	2700	1.9	136.7	IE3	BK70-..SPE09XA4	1	3.6	7.3	10.5	13	1770	2150	2700	2700	2700	199	20700	50000
20	3.1	9.7	3050	1.7	154.4	IE3	BK70-..SPE09XA4	0.95	3.2	6.4	9.7	11.5	2000	2450	3050	3050	3050	199	21900	50000
20	3.1	8.5	3500	1.5	175.7	IE3	BK70-..SPE09XA4	0.85	2.8	5.6	8.5	10	2250	2800	3500	3500	3500	199	24100	50000
20	3.1	7.8	3800	1.4	190.4	IE3	BK70Z-..SPE09XA4	0.75	2.6	5.2	7.8	9.4	2450	3000	3800	3800	3800	220	24100	50000
20	3.1	6.6	4500	1.1	226.2	IE3	BK70Z-..SPE09XA4	0.65	2.2	4.4	6.6	7.9	2900	3600	4500	4500	4500	220	24100	50000
20	3.1	5.8	5100	1	257.3	IE3	BK70Z-..SPE09XA4	0.55	1.9	3.8	5.8	6.9	3300	4100	5100	5100	5100	220	24100	50000
20	3.1	5.1	5800	0.89	293.3	IE3	BK70Z-..SPE09XA4	0.5	1.7	3.4	5.1	6.1	3800	4650	5800	5800	5800	220	24100	50000
20	3.1	7.5	3950	2.9	198.9	IE3	BK80Z-..SPE09XA4	0.75	2.5	5	7.5	9	2550	3150	3950	3950	3950	349	30000	75000
20	3.1	6.6	4500	2.5	226.1	IE3	BK80Z-..SPE09XA4	0.65	2.2	4.4	6.6	7.9	2900	3600	4500	4500	4500	349	30000	75000
20	3.1	5.9	5000	2.3	253.3	IE3	BK80Z-..SPE09XA4	0.55	1.9	3.9	5.9	7.1	3250	4050	5000	5000	5000	349	30000	75000
20	3.1	4.9	6000	1.9	300.6	IE3	BK80Z-..SPE09XA4	0.49	1.6	3.3	4.9	5.9	3900	4800	6000	6000	6000	349	30000	75000
20	3.1	4.4	6700	1.7	336.7	IE3	BK80Z-..SPE09XA4	0.44	1.4	2.9	4.4	5.3	4350	5300	6700	6700	6700	349	30000	75000
20	3.1	3.8	7700	1.5	389	IE3	BK80Z-..SPE09XA4	0.38	1.2	2.5	3.8	4.6	5000	6200	7700	7700	7700	349	30000	75000
20	3.1	3.4	8700	1.3	435.7	IE3	BK80Z-..SPE09XA4	0.34	1.1	2.2	3.4	4.1	5600	6900	8700	8700	8700	349	30000	75000
20	3.1	3	9900	1.2	499.5	IE3	BK80Z-..SPE09XA4	0.3	1	2	3	3.6	6400	7900	9900	9900	9900	349	30000	75000
20	3.1	2.6	11100	1.7	558.5	IE3	BK80Z-..SPE09XA4	0.26	0.85	1.7	2.6	3.2	7200	8900	11100	11100	11100	622	49400	120000
20	3.1	2.3	12700	1.5	637.7	IE3	BK80Z-..SPE09XA4	0.23	0.75	1.5	2.3	2.8	8200	10200	12700	12700	12700	622	49400	120000
20	3.1	2.1	14200	1.3	713.5	IE3	BK80Z-..SPE09XA4	0.21	0.7	1.4	2.1	2.5	9200	11400	14200	14200	14200	622	49400	120000
20	3.1	1.8	16400	1.1	821	IE3	BK90G50-..SPE09XA4	0.18	0.6	1.2	1.8	2.1	10600	13100	16400	16400	16400	633	49400	120000
20	3.1	1.7	17600	1	882.3	IE3	BK90G50-..SPE09XA4	0.17	0.55	1.1	1.7	2	11400	14100	17600	17600	17600	633	49400	120000
20	3.1	1.4	20000	0.92	1008	IE3	BK90G50-..SPE09XA4	0.14	0.49	0.95	1.4	1.7	13100	16100	20000	20000	20000	633	49400	120000
20	3.1	1.3	22500	0.82	1127	IE3	BK90G50-..SPE09XA4	0.13	0.44	0.85	1.3	1.5	14600	18000	22500	22500	22500	633	49400	120000

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 25.5 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
25.5	4	83	410	1.1	17.95	IE3	BK30-..SPE11SA6	8.3	27.5	55	83	100	305	355	410	410	410	65	5300	12000
25.5	4	64	530	0.85	23.2	IE3	BK30-..SPE11SA6	6.4	21.5	43	64	77	395	455	530	530	530	65	5900	12000
25.5	4	200	175	2.8	7.49	IE3	BK40-..SPE11SA6	20	66	133	200	240	130	151	175	175	175	90	750	10500
25.5	4	161	215	2.2	9.31	IE3	BK40-..SPE11SA6	16	53	107	161	193	162	188	215	215	215	90	1040	11200
25.5	4	134	255	2.8	11.17	IE3	BK40-..SPE11SA6	13	44.5	89	134	161	191	220	255	255	255	90	4100	13100
25.5	4	126	275	1.8	11.86	IE3	BK40-..SPE11SA6	12.5	42	84	126	151	205	240	275	275	275	90	1770	12200
25.5	4	103	330	2.3	14.5	IE3	BK40-..SPE11SA6	10	34	68	103	124	245	285	330	330	330	90	4500	14300
25.5	4	83	410	1.9	18.05	IE3	BK40-..SPE11SA6	8.3	27.5	55	83	99	305	355	410	410	410	90	4900	15300
25.5	4	66	510	1.5	22.44	IE3	BK40-..SPE11SA6	6.6	22	44.5	66	80	380	440	510	510	510	90	5500	16500
25.5	4	52	650	1.2	28.59	IE3	BK40-..SPE11SA6	5.2	17	34.5	52	62	485	560	650	650	650	90	6300	17000
25.5	4	43	790	0.98	34.61	IE3	BK40-..SPE11SA6	4.3	14	28.5	43	52	590	680	790	790	790	90	6900	17000
25.5	4	36.5	930	0.83	40.88	IE3	BK40-..SPE11SA6	3.6	12	24	36.5	44	690	800	930	930	930	90	7600	17000
25.5	4	83	415	1.7	17.92	IE3	BK50-..SPE11SA6	8.3	27.5	55	83	100	305	355	415	415	415	120	4600	16800
25.5	4	77	440	2.4	19.33	IE3	BK50-..SPE11SA6	7.7	25.5	51	77	93	330	380	440	440	440	120	6900	19200
25.5	4	56	600	1.7	26.51	IE3	BK50-..SPE11SA6	5.6	18.5	37.5	56	67	450	520	600	600	600	120	7800	21200
25.5	4	42.5	800	1.3	35.21	IE3	BK50-..SPE11SA6	4.2	14	28	42.5	51	600	690	800	800	800	120	8700	23100
25.5	4	31.5	1070	0.97	47.5	IE3	BK50-..SPE11SA6	3.1	10.5	21	31.5	37.5	800	930	1070	1070	1070	120	10100	25700
25.5	4	44	860	2.7	33.78	IE3	BK60-..SPE11SA6	4.4	14.5	29.5	44	53	640	740	860	860	860	130	6500	25200
25.5	4	39.5	960	2.4	37.8	IE3	BK60-..SPE11SA6	3.9	13	26	39.5	47.5	710	830	960	960	960	130	7300	26500
25.5	4	33	1140	2	45.05	IE3	BK60-..SPE11SA6	3.3	11	22	33	39.5	850	990	1140	1140	1140	130	8200	28300
25.5	4	29.5	1280	1.8	50.4	IE3	BK60-..SPE11SA6	2.9	9.9	19.5	29.5	35.5	950	1100	1280	1280	1280	130	9100	29800
25.5	4	25	1500	1.5	58.95	IE3	BK60-..SPE11SA6	2.5	8.4	16.5	25	30.5	1120	1290	1500	1500	1500	130	9900	31500
25.5	4	22.5	1680	1.4	65.95	IE3	BK60-..SPE11SA6	2.2	7.5	15	22.5	27	1250	1450	1680	1680	1680	130	10900	33000
25.5	4	19	1990	1.2	78.13	IE3	BK60-..SPE11SA6	1.9	6.3	12.5	19	23	1480	1710	1990	1990	1990	130	11900	34000
25.5	4	17	2200	1	87.41	IE3	BK60-..SPE11SA6	1.7	5.7	11	17	20.5	1660	1920	2200	2200	2200	130	12900	34000
25.5	4	14.5	2550	0.89	101.2	IE3	BK60-..SPE11SA6	1.4	4.9	9.8	14.5	17.5	1920	2200	2550	2550	2550	130	13900	34000
25.5	4	13	2850	0.8	113.2	IE3	BK60-..SPE11SA6	1.3	4.4	8.8	13	15.5	2150	2450	2850	2850	2850	130	15000	34000
25.5	4	21	1790	2.9	70.23	IE3	BK70-..SPE11SA6	2.1	7.1	14	21	25.5	1330	1540	1790	1790	1790	209	12500	44800
25.5	4	18.5	2000	2.6	79.89	IE3	BK70-..SPE11SA6	1.8	6.2	12.5	18.5	22.5	1510	1750	2000	2000	2000	209	14300	47600
25.5	4	16	2300	2.2	90.96	IE3	BK70-..SPE11SA6	1.6	5.4	10.5	16	19.5	1720	2000	2300	2300	2300	209	15300	49900
25.5	4	14	2600	2	103.5	IE3	BK70-..SPE11SA6	1.4	4.8	9.6	14	17	1960	2250	2600	2600	2600	209	17200	50000
25.5	4	12	3050	1.7	120.2	IE3	BK70-..SPE11SA6	1.2	4.1	8.3	12	14.5	2250	2600	3050	3050	3050	209	18600	50000
25.5	4	10.5	3450	1.5	136.7	IE3	BK70-..SPE11SA6	1	3.6	7.3	10.5	13	2550	3000	3450	3450	3450	209	20700	50000
25.5	4	9.7	3900	1.3	154.4	IE3	BK70-..SPE11SA6	0.95	3.2	6.4	9.7	11.5	2900	3350	3900	3900	3900	209	21900	50000
25.5	4	8.5	4450	1.2	175.7	IE3	BK70-..SPE11SA6	0.85	2.8	5.6	8.5	10	3300	3850	4450	4450	4450	209	24100	50000
25.5	4	7.8	4850	1.1	190.4	IE3	BK70Z-..SPE11SA6	0.75	2.6	5.2	7.8	9.4	3600	4150	4850	4850	4850	236	24100	50000
25.5	4	6.6	5700	0.9	226.2	IE3	BK70Z-..SPE11SA6	0.65	2.2	4.4	6.6	7.9	4250	4950	5700	5700	5700	236	24100	50000
25.5	4	9.7	3900	2.7	153.1	IE3	BK80-..SPE11SA6	0.95	3.2	6.5	9.7	11.5	2900	3350	3900	3900	3900	324	27200	75000
25.5	4	8.7	4350	2.4	171.5	IE3	BK80-..SPE11SA6	0.85	2.9	5.8	8.7	10	3250	3750	4350	4350	4350	324	30000	75000
25.5	4	8.4	4500	2.5	177.6	IE3	BK80Z-..SPE11SA6	0.8	2.8	5.6	8.4	10	3350	3900	4500	4500	4500	366	30000	75000
25.5	4	7.5	5000	2.3	198.9	IE3	BK80Z-..SPE11SA6	0.75	2.5	5	7.5	9	3750	4350	5000	5000	5000	366	30000	75000
25.5	4	6.6	5700	2	226.1	IE3	BK80Z-..SPE11SA6	0.65	2.2	4.4	6.6	7.9	4250	4950	5700	5700	5700	366	30000	75000
25.5	4	5.9	6400	1.8	253.3	IE3	BK80Z-..SPE11SA6	0.55	1.9	3.9	5.9	7.1	4800	5500	6400	6400	6400	366	30000	75000
25.5	4	4.9	7600	1.5	300.6	IE3	BK80Z-..SPE11SA6	0.49	1.6	3.3	4.9	5.9	5700	6600	7600	7600	7600	366	30000	75000
25.5	4	4.4	8500	1.3	336.7	IE3	BK80Z-..SPE11SA6	0.44	1.4	2.9	4.4	5.3	6300	7400	8500	8500	8500	366	30000	75000
25.5	4	3.8	9900	1.2	389	IE3	BK80Z-..SPE11SA6	0.38	1.2	2.5	3.8	4.6	7300	8500	9900	9900	9900	366	30000	75000
25.5	4	3.4	11100	1	435.7	IE3	BK80Z-..SPE11SA6	0.34	1.1	2.2	3.4	4.1	8200	9500	11100	11100	11100	366	30000	75000
25.5	4	3	12700	0.9	499.5	IE3	BK80Z-..SPE11SA6	0.3	1	2	3	3.6	9400	10900	12700	12700	12700	366	30000	75000
25.5	4	2.6	14200	1.3	558.5	IE3	BK80Z-..SPE11SA6	0.26	0.85	1.7	2.6	3.2	10600	12200	14200	14200	14200	366	30000	75000
25.5	4	2.3	16200	1.1	637.7	IE3	BK80Z-..SPE11SA6	0.23	0.75	1.5	2.3	2.8	12100	14000	16200	16200	16200	366	30000	75000
25.5	4	2.1	18100	1	713.5	IE3	BK80Z-..SPE11SA6	0.21	0.7	1.4	2.1	2.5	13500	15600	18100	18100	18100	366	30000	75000
25.5	4	1.8	20500	0.88	821	IE3	BK90G50-..SPE11SA6	0.18	0.6	1.2	1.8	2.1	15500	18000	20500	20500	20500	648	49400	120000
25.5	4	1.7	22000	0.82	882															

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 26.5 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
26.5	4	107	335	0.95	13.98	IE5	BK30-..S5E11MA6	10.5	35.5	71	107	128	335	335	335	335	335	65	4050	12000
26.5	4	103	345	1.3	14.5	IE5	BK30-..S5E11MA6	10	34	68	103	124	345	345	345	345	345	65	4900	12000
26.5	4	83	425	1.1	17.95	IE5	BK30-..S5E11MA6	8.3	27.5	55	83	100	425	425	425	425	425	65	5300	12000
26.5	4	64	550	0.81	23.2	IE5	BK30-..S5E11MA6	6.4	21.5	43	64	77	550	550	550	550	550	65	5900	12000
26.5	4	200	182	2.7	7.49	IE5	BK40-..S5E11MA6	20	66	133	200	240	182	182	182	182	182	90	750	10500
26.5	4	161	225	2.2	9.31	IE5	BK40-..S5E11MA6	16	53	107	161	193	225	225	225	225	225	90	1040	11200
26.5	4	134	265	2.7	11.17	IE5	BK40-..S5E11MA6	13	44.5	89	134	161	265	265	265	265	265	90	4100	13100
26.5	4	126	285	1.7	11.86	IE5	BK40-..S5E11MA6	12.5	42	84	126	151	285	285	285	285	285	90	1770	12200
26.5	4	103	345	2.3	14.5	IE5	BK40-..S5E11MA6	10	34	68	103	124	345	345	345	345	345	90	4500	14300
26.5	4	83	430	1.8	18.05	IE5	BK40-..S5E11MA6	8.3	27.5	55	83	99	430	430	430	430	430	90	4900	15300
26.5	4	66	530	1.5	22.44	IE5	BK40-..S5E11MA6	6.6	22	44.5	66	80	530	530	530	530	530	90	5500	16500
26.5	4	52	680	1.1	28.59	IE5	BK40-..S5E11MA6	5.2	17	34.5	52	62	680	680	680	680	680	90	6300	17000
26.5	4	43	820	0.94	34.61	IE5	BK40-..S5E11MA6	4.3	14	28.5	43	52	820	820	820	820	820	90	6900	17000
26.5	4	36.5	970	0.8	40.88	IE5	BK40-..S5E11MA6	3.6	12	24	36.5	44	970	970	970	970	970	90	7600	17000
26.5	4	83	430	1.7	17.92	IE5	BK50-..S5E11MA6	8.3	27.5	55	83	100	430	430	430	430	430	120	4600	16800
26.5	4	77	460	2.3	19.33	IE5	BK50-..S5E11MA6	7.7	25.5	51	77	93	460	460	460	460	460	120	6900	19200
26.5	4	56	630	1.7	26.51	IE5	BK50-..S5E11MA6	5.6	18.5	37.5	56	67	630	630	630	630	630	120	7800	21200
26.5	4	42.5	830	1.3	35.21	IE5	BK50-..S5E11MA6	4.2	14	28	42.5	51	830	830	830	830	830	120	8700	23100
26.5	4	31.5	1120	0.94	47.5	IE5	BK50-..S5E11MA6	3.1	10.5	21	31.5	37.5	1120	1120	1120	1120	1120	120	10100	25700
26.5	4	44	890	2.6	33.78	IE5	BK60-..S5E11MA6	4.4	14.5	29.5	44	53	890	890	890	890	890	130	6500	25200
26.5	4	39.5	1000	2.3	37.8	IE5	BK60-..S5E11MA6	3.9	13	26	39.5	47.5	1000	1000	1000	1000	1000	130	7300	26500
26.5	4	33	1190	1.9	45.05	IE5	BK60-..S5E11MA6	3.3	11	22	33	39.5	1190	1190	1190	1190	1190	130	8200	28300
26.5	4	29.5	1330	1.7	50.4	IE5	BK60-..S5E11MA6	2.9	9.9	19.5	29.5	35.5	1330	1330	1330	1330	1330	130	9100	29800
26.5	4	25	1560	1.5	58.95	IE5	BK60-..S5E11MA6	2.5	8.4	16.5	25	30.5	1560	1560	1560	1560	1560	130	9900	31500
26.5	4	22.5	1740	1.3	65.95	IE5	BK60-..S5E11MA6	2.2	7.5	15	22.5	27	1740	1740	1740	1740	1740	130	10900	33000
26.5	4	19	2050	1.1	78.13	IE5	BK60-..S5E11MA6	1.9	6.3	12.5	19	23	2050	2050	2050	2050	2050	130	11900	34000
26.5	4	17	2300	0.99	87.41	IE5	BK60-..S5E11MA6	1.7	5.7	11	17	20.5	2300	2300	2300	2300	2300	130	12900	34000
26.5	4	14.5	2650	0.86	101.2	IE5	BK60-..S5E11MA6	1.4	4.9	9.8	14.5	17.5	2650	2650	2650	2650	2650	130	13900	34000
26.5	4	21	1860	2.8	70.23	IE5	BK70-..S5E11MA6	2.1	7.1	14	21	25.5	1860	1860	1860	1860	1860	209	12500	44800
26.5	4	18.5	2100	2.5	79.89	IE5	BK70-..S5E11MA6	1.8	6.2	12.5	18.5	22.5	2100	2100	2100	2100	2100	209	14300	47600
26.5	4	16	2400	2.2	90.96	IE5	BK70-..S5E11MA6	1.6	5.4	10.5	16	19.5	2400	2400	2400	2400	2400	209	15300	49900
26.5	4	14	2700	1.9	103.5	IE5	BK70-..S5E11MA6	1.4	4.8	9.6	14	17	2700	2700	2700	2700	2700	209	17200	50000
26.5	4	12	3150	1.6	120.2	IE5	BK70-..S5E11MA6	1.2	4.1	8.3	12	14.5	3150	3150	3150	3150	3150	209	18600	50000
26.5	4	10.5	3600	1.4	136.7	IE5	BK70-..S5E11MA6	1	3.6	7.3	10.5	13	3600	3600	3600	3600	3600	209	20700	50000
26.5	4	9.7	4050	1.3	154.4	IE5	BK70-..S5E11MA6	0.95	3.2	6.4	9.7	11.5	4050	4050	4050	4050	4050	209	21900	50000
26.5	4	8.5	4650	1.1	175.7	IE5	BK70-..S5E11MA6	0.85	2.8	5.6	8.5	10	4650	4650	4650	4650	4650	209	24100	50000
26.5	4	7.8	5000	1	190.4	IE5	BK70Z-..S5E11MA6	0.75	2.6	5.2	7.8	9.4	5000	5000	5000	5000	5000	236	24100	50000
26.5	4	6.6	5900	0.87	226.2	IE5	BK70Z-..S5E11MA6	0.65	2.2	4.4	6.6	7.9	5900	5900	5900	5900	5900	236	24100	50000
26.5	4	11	3450	3	131.6	IE5	BK80-..S5E11MA6	1.1	3.7	7.5	11	13.5	3450	3450	3450	3450	3450	324	24900	75000
26.5	4	9.7	4050	2.6	153.1	IE5	BK80-..S5E11MA6	0.95	3.2	6.5	9.7	11.5	4050	4050	4050	4050	4050	324	27200	75000
26.5	4	8.7	4500	2.3	171.5	IE5	BK80-..S5E11MA6	0.85	2.9	5.8	8.7	10	4500	4500	4500	4500	4500	324	30000	75000
26.5	4	8.4	4700	2.4	177.6	IE5	BK80Z-..S5E11MA6	0.8	2.8	5.6	8.4	10	4700	4700	4700	4700	4700	366	30000	75000
26.5	4	7.5	5200	2.2	198.9	IE5	BK80Z-..S5E11MA6	0.75	2.5	5	7.5	9	5200	5200	5200	5200	5200	366	30000	75000
26.5	4	6.6	5900	1.9	226.1	IE5	BK80Z-..S5E11MA6	0.65	2.2	4.4	6.6	7.9	5900	5900	5900	5900	5900	366	30000	75000
26.5	4	5.9	6700	1.7	253.3	IE5	BK80Z-..S5E11MA6	0.55	1.9	3.9	5.9	7.1	6700	6700	6700	6700	6700	366	30000	75000
26.5	4	4.9	7900	1.4	300.6	IE5	BK80Z-..S5E11MA6	0.49	1.6	3.3	4.9	5.9	7900	7900	7900	7900	7900	366	30000	75000
26.5	4	4.4	8900	1.3	336.7	IE5	BK80Z-..S5E11MA6	0.44	1.4	2.9	4.4	5.3	8900	8900	8900	8900	8900	366	30000	75000
26.5	4	3.8	10300	1.1	389	IE5	BK80Z-..S5E11MA6	0.38	1.2	2.5	3.8	4.6	10300	10300	10300	10300	10300	366	30000	75000
26.5	4	3.4	11500	1	435.7	IE5	BK80Z-..S5E11MA6	0.34	1.1	2.2	3.4	4.1	11500	11500	11500	11500	11500	366	30000	75000
26.5	4	3	13200	1.4	499.2	IE5	BK80Z-..S5E11MA6	0.3	1	2	3	3.6	13200	13200	13200	13200	13200	366	30000	75000
26.5	4	2.6	14800	1.2	558.5	IE5	BK80Z-..S5E11MA6	0.26	0.85	1.7	2.6	3.2	14800	14800	14800	14800	14800	632	49400	120000
26.5	4	2.3	16800	1.1	637.7	IE5	BK80Z-..S5E11MA6	0.23	0.75	1.5	2.3	2.8	16800	16800	16800	16800	16800	632	49400	120000
26.5	4																			

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
35	5.5	200	235	1.1	7.45	IE5	BK30-..S5E11LA6	20	67	134	200	240	235	235	235	235	235	76	2200	10400
35	5.5	155	310	1	9.63	IE5	BK30-..S5E11LA6	15.5	51	103	155	186	310	310	310	310	310	76	3150	11500
35	5.5	155	310	1	9.63	IE4	BK30-..S4E11MA6	15.5	51	103	155	186	230	265	310	310	310	65	3150	11500
35	5.5	131	355	1.2	11.39	IE4	BK30-..S4E11MA6	13	43.5	87	131	158	270	305	355	355	355	65	4150	11000
35	5.5	131	355	1.2	11.39	IE5	BK30-..S5E11LA6	13	43.5	87	131	158	355	355	355	355	355	76	4150	11000
35	5.5	125	380	0.83	11.93	IE5	BK30-..S5E11LA6	12.5	41.5	83	125	150	380	380	380	380	380	76	3650	12000
35	5.5	125	380	0.83	11.93	IE4	BK30-..S4E11MA6	12.5	41.5	83	125	150	290	325	380	380	380	65	3650	12000
35	5.5	103	455	0.99	14.5	IE4	BK30-..S4E11MA6	10	34	68	103	124	345	390	455	455	455	65	4900	12000
35	5.5	103	455	0.99	14.5	IE5	BK30-..S5E11LA6	10	34	68	103	124	455	455	455	455	455	76	4900	12000
35	5.5	83	560	0.8	17.95	IE5	BK30-..S5E11LA6	8.3	27.5	55	83	100	560	560	560	560	560	76	5300	12000
35	5.5	83	560	0.8	17.95	IE4	BK30-..S4E11MA6	8.3	27.5	55	83	100	425	480	560	560	560	65	5300	12000
35	5.5	320	149	2.9	4.63	IE4	BK40-..S4E11MA6	32	107	215	320	385	112	127	149	149	149	90	430	8900
35	5.5	320	149	2.9	4.63	IE5	BK40-..S5E11LA6	32	107	215	320	385	149	149	149	149	149	102	430	8900
35	5.5	245	193	2.4	6.02	IE5	BK40-..S5E11LA6	24.5	83	166	245	295	193	193	193	193	193	102	470	9800
35	5.5	245	193	2.4	6.02	IE4	BK40-..S4E11MA6	24.5	83	166	245	295	146	166	193	193	193	90	470	9800
35	5.5	200	240	2	7.49	IE4	BK40-..S4E11MA6	20	66	133	200	240	182	205	240	240	240	90	750	10500
35	5.5	200	240	2	7.49	IE5	BK40-..S5E11LA6	20	66	133	200	240	240	240	240	240	102	750	10500	
35	5.5	161	295	1.6	9.31	IE5	BK40-..S5E11LA6	16	53	107	161	193	295	295	295	295	295	102	1040	11200
35	5.5	161	295	1.6	9.31	IE4	BK40-..S4E11MA6	16	53	107	161	193	225	255	295	295	295	90	1040	11200
35	5.5	134	350	2	11.17	IE5	BK40-..S5E11LA6	13	44.5	89	134	161	350	350	350	350	350	102	4100	13100
35	5.5	134	350	2	11.17	IE4	BK40-..S4E11MA6	13	44.5	89	134	161	265	300	350	350	350	90	4100	13100
35	5.5	126	380	1.3	11.86	IE5	BK40-..S5E11LA6	12.5	42	84	126	151	380	380	380	380	380	102	1770	12200
35	5.5	126	380	1.3	11.86	IE4	BK40-..S4E11MA6	12.5	42	84	126	151	285	325	380	380	380	90	1770	12200
35	5.5	103	455	1.7	14.5	IE5	BK40-..S5E11LA6	10	34	68	103	124	455	455	455	455	455	102	4500	14300
35	5.5	83	560	1.4	18.05	IE4	BK40-..S4E11MA6	8.3	27.5	55	83	99	430	485	560	560	560	90	4900	15300
35	5.5	83	560	1.4	18.05	IE5	BK40-..S5E11LA6	8.3	27.5	55	83	99	560	560	560	560	560	102	4900	15300
35	5.5	66	700	1.1	22.44	IE4	BK40-..S4E11MA6	6.6	22	44.5	66	80	530	600	700	700	700	90	5500	16500
35	5.5	66	700	1.1	22.44	IE5	BK40-..S5E11LA6	6.6	22	44.5	66	80	700	700	700	700	700	102	5500	16500
35	5.5	52	900	0.87	28.59	IE4	BK40-..S4E11MA6	5.2	17	34.5	52	62	680	770	900	900	900	90	6300	17000
35	5.5	52	900	0.87	28.59	IE5	BK40-..S5E11LA6	5.2	17	34.5	52	62	900	900	900	900	900	102	6300	17000
35	5.5	154	305	3	9.73	IE4	BK50-..S4E11MA6	15	51	102	154	184	230	260	305	305	305	120	5400	15400
35	5.5	154	305	3	9.73	IE5	BK50-..S5E11LA6	15	51	102	154	184	305	305	305	305	305	132	5400	15400
35	5.5	150	320	2.5	10	IE4	BK50-..S4E11MA6	15	50	100	150	180	240	275	320	320	320	120	1220	13200
35	5.5	150	320	2.5	10	IE5	BK50-..S5E11LA6	15	50	100	150	180	320	320	320	320	320	13200	13200	
35	5.5	107	435	2.4	13.95	IE4	BK50-..S4E11MA6	10.5	35.5	71	107	129	330	375	435	435	435	120	6100	17400
35	5.5	107	435	2.4	13.95	IE5	BK50-..S5E11LA6	10.5	35.5	71	107	129	435	435	435	435	435	132	6100	17400
35	5.5	83	570	1.3	17.92	IE4	BK50-..S4E11MA6	8.3	27.5	55	83	100	430	485	570	570	570	120	4600	16800
35	5.5	83	570	1.3	17.92	IE5	BK50-..S5E11LA6	8.3	27.5	55	83	100	570	570	570	570	570	132	4600	16800
35	5.5	77	600	1.7	19.33	IE5	BK50-..S5E11LA6	7.7	25.5	51	77	93	600	600	600	600	600	132	6900	19200
35	5.5	77	600	1.7	19.33	IE4	BK50-..S4E11MA6	7.7	25.5	51	77	93	460	520	600	600	600	120	6900	19200
35	5.5	56	830	1.3	26.51	IE4	BK50-..S4E11MA6	5.6	18.5	37.5	56	67	630	710	830	830	830	120	7800	21200
35	5.5	56	830	1.3	26.51	IE5	BK50-..S5E11LA6	5.6	18.5	37.5	56	67	830	830	830	830	830	132	7800	21200
35	5.5	42.5	1100	0.95	35.21	IE4	BK50-..S4E11MA6	4.2	14	28	42.5	51	1100	1100	1100	1100	1100	132	8700	23100
35	5.5	61	850	2.7	24.45	IE4	BK60-..S4E11MA6	6.1	20	40.5	61	73	640	730	850	850	850	130	4850	22000
35	5.5	61	850	2.7	24.45	IE5	BK60-..S5E11LA6	6.1	20	40.5	61	73	850	850	850	850	850	142	4850	22000
35	5.5	54	950	2.4	27.36	IE5	BK60-..S5E11LA6	5.4	18	36.5	54	65	950	950	950	950	950	142	5600	23200
35	5.5	54	950	2.4	27.36	IE4	BK60-..S4E11MA6	5.4	18	36.5	54	65	720	820	950	950	950	130	5600	23200
35	5.5	44	1180	1.9	33.78	IE4	BK60-..S4E11MA6	4.4	14.5	29.5	44	53	890	1010	1180	1180	1180	130	6500	25200
35	5.5	44	1180	1.9	33.78	IE5	BK60-..S5E11LA6	4.4	14.5	29.5	44	53	1180	1180	1180	1180	1180	142	6500	25200
35	5.5	39.5	1320	1.7	37.8	IE5	BK60-..S5E11LA6	3.9	13	26	39.5	47.5	1320	1320	1320	1320	1320	142	7300	26500
35	5.5	39.5	1320	1.7	37.8	IE4	BK60-..S4E11MA6	3.9	13	26	39.5	47.5	1000	1130	1320	1320	1320	130	7300	26500
35	5.5	33	1570	1.5	45.05	IE4	BK60-..S4E11MA6	3.3	11	22	33	39.5	1190	1350	1570	1570	1570	130	8200	28300
35	5.5	33	1570	1.5	45.05	IE5	BK60-..S5E11LA6	3.3	11	22	33	39.5	1570	1570	1570	1570	1570	142	8200	28300
35	5.5	29.5	1760	1.3	50.4	IE4	BK60-..S4E11MA6	2.9	9.9	19.5	29.5	35.5	1760	1760	1760	1760</td				

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
35	5.5	9.7	5400	0.96	154.4	IE4	BK70-..S4E11MA6	0.95	3.2	6.4	9.7	11.5	4050	4600	5400	5400	5400	209	21900	50000
35	5.5	9.7	5400	0.96	154.4	IE5	BK70-..S5E11LA6	0.95	3.2	6.4	9.7	11.5	5400	5400	5400	5400	5400	221	21900	50000
35	5.5	8.5	6100	0.85	175.7	IE5	BK70-..S5E11LA6	0.85	2.8	5.6	8.5	10	6100	6100	6100	6100	6100	221	24100	50000
35	5.5	8.5	6100	0.85	175.7	IE4	BK70-..S4E11MA6	0.85	2.8	5.6	8.5	10	4650	5200	6100	6100	6100	209	24100	50000
35	5.5	14.5	3550	2.9	102.5	IE4	BK80-..S4E11MA6	1.4	4.8	9.7	14.5	17.5	2700	3050	3550	3550	3550	324	20500	75000
35	5.5	14.5	3550	2.9	102.5	IE5	BK80-..S5E11LA6	1.4	4.8	9.7	14.5	17.5	3550	3550	3550	3550	3550	336	20500	75000
35	5.5	12.5	4100	2.6	117.5	IE5	BK80-..S5E11LA6	1.2	4.2	8.5	12.5	15	4100	4100	4100	4100	4100	336	22300	75000
35	5.5	12.5	4100	2.6	117.5	IE4	BK80-..S4E11MA6	1.2	4.2	8.5	12.5	15	3100	3500	4100	4100	4100	324	22300	75000
35	5.5	11	4600	2.3	131.6	IE4	BK80-..S4E11MA6	1.1	3.7	7.5	11	13.5	3450	3900	4600	4600	4600	324	24900	75000
35	5.5	11	4600	2.3	131.6	IE5	BK80-..S5E11LA6	1.1	3.7	7.5	11	13.5	4600	4600	4600	4600	4600	336	24900	75000
35	5.5	9.7	5300	2	153.1	IE5	BK80-..S5E11LA6	0.95	3.2	6.5	9.7	11.5	5300	5300	5300	5300	5300	336	27200	75000
35	5.5	9.7	5300	2	153.1	IE4	BK80-..S4E11MA6	0.95	3.2	6.5	9.7	11.5	4050	4550	5300	5300	5300	324	27200	75000
35	5.5	8.7	6000	1.7	171.5	IE5	BK80-..S5E11LA6	0.85	2.9	5.8	8.7	10	6000	6000	6000	6000	6000	336	30000	75000
35	5.5	8.7	6000	1.7	171.5	IE4	BK80-..S4E11MA6	0.85	2.9	5.8	8.7	10	4500	5100	6000	6000	6000	324	30000	75000
35	5.5	8.4	6200	1.9	177.6	IE5	BK80Z-..S5E11LA6	0.8	2.8	5.6	8.4	10	6200	6200	6200	6200	6200	378	30000	75000
35	5.5	8.4	6200	1.9	177.6	IE4	BK80Z-..S4E11MA6	0.8	2.8	5.6	8.4	10	4700	5300	6200	6200	6200	366	30000	75000
35	5.5	7.5	6900	1.7	198.9	IE4	BK80Z-..S4E11MA6	0.75	2.5	5	7.5	9	5200	5900	6900	6900	6900	366	30000	75000
35	5.5	7.5	6900	1.7	198.9	IE5	BK80Z-..S5E11LA6	0.75	2.5	5	7.5	9	6900	6900	6900	6900	6900	378	30000	75000
35	5.5	6.6	7900	1.5	226.1	IE5	BK80Z-..S5E11LA6	0.65	2.2	4.4	6.6	7.9	7900	7900	7900	7900	7900	378	30000	75000
35	5.5	6.6	7900	1.5	226.1	IE4	BK80Z-..S4E11MA6	0.65	2.2	4.4	6.6	7.9	5900	6700	7900	7900	7900	366	30000	75000
35	5.5	5.9	8800	1.3	253.3	IE4	BK80Z-..S4E11MA6	0.55	1.9	3.9	5.9	7.1	6700	7500	8800	8800	8800	366	30000	75000
35	5.5	5.9	8800	1.3	253.3	IE5	BK80Z-..S5E11LA6	0.55	1.9	3.9	5.9	7.1	8800	8800	8800	8800	8800	378	30000	75000
35	5.5	4.9	10500	1.1	300.6	IE4	BK80Z-..S4E11MA6	0.49	1.6	3.3	4.9	5.9	7900	9000	10500	10500	10500	366	30000	75000
35	5.5	4.9	10500	1.1	300.6	IE5	BK80Z-..S5E11LA6	0.49	1.6	3.3	4.9	5.9	10500	10500	10500	10500	10500	378	30000	75000
35	5.5	4.4	11700	0.98	336.7	IE5	BK80Z-..S5E11LA6	0.44	1.4	2.9	4.4	5.3	11700	11700	11700	11700	11700	378	30000	75000
35	5.5	4.4	11700	0.98	336.7	IE4	BK80Z-..S4E11MA6	0.44	1.4	2.9	4.4	5.3	8900	10100	11700	11700	11700	366	30000	75000
35	5.5	3.8	13600	0.84	389	IE5	BK80Z-..S5E11LA6	0.38	1.2	2.5	3.8	4.6	13600	13600	13600	13600	13600	378	30000	75000
35	5.5	3.8	13600	0.84	389	IE4	BK80Z-..S4E11MA6	0.38	1.2	2.5	3.8	4.6	10300	11600	13600	13600	13600	366	30000	75000
35	5.5	8.5	6100	3	174.7	IE4	BK90Z-..S4E11MA6	0.85	2.8	5.7	8.5	10	4600	5200	6100	6100	6100	632	49400	120000
35	5.5	8.5	6100	3	174.7	IE5	BK90Z-..S5E11LA6	0.85	2.8	5.7	8.5	10	6100	6100	6100	6100	6100	643	49400	120000
35	5.5	7.6	6800	2.7	195.4	IE4	BK90Z-..S4E11MA6	0.75	2.5	5.1	7.6	9.2	5100	5800	6800	6800	6800	632	49400	120000
35	5.5	7.6	6800	2.7	195.4	IE5	BK90Z-..S5E11LA6	0.75	2.5	5.1	7.6	9.2	6800	6800	6800	6800	6800	643	49400	120000
35	5.5	6.3	8200	2.3	234.6	IE4	BK90Z-..S4E11MA6	0.6	2.1	4.2	6.3	7.6	6200	7000	8200	8200	8200	632	49400	120000
35	5.5	6.3	8200	2.3	234.6	IE5	BK90Z-..S5E11LA6	0.6	2.1	4.2	6.3	7.6	8200	8200	8200	8200	8200	643	49400	120000
35	5.5	5.7	9100	2	262.5	IE4	BK90Z-..S4E11MA6	0.55	1.9	3.8	5.7	6.8	6900	7800	9100	9100	9100	632	49400	120000
35	5.5	5.7	9100	2	262.5	IE5	BK90Z-..S5E11LA6	0.55	1.9	3.8	5.7	6.8	9100	9100	9100	9100	9100	643	49400	120000
35	5.5	5	10300	1.8	295.6	IE4	BK90Z-..S4E11MA6	0.5	1.6	3.3	5	6	7800	8800	10300	10300	10300	632	49400	120000
35	5.5	5	10300	1.8	295.6	IE5	BK90Z-..S5E11LA6	0.5	1.6	3.3	5	6	10300	10300	10300	10300	10300	643	49400	120000
35	5.5	4.5	11500	1.6	330.7	IE5	BK90Z-..S5E11LA6	0.45	1.5	3	4.5	5.4	11500	11500	11500	11500	11500	643	49400	120000
35	5.5	4.5	11500	1.6	330.7	IE4	BK90Z-..S4E11MA6	0.45	1.5	3	4.5	5.4	8700	9900	11500	11500	11500	632	49400	120000
35	5.5	3.8	13600	1.4	389.1	IE5	BK90Z-..S5E11LA6	0.38	1.2	2.5	3.8	4.6	13600	13600	13600	13600	13600	643	49400	120000
35	5.5	3.8	13600	1.4	389.1	IE4	BK90Z-..S4E11MA6	0.38	1.2	2.5	3.8	4.6	10300	11600	13600	13600	13600	632	49400	120000
35	5.5	3.4	15200	1.2	435.3	IE4	BK90Z-..S4E11MA6	0.34	1.1	2.2	3.4	4.1	11500	13000	15200	15200	15200	632	49400	120000
35	5.5	3.4	15200	1.2	435.3	IE5	BK90Z-..S5E11LA6	0.34	1.1	2.2	3.4	4.1	15200	15200	15200	15200	15200	643	49400	120000
35	5.5	3	17400	1.1	499.2	IE4	BK90Z-..S4E11MA6	0.3	1	2	3	3.6	13200	14900	17400	17400	17400	632	49400	120000
35	5.5	3	17400	1.1	499.2	IE5	BK90Z-..S5E11LA6	0.3	1	2	3	3.6	17400	17400	17400	17400	17400	643	49400	120000
35	5.5	2.6	19500	0.95	558.5	IE4	BK90Z-..S4E11MA6	0.26	0.85	1.7	2.6	3.2	14800	16700	19500	19500	19500	632	49400	120000
35	5.5	2.6	19500	0.95	558.5	IE5	BK90Z-..S5E11LA6	0.26	0.85	1.7	2.6	3.2	19500	19500	19500	19500	19500	643	49400	120000
35	5.5	2.3	22000	0.83	637.7	IE4	BK90Z-..S4E11MA6	0.23	0.75	1.5	2.3	2.8	16800	19100	22000	22000	22000	632	49400	120000
35	5.5	2.3	22000	0.83	637.7	IE5	BK90Z-..S5E11LA6	0.23	0.75	1.5	2.3	2.8	22000	22000	22000	22000	22000	643	49400	120000

MN = 48 Nm (PN = 7.5 kW)

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 48 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
48	7.5	56	1140	0.92	26.51	IE3	BK50-../SPE11LA6	5.6	18.5	37.5	56	67	830	950	1140	1140	1140	132	7800	21200
48	7.5	108	660	3	13.85	IE3	BK60-../SPE11LA6	10.5	36	72	108	129	480	550	660	660	660	142	3850	18000
48	7.5	104	690	2.8	14.41	IE3	BK60-../SPE11LA6	10	34.5	69	104	124	500	570	690	690	690	142	3650	18600
48	7.5	93	770	2.6	16.05	IE3	BK60-../SPE11LA6	9.3	31	62	93	112	560	640	770	770	770	142	4050	18800
48	7.5	81	880	2.4	18.36	IE3	BK60-../SPE11LA6	8.1	27	54	81	98	640	730	880	880	880	142	4000	19900
48	7.5	73	980	2.3	20.54	IE3	BK60-../SPE11LA6	7.3	24	48.5	73	87	710	820	980	980	980	142	4400	20600
48	7.5	61	1170	2	24.45	IE3	BK60-../SPE11LA6	6.1	20	40.5	61	73	850	970	1170	1170	1170	142	4850	22000
48	7.5	54	1310	1.8	27.36	IE3	BK60-../SPE11LA6	5.4	18	36.5	54	65	950	1090	1310	1310	1310	142	5600	23200
48	7.5	44	1620	1.4	33.78	IE3	BK60-../SPE11LA6	4.4	14.5	29.5	44	53	1180	1350	1620	1620	1620	142	6500	25200
48	7.5	39.5	1810	1.3	37.8	IE3	BK60-../SPE11LA6	3.9	13	26	39.5	47.5	1320	1510	1810	1810	1810	142	7300	26500
48	7.5	33	2150	1.1	45.05	IE3	BK60-../SPE11LA6	3.3	11	22	33	39.5	1570	1800	2150	2150	2150	142	8200	28300
48	7.5	29.5	2400	0.95	50.4	IE3	BK60-../SPE11LA6	2.9	9.9	19.5	29.5	35.5	1760	2000	2400	2400	2400	142	9100	29800
48	7.5	25	2800	0.81	58.95	IE3	BK60-../SPE11LA6	2.5	8.4	16.5	25	30.5	2050	2350	2800	2800	2800	142	9900	31500
48	7.5	48.5	1480	3	30.9	IE3	BK70-../SPE11LA6	4.8	16	32	48.5	58	1080	1230	1480	1480	1480	221	7500	33600
48	7.5	42.5	1680	2.8	35.15	IE3	BK70-../SPE11LA6	4.2	14	28	42.5	51	1230	1400	1680	1680	1680	221	8000	35000
48	7.5	37	1920	2.5	40.08	IE3	BK70-../SPE11LA6	3.7	12	24.5	37	44.5	1400	1600	1920	1920	1920	221	8300	36300
48	7.5	32.5	2150	2.3	45.59	IE3	BK70-../SPE11LA6	3.2	10.5	21.5	32.5	39	1590	1820	2150	2150	2150	221	9000	37900
48	7.5	27.5	2550	2	54.15	IE3	BK70-../SPE11LA6	2.7	9.2	18	27.5	33	1890	2150	2550	2550	2550	221	9900	40200
48	7.5	24	2950	1.8	61.6	IE3	BK70-../SPE11LA6	2.4	8.1	16	24	29	2150	2450	2950	2950	2950	221	11500	42800
48	7.5	21	3350	1.5	70.23	IE3	BK70-../SPE11LA6	2.1	7.1	14	21	25.5	2450	2800	3350	3350	3350	221	12500	44800
48	7.5	18.5	3800	1.4	79.89	IE3	BK70-../SPE11LA6	1.8	6.2	12.5	18.5	22.5	2750	3150	3800	3800	3800	221	14300	47600
48	7.5	16	4350	1.2	90.96	IE3	BK70-../SPE11LA6	1.6	5.4	10.5	16	19.5	3150	3600	4350	4350	4350	221	15300	49900
48	7.5	14	4950	1	103.5	IE3	BK70-../SPE11LA6	1.4	4.8	9.6	14	17	3600	4100	4950	4950	4950	221	17200	50000
48	7.5	12	5700	0.9	120.2	IE3	BK70-../SPE11LA6	1.2	4.1	8.3	12	14.5	4200	4800	5700	5700	5700	221	18600	50000
48	7.5	21	3350	2.8	70.72	IE3	BK80-../SPE11LA6	2.1	7	14	21	25	2450	2800	3350	3350	3350	336	16600	68700
48	7.5	18.5	3800	2.6	79.22	IE3	BK80-../SPE11LA6	1.8	6.3	12.5	18.5	22.5	2750	3150	3800	3800	3800	336	17600	71300
48	7.5	16	4350	2.3	91.53	IE3	BK80-../SPE11LA6	1.6	5.4	10.5	16	19.5	3200	3650	4350	4350	4350	336	18300	74200
48	7.5	14.5	4900	2.1	102.5	IE3	BK80-../SPE11LA6	1.4	4.8	9.7	14.5	17.5	3550	4100	4900	4900	4900	336	20500	75000
48	7.5	12.5	5600	1.9	117.5	IE3	BK80-../SPE11LA6	1.2	4.2	8.5	12.5	15	4100	4700	5600	5600	5600	336	22300	75000
48	7.5	11	6300	1.7	131.6	IE3	BK80-../SPE11LA6	1.1	3.7	7.5	11	13.5	4600	5200	6300	6300	6300	336	24900	75000
48	7.5	9.7	7300	1.4	153.1	IE3	BK80-../SPE11LA6	0.95	3.2	6.5	9.7	11.5	5300	6100	7300	7300	7300	336	27200	75000
48	7.5	8.7	8200	1.3	171.5	IE3	BK80-../SPE11LA6	0.85	2.9	5.8	8.7	10	6000	6800	8200	8200	8200	336	30000	75000
48	7.5	8.4	8500	1.3	177.6	IE3	BK80Z-../SPE11LA6	0.8	2.8	5.6	8.4	10	6200	7100	8500	8500	8500	378	30000	75000
48	7.5	7.5	9500	1.2	198.9	IE3	BK80Z-../SPE11LA6	0.75	2.5	5	7.5	9	6900	7900	9500	9500	9500	378	30000	75000
48	7.5	6.6	10800	1.1	226.1	IE3	BK80Z-../SPE11LA6	0.65	2.2	4.4	6.6	7.9	7900	9000	10800	10800	10800	378	30000	75000
48	7.5	5.9	12100	0.95	253.3	IE3	BK80Z-../SPE11LA6	0.55	1.9	3.9	5.9	7.1	8800	10100	12100	12100	12100	378	30000	75000
48	7.5	4.9	14400	0.8	300.6	IE3	BK80Z-../SPE11LA6	0.49	1.6	3.3	4.9	5.9	10500	12000	14400	14400	14400	378	30000	75000
48	7.5	8.5	8300	2.2	174.7	IE3	BK90Z-../SPE11LA6	0.85	2.8	5.7	8.5	10	6100	6900	8300	8300	8300	643	49400	120000
48	7.5	7.6	9300	2	195.4	IE3	BK90Z-../SPE11LA6	0.75	2.5	5.1	7.6	9.2	6800	7800	9300	9300	9300	643	49400	120000
48	7.5	6.3	11200	1.6	234.6	IE3	BK90Z-../SPE11LA6	0.6	2.1	4.2	6.3	7.6	8200	9300	11200	11200	11200	643	49400	120000
48	7.5	5.7	12600	1.5	262.5	IE3	BK90Z-../SPE11LA6	0.55	1.9	3.8	5.7	6.8	9100	10500	12600	12600	12600	643	49400	120000
48	7.5	5	14100	1.3	295.6	IE3	BK90Z-../SPE11LA6	0.5	1.6	3.3	5	6	10300	11800	14100	14100	14100	643	49400	120000
48	7.5	4.5	15800	1.2	330.7	IE3	BK90Z-../SPE11LA6	0.45	1.5	3	4.5	5.4	11500	13200	15800	15800	15800	643	49400	120000
48	7.5	3.8	18600	0.99	389.1	IE3	BK90Z-../SPE11LA6	0.38	1.2	2.5	3.8	4.6	13600	15500	18600	18600	18600	643	49400	120000
48	7.5	3.4	20500	0.89	435.3	IE3	BK90Z-../SPE11LA6	0.34	1.1	2.2	3.4	4.1	15200	17400	20500	20500	20500	643	49400	120000

8

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 0.65 Nm (PN = 0.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
0.65	0.2	62	27.5	2.9	47.78	IE5	BK06-..S5E04SA4-1	3.1	10	20.5	62	75	27.5	27.5	27.5	27.5	27.5	7.6	1500	-
0.65	0.2	55	31	2.2	54.38	IE5	BK06-..S5E04SA4-1	2.7	9.1	18	55	66	31	31	31	31	31	7.6	1600	-
0.65	0.2	47	36.5	1.7	63.33	IE5	BK06-..S5E04SA4-1	2.3	7.8	15.5	47	56	36.5	36.5	36.5	36.5	36.5	7.6	1700	-
0.65	0.2	24.5	66	2.1	120.3	IE5	BK10Z-..S5E04SA4-1	1.2	4.1	8.3	24.5	29.5	66	66	66	66	66	21	7000	-
0.65	0.2	20.5	78	2.1	143.2	IE5	BK10Z-..S5E04SA4-1	1	3.4	6.9	20.5	25	78	78	78	78	78	21	7000	-
0.65	0.2	17.5	92	2.2	170.6	IE5	BK10Z-..S5E04SA4-1	0.85	2.9	5.8	17.5	21	92	92	92	92	92	21	7000	-
0.65	0.2	14.5	109	1.8	204.7	IE5	BK10Z-..S5E04SA4-1	0.7	2.4	4.8	14.5	17.5	109	109	109	109	109	21	7000	-
0.65	0.2	11.5	137	1.5	257.9	IE5	BK10Z-..S5E04SA4-1	0.55	1.9	3.8	11.5	13.5	137	137	137	137	137	21	7000	-
0.65	0.2	9.9	159	1.2	302.4	IE5	BK10Z-..S5E04SA4-1	0.49	1.6	3.3	9.9	11.5	159	159	159	159	159	21	7000	-
0.65	0.2	8	196	0.84	373.4	IE5	BK10G06-..S5E04SA4-1	0.4	1.3	2.6	8	9.6	196	196	196	196	196	21	7000	-
0.65	0.2	8.7	181	1.2	343.2	IE5	BK10G06-..S5E04SA4-1	0.43	1.4	2.9	8.7	10	181	181	181	181	181	25	7000	-
0.65	0.2	7.3	215	1	410.8	IE5	BK10G06-..S5E04SA4-1	0.36	1.2	2.4	7.3	8.7	215	215	215	215	215	25	7000	-
0.65	0.2	6.5	235	0.92	459.2	IE5	BK10G06-..S5E04SA4-1	0.32	1	2.1	6.5	7.8	235	235	235	235	235	25	7000	-
0.65	0.2	5.9	260	0.84	501.4	IE5	BK10G06-..S5E04SA4-1	0.29	0.95	1.9	5.9	7.1	260	260	260	260	260	25	7000	-
0.65	0.2	14	110	3	207.5	IE5	BK20Z-..S5E04SA4-1	0.7	2.4	4.8	14	17	110	110	110	110	110	31	8700	9000
0.65	0.2	11.5	138	2.4	259.9	IE5	BK20Z-..S5E04SA4-1	0.55	1.9	3.8	11.5	13.5	138	138	138	138	138	31	8700	9000
0.65	0.2	10	157	2	298.2	IE5	BK20Z-..S5E04SA4-1	0.5	1.6	3.3	10	12	157	157	157	157	157	31	8700	9000
0.65	0.2	8.1	191	1.5	367.7	IE5	BK20Z-..S5E04SA4-1	0.4	1.3	2.7	8.1	9.7	191	191	191	191	191	31	8700	9000
0.65	0.2	8.3	189	1.9	359.1	IE5	BK20G06-..S5E04SA4-1	0.41	1.3	2.7	8.3	10	189	189	189	189	189	34	8700	9000
0.65	0.2	6.9	220	1.6	429.7	IE5	BK20G06-..S5E04SA4-1	0.34	1.1	2.3	6.9	8.3	220	220	220	220	220	34	8700	9000
0.65	0.2	6.2	250	1.4	480.4	IE5	BK20G06-..S5E04SA4-1	0.31	1	2	6.2	7.4	250	250	250	250	250	34	8700	9000
0.65	0.2	5.7	270	1.3	524.5	IE5	BK20G06-..S5E04SA4-1	0.28	0.95	1.9	5.7	6.8	270	270	270	270	270	34	8700	9000
0.65	0.2	4.7	320	1.1	630	IE5	BK20G06-..S5E04SA4-1	0.23	0.75	1.5	4.7	5.7	320	320	320	320	320	34	8700	9000
0.65	0.2	3.9	385	0.93	757	IE5	BK20G06-..S5E04SA4-1	0.19	0.65	1.3	3.9	4.7	385	385	385	385	385	34	8700	9000
0.65	0.2	3.3	450	0.8	891.2	IE5	BK20G06-..S5E04SA4-1	0.16	0.55	1.1	3.3	4	450	450	450	450	450	34	8700	9000
0.65	0.2	6.3	245	2	471.5	IE5	BK30G06-..S5E04SA4-1	0.31	1	2.1	6.3	7.6	245	245	245	245	245	40	11200	12000
0.65	0.2	5.2	290	1.7	567	IE5	BK30G06-..S5E04SA4-1	0.26	0.85	1.7	5.2	6.3	290	290	290	290	290	40	11200	12000
0.65	0.2	4.5	335	1.5	652.5	IE5	BK30G06-..S5E04SA4-1	0.22	0.75	1.5	4.5	5.5	335	335	335	335	335	40	11200	12000
0.65	0.2	4	375	1.3	743	IE5	BK30G06-..S5E04SA4-1	0.2	0.65	1.3	4	4.8	375	375	375	375	375	40	11200	12000
0.65	0.2	3.6	410	1.2	810.9	IE5	BK30G06-..S5E04SA4-1	0.18	0.6	1.2	3.6	4.4	410	410	410	410	410	40	11200	12000
0.65	0.2	3.1	480	1	954.1	IE5	BK30G06-..S5E04SA4-1	0.15	0.5	1	3.1	3.7	480	480	480	480	480	40	11200	12000
0.65	0.2	2.6	570	0.85	1142	IE5	BK30G06-..S5E04SA4-1	0.13	0.43	0.85	2.6	3.1	570	570	570	570	570	40	11200	12000

MN = 0.8 Nm (PN = 0.25 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
0.8	0.25	78	27	2.9	38.18	IE5	BK06-..S5E04SA4-1	3.9	13	26	78	94	26	27	27	27	27	7.6	1380	-
0.8	0.25	62	34	2.4	47.78	IE5	BK06-..S5E04SA4-1	3.1	10	20.5	62	75	32	34	34	34	34	7.6	1500	-
0.8	0.25	55	38.5	1.8	54.38	IE5	BK06-..S5E04SA4-1	2.7	9.1	18	55	66	36.5	38.5	38.5	38.5	38.5	7.6	1600	-
0.8	0.25	47	45	1.4	63.33	IE5	BK06-..S5E04SA4-1	2.3	7.8	15.5	47	56	42.5	45	45	45	45	7.6	1700	-
0.8	0.25	24.5	81	1.7	120.3	IE5	BK10Z-..S5E04SA4-1	1.2	4.1	8.3	24.5	29.5	77	81	81	81	81	21	7000	-
0.8	0.25	20.5	96	1.7	143.2	IE5	BK10Z-..S5E04SA4-1	1	3.4	6.9	20.5	25	91	96	96	96	96	21	7000	-
0.8	0.25	17.5	113	1.8	170.6	IE5	BK10Z-..S5E04SA4-1	0.85	2.9	5.8	17.5	21	107	113	113	113	113	21	7000	-
0.8	0.25	14.5	134	1.5	204.7	IE5	BK10Z-..S5E04SA4-1	0.7	2.4	4.8	14.5	17.5	127	134	134	134	134	21	7000	-
0.8	0.25	11.5	169	1.2	257.9	IE5	BK10Z-..S5E04SA4-1	0.55	1.9	3.8	11.5	13.5	160	169	169	169	169	21	7000	-
0.8	0.25	9.9	195	0.94	302.4	IE5	BK10Z-..S5E04SA4-1	0.49	1.6	3.3	9.9	11.5	186	195	195	195	195	21	7000	-
0.8	0.25	8.7	220	0.98	343.2	IE5	BK10G06-..S5E04SA4-1	0.43	1.4	2.9	8.7	10	210	220	220	220	220	25	7000	-
0.8	0.25	7.3	265	0.83	410.8	IE5	BK10G06-..S5E04SA4-1	0.36	1.2	2.4	7.3	8.7	250	265	265	265	265	25	7000	-
0.8	0.25	17	115	2.9	173.4	IE5	BK20Z-..S5E04SA4-1	0.85	2.8	5.7	17	20.5	109	115	115	115	115	31	8700	9000
0.8	0.25	14	136	2.4	207.5	IE5	BK20Z-..S5E04SA4-1	0.7	2.4	4.8	14	17	129	136	136	136	136	31	8700	

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1 Nm (PN = 0.315 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1	0.315	90	29.5	2.7	33.33	IE4	BK06-../S4E04SA4-1	4.5	15	30	90	108	22.5	25	29.5	29.5	29.5	7.6	1320	-
1	0.315	78	34	2.3	38.18	IE4	BK06-../S4E04SA4-1	3.9	13	26	78	94	26	29	34	34	34	7.6	1380	-
1	0.315	62	42.5	1.9	47.78	IE4	BK06-../S4E04SA4-1	3.1	10	20.5	62	75	32	36	42.5	42.5	42.5	7.6	1500	-
1	0.315	55	48	1.4	54.38	IE4	BK06-../S4E04SA4-1	2.7	9.1	18	55	66	36.5	41	48	48	48	7.6	1600	-
1	0.315	47	56	1.1	63.33	IE4	BK06-../S4E04SA4-1	2.3	7.8	15.5	47	56	42.5	47.5	56	56	56	7.6	1700	-
1	0.315	24.5	102	1.3	120.3	IE4	BK10Z-../S4E04SA4-1	1.2	4.1	8.3	24.5	29.5	77	86	102	102	102	21	7000	-
1	0.315	20.5	120	1.4	143.2	IE4	BK10Z-../S4E04SA4-1	1	3.4	6.9	20.5	25	91	102	120	120	120	21	7000	-
1	0.315	17.5	141	1.4	170.6	IE4	BK10Z-../S4E04SA4-1	0.85	2.9	5.8	17.5	21	107	120	141	141	141	21	7000	-
1	0.315	14.5	167	1.2	204.7	IE4	BK10Z-../S4E04SA4-1	0.7	2.4	4.8	14.5	17.5	127	142	167	167	167	21	7000	-
1	0.315	11.5	210	0.95	257.9	IE4	BK10Z-../S4E04SA4-1	0.55	1.9	3.8	11.5	13.5	160	179	210	210	210	21	7000	-
1	0.315	30.5	83	2.8	96.99	IE4	BK20Z-../S4E04SA4-1	1.5	5.1	10	30.5	37	63	70	83	83	83	31	8700	9000
1	0.315	20.5	121	2.7	144.5	IE4	BK20Z-../S4E04SA4-1	1	3.4	6.9	20.5	24.5	92	103	121	121	121	31	8700	9000
1	0.315	17	143	2.3	173.4	IE4	BK20Z-../S4E04SA4-1	0.85	2.8	5.7	17	20.5	109	122	143	143	143	31	8700	9000
1	0.315	14	170	1.9	207.5	IE4	BK20Z-../S4E04SA4-1	0.7	2.4	4.8	14	17	129	144	170	170	170	31	8700	9000
1	0.315	11.5	210	1.5	259.9	IE4	BK20Z-../S4E04SA4-1	0.55	1.9	3.8	11.5	13.5	161	181	210	210	210	31	8700	9000
1	0.315	10	240	1.3	298.2	IE4	BK20Z-../S4E04SA4-1	0.5	1.6	3.3	10	12	183	205	240	240	240	31	8700	9000
1	0.315	8.1	290	0.99	367.7	IE4	BK20Z-../S4E04SA4-1	0.4	1.3	2.7	8.1	9.7	220	250	290	290	290	31	8700	9000
1	0.315	8.3	290	1.2	359.1	IE4	BK20G06-../S4E04SA4-1	0.41	1.3	2.7	8.3	10	220	245	290	290	290	34	8700	9000
1	0.315	6.9	345	1	429.7	IE4	BK20G06-../S4E04SA4-1	0.34	1.1	2.3	6.9	8.3	260	290	345	345	345	34	8700	9000
1	0.315	6.2	385	0.93	480.4	IE4	BK20G06-../S4E04SA4-1	0.31	1	2	6.2	7.4	290	325	385	385	385	34	8700	9000
1	0.315	5.7	415	0.86	524.5	IE4	BK20G06-../S4E04SA4-1	0.28	0.95	1.9	5.7	6.8	315	355	415	415	415	34	8700	9000
1	0.315	6.3	375	1.3	471.5	IE4	BK30G06-../S4E04SA4-1	0.31	1	2.1	6.3	7.6	285	320	375	375	375	40	11200	12000
1	0.315	5.2	450	1.1	567	IE4	BK30G06-../S4E04SA4-1	0.26	0.85	1.7	5.2	6.3	340	380	450	450	450	40	11200	12000
1	0.315	4.5	510	0.95	652.5	IE4	BK30G06-../S4E04SA4-1	0.22	0.75	1.5	4.5	5.5	390	435	510	510	510	40	11200	12000
1	0.315	4	580	0.84	743	IE4	BK30G06-../S4E04SA4-1	0.2	0.65	1.3	4	4.8	440	495	580	580	580	40	11200	12000

MN = 1.3 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.3	0.4	113	30.5	2.6	26.36	IE5	BK06-../S5E06MA4	5.6	18.5	37.5	113	136	30.5	30.5	30.5	30.5	30.5	11	1230	-
1.3	0.4	90	38.5	2.1	33.33	IE5	BK06-../S5E06MA4	4.5	15	30	90	108	38.5	38.5	38.5	38.5	38.5	11	1320	-
1.3	0.4	78	44.5	1.8	38.18	IE5	BK06-../S5E06MA4	3.9	13	26	78	94	44.5	44.5	44.5	44.5	44.5	11	1380	-
1.3	0.4	62	55	1.4	47.78	IE5	BK06-../S5E06MA4	3.1	10	20.5	62	75	55	55	55	55	55	11	1500	-
1.3	0.4	55	62	1.1	54.38	IE5	BK06-../S5E06MA4	2.7	9.1	18	55	66	62	62	62	62	62	11	1600	-
1.3	0.4	47	73	0.87	63.33	IE5	BK06-../S5E06MA4	2.3	7.8	15.5	47	56	73	73	73	73	73	11	1700	-
1.3	0.4	48.5	71	2.8	61.68	IE5	BK10-../S5E06MA4	2.4	8.1	16	48.5	58	71	71	71	71	71	23	7000	-
1.3	0.4	41	82	2.4	72.31	IE5	BK10-../S5E06MA4	2	6.9	13.5	41	49.5	82	82	82	82	82	23	7000	-
1.3	0.4	33.5	100	1.8	89.3	IE5	BK10-../S5E06MA4	1.6	5.5	11	33.5	40	100	100	100	100	100	23	7000	-
1.3	0.4	29	113	1.4	102.5	IE5	BK10-../S5E06MA4	1.4	4.8	9.7	29	35	113	113	113	113	113	23	7000	-
1.3	0.4	24.5	132	1	120.3	IE5	BK10Z-../S5E06MA4	1.2	4.1	8.3	24.5	29.5	132	132	132	132	132	24	7000	-
1.3	0.4	20.5	156	1	143.2	IE5	BK10Z-../S5E06MA4	1	3.4	6.9	20.5	25	156	156	156	156	156	24	7000	-
1.3	0.4	17.5	184	1.1	170.6	IE5	BK10Z-../S5E06MA4	0.85	2.9	5.8	17.5	21	184	184	184	184	184	24	7000	-
1.3	0.4	14.5	215	0.92	204.7	IE5	BK10Z-../S5E06MA4	0.7	2.4	4.8	14.5	17.5	215	215	215	215	215	24	7000	-
1.3	0.4	27.5	121	2.6	108.6	IE5	BK20-../S5E06MA4	1.3	4.6	9.2	27.5	33	121	121	121	121	121	33	8700	9000
1.3	0.4	30.5	108	2.1	96.99	IE5	BK20-../S5E06MA4	1.5	5.1	10	30.5	37	108	108	108	108	108	34	8700	9000
1.3	0.4	24	137	2.4	124.2	IE5	BK20-../S5E06MA4	1.2	4	8	24	28.5	137	137	137	137	137	34	8700	9000
1.3	0.4	20.5	157	2.1	144.5	IE5	BK20-../S5E06MA4	1	3.4	6.9	20.5	24.5	157	157	157	157	157	34	8700	9000
1.3	0.4	17	187	1.8	173.4	IE5	BK20-../S5E06MA4	0.85	2.8	5.7	17	20.5	187	187	187	187	187	34	8700	9000
1.3	0.4	14	220	1.5	207.5	IE5	BK20-../S5E06MA4	0.7	2.4	4.8	14	17	220	220	220	220	220	34	8700	9000
1.3	0.4	11.5	275	1.2	259.9	IE5	BK20-../S5E06MA4	0.55	1.9	3.8	11.5	13.5	275	275	275	275	275	34	8700	9000
1.3	0.4	10	310	0.99	298.2	IE5	BK20-../S5E													

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.3	0.4	3.9	770	1.1	756.7	IE5	BK40G10-..S5E06MA4	0.19	0.65	1.3	3.9	4.7	770	770	770	770	770	68	11700	17000
1.3	0.4	3.5	850	1	838.4	IE5	BK40G10-..S5E06MA4	0.17	0.55	1.1	3.5	4.2	850	850	850	850	850	68	11700	17000
1.3	0.4	3	1000	0.84	998.3	IE5	BK40G10-..S5E06MA4	0.15	0.5	1	3	3.6	1000	1000	1000	1000	1000	68	11700	17000
1.3	0.4	9.1	345	2.9	328.2	IE5	BK50Z-..S5E06MA4	0.45	1.5	3	9.1	10.5	345	345	345	345	345	92	14100	26000
1.3	0.4	7.2	430	1.9	414.8	IE5	BK50Z-..S5E06MA4	0.36	1.2	2.4	7.2	8.6	430	430	430	430	430	92	14100	26000
1.3	0.4	6.4	485	2.4	465.1	IE5	BK50G10-..S5E06MA4	0.32	1	2.1	6.4	7.7	485	485	485	485	485	96	14100	111000
1.3	0.4	5.8	530	2.2	513.4	IE5	BK50G10-..S5E06MA4	0.29	0.95	1.9	5.8	7	530	530	530	530	530	96	14100	111000
1.3	0.4	5.2	580	2	568.6	IE5	BK50G10-..S5E06MA4	0.26	0.85	1.7	5.2	6.3	580	580	580	580	580	96	14100	111000
1.3	0.4	4.6	670	1.7	651.7	IE5	BK50G10-..S5E06MA4	0.23	0.75	1.5	4.6	5.5	670	670	670	670	670	96	14100	111000
1.3	0.4	4.1	730	1.6	722.2	IE5	BK50G10-..S5E06MA4	0.2	0.65	1.3	4.1	4.9	730	730	730	730	730	96	14100	111000
1.3	0.4	3.4	870	1.3	859.8	IE5	BK50G10-..S5E06MA4	0.17	0.55	1.1	3.4	4.1	870	870	870	870	870	96	14100	111000
1.3	0.4	2.9	1030	1.1	1024	IE5	BK50G10-..S5E06MA4	0.14	0.48	0.95	2.9	3.5	1030	1030	1030	1030	1030	96	14100	111000
1.3	0.4	2.4	1230	0.93	1230	IE5	BK50G10-..S5E06MA4	0.12	0.4	0.8	2.4	2.9	1230	1230	1230	1230	1230	96	14100	111000
1.3	0.4	2.1	1390	0.83	1398	IE5	BK50G10-..S5E06MA4	0.1	0.35	0.7	2.1	2.5	1390	1390	1390	1390	1390	96	14100	111000
1.3	0.4	3.9	970	2.6	752.1	IE5	BK60G20-..S5E06MA4	0.19	0.65	1.3	3.9	4.7	970	970	970	970	970	123	16600	34000
1.3	0.4	3.3	1150	2.2	887.8	IE5	BK60G20-..S5E06MA4	0.16	0.55	1.1	3.3	4	1150	1150	1150	1150	1150	123	16600	34000
1.3	0.4	2.9	1320	1.9	1016	IE5	BK60G20-..S5E06MA4	0.14	0.49	0.95	2.9	3.5	1320	1320	1320	1320	1320	123	16600	34000
1.3	0.4	2.2	1710	1.5	1322	IE5	BK60G20-..S5E06MA4	0.11	0.37	0.75	2.2	2.7	1710	1710	1710	1710	1710	123	16600	34000
1.3	0.4	1.8	2100	1.2	1618	IE5	BK60G20-..S5E06MA4	0.09	0.3	0.6	1.8	2.2	2100	2100	2100	2100	2100	123	16600	34000
1.3	0.4	1.6	2350	1.1	1810	IE5	BK60G20-..S5E06MA4	0.08	0.27	0.55	1.6	1.9	2350	2350	2350	2350	2350	123	16600	34000
1.3	0.4	1.4	2600	0.96	2010	IE5	BK60G20-..S5E06MA4	0.07	0.24	0.49	1.4	1.7	2600	2600	2600	2600	2600	123	16600	34000
1.3	0.4	1.2	3050	0.81	2371	IE5	BK60G20-..S5E06MA4	0.06	0.21	0.42	1.2	1.5	3050	3050	3050	3050	3050	123	16600	34000
1.3	0.4	2	1890	3	1457	IE5	BK70G20-..S5E06MA4	0.1	0.34	0.65	2	2.4	1890	1890	1890	1890	1890	201	24100	50000
1.3	0.4	1.7	2200	2.6	1696	IE5	BK70G20-..S5E06MA4	0.085	0.29	0.55	1.7	2.1	2200	2200	2200	2200	2200	201	24100	50000
1.3	0.4	1.4	2650	2.1	2040	IE5	BK70G20-..S5E06MA4	0.07	0.24	0.49	1.4	1.7	2650	2650	2650	2650	2650	201	24100	50000
1.3	0.4	1.1	3350	1.7	2578	IE5	BK70G20-..S5E06MA4	0.055	0.19	0.38	1.1	1.3	3350	3350	3350	3350	3350	201	24100	50000
1.3	0.4	0.95	3950	1.4	3041	IE5	BK70G20-..S5E06MA4	0.049	0.16	0.32	0.95	1.1	3950	3950	3950	3950	3950	201	24100	50000
1.3	0.4	0.85	4550	1.3	3505	IE5	BK70G20-..S5E06MA4	0.042	0.14	0.28	0.85	1	4550	4550	4550	4550	4550	201	24100	50000
1.3	0.4	0.75	5000	1.1	3894	IE5	BK70G20-..S5E06MA4	0.038	0.12	0.25	0.75	0.9	5000	5000	5000	5000	5000	201	24100	50000
1.3	0.4	0.65	5800	0.97	4531	IE5	BK70G20-..S5E06MA4	0.033	0.11	0.22	0.65	0.75	5800	5800	5800	5800	5800	201	24100	50000
1.3	0.4	0.55	7000	0.81	5436	IE5	BK70G20-..S5E06MA4	0.027	0.09	0.18	0.55	0.65	7000	7000	7000	7000	7000	201	24100	50000

MN = 1.75 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.75	0.55	166	28	2.8	18	IE5	BK06-..S5E06MA4	8.3	27.5	55	166	200	28	28	28	28	28	11	1080	-
1.75	0.55	139	33.5	2.4	21.54	IE5	BK06-..S5E06MA4	6.9	23	46	139	167	33.5	33.5	33.5	33.5	33.5	11	1150	-
1.75	0.55	113	41.5	1.9	26.36	IE5	BK06-..S5E06MA4	5.6	18.5	37.5	113	136	41.5	41.5	41.5	41.5	41.5	11	1230	-
1.75	0.55	90	52	1.5	33.33	IE5	BK06-..S5E06MA4	4.5	15	30	90	108	52	52	52	52	52	11	1320	-
1.75	0.55	78	60	1.3	38.18	IE5	BK06-..S5E06MA4	3.9	13	26	78	94	60	60	60	60	60	11	1380	-
1.75	0.55	62	74	1.1	47.78	IE5	BK06-..S5E06MA4	3.1	10	20.5	62	75	74	74	74	74	74	11	1500	-
1.75	0.55	55	84	0.8	54.38	IE5	BK06-..S5E06MA4	2.7	9.1	18	55	66	84	84	84	84	84	11	1600	-
1.75	0.55	61	76	2.6	48.96	IE5	BK10-..S5E06MA4	3	10	20	61	73	76	76	76	76	76	23	6400	-
1.75	0.55	48.5	96	2.1	61.68	IE5	BK10-..S5E06MA4	2.4	8.1	16	48.5	58	96	96	96	96	96	23	7000	-
1.75	0.55	41	111	1.8	72.31	IE5	BK10-..S5E06MA4	2	6.9	13.5	41	49.5	111	111	111	111	111	23	7000	-
1.75	0.55	33.5	135	1.3	89.3	IE5	BK10-..S5E06MA4	1.6	5.5	11	33.5	40	135	135	135	135	135	23	7000	-
1.75	0.55	29	152	1	102.5	IE5	BK10-..S5E06MA4	1.4	4.8	9.7	29	35	152	152	152	152	152	23	7000	-
1.75	0.55	17.5	245	0.81	170.6	IE5	BK10Z-..S5E06MA4	0.85	2.9	5.8	17.5	21	245	245	245	245	245	24	7000	-
1.75	0.55	39	118	2.8	76.79	IE5	BK20-..S5E06MA4	1.9	6.5	13	39	46.5	118	118	118	118	118	33</td		

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.75 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.75	0.55	6.1	680	1.2	487.3	IE5	BK40G10-..S5E06MA4	0.3	1	2	6.1	7.3	680	680	680	680	680	68	11700	17000
1.75	0.55	5.5	750	1.1	540	IE5	BK40G10-..S5E06MA4	0.27	0.9	1.8	5.5	6.6	750	750	750	750	750	68	11700	17000
1.75	0.55	4.5	910	0.93	660.2	IE5	BK40G10-..S5E06MA4	0.22	0.75	1.5	4.5	5.4	910	910	910	910	910	68	11700	17000
1.75	0.55	3.9	1040	0.82	756.7	IE5	BK40G10-..S5E06MA4	0.19	0.65	1.3	3.9	4.7	1040	1040	1040	1040	1040	68	11700	17000
1.75	0.55	11	370	2.8	264.5	IE5	BK50Z-..S5E06MA4	0.55	1.8	3.7	11	13.5	370	370	370	370	370	92	14100	26000
1.75	0.55	9.1	465	2.2	328.2	IE5	BK50Z-..S5E06MA4	0.45	1.5	3	9.1	10.5	465	465	465	465	465	92	14100	26000
1.75	0.55	7.2	580	1.4	414.8	IE5	BK50Z-..S5E06MA4	0.36	1.2	2.4	7.2	8.6	580	580	580	580	580	92	14100	26000
1.75	0.55	6.4	650	1.8	465.1	IE5	BK50G10-..S5E06MA4	0.32	1	2.1	6.4	7.7	650	650	650	650	650	96	14100	111000
1.75	0.55	5.8	710	1.6	513.4	IE5	BK50G10-..S5E06MA4	0.29	0.95	1.9	5.8	7	710	710	710	710	710	96	14100	111000
1.75	0.55	5.2	790	1.5	568.6	IE5	BK50G10-..S5E06MA4	0.26	0.85	1.7	5.2	6.3	790	790	790	790	790	96	14100	111000
1.75	0.55	4.6	900	1.3	651.7	IE5	BK50G10-..S5E06MA4	0.23	0.75	1.5	4.6	5.5	900	900	900	900	900	96	14100	111000
1.75	0.55	4.1	990	1.2	722.2	IE5	BK50G10-..S5E06MA4	0.2	0.65	1.3	4.1	4.9	990	990	990	990	990	96	14100	111000
1.75	0.55	3.4	1170	0.98	859.8	IE5	BK50G10-..S5E06MA4	0.17	0.55	1.1	3.4	4.1	1170	1170	1170	1170	1170	96	14100	111000
1.75	0.55	2.9	1390	0.83	1024	IE5	BK50G10-..S5E06MA4	0.14	0.48	0.95	2.9	3.5	1390	1390	1390	1390	1390	96	14100	111000
1.75	0.55	4.8	1080	2.3	621.5	IE5	BK60G20-..S5E06MA4	0.24	0.8	1.6	4.8	5.7	1080	1080	1080	1080	1080	123	16600	34000
1.75	0.55	3.9	1310	1.9	752.1	IE5	BK60G20-..S5E06MA4	0.19	0.65	1.3	3.9	4.7	1310	1310	1310	1310	1310	123	16600	34000
1.75	0.55	3.3	1550	1.6	887.8	IE5	BK60G20-..S5E06MA4	0.16	0.55	1.1	3.3	4	1550	1550	1550	1550	1550	123	16600	34000
1.75	0.55	2.9	1770	1.4	1016	IE5	BK60G20-..S5E06MA4	0.14	0.49	0.95	2.9	3.5	1770	1770	1770	1770	1770	123	16600	34000
1.75	0.55	2.2	2300	1.1	1322	IE5	BK60G20-..S5E06MA4	0.11	0.37	0.75	2.2	2.7	2300	2300	2300	2300	2300	123	16600	34000
1.75	0.55	1.8	2800	0.88	1618	IE5	BK60G20-..S5E06MA4	0.09	0.3	0.6	1.8	2.2	2800	2800	2800	2800	2800	123	16600	34000
1.75	0.55	2.6	1990	2.9	1139	IE5	BK70G20-..S5E06MA4	0.13	0.43	0.85	2.6	3.1	1990	1990	1990	1990	1990	201	24100	50000
1.75	0.55	2.3	2200	2.5	1280	IE5	BK70G20-..S5E06MA4	0.11	0.39	0.75	2.3	2.8	2200	2200	2200	2200	2200	201	24100	50000
1.75	0.55	2	2500	2.2	1457	IE5	BK70G20-..S5E06MA4	0.1	0.34	0.65	2	2.4	2500	2500	2500	2500	2500	201	24100	50000
1.75	0.55	1.7	2950	1.9	1696	IE5	BK70G20-..S5E06MA4	0.085	0.29	0.55	1.7	2.1	2950	2950	2950	2950	2950	201	24100	50000
1.75	0.55	1.4	3550	1.6	2040	IE5	BK70G20-..S5E06MA4	0.07	0.24	0.49	1.4	1.7	3550	3550	3550	3550	3550	201	24100	50000
1.75	0.55	1.1	4500	1.3	2578	IE5	BK70G20-..S5E06MA4	0.055	0.19	0.38	1.1	1.3	4500	4500	4500	4500	4500	201	24100	50000
1.75	0.55	0.95	5300	1.1	3041	IE5	BK70G20-..S5E06MA4	0.049	0.16	0.32	0.95	1.1	5300	5300	5300	5300	5300	201	24100	50000
1.75	0.55	0.85	6100	0.93	3505	IE5	BK70G20-..S5E06MA4	0.042	0.14	0.28	0.85	1	6100	6100	6100	6100	6100	201	24100	50000
1.75	0.55	0.75	6800	0.84	3894	IE5	BK70G20-..S5E06MA4	0.038	0.12	0.25	0.75	0.9	6800	6800	6800	6800	6800	201	24100	50000

MN = 2.4 Nm (PN = 0.75 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	196	33	2.4	15.29	IE5	BK06-..S5E06LA4	9.8	32.5	65	196	235	33	33	33	33	33	11	1020	-
2.4	0.75	196	33	2.4	15.29	IE3	BK06-..SPE06MA4	9.8	32.5	65	196	235	25	27.5	30.5	33	33	11	1020	-
2.4	0.75	166	38.5	2.1	18	IE5	BK06-..S5E06LA4	8.3	27.5	55	166	200	38.5	38.5	38.5	38.5	38.5	11	1080	-
2.4	0.75	166	38.5	2.1	18	IE3	BK06-..SPE06MA4	8.3	27.5	55	166	200	29	32	35.5	38.5	38.5	11	1080	-
2.4	0.75	139	46.5	1.7	21.54	IE5	BK06-..S5E06LA4	6.9	23	46	139	167	46.5	46.5	46.5	46.5	46.5	11	1150	-
2.4	0.75	139	46.5	1.7	21.54	IE3	BK06-..SPE06MA4	6.9	23	46	139	167	34.5	38.5	42.5	46.5	46.5	11	1150	-
2.4	0.75	113	56	1.4	26.36	IE5	BK06-..S5E06LA4	5.6	18.5	37.5	113	136	56	56	56	56	56	11	1230	-
2.4	0.75	113	56	1.4	26.36	IE3	BK06-..SPE06MA4	5.6	18.5	37.5	113	136	42.5	47	52	56	56	11	1230	-
2.4	0.75	90	71	1.1	33.33	IE5	BK06-..S5E06LA4	4.5	15	30	90	108	71	71	71	71	71	11	1320	-
2.4	0.75	90	71	1.1	33.33	IE3	BK06-..SPE06MA4	4.5	15	30	90	108	53	59	65	71	71	11	1320	-
2.4	0.75	78	82	0.97	38.18	IE5	BK06-..S5E06LA4	3.9	13	26	78	94	82	82	82	82	82	11	1380	-
2.4	0.75	78	82	0.97	38.18	IE3	BK06-..SPE06MA4	3.9	13	26	78	94	61	68	75	82	82	11	1380	-
2.4	0.75	87	73	2.7	34.25	IE5	BK10-..S5E06LA4	4.3	14.5	29	87	105	73	73	73	73	73	23	5600	-
2.4	0.75	87	73	2.7	34.25	IE3	BK10-..SPE06MA4	4.3	14.5	29	87	105	55	61	67	73	73	23	5600	-
2.4	0.75	73	88	2.3	40.79	IE5	BK10-..S5E06LA4	3.6	12	24.5	73	88	88	88	88	88	88	23	6000	-
2.4	0.75	73	88	2.3	40.79	IE3	BK10-..SPE06MA4	3.6	12	24.5	73	88	66	73	80	88	88	23	6000	-
2.4</td																				

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.75 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	20.5	290	1.1	144.5	IE5	BK20Z-..//S5E06LA4	1	3.4	6.9	20.5	24.5	290	290	290	290	290	34	8700	9000
2.4	0.75	20.5	290	1.1	144.5	IE3	BK20Z-..//SPE06MA4	1	3.4	6.9	20.5	24.5	215	240	265	290	290	34	8700	9000
2.4	0.75	17	345	0.96	173.4	IE5	BK20Z-..//S5E06LA4	0.85	2.8	5.7	17	20.5	345	345	345	345	345	34	8700	9000
2.4	0.75	17	345	0.96	173.4	IE3	BK20Z-..//SPE06MA4	0.85	2.8	5.7	17	20.5	255	285	315	345	345	34	8700	9000
2.4	0.75	14	405	0.81	207.5	IE5	BK20Z-..//S5E06LA4	0.7	2.4	4.8	14	17	405	405	405	405	405	34	8700	9000
2.4	0.75	14	405	0.81	207.5	IE3	BK20Z-..//SPE06MA4	0.7	2.4	4.8	14	17	305	340	370	405	405	34	8700	9000
2.4	0.75	41.5	149	3	71.56	IE5	BK30-..//S5E06LA4	2	6.9	13.5	41.5	50	149	149	149	149	149	39	9700	12000
2.4	0.75	41.5	149	3	71.56	IE3	BK30-..//SPE06MA4	2	6.9	13.5	41.5	50	112	124	136	149	149	39	9700	12000
2.4	0.75	33.5	182	2.5	88.38	IE5	BK30-..//S5E06LA4	1.6	5.6	11	33.5	40.5	182	182	182	182	182	39	10600	12000
2.4	0.75	33.5	182	2.5	88.38	IE3	BK30-..//SPE06MA4	1.6	5.6	11	33.5	40.5	136	152	167	182	182	39	10600	12000
2.4	0.75	29	205	2.2	102.4	IE5	BK30-..//S5E06LA4	1.4	4.8	9.7	29	35	205	205	205	205	205	39	11200	12000
2.4	0.75	24	250	1.8	123.9	IE5	BK30Z-..//S5E06LA4	1.2	4	8	24	29	250	250	250	250	250	41	11200	12000
2.4	0.75	24	250	1.8	123.9	IE3	BK30Z-..//SPE06MA4	1.2	4	8	24	29	189	210	230	250	250	41	11200	12000
2.4	0.75	20.5	290	1.5	145.1	IE5	BK30Z-..//S5E06LA4	1	3.4	6.8	20.5	24.5	290	290	290	290	290	41	11200	12000
2.4	0.75	20.5	290	1.5	145.1	IE3	BK30Z-..//SPE06MA4	1	3.4	6.8	20.5	24.5	215	240	265	290	290	41	11200	12000
2.4	0.75	16	365	1.2	184.8	IE5	BK30Z-..//S5E06LA4	0.8	2.7	5.4	16	19	365	365	365	365	365	41	11200	12000
2.4	0.75	16	365	1.2	184.8	IE3	BK30Z-..//SPE06MA4	0.8	2.7	5.4	16	19	275	305	335	365	365	41	11200	12000
2.4	0.75	13.5	425	1.1	216.5	IE5	BK30Z-..//S5E06LA4	0.65	2.3	4.6	13.5	16.5	425	425	425	425	425	41	11200	12000
2.4	0.75	13.5	425	1.1	216.5	IE3	BK30Z-..//SPE06MA4	0.65	2.3	4.6	13.5	16.5	315	355	390	425	425	41	11200	12000
2.4	0.75	11.5	500	0.9	255.3	IE5	BK30Z-..//S5E06LA4	0.55	1.9	3.9	11.5	14	500	500	500	500	500	41	11200	12000
2.4	0.75	11.5	500	0.9	255.3	IE3	BK30Z-..//SPE06MA4	0.55	1.9	3.9	11.5	14	375	415	460	500	500	41	11200	12000
2.4	0.75	20.5	285	2.7	143	IE5	BK40Z-..//S5E06LA4	1	3.4	6.9	20.5	25	285	285	285	285	285	64	11700	17000
2.4	0.75	20.5	285	2.7	143	IE3	BK40Z-..//SPE06MA4	1	3.4	6.9	20.5	25	215	240	260	285	285	64	11700	17000
2.4	0.75	17.5	335	2.3	169	IE5	BK40Z-..//S5E06LA4	0.85	2.9	5.9	17.5	21	335	335	335	335	335	64	11700	17000
2.4	0.75	17.5	335	2.3	169	IE3	BK40Z-..//SPE06MA4	0.85	2.9	5.9	17.5	21	250	280	305	335	335	64	11700	17000
2.4	0.75	14	415	1.9	211.5	IE5	BK40Z-..//S5E06LA4	0.7	2.3	4.7	14	17	415	415	415	415	415	64	11700	17000
2.4	0.75	14	415	1.9	211.5	IE3	BK40Z-..//SPE06MA4	0.7	2.3	4.7	14	17	310	345	380	415	415	64	11700	17000
2.4	0.75	12	475	1.6	246.6	IE5	BK40Z-..//S5E06LA4	0.6	2	4	12	14.5	475	475	475	475	475	64	11700	17000
2.4	0.75	12	475	1.6	246.6	IE3	BK40Z-..//SPE06MA4	0.6	2	4	12	14.5	355	395	435	475	475	64	11700	17000
2.4	0.75	10	560	1.2	289.8	IE5	BK40Z-..//S5E06LA4	0.5	1.7	3.4	10	12	560	560	560	560	560	64	11700	17000
2.4	0.75	10	560	1.2	289.8	IE3	BK40Z-..//SPE06MA4	0.5	1.7	3.4	10	12	420	465	510	560	560	64	11700	17000
2.4	0.75	8.6	670	0.86	348.7	IE5	BK40Z-..//S5E06LA4	0.43	1.4	2.8	8.6	10	670	670	670	670	670	64	11700	17000
2.4	0.75	8.6	670	0.86	348.7	IE3	BK40Z-..//SPE06MA4	0.43	1.4	2.8	8.6	10	500	560	620	670	670	64	11700	17000
2.4	0.75	6.1	930	0.91	487.3	IE5	BK40G10-..//S5E06LA4	0.3	1	2	6.1	7.3	930	930	930	930	930	68	11700	17000
2.4	0.75	6.1	930	0.91	487.3	IE3	BK40G10-..//SPE06MA4	0.3	1	2	6.1	7.3	700	780	850	930	930	68	11700	17000
2.4	0.75	5.5	1030	0.82	540	IE5	BK40G10-..//S5E06LA4	0.27	0.9	1.8	5.5	6.6	1030	1030	1030	1030	1030	68	11700	17000
2.4	0.75	5.5	1030	0.82	540	IE3	BK40G10-..//SPE06MA4	0.27	0.9	1.8	5.5	6.6	770	860	940	1030	1030	68	11700	17000
2.4	0.75	14.5	405	2.6	206.8	IE5	BK50Z-..//S5E06LA4	0.7	2.4	4.8	14.5	17	405	405	405	405	405	92	14100	26000
2.4	0.75	14.5	405	2.6	206.8	IE3	BK50Z-..//SPE06MA4	0.7	2.4	4.8	14.5	17	305	335	370	405	405	92	14100	26000
2.4	0.75	11	510	2	264.5	IE5	BK50Z-..//S5E06LA4	0.55	1.8	3.7	11	13.5	510	510	510	510	510	92	14100	26000
2.4	0.75	11	510	2	264.5	IE3	BK50Z-..//SPE06MA4	0.55	1.8	3.7	11	13.5	385	425	470	510	510	92	14100	26000
2.4	0.75	9.1	630	1.6	328.2	IE5	BK50Z-..//S5E06LA4	0.45	1.5	3	9.1	10.5	630	630	630	630	630	92	14100	26000
2.4	0.75	9.1	630	1.6	328.2	IE3	BK50Z-..//SPE06MA4	0.45	1.5	3	9.1	10.5	475	530	580	630	630	92	14100	26000
2.4	0.75	7.2	790	1.1	414.8	IE5	BK50Z-..//S5E06LA4	0.36	1.2	2.4	7.2	8.6	790	790	790	790	790	92	14100	26000
2.4	0.75	7.2	790	1.1	414.8	IE3	BK50Z-..//SPE06MA4	0.36	1.2	2.4	7.2	8.6	590	660	730	790	790	92	14100	26000
2.4	0.75	6.4	890	1.3	465.1	IE5	BK50G10-..//S5E06LA4	0.32	1	2.1	6.4	7.7	890	890	890	890	890	96	14100	111000
2.4	0.75	6.4	890	1.3	465.1	IE3	BK50G10-..//SPE06MA4	0.32	1	2.1	6.4	7.7	670	740	820	890	890	96	14100	111000
2.4	0.75	5.8	980	1.2	513.4	IE5	BK50G10-..//S5E06LA4	0.29	0.95	1.9	5.8	7	980	980	980	980	980	96	14100	111000
2.4	0.75	5.8	980	1.2	513.4	IE3	BK50G10-..//SPE06MA4	0.29	0.95	1.9	5.8	7	730	820	900	980	980	96	14100	111000
2.4	0.75	5.2	1080	1.1	568.6	IE5	BK50G10-..//S5E06LA4	0.26	0.85	1.7	5.2	6.3	1080	1080	1080	1080	1080	96	14100	111000
2.4	0.75	5.2	1080	1.1	568.6	IE3	BK50G10-..//SPE06MA4	0.26	0.85	1.7	5.2	6.3	810	900	990	1080	1080	96	14100	111000
2.4	0.75	4.6	1230	0.93	651.7	IE5	BK50G10-..//S5E06LA4	0.23	0.75	1.5	4.6	5.5	1230	1230	1230	1230	1230	96	14100	111000
2.4	0.75	4.6	1230</																	

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.75 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	1.1	6100	0.92	2578	IE5	BK70G20-..S5E06LA4	0.055	0.19	0.38	1.1	1.3	6100	6100	6100	6100	6100	201	24100	50000
2.4	0.75	1.1	6100	0.92	2578	IE3	BK70G20-..SPE06MA4	0.055	0.19	0.38	1.1	1.3	4600	5100	5600	6100	6100	201	24100	50000

MN = 3.5 Nm (PN = 1.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
3.5	1.1	305	31	2.6	9.71	IE4	BK06-..S4E06LA4	15	51	102	305	370	22	25.5	31	31	31	11	880	-
3.5	1.1	255	37.5	2.1	11.67	IE4	BK06-..S4E06LA4	12.5	42.5	85	255	305	26.5	31	37.5	37.5	37.5	11	930	-
3.5	1.1	196	48.5	1.6	15.29	IE4	BK06-..S4E06LA4	9.8	32.5	65	196	235	34.5	40	48.5	48.5	48.5	11	1020	-
3.5	1.1	166	56	1.4	18	IE4	BK06-..S4E06LA4	8.3	27.5	55	166	200	40.5	46.5	56	56	56	11	1080	-
3.5	1.1	139	67	1.2	21.54	IE4	BK06-..S4E06LA4	6.9	23	46	139	167	48	56	67	67	67	11	1150	-
3.5	1.1	113	83	0.96	26.36	IE4	BK06-..S4E06LA4	5.6	18.5	37.5	113	136	59	68	83	83	83	11	1230	-
3.5	1.1	250	38	3	11.93	IE4	BK10-..S4E06LA4	12.5	41.5	83	250	300	27	31.5	38	38	38	23	3100	-
3.5	1.1	177	53	2.6	16.92	IE4	BK10-..S4E06LA4	8.8	29.5	59	177	210	38	44	53	53	53	23	3700	-
3.5	1.1	132	71	2.8	22.65	IE4	BK10-..S4E06LA4	6.6	22	44	132	158	50	59	71	71	71	23	4650	-
3.5	1.1	104	90	2.2	28.76	IE4	BK10-..S4E06LA4	5.2	17	34.5	104	125	64	75	90	90	90	23	5200	-
3.5	1.1	87	107	1.9	34.25	IE4	BK10-..S4E06LA4	4.3	14.5	29	87	105	77	89	107	107	107	23	5600	-
3.5	1.1	73	128	1.6	40.79	IE4	BK10-..S4E06LA4	3.6	12	24.5	73	88	91	106	128	128	128	23	6000	-
3.5	1.1	61	152	1.3	48.96	IE4	BK10-..S4E06LA4	3	10	20	61	73	108	126	152	152	152	23	6400	-
3.5	1.1	48.5	192	1	61.68	IE4	BK10-..S4E06LA4	2.4	8.1	16	48.5	58	137	159	192	192	192	23	7000	-
3.5	1.1	41	220	0.9	72.31	IE4	BK10-..S4E06LA4	2	6.9	13.5	41	49.5	159	184	220	220	220	23	7000	-
3.5	1.1	81	115	2.9	36.69	IE4	BK20-..S4E06LA4	4	13.5	27	81	98	82	95	115	115	115	33	5400	9000
3.5	1.1	70	134	2.5	42.7	IE4	BK20-..S4E06LA4	3.5	11.5	23	70	84	96	111	134	134	134	33	5800	9000
3.5	1.1	58	159	2.1	51.22	IE4	BK20-..S4E06LA4	2.9	9.7	19.5	58	70	113	132	159	159	159	33	6300	9000
3.5	1.1	48.5	190	1.7	61.3	IE4	BK20-..S4E06LA4	2.4	8.1	16	48.5	58	136	158	190	190	190	33	6500	9000
3.5	1.1	39	235	1.4	76.79	IE4	BK20-..S4E06LA4	1.9	6.5	13	39	46.5	168	195	235	235	235	33	7500	9000
3.5	1.1	34	265	1.2	88.12	IE4	BK20-..S4E06LA4	1.7	5.6	11	34	40.5	191	220	265	265	265	33	8000	9000
3.5	1.1	27.5	325	0.96	108.6	IE4	BK20-..S4E06LA4	1.3	4.6	9.2	27.5	33	230	270	325	325	325	33	8700	9000
3.5	1.1	24	365	0.89	124.2	IE4	BK20Z-..S4E06LA4	1.2	4	8	24	28.5	260	305	365	365	365	41	8700	9000
3.5	1.1	59	154	2.9	50.27	IE4	BK30-..S4E06LA4	2.9	9.9	19.5	59	71	110	128	154	154	154	39	8300	12000
3.5	1.1	50	182	2.5	59.27	IE4	BK30-..S4E06LA4	2.5	8.4	16.5	50	60	130	151	182	182	182	39	8900	12000
3.5	1.1	41.5	215	2.1	71.56	IE4	BK30-..S4E06LA4	2	6.9	13.5	41.5	50	155	180	215	215	215	39	9700	12000
3.5	1.1	33.5	265	1.7	88.38	IE4	BK30-..S4E06LA4	1.6	5.6	11	33.5	40.5	190	220	265	265	265	39	10600	12000
3.5	1.1	29	300	1.5	102.4	IE4	BK30-..S4E06LA4	1.4	4.8	9.7	29	35	215	250	300	300	300	39	11200	12000
3.5	1.1	24	365	1.2	123.9	IE4	BK30Z-..S4E06LA4	1.2	4	8	24	29	260	305	365	365	365	41	11200	12000
3.5	1.1	20.5	425	1.1	145.1	IE4	BK30Z-..S4E06LA4	1	3.4	6.8	20.5	24.5	300	350	425	425	425	41	11200	12000
3.5	1.1	16	530	0.84	184.8	IE4	BK30Z-..S4E06LA4	0.8	2.7	5.4	16	19	380	440	530	530	530	41	11200	12000
3.5	1.1	25	350	2.2	118.2	IE4	BK40Z-..S4E06LA4	1.2	4.2	8.4	25	30	250	290	350	350	350	64	11700	17000
3.5	1.1	20.5	420	1.9	143	IE4	BK40Z-..S4E06LA4	1	3.4	6.9	20.5	25	300	345	420	420	420	64	11700	17000
3.5	1.1	17.5	490	1.6	169	IE4	BK40Z-..S4E06LA4	0.85	2.9	5.9	17.5	21	350	405	490	490	490	64	11700	17000
3.5	1.1	14	600	1.3	211.5	IE4	BK40Z-..S4E06LA4	0.7	2.3	4.7	14	17	430	500	600	600	600	64	11700	17000
3.5	1.1	12	690	1.1	246.6	IE4	BK40Z-..S4E06LA4	0.6	2	4	12	14.5	495	570	690	690	690	64	11700	17000
3.5	1.1	10	820	0.83	289.8	IE4	BK40Z-..S4E06LA4	0.5	1.7	3.4	10	12	580	680	820	820	820	64	11700	17000
3.5	1.1	19.5	445	2.4	153.3	IE4	BK50Z-..S4E06LA4	0.95	3.2	6.5	19.5	23	315	365	445	445	445	92	14100	26000
3.5	1.1	14.5	590	1.8	206.8	IE4	BK50Z-..S4E06LA4	0.7	2.4	4.8	14.5	17	420	490	590	590	590	92	14100	26000
3.5	1.1	11	740	1.4	264.5	IE4	BK50Z-..S4E06LA4	0.55	1.8	3.7	11	13.5	530	620	740	740	740	92	14100	26000
3.5	1.1	9.1	930	1.1	328.2	IE4	BK50Z-..S4E06LA4	0.45	1.5	3	9.1	10.5	660	770	930	930	930	92	14100	26000
3.5	1.1	6.4	1300	0.88	465.1	IE4	BK50G10-..S4E06LA4	0.32	1	2.1	6.4	7.7	930	1080	1300	1300	1300	96	14100	111000
3.5	1.1	5.8	1430	0.8	513.4	IE4	BK50G10-..S4E06LA4	0.29	0.95	1.9	5.8	7	1020	1190	1430	1430	1430	96	14100	111000
3.5	1.1	4.8	2150	1.1	621.5	IE4	BK60G20-..S4E06LA4	0.24	0.8	1.6	4.8	5.7	1550	1800	2150	2150	2150	123	16600	34000
3.5	1.1	3.9	2600	0.95	752.1	IE4	BK60G20-..S4E06LA4	0.19	0.65	1.3	3.9	4.7	1880	2150						

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
5	1.55	410	33	2.2	7.25	IE5	BK06-..S5E08MA4	20.5	68	137	410	495	33	33	33	33	33	15	800	-
5	1.55	305	44.5	1.8	9.71	IE5	BK06-..S5E08MA4	15	51	102	305	370	44.5	44.5	44.5	44.5	44.5	15	880	-
5	1.55	255	53	1.5	11.67	IE5	BK06-..S5E08MA4	12.5	42.5	85	255	305	53	53	53	53	53	15	930	-
5	1.55	196	69	1.1	15.29	IE5	BK06-..S5E08MA4	9.8	32.5	65	196	235	69	69	69	69	69	15	1020	-
5	1.55	166	81	0.99	18	IE5	BK06-..S5E08MA4	8.3	27.5	55	166	200	81	81	81	81	81	15	1080	-
5	1.55	139	96	0.83	21.54	IE5	BK06-..S5E08MA4	6.9	23	46	139	167	96	96	96	96	96	15	1150	-
5	1.55	315	43	2.7	9.4	IE5	BK08-..S5E08MA4	15.5	53	106	315	380	43	43	43	43	43	27	2700	-
5	1.55	250	54	2.1	11.93	IE5	BK08-..S5E08MA4	12.5	41.5	83	250	300	54	54	54	54	54	27	3100	-
5	1.55	177	76	1.8	16.92	IE5	BK08-..S5E08MA4	8.8	29.5	59	177	210	76	76	76	76	76	27	3700	-
5	1.55	161	83	2.4	18.52	IE5	BK08-..S5E08MA4	8	26.5	53	161	194	83	83	83	83	83	27	4300	-
5	1.55	132	101	2	22.65	IE5	BK08-..S5E08MA4	6.6	22	44	132	158	101	101	101	101	101	27	4650	-
5	1.55	104	129	1.5	28.76	IE5	BK08-..S5E08MA4	5.2	17	34.5	104	125	129	129	129	129	129	27	5200	-
5	1.55	87	154	1.3	34.25	IE5	BK08-..S5E08MA4	4.3	14.5	29	87	105	154	154	154	154	154	27	5600	-
5	1.55	73	183	1.1	40.79	IE5	BK08-..S5E08MA4	3.6	12	24.5	73	88	183	183	183	183	183	27	6000	-
5	1.55	61	215	0.92	48.96	IE5	BK08-..S5E08MA4	3	10	20	61	73	215	215	215	215	215	27	6400	-
5	1.55	315	43	2.7	9.4	IE5	BK10-..S5E08MA4	15.5	53	106	315	380	43	43	43	43	43	27	2700	-
5	1.55	250	54	2.1	11.93	IE5	BK10-..S5E08MA4	12.5	41.5	83	250	300	54	54	54	54	54	27	3100	-
5	1.55	177	76	1.8	16.92	IE5	BK10-..S5E08MA4	8.8	29.5	59	177	210	76	76	76	76	76	27	3700	-
5	1.55	161	83	2.4	18.52	IE5	BK10-..S5E08MA4	8	26.5	53	161	194	83	83	83	83	83	27	4300	-
5	1.55	132	101	2	22.65	IE5	BK10-..S5E08MA4	6.6	22	44	132	158	101	101	101	101	101	27	4650	-
5	1.55	104	129	1.5	28.76	IE5	BK10-..S5E08MA4	5.2	17	34.5	104	125	129	129	129	129	129	27	5200	-
5	1.55	87	154	1.3	34.25	IE5	BK10-..S5E08MA4	4.3	14.5	29	87	105	154	154	154	154	154	27	5600	-
5	1.55	73	183	1.1	40.79	IE5	BK10-..S5E08MA4	3.6	12	24.5	73	88	183	183	183	183	183	27	6000	-
5	1.55	61	215	0.92	48.96	IE5	BK10-..S5E08MA4	3	10	20	61	73	215	215	215	215	215	27	6400	-
5	1.55	172	79	2.9	17.42	IE5	BK17-..S5E08MA4	8.6	28.5	57	172	205	79	79	79	79	79	36	3250	9000
5	1.55	123	109	3	24.29	IE5	BK17-..S5E08MA4	6.1	20.5	41	123	148	109	109	109	109	109	36	4500	9000
5	1.55	104	128	2.6	28.66	IE5	BK17-..S5E08MA4	5.2	17	34.5	104	125	128	128	128	128	128	36	4850	9000
5	1.55	81	165	2	36.69	IE5	BK17-..S5E08MA4	4	13.5	27	81	98	165	165	165	165	165	36	5400	9000
5	1.55	70	192	1.7	42.7	IE5	BK17-..S5E08MA4	3.5	11.5	23	70	84	192	192	192	192	192	36	5800	9000
5	1.55	58	225	1.4	51.22	IE5	BK17-..S5E08MA4	2.9	9.7	19.5	58	70	225	225	225	225	225	36	6300	9000
5	1.55	48.5	270	1.2	61.3	IE5	BK17-..S5E08MA4	2.4	8.1	16	48.5	58	270	270	270	270	270	36	6500	9000
5	1.55	39	335	0.98	76.79	IE5	BK17-..S5E08MA4	1.9	6.5	13	39	46.5	335	335	335	335	335	36	7500	9000
5	1.55	34	380	0.86	88.12	IE5	BK17-..S5E08MA4	1.7	5.6	11	34	40.5	380	380	380	380	380	36	8000	9000
5	1.55	172	79	2.9	17.42	IE5	BK20-..S5E08MA4	8.6	28.5	57	172	205	79	79	79	79	79	36	3250	9000
5	1.55	123	109	3	24.29	IE5	BK20-..S5E08MA4	6.1	20.5	41	123	148	109	109	109	109	109	36	4500	9000
5	1.55	104	128	2.6	28.66	IE5	BK20-..S5E08MA4	5.2	17	34.5	104	125	128	128	128	128	128	36	4850	9000
5	1.55	81	165	2	36.69	IE5	BK20-..S5E08MA4	4	13.5	27	81	98	165	165	165	165	165	36	5400	9000
5	1.55	70	192	1.7	42.7	IE5	BK20-..S5E08MA4	3.5	11.5	23	70	84	192	192	192	192	192	36	5800	9000
5	1.55	58	225	1.4	51.22	IE5	BK20-..S5E08MA4	2.9	9.7	19.5	58	70	225	225	225	225	225	36	6300	9000
5	1.55	48.5	270	1.2	61.3	IE5	BK20-..S5E08MA4	2.4	8.1	16	48.5	58	270	270	270	270	270	36	6500	9000
5	1.55	39	335	0.98	76.79	IE5	BK20-..S5E08MA4	1.9	6.5	13	39	46.5	335	335	335	335	335	36	7500	9000
5	1.55	34	380	0.86	88.12	IE5	BK20-..S5E08MA4	1.7	5.6	11	34	40.5	380	380	380	380	380	36	8000	9000
5	1.55	89	151	3	13.7	IE5	BK30-..S5E08MA4	4.4	14.5	29.5	89	106	151	151	151	151	151	42	7000	12000
5	1.55	69	190	2.4	42.89	IE5	BK30-..S5E08MA4	3.4	11.5	23	69	83	190	190	190	190	190	42	7800	12000
5	1.55	59	220	2	50.27	IE5	BK30-..S5E08MA4	2.9	9.9	19.5	59	71	220	220	220	220	220	42	8300	12000
5	1.55	50	260	1.7	59.27	IE5	BK30-..S5E08MA4	2.5	8.4	16.5	50	60	260	260	260	260	260	42	8900	12000
5	1.55	41.5	310	1.4	71.56	IE5	BK30-..S5E08MA4	2	6.9	13.5	41.5	50	310	310	310	310	310	42	9700	12000
5	1.55	33.5	380	1.2	88.38	IE5	BK30-..S5E08MA4	1.6	5.6	11	33.5	40.5	380	380	380	380	380	42	10600	12000
5	1.55	29	435	1	102.4	IE5	BK30-..S5E08MA4	1.4	4.8	9.7	29	35	435	435	435	435	435	42	11200	12000
5	1.55	24	520	0.85	123.9	IE5	BK30Z-..S5E08MA4	1.2	4	8	24	29	520	520	520	520	520	45	11200	12000
5	1.55	50	260	3	59.66	IE5	BK40-..S5E08MA4	2.5	8.3	16.5	50	60	260	260	260	260	260	63	9100	17000
5	1.55	42.5	300	2.6	70.11	IE5	BK40-..S5E08MA4	2.1	7.1	14	42.5	51	300	300	300	300	300	63	9800	17000
5	1.55	35.5	365	2.1	84.36	IE5	BK40-..S5E08MA4	1.7	5.9	11.5	35.5	42.5	365	365	365	365	365	63	10700	17000
5	1.55	28.5	440	1.8	104	IE5	BK40-..S5E08MA4	1.4	4.8	9.6	28.5	34.5	440	440	440	440	440	63	11700	17000
5	1.55	25	500	1.6	118.2	IE5	BK40Z-..S5E08MA4	1.2	4.2	8.4	25	30	500	500	500	500	500	67	11700	17000
5	1.55	20.5	600																	

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 1.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
5	1.55	7.8	1890	2.7	379.9	IE5	BK70Z-../S5E08MA4	0.39	1.3	2.6	7.8	9.4	1890	1890	1890	1890	1890	207	24100	50000
5	1.55	6.9	2150	2.4	432.1	IE5	BK70Z-../S5E08MA4	0.34	1.1	2.3	6.9	8.3	2150	2150	2150	2150	2150	207	24100	50000
5	1.55	5.9	2500	2.1	501.8	IE5	BK70Z-../S5E08MA4	0.29	0.95	1.9	5.9	7.1	2500	2500	2500	2500	2500	207	24100	50000
5	1.55	5.2	2850	1.8	570.8	IE5	BK70Z-../S5E08MA4	0.26	0.85	1.7	5.2	6.3	2850	2850	2850	2850	2850	207	24100	50000
5	1.55	4.6	3200	1.6	644.9	IE5	BK70Z-../S5E08MA4	0.23	0.75	1.5	4.6	5.5	3200	3200	3200	3200	3200	207	24100	50000
5	1.55	4	3650	1.4	733.6	IE5	BK70Z-../S5E08MA4	0.2	0.65	1.3	4	4.9	3650	3650	3650	3650	3650	207	24100	50000
5	1.55	3.5	4200	1.3	847.7	IE5	BK70G20-../S5E08MA4	0.17	0.55	1.1	3.5	4.2	4200	4200	4200	4200	4200	205	24100	50000
5	1.55	3.1	4800	1.2	964.6	IE5	BK70G20-../S5E08MA4	0.15	0.5	1	3.1	3.7	4800	4800	4800	4800	4800	205	24100	50000
5	1.55	2.6	5600	1	1139	IE5	BK70G20-../S5E08MA4	0.13	0.43	0.85	2.6	3.1	5600	5600	5600	5600	5600	205	24100	50000
5	1.55	2.3	6400	0.89	1280	IE5	BK70G20-../S5E08MA4	0.11	0.39	0.75	2.3	2.8	6400	6400	6400	6400	6400	205	24100	50000
5	1.55	3.9	3750	3	756.3	IE5	BK80G40-../S5E08MA4	0.19	0.65	1.3	3.9	4.7	3750	3750	3750	3750	3750	347	30000	75000
5	1.55	3.5	4200	2.7	847.2	IE5	BK80G40-../S5E08MA4	0.17	0.55	1.1	3.5	4.2	4200	4200	4200	4200	4200	347	30000	75000
5	1.55	3.1	4800	2.4	963	IE5	BK80G40-../S5E08MA4	0.15	0.5	1	3.1	3.7	4800	4800	4800	4800	4800	347	30000	75000
5	1.55	2.7	5300	2.1	1079	IE5	BK80G40-../S5E08MA4	0.13	0.46	0.9	2.7	3.3	5300	5300	5300	5300	5300	347	30000	75000
5	1.55	2.2	6500	1.8	1307	IE5	BK80G40-../S5E08MA4	0.11	0.38	0.75	2.2	2.7	6500	6500	6500	6500	6500	347	30000	75000
5	1.55	2.1	7100	1.6	1425	IE5	BK80G40-../S5E08MA4	0.1	0.35	0.7	2.1	2.5	7100	7100	7100	7100	7100	347	30000	75000
5	1.55	1.8	7900	1.5	1583	IE5	BK80G40-../S5E08MA4	0.09	0.31	0.6	1.8	2.2	7900	7900	7900	7900	7900	347	30000	75000
5	1.55	1.6	8800	1.3	1775	IE5	BK80G40-../S5E08MA4	0.08	0.28	0.55	1.6	2	8800	8800	8800	8800	8800	347	30000	75000
5	1.55	1.3	11000	1	2205	IE5	BK80G40-../S5E08MA4	0.065	0.22	0.45	1.3	1.6	11000	11000	11000	11000	11000	347	30000	75000
5	1.55	1.2	12200	0.94	2449	IE5	BK80G40-../S5E08MA4	0.06	0.2	0.4	1.2	1.4	12200	12200	12200	12200	12200	347	30000	75000
5	1.55	1	14000	0.82	2811	IE5	BK80G40-../S5E08MA4	0.05	0.17	0.35	1	1.2	14000	14000	14000	14000	14000	347	30000	75000
5	1.55	2.2	6800	2.7	1363	IE5	BK90G50-../S5E08MA4	0.11	0.36	0.7	2.2	2.6	6800	6800	6800	6800	6800	620	49400	120000
5	1.55	1.8	7800	2.3	1579	IE5	BK90G50-../S5E08MA4	0.09	0.31	0.6	1.8	2.2	7800	7800	7800	7800	7800	620	49400	120000
5	1.55	1.6	9000	2.1	1803	IE5	BK90G50-../S5E08MA4	0.08	0.27	0.55	1.6	1.9	9000	9000	9000	9000	9000	620	49400	120000
5	1.55	1.4	10000	1.8	2016	IE5	BK90G50-../S5E08MA4	0.07	0.24	0.49	1.4	1.7	10000	10000	10000	10000	10000	620	49400	120000
5	1.55	1	13800	1.3	2764	IE5	BK90G50-../S5E08MA4	0.05	0.18	0.36	1	1.3	13800	13800	13800	13800	13800	620	49400	120000
5	1.55	0.95	15300	1.2	3065	IE5	BK90G50-../S5E08MA4	0.048	0.16	0.32	0.95	1.1	15300	15300	15300	15300	15300	620	49400	120000
5	1.55	0.8	18300	1	3672	IE5	BK90G50-../S5E08MA4	0.04	0.13	0.27	0.8	0.95	18300	18300	18300	18300	18300	620	49400	120000
5	1.55	0.7	20000	0.91	4070	IE5	BK90G50-../S5E08MA4	0.036	0.12	0.24	0.7	0.85	20000	20000	20000	20000	20000	620	49400	120000

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	410	46.5	1.6	7.25	IE4	BK06-../S4E08MA4	20.5	68	137	410	495	33	39	46.5	46.5	46.5	15	800	-
7	2.2	410	46.5	1.6	7.25	IE5	BK06-../S5E08LA4	20.5	68	137	410	495	43	46.5	46.5	46.5	46.5	16	800	-
7	2.2	305	62	1.3	9.71	IE4	BK06-../S4E08MA4	15	51	102	305	370	44.5	52	62	62	62	15	880	-
7	2.2	305	62	1.3	9.71	IE5	BK06-../S5E08LA4	15	51	102	305	370	58	62	62	62	62	16	880	-
7	2.2	255	75	1.1	11.67	IE4	BK06-../S4E08MA4	12.5	42.5	85	255	305	53	63	75	75	75	15	930	-
7	2.2	255	75	1.1	11.67	IE5	BK06-../S5E08LA4	12.5	42.5	85	255	305	69	75	75	75	75	16	930	-
7	2.2	196	97	0.82	15.29	IE4	BK06-../S4E08MA4	9.8	32.5	65	196	235	69	82	97	97	97	15	1020	-
7	2.2	196	97	0.82	15.29	IE5	BK06-../S5E08LA4	9.8	32.5	65	196	235	90	97	97	97	97	16	1020	-
7	2.2	495	38.5	2.7	6.02	IE4	BK08-../S4E08MA4	24.5	83	166	495	590	27.5	32.5	38.5	38.5	38.5	27	2100	-
7	2.2	495	38.5	2.7	6.02	IE5	BK08-../S5E08LA4	24.5	83	166	495	590	35.5	38.5	38.5	38.5	38.5	28	2100	-
7	2.2	390	49	2.3	7.68	IE4	BK08-../S4E08MA4	19.5	65	130	390	465	35	41.5	49	49	49	27	2400	-
7	2.2	390	49	2.3	7.68	IE5	BK08-../S5E08LA4	19.5	65	130	390	465	45.5	49	49	49	49	28	2400	-
7	2.2	315	60	1.9	9.4	IE4	BK08-../S4E08MA4	15.5	53	106	315	380	43	51	60	60	60	27	2700	-
7	2.2	315	60	1.9	9.4	IE5	BK08-../S5E08LA4	15.5	53	106	315	380	56	60	60	60	60	27	2700	-
7	2.2	280	67	2.7	10.7	IE4	BK08-../S4E08MA4	14	46.5	93	280	335	48	56	67	67	67	27	3500	-
7	2.2	280	67	2.7	10.7	IE5	BK08-../S5E08LA4	14	46.5	93	280	335	62	67	67	67	67			

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	250	76	1.5	11.93	IE5	BK10-..S5E08LA4	12.5	41.5	83	250	300	71	76	76	76	76	28	3100	-
7	2.2	205	91	2.2	14.5	IE4	BK10-..S4E08MA4	10	34	68	205	245	65	76	91	91	91	27	3900	-
7	2.2	205	91	2.2	14.5	IE5	BK10-..S5E08LA4	10	34	68	205	245	84	91	91	91	91	28	3900	-
7	2.2	177	106	1.3	16.92	IE4	BK10-..S4E08MA4	8.8	29.5	59	177	210	76	89	106	106	106	27	3700	-
7	2.2	177	106	1.3	16.92	IE5	BK10-..S5E08LA4	8.8	29.5	59	177	210	98	106	106	106	106	28	3700	-
7	2.2	161	116	1.7	18.52	IE4	BK10-..S4E08MA4	8	26.5	53	161	194	83	98	116	116	116	27	4300	-
7	2.2	161	116	1.7	18.52	IE5	BK10-..S5E08LA4	8	26.5	53	161	194	108	116	116	116	116	28	4300	-
7	2.2	132	142	1.4	22.65	IE4	BK10-..S4E08MA4	6.6	22	44	132	158	101	120	142	142	142	27	4650	-
7	2.2	132	142	1.4	22.65	IE5	BK10-..S5E08LA4	6.6	22	44	132	158	132	142	142	142	142	28	4650	-
7	2.2	104	181	1.1	28.76	IE4	BK10-..S4E08MA4	5.2	17	34.5	104	125	129	152	181	181	181	27	5200	-
7	2.2	104	181	1.1	28.76	IE5	BK10-..S5E08LA4	5.2	17	34.5	104	125	168	181	181	181	181	28	5200	-
7	2.2	87	215	0.93	34.25	IE4	BK10-..S4E08MA4	4.3	14.5	29	87	105	154	181	215	215	215	27	5600	-
7	2.2	87	215	0.93	34.25	IE5	BK10-..S5E08LA4	4.3	14.5	29	87	105	200	215	215	215	215	28	5600	-
7	2.2	172	110	2.1	17.42	IE4	BK17-..S4E08MA4	8.6	28.5	57	172	205	79	93	110	110	110	36	3250	9000
7	2.2	172	110	2.1	17.42	IE5	BK17-..S5E08LA4	8.6	28.5	57	172	205	103	110	110	110	110	38	3250	9000
7	2.2	154	122	2.7	19.39	IE4	BK17-..S4E08MA4	7.7	25.5	51	154	185	87	102	122	122	122	36	4050	9000
7	2.2	154	122	2.7	19.39	IE5	BK17-..S5E08LA4	7.7	25.5	51	154	185	113	122	122	122	122	38	4050	9000
7	2.2	123	153	2.2	24.29	IE4	BK17-..S4E08MA4	6.1	20.5	41	123	148	109	128	153	153	153	36	4500	9000
7	2.2	123	153	2.2	24.29	IE5	BK17-..S5E08LA4	6.1	20.5	41	123	148	142	153	153	153	153	38	4500	9000
7	2.2	104	180	1.8	28.66	IE4	BK17-..S4E08MA4	5.2	17	34.5	104	125	167	180	180	180	180	36	4850	9000
7	2.2	81	230	1.4	36.69	IE4	BK17-..S4E08MA4	4	13.5	27	81	98	165	194	230	230	230	36	5400	9000
7	2.2	81	230	1.4	36.69	IE5	BK17-..S5E08LA4	4	13.5	27	81	98	210	230	230	230	230	38	5400	9000
7	2.2	70	265	1.2	42.7	IE4	BK17-..S4E08MA4	3.5	11.5	23	70	84	192	225	265	265	265	36	5800	9000
7	2.2	70	265	1.2	42.7	IE5	BK17-..S5E08LA4	3.5	11.5	23	70	84	245	265	265	265	265	38	5800	9000
7	2.2	58	315	1	51.22	IE4	BK17-..S4E08MA4	2.9	9.7	19.5	58	70	225	265	315	315	315	36	6300	9000
7	2.2	58	315	1	51.22	IE5	BK17-..S5E08LA4	2.9	9.7	19.5	58	70	295	315	315	315	315	38	6300	9000
7	2.2	48.5	380	0.86	61.3	IE4	BK17-..S4E08MA4	2.4	8.1	16	48.5	58	270	320	380	380	380	36	6500	9000
7	2.2	48.5	380	0.86	61.3	IE5	BK17-..S5E08LA4	2.4	8.1	16	48.5	58	350	380	380	380	380	38	6500	9000
7	2.2	172	110	2.1	17.42	IE4	BK20-..S4E08MA4	8.6	28.5	57	172	205	79	93	110	110	110	36	3250	9000
7	2.2	172	110	2.1	17.42	IE5	BK20-..S5E08LA4	8.6	28.5	57	172	205	103	110	110	110	110	38	3250	9000
7	2.2	154	122	2.7	19.39	IE4	BK20-..S4E08MA4	7.7	25.5	51	154	185	87	102	122	122	122	36	4050	9000
7	2.2	154	122	2.7	19.39	IE5	BK20-..S5E08LA4	7.7	25.5	51	154	185	113	122	122	122	122	38	4050	9000
7	2.2	123	153	2.2	24.29	IE4	BK20-..S4E08MA4	6.1	20.5	41	123	148	109	128	153	153	153	36	4500	9000
7	2.2	123	153	2.2	24.29	IE5	BK20-..S5E08LA4	6.1	20.5	41	123	148	142	153	153	153	153	38	4500	9000
7	2.2	104	180	1.8	28.66	IE4	BK20-..S4E08MA4	5.2	17	34.5	104	125	128	152	180	180	180	36	4850	9000
7	2.2	81	230	1.4	36.69	IE4	BK20-..S4E08MA4	4	13.5	27	81	98	165	194	230	230	230	36	5400	9000
7	2.2	81	230	1.4	36.69	IE5	BK20-..S5E08LA4	4	13.5	27	81	98	210	230	230	230	230	38	5400	9000
7	2.2	70	265	1.2	42.7	IE4	BK20-..S4E08MA4	3.5	11.5	23	70	84	192	225	265	265	265	36	5800	9000
7	2.2	58	315	1	51.22	IE4	BK20-..S4E08MA4	2.9	9.7	19.5	58	70	225	265	315	315	315	36	6300	9000
7	2.2	58	315	1	51.22	IE5	BK20-..S5E08LA4	2.9	9.7	19.5	58	70	295	315	315	315	315	38	6300	9000
7	2.2	48.5	380	0.86	61.3	IE4	BK20-..S4E08MA4	2.4	8.1	16	48.5	58	270	320	380	380	380	36	6500	9000
7	2.2	48.5	380	0.86	61.3	IE5	BK20-..S5E08LA4	2.4	8.1	16	48.5	58	350	380	380	380	380	38	6500	9000
7	2.2	143	132	2.4	20.85	IE4	BK30-..S4E08MA4	7.1	23.5	47.5	143	172	94	111	132	132	132	42	5000	12000
7	2.2	143	132	2.4	20.85	IE5	BK30-..S5E08LA4	7.1	23.5	47.5	143	172	123	132	132	132	132	44	5000	12000
7	2.2	104	181	2.5	28.76	IE4	BK30-..S4E08MA4	5.2	17	34.5	104	125	129	152	181	181	181	42	6500	12000
7	2.2	104	181	2.5	28.76	IE5	BK30-..S5E08LA4	5.2	17	34.5	104	125	168	181	181	181	181	44	6500	12000
7	2.2	89	210	2.1	33.7	IE4	BK30-..S4E08MA4	4.4	14.5	29.5	89	106	151	178	210	210	210	42	7000	12000
7	2.2	89	210	2.1	33.7	IE5	BK30-..S5E08LA4	4.4	14.5	29.5	89	106	197	210	210	210	210	44	7000	12000
7	2.2	69	265	1.7	42.89	IE4	BK30-..S4E08MA4	3.4	11.5	23	69	83	190	225	265	265	265	42	7800	12000
7	2.2	69	265	1.7	42.89	IE5	BK30-..S5E08LA4	3.4	11.5	23	69	83	245	265	265	265	265	44	7800	12000
7	2.2	59	305	1.5	50.27	IE4	BK30-..S4E08MA4	2.9	9.9	19.5	59	71	220	260	305	305	305	42	8300	12000
7	2.2	59	305	1.5	50.27	IE5	BK30-..S5E08LA4	2.9	9.9	19.5	59	71	285	305	305	305	305	44	8300	12000
7	2.2	50	365	1.2	59.27	IE4	BK30-..S4E08MA4	2.5	8.4	16.5	50	60	260	305	365	365	365	42	8900	12000
7	2.2	50	365	1.2	59.27	IE5	BK30-..S5E08LA4	2.5	8.4	16.5	50	60	335	365	365	365	365	44	8900	12000
7	2.2	41.5	435	1	71.56	IE4	BK30-..S4E08MA4	2	6.9	13.5	41.5	50	310	365	435	435	435	42		

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	49	370	2.8	60.76	IE5	BK50-..S5E08LA4	2.4	8.2	16	49	59	345	370	370	370	370	93	11400	26000
7	2.2	39.5	455	2.3	75.4	IE4	BK50-..S4E08MA4	1.9	6.6	13	39.5	47.5	325	385	455	455	455	91	12600	26000
7	2.2	39.5	455	2.3	75.4	IE5	BK50-..S5E08LA4	1.9	6.6	13	39.5	47.5	425	455	455	455	455	93	12600	26000
7	2.2	31	570	1.8	95.29	IE4	BK50-..S4E08MA4	1.5	5.2	10	31	37.5	405	480	570	570	570	91	14100	26000
7	2.2	25.5	680	1.5	115.4	IE4	BK50Z-..S4E08MA4	1.2	4.3	8.6	25.5	31	490	570	680	680	680	96	14100	26000
7	2.2	25.5	680	1.5	115.4	IE5	BK50Z-..S5E08LA4	1.2	4.3	8.6	25.5	31	630	680	680	680	680	98	14100	26000
7	2.2	19.5	890	1.2	153.3	IE4	BK50Z-..S4E08MA4	0.95	3.2	6.5	19.5	23	630	750	890	890	890	96	14100	26000
7	2.2	19.5	890	1.2	153.3	IE5	BK50Z-..S5E08LA4	0.95	3.2	6.5	19.5	23	820	890	890	890	890	98	14100	26000
7	2.2	14.5	1180	0.88	206.8	IE4	BK50Z-..S4E08MA4	0.7	2.4	4.8	14.5	17	840	1000	1180	1180	1180	96	14100	26000
7	2.2	14.5	1180	0.88	206.8	IE5	BK50Z-..S5E08LA4	0.7	2.4	4.8	14.5	17	1100	1180	1180	1180	1180	98	14100	26000
7	2.2	19.5	1070	2.1	153.7	IE4	BK60Z-..S4E08MA4	0.95	3.2	6.5	19.5	23	760	900	1070	1070	1070	119	16600	34000
7	2.2	19.5	1070	2.1	153.7	IE5	BK60Z-..S5E08LA4	0.95	3.2	6.5	19.5	23	990	1070	1070	1070	1070	120	16600	34000
7	2.2	16	1280	1.8	183.2	IE4	BK60Z-..S4E08MA4	0.8	2.7	5.4	16	19.5	910	1080	1280	1280	1280	119	16600	34000
7	2.2	16	1280	1.8	183.2	IE5	BK60Z-..S5E08LA4	0.8	2.7	5.4	16	19.5	1190	1280	1280	1280	1280	120	16600	34000
7	2.2	14.5	1430	1.6	205	IE4	BK60Z-..S4E08MA4	0.7	2.4	4.8	14.5	17.5	1020	1200	1430	1430	1430	119	16600	34000
7	2.2	14.5	1430	1.6	205	IE5	BK60Z-..S5E08LA4	0.7	2.4	4.8	14.5	17.5	1330	1430	1430	1430	1430	120	16600	34000
7	2.2	12.5	1670	1.4	239.7	IE4	BK60Z-..S4E08MA4	0.6	2	4.1	12.5	15	1190	1410	1670	1670	1670	119	16600	34000
7	2.2	12.5	1670	1.4	239.7	IE5	BK60Z-..S5E08LA4	0.6	2	4.1	12.5	15	1550	1670	1670	1670	1670	120	16600	34000
7	2.2	11	1870	1.2	268.2	IE4	BK60Z-..S4E08MA4	0.55	1.8	3.7	11	13	1340	1580	1870	1870	1870	119	16600	34000
7	2.2	11	1870	1.2	268.2	IE5	BK60Z-..S5E08LA4	0.55	1.8	3.7	11	13	1740	1870	1870	1870	1870	120	16600	34000
7	2.2	9.4	2200	1	317.7	IE4	BK60Z-..S4E08MA4	0.47	1.5	3.1	9.4	11	1580	1870	2200	2200	2200	119	16600	34000
7	2.2	9.4	2200	1	317.7	IE5	BK60Z-..S5E08LA4	0.47	1.5	3.1	9.4	11	2050	2200	2200	2200	2200	120	16600	34000
7	2.2	8.4	2450	0.92	355.5	IE4	BK60Z-..S4E08MA4	0.42	1.4	2.8	8.4	10	2300	2450	2450	2450	2450	119	16600	34000
7	2.2	7.2	2850	0.8	411.5	IE4	BK60Z-..S4E08MA4	0.36	1.2	2.4	7.2	8.7	2050	2400	2850	2850	2850	119	16600	34000
7	2.2	7.2	2850	0.8	411.5	IE5	BK60Z-..S5E08LA4	0.36	1.2	2.4	7.2	8.7	2650	2850	2850	2850	2850	120	16600	34000
7	2.2	11.5	1800	2.9	257.3	IE4	BK70Z-..S4E08MA4	0.55	1.9	3.8	11.5	13.5	1280	1510	1800	1800	1800	207	24100	50000
7	2.2	11.5	1800	2.9	257.3	IE5	BK70Z-..S5E08LA4	0.55	1.9	3.8	11.5	13.5	1670	1800	1800	1800	1800	208	24100	50000
7	2.2	10	2050	2.5	293.3	IE4	BK70Z-..S4E08MA4	0.5	1.7	3.4	10	12	1460	1730	2050	2050	2050	207	24100	50000
7	2.2	10	2050	2.5	293.3	IE5	BK70Z-..S5E08LA4	0.5	1.7	3.4	10	12	1900	2050	2050	2050	2050	208	24100	50000
7	2.2	8.9	2300	2.2	333.6	IE4	BK70Z-..S4E08MA4	0.44	1.4	2.9	8.9	10.5	1660	1960	2300	2300	2300	207	24100	50000
7	2.2	8.9	2300	2.2	333.6	IE5	BK70Z-..S5E08LA4	0.44	1.4	2.9	8.9	10.5	2150	2300	2300	2300	2300	208	24100	50000
7	2.2	7.8	2650	2	379.9	IE4	BK70Z-..S4E08MA4	0.39	1.3	2.6	7.8	9.4	1890	2200	2650	2650	2650	207	24100	50000
7	2.2	7.8	2650	2	379.9	IE5	BK70Z-..S5E08LA4	0.39	1.3	2.6	7.8	9.4	2450	2650	2650	2650	2650	208	24100	50000
7	2.2	6.9	3000	1.7	432.1	IE4	BK70Z-..S4E08MA4	0.34	1.1	2.3	6.9	8.3	2150	2500	3000	3000	3000	207	24100	50000
7	2.2	6.9	3000	1.7	432.1	IE5	BK70Z-..S5E08LA4	0.34	1.1	2.3	6.9	8.3	2800	3000	3000	3000	3000	208	24100	50000
7	2.2	5.9	3500	1.5	501.8	IE4	BK70Z-..S4E08MA4	0.29	0.95	1.9	5.9	7.1	2500	2950	3500	3500	3500	207	24100	50000
7	2.2	5.9	3500	1.5	501.8	IE5	BK70Z-..S5E08LA4	0.29	0.95	1.9	5.9	7.1	3250	3500	3500	3500	3500	208	24100	50000
7	2.2	5.2	3950	1.3	570.8	IE4	BK70Z-..S5E08LA4	0.26	0.85	1.7	5.2	6.3	2850	3350	3950	3950	3950	208	24100	50000
7	2.2	4.6	4500	1.2	644.9	IE4	BK70Z-..S4E08MA4	0.23	0.75	1.5	4.6	5.5	3200	3800	4500	4500	4500	207	24100	50000
7	2.2	4.6	4500	1.2	644.9	IE5	BK70Z-..S5E08LA4	0.23	0.75	1.5	4.6	5.5	4150	4500	4500	4500	4500	208	24100	50000
7	2.2	4	5100	1	733.6	IE4	BK70Z-..S4E08MA4	0.2	0.65	1.3	4	4.9	3650	4300	5100	5100	5100	207	24100	50000
7	2.2	3.5	5900	0.96	847.7	IE4	BK70G20-..S4E08MA4	0.17	0.55	1.1	3.5	4.2	4200	5000	5900	5900	5900	205	24100	50000
7	2.2	3.5	5900	0.96	847.7	IE5	BK70G20-..S5E08LA4	0.17	0.55	1.1	3.5	4.2	5500	5900	5900	5900	5900	206	24100	50000
7	2.2	3.1	6700	0.84	964.6	IE4	BK70G20-..S4E08MA4	0.15	0.5	1	3.1	3.7	4800	5600	6700	6700	6700	205	24100	50000
7	2.2	3.1	6700	0.84	964.6	IE5	BK70G20-..S5E08LA4	0.15	0.5	1	3.1	3.7	6200	6700	6700	6700	6700	206	24100	50000
7	2.2	4.9	4250	2.7	607.8	IE4	BK80G40-..S4E08MA4	0.24	0.8	1.6	4.9	5.9	3000	3550	4250	4250	4250	347	30000	75000
7	2.2	4.9	4250	2.7	607.8	IE5	BK80G40-..S5E08LA4	0.24	0.8	1.6	4.9	5.9	3950	4250	4250	4250	4250	348	30000	75000
7	2.2	4.4	4750	2.4	680.9	IE4	BK80G40-..S4E08MA4	0.22	0.7	1.4	4.4	5.2	3400	4000	4750	4750	4750	347	30000	75000
7	2.2	4.4	4750	2.4	680.9	IE5	BK80G40-..S5E08LA4	0.22	0.7	1.4	4.4	5.2	4400	4750	4750	4750	4750	348	30000	75000
7	2.2	3.9	5200	2.2	756.3	IE4	BK80G40-..S4E08MA4	0.19	0.65	1.3	3.9	4.7	3750	4450	5200	5200	5200	347	30000	75000
7	2.2	3.9	5200	2.2	756.3	IE5	BK80G40-..S5E08LA4	0.19	0.65	1.3	3.9	4.7	4900	5200	5200	5200	5200	348	30000	75000
7	2.2	3.5	5900	1.9	847.2	IE4	B													

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	1.6	12600	1.5	1803	IE4	BK90G50-..S4E08MA4	0.08	0.27	0.55	1.6	1.9	9000	10600	12600	12600	12600	620	49400	120000
7	2.2	1.6	12600	1.5	1803	IE5	BK90G50-..S5E08LA4	0.08	0.27	0.55	1.6	1.9	11700	12600	12600	12600	12600	621	49400	120000
7	2.2	1.4	14100	1.3	2016	IE4	BK90G50-..S4E08MA4	0.07	0.24	0.49	1.4	1.7	10000	11800	14100	14100	14100	620	49400	120000
7	2.2	1.4	14100	1.3	2016	IE5	BK90G50-..S5E08LA4	0.07	0.24	0.49	1.4	1.7	13100	14100	14100	14100	14100	621	49400	120000
7	2.2	1	19300	0.96	2764	IE4	BK90G50-..S4E08MA4	0.05	0.18	0.36	1	1.3	13800	16300	19300	19300	19300	620	49400	120000
7	2.2	1	19300	0.96	2764	IE5	BK90G50-..S5E08LA4	0.05	0.18	0.36	1	1.3	17900	19300	19300	19300	19300	621	49400	120000
7	2.2	0.95	21000	0.86	3065	IE4	BK90G50-..S4E08MA4	0.048	0.16	0.32	0.95	1.1	15300	18000	21000	21000	21000	620	49400	120000
7	2.2	0.95	21000	0.86	3065	IE5	BK90G50-..S5E08LA4	0.048	0.16	0.32	0.95	1.1	19900	21000	21000	21000	21000	621	49400	120000

MN = 10 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
10	3.1	410	66	1.1	7.25	IE3	BK06-..SPE08LA4	20.5	68	137	410	495	43	53	66	66	66	16	800	-
10	3.1	305	89	0.9	9.71	IE3	BK06-..SPE08LA4	15	51	102	305	370	58	71	89	89	89	16	880	-
10	3.1	670	40.5	2.3	4.44	IE3	BK08-..SPE08LA4	33.5	112	225	670	810	26.5	32.5	40.5	40.5	40.5	28	1900	-
10	3.1	495	55	1.9	6.02	IE3	BK08-..SPE08LA4	24.5	83	166	495	590	35.5	44	55	55	55	28	2100	-
10	3.1	390	70	1.6	7.68	IE3	BK08-..SPE08LA4	19.5	65	130	390	465	45.5	56	70	70	70	28	2400	-
10	3.1	315	86	1.3	9.4	IE3	BK08-..SPE08LA4	15.5	53	106	315	380	56	69	86	86	86	28	2700	-
10	3.1	280	96	1.9	10.7	IE3	BK08-..SPE08LA4	14	46.5	93	280	335	62	77	96	96	96	28	3500	-
10	3.1	250	109	1	11.93	IE3	BK08-..SPE08LA4	12.5	41.5	83	250	300	71	87	109	109	109	28	3100	-
10	3.1	205	130	1.5	14.5	IE3	BK08-..SPE08LA4	10	34	68	205	245	84	104	130	130	130	28	3900	-
10	3.1	177	152	0.89	16.92	IE3	BK08-..SPE08LA4	8.8	29.5	59	177	210	98	121	152	152	152	28	3700	-
10	3.1	161	166	1.2	18.52	IE3	BK08-..SPE08LA4	8	26.5	53	161	194	108	133	166	166	166	28	4300	-
10	3.1	132	200	0.98	22.65	IE3	BK08-..SPE08LA4	6.6	22	44	132	158	132	163	200	200	200	28	4650	-
10	3.1	670	40.5	2.3	4.44	IE3	BK10-..SPE08LA4	33.5	112	225	670	810	26.5	32.5	40.5	40.5	40.5	28	1900	-
10	3.1	495	55	1.9	6.02	IE3	BK10-..SPE08LA4	24.5	83	166	495	590	35.5	44	55	55	55	28	2100	-
10	3.1	390	70	1.6	7.68	IE3	BK10-..SPE08LA4	19.5	65	130	390	465	45.5	56	70	70	70	28	2400	-
10	3.1	315	86	1.3	9.4	IE3	BK10-..SPE08LA4	15.5	53	106	315	380	56	69	86	86	86	28	2700	-
10	3.1	280	96	1.9	10.7	IE3	BK10-..SPE08LA4	14	46.5	93	280	335	62	77	96	96	96	28	3500	-
10	3.1	250	109	1	11.93	IE3	BK10-..SPE08LA4	12.5	41.5	83	250	300	71	87	109	109	109	28	3100	-
10	3.1	205	130	1.5	14.5	IE3	BK10-..SPE08LA4	10	34	68	205	245	84	104	130	130	130	28	3900	-
10	3.1	177	152	0.89	16.92	IE3	BK10-..SPE08LA4	8.8	29.5	59	177	210	98	121	152	152	152	28	3700	-
10	3.1	161	166	1.2	18.52	IE3	BK10-..SPE08LA4	8	26.5	53	161	194	108	133	166	166	166	28	4300	-
10	3.1	132	200	0.98	22.65	IE3	BK10-..SPE08LA4	6.6	22	44	132	158	132	163	200	200	200	28	4650	-
10	3.1	300	91	2.5	9.91	IE3	BK17-..SPE08LA4	15	50	100	300	360	59	72	91	91	91	38	1910	8300
10	3.1	265	100	3	11.14	IE3	BK17-..SPE08LA4	13	44.5	89	265	320	65	80	100	100	100	38	3300	8100
10	3.1	255	107	2.1	11.69	IE3	BK17-..SPE08LA4	12.5	42.5	85	255	305	69	86	107	107	107	38	2400	8800
10	3.1	200	132	2.5	14.75	IE3	BK17-..SPE08LA4	10	33.5	67	200	240	86	106	132	132	132	38	3650	9000
10	3.1	172	158	1.5	17.42	IE3	BK17-..SPE08LA4	8.6	28.5	57	172	205	103	126	158	158	158	38	3250	9000
10	3.1	154	174	1.9	19.39	IE3	BK17-..SPE08LA4	7.7	25.5	51	154	185	113	139	174	174	174	38	4050	9000
10	3.1	123	215	1.5	24.29	IE3	BK17-..SPE08LA4	6.1	20.5	41	123	148	142	174	215	215	215	38	4500	9000
10	3.1	104	255	1.3	28.66	IE3	BK17-..SPE08LA4	5.2	17	34.5	104	125	167	205	255	255	255	38	4850	9000
10	3.1	81	330	1	36.69	IE3	BK17-..SPE08LA4	4	13.5	27	81	98	210	260	330	330	330	38	5400	9000
10	3.1	70	380	0.86	42.7	IE3	BK17-..SPE08LA4	3.5	11.5	23	70	84	245	305	380	380	380	38	5800	9000
10	3.1	250	109	2.9	11.93	IE3	BK20-..SPE08LA4	15	50	100	300	360	59	72	91	91	91	38	1910	8300
10	3.1	265	100	3	11.14	IE3	BK20-..SPE08LA4	13	44.5	89	265	320	65	80	100	100	100	38	3300	8100
10	3.1	255	107	2.1	11.69	IE3	BK20-..SPE08LA4	12.5	42.5	85	255	305	69	86	107	107	107	38	2400	8800
10	3.1	200	132	2.5	14.75	IE3	BK20-..SPE08LA4	10	33.5	67	200	240	86	106	132	132	132	38	3650	9000
10	3.1	172	158	1.5	17.42	IE3	BK20-..SPE08LA4	8.6	28.5	57	172	205	103	126	158	158	158	38	3250	9000
10	3.1	154	174	1.9	19.39	IE3	BK20-..SPE08LA4	7.7	25.5	51	154	185	113	139	174	174	174	38	4050	9000
10	3.1	123	215	1.5	24.29	IE3	BK20-..SPE08LA4	6.1	20.5	41	123	148	142	174	215	215	215	38	4500	9000
10	3.1	1																		

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 3.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
10	3.1	35.5	730	1.1	84.36	IE3	BK40-../SPE08LA4	1.7	5.9	11.5	35.5	42.5	475	580	730	730	730	64	10700	17000
10	3.1	28.5	880	0.88	104	IE3	BK40-../SPE08LA4	1.4	4.8	9.6	28.5	34.5	570	700	880	880	880	64	11700	17000
10	3.1	63	420	2.5	47.5	IE3	BK50-../SPE08LA4	3.1	10.5	21	63	75	270	335	420	420	420	93	10100	25700
10	3.1	49	530	2	60.76	IE3	BK50-../SPE08LA4	2.4	8.2	16	49	59	345	425	530	530	530	93	11400	26000
10	3.1	39.5	650	1.6	75.4	IE3	BK50-../SPE08LA4	1.9	6.6	13	39.5	47.5	425	520	650	650	650	93	12600	26000
10	3.1	31	810	1.3	95.29	IE3	BK50-../SPE08LA4	1.5	5.2	10	31	37.5	530	650	810	810	810	93	14100	26000
10	3.1	25.5	980	1.1	115.4	IE3	BK50Z-../SPE08LA4	1.2	4.3	8.6	25.5	31	630	780	980	980	980	98	14100	26000
10	3.1	19.5	1270	0.83	153.3	IE3	BK50Z-../SPE08LA4	0.95	3.2	6.5	19.5	23	820	1010	1270	1270	1270	98	14100	26000
10	3.1	19.5	1530	1.5	153.7	IE3	BK60Z-../SPE08LA4	0.95	3.2	6.5	19.5	23	990	1220	1530	1530	1530	120	16600	34000
10	3.1	16	1830	1.3	183.2	IE3	BK60Z-../SPE08LA4	0.8	2.7	5.4	16	19.5	1190	1460	1830	1830	1830	120	16600	34000
10	3.1	14.5	2050	1.1	205	IE3	BK60Z-../SPE08LA4	0.7	2.4	4.8	14.5	17.5	1330	1640	2050	2050	2050	120	16600	34000
10	3.1	12.5	2350	0.96	239.7	IE3	BK60Z-../SPE08LA4	0.6	2	4.1	12.5	15	1550	1910	2350	2350	2350	120	16600	34000
10	3.1	11	2650	0.86	268.2	IE3	BK60Z-../SPE08LA4	0.55	1.8	3.7	11	13	1740	2100	2650	2650	2650	120	16600	34000
10	3.1	15.5	1900	2.7	190.4	IE3	BK70Z-../SPE08LA4	0.75	2.6	5.2	15.5	18.5	1230	1520	1900	1900	1900	208	24100	50000
10	3.1	13	2250	2.3	226.2	IE3	BK70Z-../SPE08LA4	0.65	2.2	4.4	13	15.5	1470	1800	2250	2250	2250	208	24100	50000
10	3.1	11.5	2550	2	257.3	IE3	BK70Z-../SPE08LA4	0.55	1.9	3.8	11.5	13.5	1670	2050	2550	2550	2550	208	24100	50000
10	3.1	10	2900	1.8	293.3	IE3	BK70Z-../SPE08LA4	0.5	1.7	3.4	10	12	1900	2300	2900	2900	2900	208	24100	50000
10	3.1	8.9	3300	1.6	333.6	IE3	BK70Z-../SPE08LA4	0.44	1.4	2.9	8.9	10.5	2150	2650	3300	3300	3300	208	24100	50000
10	3.1	7.8	3750	1.4	379.9	IE3	BK70Z-../SPE08LA4	0.39	1.3	2.6	7.8	9.4	2450	3000	3750	3750	3750	208	24100	50000
10	3.1	6.9	4300	1.2	432.1	IE3	BK70Z-../SPE08LA4	0.34	1.1	2.3	6.9	8.3	2800	3450	4300	4300	4300	208	24100	50000
10	3.1	5.9	5000	1	501.8	IE3	BK70Z-../SPE08LA4	0.29	0.95	1.9	5.9	7.1	3250	4000	5000	5000	5000	208	24100	50000
10	3.1	5.2	5700	0.91	570.8	IE3	BK70Z-../SPE08LA4	0.26	0.85	1.7	5.2	6.3	3700	4550	5700	5700	5700	208	24100	50000
10	3.1	4.6	6400	0.81	644.9	IE3	BK70Z-../SPE08LA4	0.23	0.75	1.5	4.6	5.5	4150	5100	6400	6400	6400	208	24100	50000
10	3.1	4.9	6000	1.9	607.8	IE3	BK80G40-../SPE08LA4	0.24	0.8	1.6	4.9	5.9	3950	4850	6000	6000	6000	348	30000	75000
10	3.1	4.4	6800	1.7	680.9	IE3	BK80G40-../SPE08LA4	0.22	0.7	1.4	4.4	5.2	4400	5400	6800	6800	6800	348	30000	75000
10	3.1	3.9	7500	1.5	756.3	IE3	BK80G40-../SPE08LA4	0.19	0.65	1.3	3.9	4.7	4900	6000	7500	7500	7500	348	30000	75000
10	3.1	3.5	8400	1.4	847.2	IE3	BK80G40-../SPE08LA4	0.17	0.55	1.1	3.5	4.2	5500	6700	8400	8400	8400	348	30000	75000
10	3.1	3.1	9600	1.2	963	IE3	BK80G40-../SPE08LA4	0.15	0.5	1	3.1	3.7	6200	7700	9600	9600	9600	348	30000	75000
10	3.1	2.7	10700	1.1	1079	IE3	BK80G40-../SPE08LA4	0.13	0.46	0.9	2.7	3.3	7000	8600	10700	10700	10700	348	30000	75000
10	3.1	2.2	13000	0.88	1307	IE3	BK80G40-../SPE08LA4	0.11	0.38	0.75	2.2	2.7	8400	10400	13000	13000	13000	348	30000	75000
10	3.1	2.1	14200	0.81	1425	IE3	BK80G40-../SPE08LA4	0.1	0.35	0.7	2.1	2.5	9200	11400	14200	14200	14200	348	30000	75000
10	3.1	3.6	8200	2.3	821	IE3	BK90G50-../SPE08LA4	0.18	0.6	1.2	3.6	4.3	5300	6500	8200	8200	8200	621	49400	120000
10	3.1	3.4	8800	2.1	882.3	IE3	BK90G50-../SPE08LA4	0.17	0.55	1.1	3.4	4	5700	7000	8800	8800	8800	621	49400	120000
10	3.1	2.9	10000	1.8	1008	IE3	BK90G50-../SPE08LA4	0.14	0.49	0.95	2.9	3.5	6500	8000	10000	10000	10000	621	49400	120000
10	3.1	2.6	11200	1.6	1127	IE3	BK90G50-../SPE08LA4	0.13	0.44	0.85	2.6	3.1	7300	9000	11200	11200	11200	621	49400	120000
10	3.1	2.2	13600	1.4	1363	IE3	BK90G50-../SPE08LA4	0.11	0.36	0.7	2.2	2.6	8800	10900	13600	13600	13600	621	49400	120000
10	3.1	1.8	15700	1.2	1579	IE3	BK90G50-../SPE08LA4	0.09	0.31	0.6	1.8	2.2	10200	12600	15700	15700	15700	621	49400	120000
10	3.1	1.6	18000	1	1803	IE3	BK90G50-../SPE08LA4	0.08	0.27	0.55	1.6	1.9	11700	14400	18000	18000	18000	621	49400	120000
10	3.1	1.4	20000	0.92	2016	IE3	BK90G50-../SPE08LA4	0.07	0.24	0.49	1.4	1.7	13100	16100	20000	20000	20000	621	49400	120000

MN = 13 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
13	4	670	53	1.8	4.44	IE4	BK10-../S4E09SA4	33.5	112	225	670	810	34.5	40.5	53	53	53	32	1900	-
13	4	495	71	1.5	6.02	IE4	BK10-../S4E09SA4	24.5	83	166	495	590	47	55	71	71	71	32	2100	-
13	4	390	91	1.3	7.68	IE4	BK10-../S4E09SA4	19.5	65	130	390	465	60	70	91	91	91	32	2400	-
13	4	315	112	1	9.4	IE4	BK10-../S4E09SA4	15.5	53	106	315	380	73	86	112	112	112	32	2700	-
13	4	280	125	1.4	10.7	IE4	BK10-../S4E09SA4	14	46.5	93	280	335	81	96	125	125	125	32	3500	-
13	4	250	142	0.81	11.93	IE4	BK10-../S4E09SA4	12.5												

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 13 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
13	4	123	280	1.2	24.29	IE4	BK20-..S4E09SA4	6.1	20.5	41	123	148	185	215	280	280	280	42	4500	9000
13	4	104	335	0.98	28.66	IE4	BK20-..S4E09SA4	5.2	17	34.5	104	125	215	255	335	335	335	42	4850	9000
13	4	495	71	2.9	6.02	IE4	BK30-..S4E09SA4	24.5	83	166	495	590	47	55	71	71	71	48	1690	9600
13	4	400	89	3	7.45	IE4	BK30-..S4E09SA4	20	67	134	400	480	58	68	89	89	89	48	2200	10400
13	4	310	115	2.8	9.63	IE4	BK30-..S4E09SA4	15.5	51	103	310	370	75	88	115	115	115	48	3150	11500
13	4	250	142	2.2	11.93	IE4	BK30-..S4E09SA4	12.5	41.5	83	250	300	93	109	142	142	142	48	3650	12000
13	4	210	165	1.9	13.98	IE4	BK30-..S4E09SA4	10.5	35.5	71	210	255	108	127	165	165	165	48	4050	12000
13	4	205	169	2.7	14.5	IE4	BK30-..S4E09SA4	10	34	68	205	245	110	130	169	169	169	48	4900	12000
13	4	167	210	2.1	17.95	IE4	BK30-..S4E09SA4	8.3	27.5	55	167	200	137	161	210	210	210	48	5300	12000
13	4	143	245	1.3	20.85	IE4	BK30-..S4E09SA4	7.1	23.5	47.5	143	172	161	189	245	245	245	48	5000	12000
13	4	129	270	1.7	23.2	IE4	BK30-..S4E09SA4	6.4	21.5	43	129	155	177	205	270	270	270	48	5900	12000
13	4	104	335	1.3	28.76	IE4	BK30-..S4E09SA4	5.2	17	34.5	104	125	220	255	335	335	335	48	6500	12000
13	4	89	390	1.1	33.7	IE4	BK30-..S4E09SA4	4.4	14.5	29.5	89	106	255	300	390	390	390	48	7000	12000
13	4	69	495	0.91	42.89	IE4	BK30-..S4E09SA4	3.4	11.5	23	69	83	320	380	495	495	495	48	7800	12000
13	4	133	260	3	22.44	IE4	BK40-..S4E09SA4	6.6	22	44.5	133	160	171	200	260	260	260	68	5500	16500
13	4	104	330	2.3	28.59	IE4	BK40-..S4E09SA4	5.2	17	34.5	104	125	215	255	330	330	330	68	6300	17000
13	4	86	400	1.9	34.61	IE4	BK40-..S4E09SA4	4.3	14	28.5	86	104	260	310	400	400	400	68	6900	17000
13	4	73	475	1.6	40.88	IE4	BK40-..S4E09SA4	3.6	12	24	73	88	310	365	475	475	475	68	7600	17000
13	4	58	580	1.3	51.18	IE4	BK40-..S4E09SA4	2.9	9.7	19.5	58	70	380	450	580	580	580	68	8400	17000
13	4	50	680	1.1	59.66	IE4	BK40-..S4E09SA4	2.5	8.3	16.5	50	60	445	520	680	680	680	68	9100	17000
13	4	42.5	790	0.98	70.11	IE4	BK40-..S4E09SA4	2.1	7.1	14	42.5	51	510	600	790	790	790	68	9800	17000
13	4	35.5	950	0.82	84.36	IE4	BK40-..S4E09SA4	1.7	5.9	11.5	35.5	42.5	620	730	950	950	950	68	10700	17000
13	4	85	410	2.5	35.21	IE4	BK50-..S4E09SA4	4.2	14	28	85	102	265	315	410	410	410	96	8700	23100
13	4	63	540	1.9	47.5	IE4	BK50-..S4E09SA4	3.1	10.5	21	63	75	355	420	540	540	540	96	10100	25700
13	4	49	690	1.5	60.76	IE4	BK50-..S4E09SA4	2.4	8.2	16	49	59	450	530	690	690	690	96	11400	26000
13	4	39.5	850	1.2	75.4	IE4	BK50-..S4E09SA4	1.9	6.6	13	39.5	47.5	550	650	850	850	850	96	12600	26000
13	4	31	1060	0.99	95.29	IE4	BK50-..S4E09SA4	1.5	5.2	10	31	37.5	690	810	1060	1060	1060	96	14100	26000
13	4	25.5	1270	0.82	115.4	IE4	BK50Z-..S4E09SA4	1.2	4.3	8.6	25.5	31	830	980	1270	1270	1270	101	14100	26000
13	4	50	760	3	58.95	IE4	BK60-..S4E09SA4	2.5	8.4	16.5	50	61	500	580	760	760	760	105	9900	31500
13	4	45	850	2.7	65.95	IE4	BK60-..S4E09SA4	2.2	7.5	15	45	54	560	650	850	850	850	105	10900	33000
13	4	38	1010	2.3	78.13	IE4	BK60-..S4E09SA4	1.9	6.3	12.5	38	46	660	780	1010	1010	1010	105	11900	34000
13	4	34	1130	2	87.41	IE4	BK60-..S4E09SA4	1.7	5.7	11	34	41	740	870	1130	1130	1130	105	12900	34000
13	4	29.5	1310	1.7	101.2	IE4	BK60-..S4E09SA4	1.4	4.9	9.8	29.5	35.5	860	1010	1310	1310	1310	105	13900	34000
13	4	26.5	1470	1.6	113.2	IE4	BK60-..S4E09SA4	1.3	4.4	8.8	26.5	31.5	960	1130	1470	1470	1470	105	15000	34000
13	4	24	1590	1.4	122.5	IE4	BK60-..S4E09SA4	1.2	4	8.1	24	29	1040	1220	1590	1590	1590	105	15500	34000
13	4	21.5	1780	1.3	137	IE4	BK60-..S4E09SA4	1	3.6	7.2	21.5	26	1160	1370	1780	1780	1780	105	16600	34000
13	4	19.5	1990	1.2	153.7	IE4	BK60Z-..S4E09SA4	0.95	3.2	6.5	19.5	23	1300	1530	1990	1990	1990	124	16600	34000
13	4	16	2350	0.97	183.2	IE4	BK60Z-..S4E09SA4	0.8	2.7	5.4	16	19.5	1550	1830	2350	2350	2350	124	16600	34000
13	4	14.5	2650	0.86	205	IE4	BK60Z-..S4E09SA4	0.7	2.4	4.8	14.5	17.5	1740	2050	2650	2650	2650	124	16600	34000
13	4	21.5	1770	2.9	136.7	IE4	BK70-..S4E09SA4	1	3.6	7.3	21.5	26	1160	1360	1770	1770	1770	191	20700	50000
13	4	19	2000	2.6	154.4	IE4	BK70-..S4E09SA4	0.95	3.2	6.4	19	23	1310	1540	2000	2000	2000	191	21900	50000
13	4	17	2250	2.3	175.7	IE4	BK70-..S4E09SA4	0.85	2.8	5.6	17	20	1490	1750	2250	2250	2250	191	24100	50000
13	4	15.5	2450	2.1	190.4	IE4	BK70Z-..S4E09SA4	0.75	2.6	5.2	15.5	18.5	1610	1900	2450	2450	2450	212	24100	50000
13	4	13	2900	1.8	226.2	IE4	BK70Z-..S4E09SA4	0.65	2.2	4.4	13	15.5	1920	2250	2900	2900	2900	212	24100	50000
13	4	11.5	3300	1.6	257.3	IE4	BK70Z-..S4E09SA4	0.55	1.9	3.8	11.5	13.5	2150	2550	3300	3300	3300	212	24100	50000
13	4	10	3800	1.4	293.3	IE4	BK70Z-..S4E09SA4	0.5	1.7	3.4	10	12	2450	2900	3800	3800	3800	212	24100	50000
13	4	8.9	4300	1.2	333.6	IE4	BK70Z-..S4E09SA4	0.44	1.4	2.9	8.9	10.5	2800	3300	4300	4300	4300	212	24100	50000
13	4	7.8	4900	1.1	379.9	IE4	BK70Z-..S4E09SA4	0.39	1.3	2.6	7.8	9.4	3200	3750	4900	4900	4900	212	24100	50000
13	4	6.9	5600	0.93	432.1	IE4	BK70Z-..S4E09SA4	0.34	1.1	2.3	6.9	8.3	3650	4300	5600	5600	5600	212	24100	50000
13	4	5.9	6500	0.8	501.8	IE4	BK70Z-..S4E09SA4	0.29	0.95	1.9	5.9	7.1	4250	5000	6500	6500	6500	212	24100	50000
13	4	9.9	3900	2.9	300.6	IE4	BK80Z-..S4E09SA4	0.49	1.6	3.3	9.9	11.5	2550	3000	3900	3900	3900	341	30000	75000
13	4	8.9	4350	2.6	336.7	IE4	BK80Z-..S4E09SA4	0.44	1.4	2.9	8.9	10.5	2850	3350	4350	4350	4350	341	30000	75000
13	4	7.7	5000	2.3	389	IE4	BK80Z-..S4E09SA4	0.38	1.2	2.5	7.7	9.2	3300	3850	5000	5000	5000	341	30000	75000
13	4	6.8	5600																	

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 17.5 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
17.5	5.5	670	71	1.3	4.44	IE5	BK10-..S5E09XA4	33.5	112	225	670	810	53	65	71	71	71	40	1900	-	
17.5	5.5	495	96	1.1	6.02	IE5	BK10-..S5E09XA4	24.5	83	166	495	590	71	88	96	96	96	40	2100	-	
17.5	5.5	390	123	0.93	7.68	IE5	BK10-..S5E09XA4	19.5	65	130	390	465	91	113	123	123	123	40	2400	-	
17.5	5.5	280	168	1.1	10.7	IE5	BK10-..S5E09XA4	14	46.5	93	280	335	125	154	168	168	168	40	3500	-	
17.5	5.5	205	225	0.88	14.5	IE5	BK10-..S5E09XA4	10	34	68	205	245	169	205	225	225	225	40	3900	-	
17.5	5.5	660	73	2.7	4.54	IE5	BK17-..S5E09XA4	33	110	220	660	790	54	66	73	73	73	50	520	6100	
17.5	5.5	495	96	2.2	6.02	IE5	BK17-..S5E09XA4	24.5	83	166	495	590	71	88	96	96	96	50	580	6800	
17.5	5.5	375	127	1.8	7.91	IE5	BK17-..S5E09XA4	18.5	63	126	375	455	94	116	127	127	127	50	1330	7600	
17.5	5.5	300	159	1.4	9.91	IE5	BK17-..S5E09XA4	15	50	100	300	360	118	145	159	159	159	50	1910	8300	
17.5	5.5	265	175	1.7	11.14	IE5	BK17-..S5E09XA4	13	44.5	89	265	320	130	160	175	175	175	50	3300	8100	
17.5	5.5	255	188	1.2	11.69	IE5	BK17-..S5E09XA4	12.5	42.5	85	255	305	139	172	188	188	188	50	2400	8800	
17.5	5.5	200	230	1.4	14.75	IE5	BK17-..S5E09XA4	10	33.5	67	200	240	172	210	230	230	230	50	3650	9000	
17.5	5.5	172	275	0.83	17.42	IE5	BK17-..S5E09XA4	8.6	28.5	57	172	205	205	250	275	275	275	50	3250	9000	
17.5	5.5	154	305	1.1	19.39	IE5	BK17-..S5E09XA4	7.7	25.5	51	154	185	225	275	305	305	305	50	4050	9000	
17.5	5.5	123	380	0.86	24.29	IE5	BK17-..S5E09XA4	6.1	20.5	41	123	148	280	345	380	380	380	50	4500	9000	
17.5	5.5	660	73	2.7	4.54	IE5	BK20-..S5E09XA4	33	110	220	660	790	54	66	73	73	73	50	520	6100	
17.5	5.5	495	96	2.2	6.02	IE5	BK20-..S5E09XA4	24.5	83	166	495	590	71	88	96	96	96	50	580	6800	
17.5	5.5	375	127	1.8	7.91	IE5	BK20-..S5E09XA4	18.5	63	126	375	455	94	116	127	127	127	50	1330	7600	
17.5	5.5	300	159	1.4	9.91	IE5	BK20-..S5E09XA4	15	50	100	300	360	118	145	159	159	159	50	1910	8300	
17.5	5.5	265	175	1.7	11.14	IE5	BK20-..S5E09XA4	13	44.5	89	265	320	130	160	175	175	175	50	3300	8100	
17.5	5.5	255	188	1.2	11.69	IE5	BK20-..S5E09XA4	12.5	42.5	85	255	305	139	172	188	188	188	50	2400	8800	
17.5	5.5	200	230	1.4	14.75	IE5	BK20-..S5E09XA4	10	33.5	67	200	240	172	210	230	230	230	50	3650	9000	
17.5	5.5	172	275	0.83	17.42	IE5	BK20-..S5E09XA4	8.6	28.5	57	172	205	205	250	275	275	275	50	3250	9000	
17.5	5.5	154	305	1.1	19.39	IE5	BK20-..S5E09XA4	7.7	25.5	51	154	185	225	275	305	305	305	50	4050	9000	
17.5	5.5	123	380	0.86	24.29	IE5	BK20-..S5E09XA4	6.1	20.5	41	123	148	280	345	380	380	380	50	4500	9000	
17.5	5.5	630	76	2.5	4.73	IE4	BK30-..S4E11SA6	31.5	105	210	630	760	76	76	76	76	76	65	1550	8800	
17.5	5.5	630	76	2.5	4.73	IE5	BK30-..S5E09XA4	31.5	105	210	630	760	56	69	76	76	76	56	1550	8800	
17.5	5.5	495	96	2.2	6.02	IE4	BK30-..S4E11SA6	24.5	83	166	495	590	96	96	96	96	96	65	1690	9600	
17.5	5.5	495	96	2.2	6.02	IE5	BK30-..S5E09XA4	24.5	83	166	495	590	71	88	96	96	96	56	1690	9600	
17.5	5.5	400	119	2.2	7.45	IE4	BK30-..S4E11SA6	20	67	134	400	480	119	119	119	119	119	65	2200	10400	
17.5	5.5	400	119	2.2	7.45	IE5	BK30-..S5E09XA4	20	67	134	400	480	89	109	119	119	119	56	2200	10400	
17.5	5.5	310	155	2.1	9.63	IE4	BK30-..S4E11SA6	15.5	51	103	310	370	155	155	155	155	155	65	3150	11500	
17.5	5.5	310	155	2.1	9.63	IE5	BK30-..S5E09XA4	15.5	51	103	310	370	115	141	155	155	155	56	3150	11500	
17.5	5.5	260	179	2.3	11.39	IE4	BK30-..S4E11SA6	13	43.5	87	260	315	179	179	179	179	179	65	4150	11000	
17.5	5.5	260	179	2.3	11.39	IE5	BK30-..S5E09XA4	13	43.5	87	260	315	133	164	179	179	179	56	4150	11000	
17.5	5.5	250	192	1.7	11.93	IE4	BK30-..S4E11SA6	12.5	41.5	83	250	300	192	192	192	192	192	65	3650	12000	
17.5	5.5	250	192	1.7	11.93	IE5	BK30-..S5E09XA4	12.5	41.5	83	250	300	142	175	192	192	192	56	3650	12000	
17.5	5.5	210	220	1.4	13.98	IE4	BK30-..S4E11SA6	10.5	35.5	71	210	255	220	220	220	220	220	65	4050	12000	
17.5	5.5	210	220	1.4	13.98	IE5	BK30-..S5E09XA4	10.5	35.5	71	210	255	165	200	220	220	220	56	4050	12000	
17.5	5.5	205	225	2	14.5	IE4	BK30-..S4E11SA6	10	34	68	205	245	225	225	225	225	225	65	4900	12000	
17.5	5.5	205	225	2	14.5	IE5	BK30-..S5E09XA4	10	34	68	205	245	169	205	225	225	225	56	4900	12000	
17.5	5.5	167	280	1.6	17.95	IE4	BK30-..S4E11SA6	8.3	27.5	55	167	200	280	280	280	280	280	65	5300	12000	
17.5	5.5	167	280	1.6	17.95	IE5	BK30-..S5E09XA4	8.3	27.5	55	167	200	210	255	280	280	280	65	5300	12000	
17.5	5.5	143	330	0.96	20.85	IE5	BK30-..S5E09XA4	7.1	23.5	47.5	143	172	245	300	330	330	330	330	56	5000	12000
17.5	5.5	129	365	1.2	23.2	IE4	BK30-..S4E11SA6	6.4	21.5	43	129	155	365	365	365	365	365	65	5900	12000	
17.5	5.5	129	365	1.2	23.2	IE5	BK30-..S5E09XA4	6.4	21.5	43	129	155	270	330	365	365	365	65	5900	12000	
17.5	5.5	104	450	0.99	28.76	IE4	BK30-..S4E11SA6	5.2	17	34.5	104	125	450	450	450	450	450	65	6500	12000	
17.5	5.5	104	450	0.99	28.76	IE5	BK30-..S5E09XA4	5.2	17	34.5	104	125	335	410	450	450	450	65	6500	12000	
17.5	5.5	89	530	0.85	33.7	IE4	BK30-..S4E11SA6	4.4	14.5	29.5	89	106	530	530	530	530	530	65	7000	12000	
17.5	5.5	89	530	0.85	33.7	IE5	BK30-..S5E09XA4	4.4	14.5	29.5	89	106	390	485	530	530	530	65	7000	12000	
17.5	5.5	250	190	2.6	11.86	IE4	BK40-..S4E11SA6	12.5	42	84	250	300	190	190	190	190	190	90	1770	12200	
17.5	5.5	250	190	2.6	11.86	IE5	BK40-..S5E09XA4	12.5	42	84	250	300	141	174	190	190	190	76	1770	12200	
17.5	5.5	166	280	2.7	18.05	IE4	BK40-..S4E11SA6	8.3	27.5	55	166	199	280	280	280	280	280	90	4900	15300	
17.5	5.5	166	280	2.7	18.05	IE5	BK40-..S5E09XA4	8.3	27.5	55	166	199	210								

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 17.5 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
17.5	5.5	66	780	2.9	45.05	IE5	BK60-..S5E09XA4	3.3	11	22	66	79	580	720	780	780	780	113	8200	28300
17.5	5.5	59	880	2.6	50.4	IE4	BK60-..S4E11SA6	2.9	9.9	19.5	59	71	880	880	880	880	880	130	9100	29800
17.5	5.5	59	880	2.6	50.4	IE5	BK60-..S5E09XA4	2.9	9.9	19.5	59	71	650	800	880	880	880	113	9100	29800
17.5	5.5	50	1030	2.2	58.95	IE4	BK60-..S4E11SA6	2.5	8.4	16.5	50	61	1030	1030	1030	1030	1030	130	9900	31500
17.5	5.5	50	1030	2.2	58.95	IE5	BK60-..S5E09XA4	2.5	8.4	16.5	50	61	760	940	1030	1030	1030	113	9900	31500
17.5	5.5	45	1150	2	65.95	IE4	BK60-..S4E11SA6	2.2	7.5	15	45	54	1150	1150	1150	1150	1150	130	10900	33000
17.5	5.5	45	1150	2	65.95	IE5	BK60-..S5E09XA4	2.2	7.5	15	45	54	850	1050	1150	1150	1150	113	10900	33000
17.5	5.5	38	1360	1.7	78.13	IE4	BK60-..S4E11SA6	1.9	6.3	12.5	38	46	1360	1360	1360	1360	1360	130	11900	34000
17.5	5.5	38	1360	1.7	78.13	IE5	BK60-..S5E09XA4	1.9	6.3	12.5	38	46	1010	1250	1360	1360	1360	113	11900	34000
17.5	5.5	34	1520	1.5	87.41	IE4	BK60-..S4E11SA6	1.7	5.7	11	34	41	1520	1520	1520	1520	1520	130	12900	34000
17.5	5.5	34	1520	1.5	87.41	IE5	BK60-..S5E09XA4	1.7	5.7	11	34	41	1130	1390	1520	1520	1520	113	12900	34000
17.5	5.5	29.5	1770	1.3	101.2	IE4	BK60-..S4E11SA6	1.4	4.9	9.8	29.5	35.5	1770	1770	1770	1770	1770	130	13900	34000
17.5	5.5	29.5	1770	1.3	101.2	IE5	BK60-..S5E09XA4	1.4	4.9	9.8	29.5	35.5	1310	1610	1770	1770	1770	113	13900	34000
17.5	5.5	26.5	1980	1.2	113.2	IE4	BK60-..S4E11SA6	1.3	4.4	8.8	26.5	31.5	1980	1980	1980	1980	1980	130	15000	34000
17.5	5.5	26.5	1980	1.2	113.2	IE5	BK60-..S5E09XA4	1.3	4.4	8.8	26.5	31.5	1470	1810	1980	1980	1980	113	15000	34000
17.5	5.5	24	2100	1.1	122.5	IE4	BK60-..S4E11SA6	1.2	4	8.1	24	29	2100	2100	2100	2100	2100	130	15500	34000
17.5	5.5	24	2100	1.1	122.5	IE5	BK60-..S5E09XA4	1.2	4	8.1	24	29	1590	1960	2100	2100	2100	113	15500	34000
17.5	5.5	21.5	2350	0.96	137	IE4	BK60-..S4E11SA6	1	3.6	7.2	21.5	26	2350	2350	2350	2350	2350	130	16600	34000
17.5	5.5	21.5	2350	0.96	137	IE5	BK60-..S5E09XA4	1	3.6	7.2	21.5	26	1780	2150	2350	2350	2350	113	16600	34000
17.5	5.5	19.5	2650	0.86	153.7	IE4	BK60Z-..S4E11SA6	0.95	3.2	6.5	19.5	23	2650	2650	2650	2650	2650	146	16600	34000
17.5	5.5	19.5	2650	0.86	153.7	IE5	BK60Z-..S5E09XA4	0.95	3.2	6.5	19.5	23	1990	2450	2650	2650	2650	132	16600	34000
17.5	5.5	28.5	1810	2.9	103.5	IE4	BK70-..S4E11SA6	1.4	4.8	9.6	28.5	34.5	1810	1810	1810	1810	1810	209	17200	50000
17.5	5.5	28.5	1810	2.9	103.5	IE5	BK70-..S5E09XA4	1.4	4.8	9.6	28.5	34.5	1340	1650	1810	1810	1810	199	17200	50000
17.5	5.5	24.5	2100	2.5	120.2	IE4	BK70-..S4E11SA6	1.2	4.1	8.3	24.5	29.5	2100	2100	2100	2100	2100	209	18600	50000
17.5	5.5	24.5	2100	2.5	120.2	IE5	BK70-..S5E09XA4	1.2	4.1	8.3	24.5	29.5	1560	1920	2100	2100	2100	199	18600	50000
17.5	5.5	21.5	2350	2.2	136.7	IE4	BK70-..S4E11SA6	1	3.6	7.3	21.5	26	2350	2350	2350	2350	2350	209	20700	50000
17.5	5.5	21.5	2350	2.2	136.7	IE5	BK70-..S5E09XA4	1	3.6	7.3	21.5	26	1770	2150	2350	2350	2350	199	20700	50000
17.5	5.5	19	2700	1.9	154.4	IE4	BK70-..S4E11SA6	0.95	3.2	6.4	19	23	2700	2700	2700	2700	2700	209	21900	50000
17.5	5.5	19	2700	1.9	154.4	IE5	BK70-..S5E09XA4	0.95	3.2	6.4	19	23	2000	2450	2700	2700	2700	199	21900	50000
17.5	5.5	17	3050	1.7	175.7	IE4	BK70-..S4E11SA6	0.85	2.8	5.6	17	20	3050	3050	3050	3050	3050	209	24100	50000
17.5	5.5	17	3050	1.7	175.7	IE5	BK70-..S5E09XA4	0.85	2.8	5.6	17	20	2250	2800	3050	3050	3050	199	24100	50000
17.5	5.5	15.5	3300	1.6	190.4	IE4	BK70Z-..S4E11SA6	0.75	2.6	5.2	15.5	18.5	3300	3300	3300	3300	3300	236	24100	50000
17.5	5.5	15.5	3300	1.6	190.4	IE5	BK70Z-..S5E09XA4	0.75	2.6	5.2	15.5	18.5	2450	3000	3300	3300	3300	220	24100	50000
17.5	5.5	13	3950	1.3	226.2	IE4	BK70Z-..S4E11SA6	0.65	2.2	4.4	13	15.5	3950	3950	3950	3950	3950	236	24100	50000
17.5	5.5	13	3950	1.3	226.2	IE5	BK70Z-..S5E09XA4	0.65	2.2	4.4	13	15.5	2900	3600	3950	3950	3950	220	24100	50000
17.5	5.5	11.5	4400	2.6	253.3	IE4	BK80Z-..S4E11SA6	0.55	1.9	3.9	11.5	14	4400	4400	4400	4400	4400	349	30000	75000
17.5	5.5	11.5	4400	2.6	253.3	IE5	BK80Z-..S5E09XA4	0.55	1.9	3.9	11.5	14	3250	4050	4400	4400	4400	349	30000	75000
17.5	5.5	9.9	5200	2.2	300.6	IE4	BK80Z-..S4E11SA6	0.49	1.6	3.3	9.9	11.5	5200	5200	5200	5200	5200	346	30000	75000
17.5	5.5	9.9	5200	2.2	300.6	IE5	BK80Z-..S5E09XA4	0.49	1.6	3.3	9.9	11.5	3900	4800	5200	5200	5200	349	30000	75000
17.5	5.5	8.9	5800	2	336.7	IE4	BK80Z-..S4E11SA6	0.44	1.4	2.9	8.9	10.5	5800	5800	5800	5800	5800	366	30000	75000
17.5	5.5	8.9	5800	2	336.7	IE5	BK80Z-..S5E09XA4	0.44	1.4	2.9	8.9	10.5	4300	5300	5800	5800	5800	220	24100	50000
17.5	5.5	13	3950	2.9	126.1	IE4	BK80Z-..S4E11SA6	0.65	2.2	4.4	13	15.5	3950	3950	3950	3950	3950	366	30000	75000
17.5	5.5	13	3950	2.9	126.1	IE5	BK80Z-..S5E09XA4	0.65	2.2	4.4	13	15.5	2900	3600	3950	3950	3950	349	30000	75000
17.5	5.5	11.5	4400	2.6	253.3	IE4	BK80Z-..S4E11SA6	0.55	1.9	3.9	11.5	14	4400	4400	4400	4400	4400	349	30000	75000
17.5	5.5	9.9	5200	2.2	300.6	IE4	BK80Z-..S4E11SA6	0.49	1.6	3.3	9.9	11.5	5200	5200	5200	5200	5200	349	30000	75000
17.5	5.5	8.9	5800	2	336.7	IE4	BK80Z-..S4E11SA6	0.44	1.4	2.9	8.9	10.5	4350	5300	5800	5800	5800	349	30000	75000
17.5	5.5	7.7	6800	1.7	389	IE4	BK80Z-..S4E11SA6	0.38	1.2	2.5	7.7	9.2	6800	6800	6800	6800	6800	366	30000	75000
17.5	5.5	7.7	6800	1.7	389	IE5	BK80Z-..S5E09XA4	0.38	1.2	2.5	7.7	9.2	5000	6200	6800	6800	6800	349	30000	75000
17.5	5.5	6.8	7600	1.5	435.7	IE4	BK80Z-..S4E11SA6	0.34	1.1	2.2	6.8	8.2	7600	7600	7600	7600	7600	366	30000	75000
17.5	5.5	6.8	7600	1.5	435.7	IE5	BK80Z-..S5E09XA4	0.34	1.1	2.2	6.8	8.2	5600	6900	7600	7600	7600	34		

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 17.5 Nm (PN = 5.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
17.5	5.5	2.9	17600	1	1008	IE5	BK90G50-..S5E09XA4	0.14	0.49	0.95	2.9	3.5	13100	16100	17600	17600	17600	633	49400	120000
17.5	5.5	2.6	19700	0.94	1127	IE4	BK90G50-..S4E11SA6	0.13	0.44	0.85	2.6	3.1	19700	19700	19700	19700	19700	648	49400	120000
17.5	5.5	2.6	19700	0.94	1127	IE5	BK90G50-..S5E09XA4	0.13	0.44	0.85	2.6	3.1	14600	18000	19700	19700	19700	633	49400	120000

MN = 20 Nm (PN = 6.3 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{FRN} [N]	F _{FRV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
20	6.3	670	81	1.2	4.44	IE5	BK10-..S5E09XA4	33.5	112	225	670	810	53	65	81	81	71	40	1900	-
20	6.3	495	110	0.95	6.02	IE5	BK10-..S5E09XA4	24.5	83	166	495	590	71	88	110	110	96	40	2100	-
20	6.3	390	141	0.81	7.68	IE5	BK10-..S5E09XA4	19.5	65	130	390	465	91	113	141	141	123	40	2400	-
20	6.3	280	192	0.94	10.7	IE5	BK10-..S5E09XA4	14	46.5	93	280	335	125	154	192	192	168	40	3500	-
20	6.3	660	83	2.3	4.54	IE5	BK17-..S5E09XA4	33	110	220	660	790	54	66	83	83	73	50	520	6100
20	6.3	495	110	1.9	6.02	IE5	BK17-..S5E09XA4	24.5	83	166	495	590	71	88	110	110	96	50	580	6800
20	6.3	375	145	1.6	7.91	IE5	BK17-..S5E09XA4	18.5	63	126	375	455	94	116	145	145	127	50	1330	7600
20	6.3	300	182	1.3	9.91	IE5	BK17-..S5E09XA4	15	50	100	300	360	118	145	182	182	159	50	1910	8300
20	6.3	265	200	1.5	11.14	IE5	BK17-..S5E09XA4	13	44.5	89	265	320	130	160	200	200	175	50	3300	8100
20	6.3	255	215	1.1	11.69	IE5	BK17-..S5E09XA4	12.5	42.5	85	255	305	139	172	215	215	188	50	2400	8800
20	6.3	200	265	1.2	14.75	IE5	BK17-..S5E09XA4	10	33.5	67	200	240	172	210	265	265	230	50	3650	9000
20	6.3	154	345	0.95	19.39	IE5	BK17-..S5E09XA4	7.7	25.5	51	154	185	225	275	345	345	305	50	4050	9000
20	6.3	660	83	2.3	4.54	IE5	BK20-..S5E09XA4	33	110	220	660	790	54	66	83	83	73	50	520	6100
20	6.3	495	110	1.9	6.02	IE5	BK20-..S5E09XA4	24.5	83	166	495	590	71	88	110	110	96	50	580	6800
20	6.3	375	145	1.6	7.91	IE5	BK20-..S5E09XA4	18.5	63	126	375	455	94	116	145	145	127	50	1330	7600
20	6.3	300	182	1.3	9.91	IE5	BK20-..S5E09XA4	15	50	100	300	360	118	145	182	182	159	50	1910	8300
20	6.3	265	200	1.5	11.14	IE5	BK20-..S5E09XA4	13	44.5	89	265	320	130	160	200	200	175	50	3300	8100
20	6.3	255	215	1.1	11.69	IE5	BK20-..S5E09XA4	12.5	42.5	85	255	305	139	172	215	215	188	50	2400	8800
20	6.3	200	265	1.2	14.75	IE5	BK20-..S5E09XA4	10	33.5	67	200	240	172	210	265	265	230	50	3650	9000
20	6.3	154	345	0.95	19.39	IE5	BK20-..S5E09XA4	7.7	25.5	51	154	185	225	275	345	345	305	50	4050	9000
20	6.3	630	87	2.2	4.73	IE5	BK30-..S5E09XA4	31.5	105	210	630	760	56	69	87	87	76	56	1550	8800
20	6.3	495	110	1.9	6.02	IE5	BK30-..S5E09XA4	24.5	83	166	495	590	71	88	110	110	96	56	1690	9600
20	6.3	400	137	1.9	7.45	IE5	BK30-..S5E09XA4	20	67	134	400	480	89	109	137	137	119	56	2200	10400
20	6.3	310	177	1.8	9.63	IE5	BK30-..S5E09XA4	15.5	51	103	310	370	115	141	177	177	155	56	3150	11500
20	6.3	260	205	2	11.39	IE5	BK30-..S5E09XA4	13	43.5	87	260	315	133	164	205	205	179	56	4150	11000
20	6.3	250	215	1.5	11.93	IE5	BK30-..S5E09XA4	12.5	41.5	83	250	300	142	175	215	215	192	56	3650	12000
20	6.3	210	250	1.3	13.98	IE5	BK30-..S5E09XA4	10.5	35.5	71	210	255	165	200	250	250	220	56	4050	12000
20	6.3	205	260	1.7	14.5	IE5	BK30-..S5E09XA4	10	34	68	205	245	169	205	260	260	225	56	4900	12000
20	6.3	167	320	1.4	17.95	IE5	BK30-..S5E09XA4	8.3	27.5	55	167	200	210	255	320	320	280	56	5300	12000
20	6.3	143	375	0.84	20.85	IE5	BK30-..S5E09XA4	7.1	23.5	47.5	143	172	245	300	375	375	330	56	5000	12000
20	6.3	129	415	1.1	23.2	IE5	BK30-..S5E09XA4	6.4	21.5	43	129	155	270	330	415	415	365	56	5900	12000
20	6.3	104	510	0.87	28.76	IE5	BK30-..S5E09XA4	5.2	17	34.5	104	125	335	410	510	510	450	56	6500	12000
20	6.3	320	171	2.9	9.31	IE5	BK40-..S5E09XA4	16	53	107	320	385	111	137	171	171	149	76	1040	11200
20	6.3	250	215	2.2	11.86	IE5	BK40-..S5E09XA4	12.5	42	84	250	300	141	174	215	215	190	76	1770	12200
20	6.3	205	260	3	14.5	IE5	BK40-..S5E09XA4	10	34	68	205	245	169	205	260	260	225	76	4500	14300
20	6.3	166	320	2.4	18.05	IE5	BK40-..S5E09XA4	8.3	27.5	55	166	199	210	255	320	320	280	76	4900	15300
20	6.3	133	400	1.9	22.44	IE5	BK40-..S5E09XA4	6.6	22	44.5	133	160	260	320	400	400	350	76	5500	16500
20	6.3	104	510	1.5	28.59	IE5	BK40-..S5E09XA4	5.2	17	34.5	104	125	330	410	510	510	450	76	6300	17000
20	6.3	86	620	1.3	34.61	IE5	BK40-..S5E09XA4	4.3	14	28.5	86	104	400	495	620	620	540	76	6900	17000
20	6.3	73	730	1.1	40.88	IE5	BK40-..S5E09XA4	3.6	12	24	73	88	475	580	730	730	640	76	7600	17000
20	6.3	58	900	0.87	51.18	IE5	BK40-..S5E09XA4	2.9	9.7	19.5	58	70	580	720	900	900	780	76	8400	17000
20	6.3	167	325	2.2	17.92	IE5	BK50-..S5E09XA4	8.3	27.5	55	167	200	210	260	325	325	285	104	4600	16800
20	6.3	155	345	3	19.33	IE5	BK50-..S5E09XA4	7.7	25.5	51	155	186	225	275	345	345	300	104	6900	19200
20	6.3	113	475	2.2	26.51	IE5	BK50-..S5E09XA4	5.6	18.5	37.5	113</td									

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 20 Nm (PN = 6.3 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
20	6.3	21.5	2700	1.9	136.7	IE5	BK70-..S5E09XA4	1	3.6	7.3	21.5	26	1770	2150	2700	2350	199	20700	50000	
20	6.3	19	3050	1.7	154.4	IE5	BK70-..S5E09XA4	0.95	3.2	6.4	19	23	2000	2450	3050	3050	2700	199	21900	50000
20	6.3	17	3500	1.5	175.7	IE5	BK70-..S5E09XA4	0.85	2.8	5.6	17	20	2250	2800	3500	3500	3050	199	24100	50000
20	6.3	15.5	3800	1.4	190.4	IE5	BK70Z-..S5E09XA4	0.75	2.6	5.2	15.5	18.5	2450	3000	3800	3800	3300	220	24100	50000
20	6.3	13	4500	1.1	226.2	IE5	BK70Z-..S5E09XA4	0.65	2.2	4.4	13	15.5	2900	3600	4500	4500	3950	220	24100	50000
20	6.3	11.5	5100	1	257.3	IE5	BK70Z-..S5E09XA4	0.55	1.9	3.8	11.5	13.5	3300	4100	5100	5100	4500	220	24100	50000
20	6.3	10	5800	0.89	293.3	IE5	BK70Z-..S5E09XA4	0.5	1.7	3.4	10	12	3800	4650	5800	5800	5100	220	24100	50000
20	6.3	15	3950	2.9	198.9	IE5	BK80Z-..S5E09XA4	0.75	2.5	5	15	18	2550	3150	3950	3950	3450	349	30000	75000
20	6.3	13	4500	2.5	226.1	IE5	BK80Z-..S5E09XA4	0.65	2.2	4.4	13	15.5	2900	3600	4500	4500	3950	349	30000	75000
20	6.3	11.5	5000	2.3	253.3	IE5	BK80Z-..S5E09XA4	0.55	1.9	3.9	11.5	14	3250	4050	5000	5000	4400	349	30000	75000
20	6.3	9.9	6000	1.9	300.6	IE5	BK80Z-..S5E09XA4	0.49	1.6	3.3	9.9	11.5	3900	4800	6000	6000	5200	349	30000	75000
20	6.3	8.9	6700	1.7	336.7	IE5	BK80Z-..S5E09XA4	0.44	1.4	2.9	8.9	10.5	4350	5300	6700	6700	5800	349	30000	75000
20	6.3	7.7	7700	1.5	389	IE5	BK80Z-..S5E09XA4	0.38	1.2	2.5	7.7	9.2	5000	6200	7700	7700	6800	349	30000	75000
20	6.3	6.8	8700	1.3	435.7	IE5	BK80Z-..S5E09XA4	0.34	1.1	2.2	6.8	8.2	5600	6900	8700	8700	7600	349	30000	75000
20	6.3	6	9900	1.2	499.5	IE5	BK80Z-..S5E09XA4	0.3	1	2	6	7.2	6400	7900	9900	9900	8700	349	30000	75000
20	6.3	5.3	11100	1	559.5	IE5	BK80Z-..S5E09XA4	0.26	0.85	1.7	5.3	6.4	7200	8900	11100	11100	9700	349	30000	75000
20	6.3	4.9	12100	0.95	607.8	IE5	BK80G40-..S5E09XA4	0.24	0.8	1.6	4.9	5.9	7900	9700	12100	12100	10600	360	30000	75000
20	6.3	4.4	13600	0.84	680.9	IE5	BK80G40-..S5E09XA4	0.22	0.7	1.4	4.4	5.2	8800	10800	13600	13600	11900	360	30000	75000
20	6.3	9	6600	2.8	330.7	IE5	BK90Z-..S5E09XA4	0.45	1.5	3	9	10.5	4250	5200	6600	6600	5700	622	49400	120000
20	6.3	7.7	7700	2.4	389.1	IE5	BK90Z-..S5E09XA4	0.38	1.2	2.5	7.7	9.2	5000	6200	7700	7700	6800	622	49400	120000
20	6.3	6.8	8700	2.1	435.3	IE5	BK90Z-..S5E09XA4	0.34	1.1	2.2	6.8	8.2	5600	6900	8700	8700	7600	622	49400	120000
20	6.3	6	9900	1.9	499.2	IE5	BK90Z-..S5E09XA4	0.3	1	2	6	7.2	6400	7900	9900	9900	8700	622	49400	120000
20	6.3	5.3	11100	1.7	558.5	IE5	BK90Z-..S5E09XA4	0.26	0.85	1.7	5.3	6.4	7200	8900	11100	11100	9700	622	49400	120000
20	6.3	4.7	12700	1.5	637.7	IE5	BK90Z-..S5E09XA4	0.23	0.75	1.5	4.7	5.6	8200	10200	12700	12700	11100	622	49400	120000
20	6.3	4.2	14200	1.3	713.5	IE5	BK90Z-..S5E09XA4	0.21	0.7	1.4	4.2	5	9200	11400	14200	14200	12400	622	49400	120000
20	6.3	3.6	16400	1.1	821	IE5	BK90G50-..S5E09XA4	0.18	0.6	1.2	3.6	4.3	10600	13100	16400	16400	14300	633	49400	120000
20	6.3	3.4	17600	1	882.3	IE5	BK90G50-..S5E09XA4	0.17	0.55	1.1	3.4	4	11400	14100	17600	17600	15400	633	49400	120000
20	6.3	2.9	20000	0.92	1008	IE5	BK90G50-..S5E09XA4	0.14	0.49	0.95	2.9	3.5	13100	16100	20000	20000	17600	633	49400	120000
20	6.3	2.6	22500	0.82	1127	IE5	BK90G50-..S5E09XA4	0.13	0.44	0.85	2.6	3.1	14600	18000	22500	22500	19700	633	49400	120000

MN = 24 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
24	7.5	630	104	1.9	4.73	IE4	BK30-..S4E11SA6	31.5	105	210	630	760	82	93	104	104	104	65	1550	8800	
24	7.5	630	104	1.9	4.73	IE5	BK30-..S5E11MA6	31.5	105	210	630	760	104	104	104	104	104	65	1550	8800	
24	7.5	495	132	1.6	6.02	IE4	BK30-..S4E11SA6	24.5	83	166	495	590	105	119	132	132	132	65	1690	9600	
24	7.5	495	132	1.6	6.02	IE5	BK30-..S5E11MA6	24.5	83	166	495	590	132	132	132	132	132	65	1690	9600	
24	7.5	400	164	1.6	7.45	IE4	BK30-..S4E11SA6	20	67	134	400	480	130	147	164	164	164	65	2200	10400	
24	7.5	400	164	1.6	7.45	IE5	BK30-..S5E11MA6	20	67	134	400	480	164	164	164	164	164	65	2200	10400	
24	7.5	310	210	1.5	9.63	IE4	BK30-..S4E11SA6	15.5	51	103	310	370	168	190	210	210	210	65	3150	11500	
24	7.5	310	210	1.5	9.63	IE5	BK30-..S5E11MA6	15.5	51	103	310	370	210	210	210	210	210	65	3150	11500	
24	7.5	260	245	1.7	11.39	IE4	BK30-..S4E11SA6	13	43.5	87	260	315	194	220	245	245	245	65	4150	11000	
24	7.5	260	245	1.7	11.39	IE5	BK30-..S5E11MA6	13	43.5	87	260	315	245	245	245	245	245	65	4150	11000	
24	7.5	250	260	1.2	11.93	IE4	BK30-..S4E11SA6	12.5	41.5	83	250	300	205	235	260	260	260	65	3650	12000	
24	7.5	250	260	1.2	11.93	IE5	BK30-..S5E11MA6	12.5	41.5	83	250	300	260	260	260	260	260	65	3650	12000	
24	7.5	210	305	1	13.98	IE4	BK30-..S4E11SA6	10.5	35.5	71	210	255	240	270	305	305	305	65	4050	12000	
24	7.5	210	305	1	13.98	IE5	BK30-..S5E11MA6	10.5	35.5	71	210	255	305	305	305	305	305	65	4050	12000	
24	7.5	205	310	1.4	14.5	IE4	BK30-..S4E11SA6	10	34	68	205	245	245	280	310	310	310	310	65	4900	12000
24	7.5	205	310	1.4	14.5	IE5	BK30-..S5E11MA6	10	34	68	205	245	310	310	310	310	310	65			

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 24 Nm (PN = 7.5 kW)




M _N	P _N	n ₂	M ₂	f _B	i	IE-Classe	Type	Speed range n ₂ [1/min]					Torque range M ₂ [Nm]					m	F _{RN}	F _{RV}
								at motor speed n ₁ [1/min]					at motor speed n ₁ [1/min]							
[Nm]	[kW]	[1/min]	[Nm]	[‐]	[:1]			150	500	1000	3000	3600	150	500	1000	3000	3600	[kg]	[N]	[N]
24	7.5	167	390	1.8	17.92	IE4	BK50-..S4E11SA6	8.3	27.5	55	167	200	305	350	390	390	390	120	4600	16800
24	7.5	167	390	1.8	17.92	IE5	BK50-..S5E11MA6	8.3	27.5	55	167	200	390	390	390	390	390	120	4600	16800
24	7.5	155	415	2.5	19.33	IE4	BK50-..S4E11SA6	7.7	25.5	51	155	186	330	370	415	415	415	120	6900	19200
24	7.5	155	415	2.5	19.33	IE5	BK50-..S5E11MA6	7.7	25.5	51	155	186	415	415	415	415	415	120	6900	19200
24	7.5	113	570	1.8	26.51	IE4	BK50-..S4E11SA6	5.6	18.5	37.5	113	135	450	510	570	570	570	120	7800	21200
24	7.5	113	570	1.8	26.51	IE5	BK50-..S5E11MA6	5.6	18.5	37.5	113	135	570	570	570	570	570	120	7800	21200
24	7.5	85	760	1.4	35.21	IE4	BK50-..S4E11SA6	4.2	14	28	85	102	600	680	760	760	760	120	8700	23100
24	7.5	85	760	1.4	35.21	IE5	BK50-..S5E11MA6	4.2	14	28	85	102	760	760	760	760	760	120	8700	23100
24	7.5	63	1010	1	47.5	IE4	BK50-..S4E11SA6	3.1	10.5	21	63	75	800	900	1010	1010	1010	120	10100	25700
24	7.5	63	1010	1	47.5	IE5	BK50-..S5E11MA6	3.1	10.5	21	63	75	1010	1010	1010	1010	1010	120	10100	25700
24	7.5	49	1280	0.82	60.76	IE4	BK50-..S4E11SA6	2.4	8.2	16	49	59	1010	1140	1280	1280	1280	120	11400	26000
24	7.5	49	1280	0.82	60.76	IE5	BK50-..S5E11MA6	2.4	8.2	16	49	59	1280	1280	1280	1280	1280	120	11400	26000
24	7.5	88	810	2.8	33.78	IE4	BK60-..S4E11SA6	4.4	14.5	29.5	88	106	640	720	810	810	810	130	6500	25200
24	7.5	88	810	2.8	33.78	IE5	BK60-..S5E11MA6	4.4	14.5	29.5	88	106	810	810	810	810	810	130	6500	25200
24	7.5	79	900	2.5	37.8	IE4	BK60-..S4E11SA6	3.9	13	26	79	95	710	810	900	900	900	130	7300	26500
24	7.5	79	900	2.5	37.8	IE5	BK60-..S5E11MA6	3.9	13	26	79	95	900	900	900	900	900	130	7300	26500
24	7.5	66	1080	2.1	45.05	IE4	BK60-..S4E11SA6	3.3	11	22	66	79	850	960	1080	1080	1080	130	8200	28300
24	7.5	66	1080	2.1	45.05	IE5	BK60-..S5E11MA6	3.3	11	22	66	79	1080	1080	1080	1080	1080	130	8200	28300
24	7.5	59	1200	1.9	50.4	IE4	BK60-..S4E11SA6	2.9	9.9	19.5	59	71	950	1080	1200	1200	1200	130	9100	29800
24	7.5	59	1200	1.9	50.4	IE5	BK60-..S5E11MA6	2.9	9.9	19.5	59	71	1200	1200	1200	1200	1200	130	9100	29800
24	7.5	50	1410	1.6	58.95	IE4	BK60-..S4E11SA6	2.5	8.4	16.5	50	61	1120	1260	1410	1410	1410	130	9900	31500
24	7.5	50	1410	1.6	58.95	IE5	BK60-..S5E11MA6	2.5	8.4	16.5	50	61	1410	1410	1410	1410	1410	130	9900	31500
24	7.5	45	1580	1.5	65.95	IE4	BK60-..S4E11SA6	2.2	7.5	15	45	54	1250	1410	1580	1580	1580	130	10900	33000
24	7.5	45	1580	1.5	65.95	IE5	BK60-..S5E11MA6	2.2	7.5	15	45	54	1580	1580	1580	1580	1580	130	10900	33000
24	7.5	38	1870	1.2	78.13	IE4	BK60-..S4E11SA6	1.9	6.3	12.5	38	46	1480	1670	1870	1870	1870	130	11900	34000
24	7.5	38	1870	1.2	78.13	IE5	BK60-..S5E11MA6	1.9	6.3	12.5	38	46	1870	1870	1870	1870	1870	130	11900	34000
24	7.5	34	2050	1.1	87.41	IE4	BK60-..S4E11SA6	1.7	5.7	11	34	41	1660	1870	2050	2050	2050	130	12900	34000
24	7.5	34	2050	1.1	87.41	IE5	BK60-..S5E11MA6	1.7	5.7	11	34	41	2050	2050	2050	2050	2050	130	12900	34000
24	7.5	29.5	2400	0.95	101.2	IE4	BK60-..S4E11SA6	1.4	4.9	9.8	29.5	35.5	1920	2150	2400	2400	2400	130	13900	34000
24	7.5	29.5	2400	0.95	101.2	IE5	BK60-..S5E11MA6	1.4	4.9	9.8	29.5	35.5	2400	2400	2400	2400	2400	130	13900	34000
24	7.5	26.5	2700	0.85	113.2	IE4	BK60-..S4E11SA6	1.3	4.4	8.8	26.5	31.5	2150	2700	2700	2700	2700	130	15000	34000
24	7.5	26.5	2700	0.85	113.2	IE5	BK60-..S5E11MA6	1.3	4.4	8.8	26.5	31.5	2700	2700	2700	2700	2700	130	15000	34000
24	7.5	37.5	1910	2.7	79.89	IE4	BK70-..S4E11SA6	1.8	6.2	12.5	37.5	45	1510	1710	1910	1910	1910	209	14300	47600
24	7.5	37.5	1910	2.7	79.89	IE5	BK70-..S5E11MA6	1.8	6.2	12.5	37.5	45	1910	1910	1910	1910	1910	209	14300	47600
24	7.5	32.5	2150	2.4	90.96	IE4	BK70-..S4E11SA6	1.6	5.4	10.5	32.5	39.5	1720	1950	2150	2150	2150	209	15300	49900
24	7.5	32.5	2150	2.4	90.96	IE5	BK70-..S5E11MA6	1.6	5.4	10.5	32.5	39.5	2150	2150	2150	2150	2150	209	15300	49900
24	7.5	28.5	2450	2.1	103.5	IE4	BK70-..S4E11SA6	1.4	4.8	9.6	28.5	34.5	1960	2200	2450	2450	2450	209	17200	50000
24	7.5	28.5	2450	2.1	103.5	IE5	BK70-..S5E11MA6	1.4	4.8	9.6	28.5	34.5	2450	2450	2450	2450	2450	209	17200	50000
24	7.5	24.5	2850	1.8	120.2	IE4	BK70-..S4E11SA6	1.2	4.1	8.3	24.5	29.5	2250	2550	2850	2850	2850	209	18600	50000
24	7.5	24.5	2850	1.8	120.2	IE5	BK70-..S5E11MA6	1.2	4.1	8.3	24.5	29.5	2850	2850	2850	2850	2850	209	18600	50000
24	7.5	21.5	3250	1.6	136.7	IE4	BK70-..S4E11SA6	1	3.6	7.3	21.5	26	2550	2900	3250	3250	3250	209	20700	50000
24	7.5	21.5	3250	1.6	136.7	IE5	BK70-..S5E11MA6	1	3.6	7.3	21.5	26	3250	3250	3250	3250	3250	209	20700	50000
24	7.5	19	3700	1.4	154.4	IE4	BK70-..S4E11SA6	0.95	3.2	6.4	19	23	2900	3300	3700	3700	3700	209	21900	50000
24	7.5	19	3700	1.4	154.4	IE5	BK70-..S5E11MA6	0.95	3.2	6.4	19	23	3700	3700	3700	3700	3700	209	21900	50000
24	7.5	17	4200	1.2	175.7	IE4	BK70-..S4E11SA6	0.85	2.8	5.6	17	20	3300	3750	4200	4200	4200	209	24100	50000
24	7.5	17	4200	1.2	175.7	IE5	BK70-..S5E11MA6	0.85	2.8	5.6	17	20	4200	4200	4200	4200	4200	209	24100	50000
24	7.5	15.5	4550	1.1	190.4	IE4	BK70Z-..S4E11SA6	0.75	2.6	5.2	15.5	18.5	3600	4050	4550	4550	4550	236	24100	50000
24	7.5	15.5	4550	1.1	190.4	IE5	BK70Z-..S5E11MA6	0.75	2.6	5.2	15.5	18.5	4550	4550	4550	4550	4550	236	24100	50000
24	7.5	13	5400	0.96	226.2	IE4	BK70Z-..S4E11SA6	0.65	2.2	4.4	13	15	4250	4850	5400	5400	5400	236	24100	50000
24	7.5	13	5400	0.96	226.2	IE5	BK70Z-..S5E11MA6	0.65	2.2	4.4	13	15	4850	5500	6100	6100	6100	236	24100	50000
24	7.5	11.5	6000	1.9	253.3	IE4	BK80Z-..S4E11SA6	0.55	1.9	3.9	11.5	14	4800	5400	6000	6000	6000	306	30000	75000
24	7.5	11.5	6000	1.9	253.3	IE5	BK80Z-..S5E11MA6	0.55	1.9	3.9	11.5	14	6000	6000	6000	6000	6000	306	30000	75000
24	7.5	9.9	7200	1.6	300.6	IE4	BK80Z-..S4E11SA6	0.49	1.6	3.3	9.9	11.5	5700	6400	7200	7200	7200	306	30000	75000
24	7.5	9.9	7200	1.6	300.6	IE5	BK80Z-..S5E11MA6	0.49	1.6	3.3	9.9	11.5	7200	7200	7200	7200	7200	306	30000	75000
24	7.5	8.9	8000	1.4	336.7	IE4	BK80Z-..S4E11SA6	0.44	1.4	2.9	8.9	10.5	6300	7200	8000	8000	8000	306	30000	75000
24	7.5	8.9	8000	1.4	336.7	IE5	BK80Z-..S5E11MA6	0.44	1.4	2.9	8.9	10.5	8000	8000	8000	8000	8000	306	30000	75000
24	7.5	7.7	9300	1.2	389	IE4	BK80Z-..S4E11SA6	0.38	1.2	2.5	7.7	9.2	7300	8300	9300	9300	9300	306	30000	75000
24	7.5	7.7	9300	1.2	389	IE5	BK80Z-..S5E11MA6	0.38	1.2	2.5	7.7	9.2	9300	9300	9300	9300	9300	306	30000	75000
24	7.5	6.8	10400	1.1	435.7	IE4	BK80Z-..S4E11SA6	0.34												

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 24 Nm (PN = 7.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
24	7.5	10	7000	2.6	295.6	IE5	BK90Z-..S5E11MA6	0.5	1.6	3.3	10	12	7000	7000	7000	7000	7000	632	49400	120000
24	7.5	9	7900	2.3	330.7	IE4	BK90Z-..S4E11SA6	0.45	1.5	3	9	10.5	6200	7100	7900	7900	632	49400	120000	
24	7.5	9	7900	2.3	330.7	IE5	BK90Z-..S5E11MA6	0.45	1.5	3	9	10.5	7900	7900	7900	7900	632	49400	120000	
24	7.5	7.7	9300	2	389.1	IE4	BK90Z-..S4E11SA6	0.38	1.2	2.5	7.7	9.2	7300	8300	9300	9300	9300	632	49400	120000
24	7.5	7.7	9300	2	389.1	IE5	BK90Z-..S5E11MA6	0.38	1.2	2.5	7.7	9.2	9300	9300	9300	9300	9300	632	49400	120000
24	7.5	6.8	10400	1.8	435.3	IE4	BK90Z-..S4E11SA6	0.34	1.1	2.2	6.8	8.2	8200	9300	10400	10400	10400	632	49400	120000
24	7.5	6.8	10400	1.8	435.3	IE5	BK90Z-..S5E11MA6	0.34	1.1	2.2	6.8	8.2	10400	10400	10400	10400	10400	632	49400	120000
24	7.5	6	11900	1.5	499.2	IE4	BK90Z-..S4E11SA6	0.3	1	2	6	7.2	9400	10700	11900	11900	11900	632	49400	120000
24	7.5	6	11900	1.5	499.2	IE5	BK90Z-..S5E11MA6	0.3	1	2	6	7.2	11900	11900	11900	11900	11900	632	49400	120000
24	7.5	5.3	13400	1.4	558.5	IE4	BK90Z-..S4E11SA6	0.26	0.85	1.7	5.3	6.4	10600	12000	13400	13400	13400	632	49400	120000
24	7.5	5.3	13400	1.4	558.5	IE5	BK90Z-..S5E11MA6	0.26	0.85	1.7	5.3	6.4	13400	13400	13400	13400	13400	632	49400	120000
24	7.5	4.7	15300	1.2	637.7	IE4	BK90Z-..S4E11SA6	0.23	0.75	1.5	4.7	5.6	12100	13700	15300	15300	15300	632	49400	120000
24	7.5	4.7	15300	1.2	637.7	IE5	BK90Z-..S5E11MA6	0.23	0.75	1.5	4.7	5.6	15300	15300	15300	15300	15300	632	49400	120000
24	7.5	4.2	17100	1.1	713.5	IE4	BK90Z-..S4E11SA6	0.21	0.7	1.4	4.2	5	13500	15300	17100	17100	17100	632	49400	120000
24	7.5	4.2	17100	1.1	713.5	IE5	BK90Z-..S5E11MA6	0.21	0.7	1.4	4.2	5	17100	17100	17100	17100	17100	632	49400	120000
24	7.5	3.6	19700	0.94	821	IE4	BK90G50-..S4E11SA6	0.18	0.6	1.2	3.6	4.3	15500	17600	19700	19700	19700	648	49400	120000
24	7.5	3.6	19700	0.94	821	IE5	BK90G50-..S5E11MA6	0.18	0.6	1.2	3.6	4.3	19700	19700	19700	19700	19700	648	49400	120000
24	7.5	3.4	21000	0.87	882.3	IE4	BK90G50-..S4E11SA6	0.17	0.55	1.1	3.4	4	16700	18900	21000	21000	21000	648	49400	120000
24	7.5	3.4	21000	0.87	882.3	IE5	BK90G50-..S5E11MA6	0.17	0.55	1.1	3.4	4	21000	21000	21000	21000	21000	648	49400	120000

MN = 30 Nm (PN = 9.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	630	130	1.5	4.73	IE5	BK30-..S5E11LA6	31.5	105	210	630	760	130	130	130	130	130	76	1550	8800
30	9.5	630	130	1.5	4.73	IE5	BK30-..S5E11MA6	31.5	105	210	630	760	115	130	130	130	130	65	1550	8800
30	9.5	495	166	1.3	6.02	IE5	BK30-..S5E11LA6	24.5	83	166	495	590	166	166	166	166	166	76	1690	9600
30	9.5	495	166	1.3	6.02	IE5	BK30-..S5E11MA6	24.5	83	166	495	590	146	166	166	166	166	65	1690	9600
30	9.5	400	205	1.3	7.45	IE5	BK30-..S5E11LA6	20	67	134	400	480	205	205	205	205	205	76	2200	10400
30	9.5	400	205	1.3	7.45	IE5	BK30-..S5E11MA6	20	67	134	400	480	181	205	205	205	205	65	2200	10400
30	9.5	310	265	1.2	9.63	IE5	BK30-..S5E11LA6	15.5	51	103	310	370	265	265	265	265	265	76	3150	11500
30	9.5	310	265	1.2	9.63	IE5	BK30-..S5E11MA6	15.5	51	103	310	370	230	265	265	265	265	65	3150	11500
30	9.5	260	305	1.3	11.39	IE5	BK30-..S5E11LA6	13	43.5	87	260	315	305	305	305	305	305	76	4150	11000
30	9.5	260	305	1.3	11.39	IE5	BK30-..S5E11MA6	13	43.5	87	260	315	270	305	305	305	305	65	4150	11000
30	9.5	250	325	0.97	11.93	IE5	BK30-..S5E11LA6	12.5	41.5	83	250	300	325	325	325	325	325	76	3650	12000
30	9.5	250	325	0.97	11.93	IE5	BK30-..S5E11MA6	12.5	41.5	83	250	300	290	325	325	325	325	65	3650	12000
30	9.5	210	380	0.84	13.98	IE5	BK30-..S5E11LA6	10.5	35.5	71	210	255	380	380	380	380	380	76	4050	12000
30	9.5	210	380	0.84	13.98	IE5	BK30-..S5E11MA6	10.5	35.5	71	210	255	335	380	380	380	380	65	4050	12000
30	9.5	205	390	1.1	14.5	IE5	BK30-..S5E11LA6	10	34	68	205	245	390	390	390	390	390	76	4900	12000
30	9.5	205	390	1.1	14.5	IE5	BK30-..S5E11MA6	10	34	68	205	245	345	390	390	390	390	65	4900	12000
30	9.5	167	480	0.93	17.95	IE5	BK30-..S5E11LA6	8.3	27.5	55	167	200	480	480	480	480	480	76	5300	12000
30	9.5	167	480	0.93	17.95	IE5	BK30-..S5E11MA6	8.3	27.5	55	167	200	425	480	480	480	480	65	5300	12000
30	9.5	495	166	2.8	6.02	IE5	BK40-..S5E11LA6	24.5	83	166	495	590	166	166	166	166	166	102	470	9800
30	9.5	495	166	2.8	6.02	IE5	BK40-..S5E11MA6	24.5	83	166	495	590	146	166	166	166	166	90	470	9800
30	9.5	400	205	2.4	7.49	IE5	BK40-..S5E11LA6	20	66	133	400	480	205	205	205	205	205	102	750	10500
30	9.5	400	205	2.4	7.49	IE5	BK40-..S5E11MA6	20	66	133	400	480	182	205	205	205	205	90	750	10500
30	9.5	320	255	1.9	9.31	IE5	BK40-..S5E11LA6	16	53	107	320	385	255	255	255	255	255	102	1040	11200
30	9.5	320	255	1.9	9.31	IE5	BK40-..S5E11MA6	16	53	107	320	385	225	255	255	255	255	90	1040	11200
30	9.5	265	300	2.4	11.17	IE5	BK40-..S5E11LA6	13	44.5	89	265	320	265	300	300	300	300	90	4100	13100
30	9.5	250	325	1.5	11.86	IE5	BK40-..S5E11LA6	12.5	42	84	250	300	325	325	325	325	325	102	1770	12200
30	9.5	250	325	1.5</																

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 30 Nm (PN = 9.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	63	1260	0.83	47.5	IE5	BK50-..S5E11MA6	3.1	10.5	21	63	75	1120	1260	1260	1260	1260	120	10100	25700
30	9.5	109	820	2.8	27.36	IE5	BK60-..S5E11LA6	5.4	18	36.5	109	131	820	820	820	820	820	142	5600	23200
30	9.5	109	820	2.8	27.36	IE5	BK60-..S5E11MA6	5.4	18	36.5	109	131	720	820	820	820	820	130	5600	23200
30	9.5	88	1010	2.3	33.78	IE5	BK60-..S5E11LA6	4.4	14.5	29.5	88	106	1010	1010	1010	1010	1010	142	6500	25200
30	9.5	88	1010	2.3	33.78	IE5	BK60-..S5E11MA6	4.4	14.5	29.5	88	106	890	1010	1010	1010	1010	130	6500	25200
30	9.5	79	1130	2	37.8	IE5	BK60-..S5E11LA6	3.9	13	26	79	95	1130	1130	1130	1130	1130	142	7300	26500
30	9.5	79	1130	2	37.8	IE5	BK60-..S5E11MA6	3.9	13	26	79	95	1000	1130	1130	1130	1130	130	7300	26500
30	9.5	66	1350	1.7	45.05	IE5	BK60-..S5E11LA6	3.3	11	22	66	79	1350	1350	1350	1350	1350	142	8200	28300
30	9.5	66	1350	1.7	45.05	IE5	BK60-..S5E11MA6	3.3	11	22	66	79	1190	1350	1350	1350	1350	130	8200	28300
30	9.5	59	1510	1.5	50.4	IE5	BK60-..S5E11LA6	2.9	9.9	19.5	59	71	1510	1510	1510	1510	1510	142	9100	29800
30	9.5	59	1510	1.5	50.4	IE5	BK60-..S5E11MA6	2.9	9.9	19.5	59	71	1330	1510	1510	1510	1510	130	9100	29800
30	9.5	50	1760	1.3	58.95	IE5	BK60-..S5E11LA6	2.5	8.4	16.5	50	61	1760	1760	1760	1760	1760	142	9900	31500
30	9.5	50	1760	1.3	58.95	IE5	BK60-..S5E11MA6	2.5	8.4	16.5	50	61	1560	1760	1760	1760	1760	130	9900	31500
30	9.5	45	1970	1.2	65.95	IE5	BK60-..S5E11LA6	2.2	7.5	15	45	54	1970	1970	1970	1970	1970	142	10900	33000
30	9.5	45	1970	1.2	65.95	IE5	BK60-..S5E11MA6	2.2	7.5	15	45	54	1740	1970	1970	1970	1970	130	10900	33000
30	9.5	38	2300	0.98	78.13	IE5	BK60-..S5E11LA6	1.9	6.3	12.5	38	46	2300	2300	2300	2300	2300	142	11900	34000
30	9.5	38	2300	0.98	78.13	IE5	BK60-..S5E11MA6	1.9	6.3	12.5	38	46	2050	2300	2300	2300	2300	130	11900	34000
30	9.5	34	2600	0.88	87.41	IE5	BK60-..S5E11LA6	1.7	5.7	11	34	41	2600	2600	2600	2600	2600	142	12900	34000
30	9.5	34	2600	0.88	87.41	IE5	BK60-..S5E11MA6	1.7	5.7	11	34	41	2300	2600	2600	2600	2600	130	12900	34000
30	9.5	48.5	1840	2.8	61.6	IE5	BK70-..S5E11LA6	2.4	8.1	16	48.5	58	1840	1840	1840	1840	1840	221	11500	42800
30	9.5	48.5	1840	2.8	61.6	IE5	BK70-..S5E11MA6	2.4	8.1	16	48.5	58	1630	1840	1840	1840	1840	209	11500	42800
30	9.5	42.5	2100	2.5	70.23	IE5	BK70-..S5E11LA6	2.1	7.1	14	42.5	51	2100	2100	2100	2100	2100	221	12500	44800
30	9.5	42.5	2100	2.5	70.23	IE5	BK70-..S5E11MA6	2.1	7.1	14	42.5	51	1860	2100	2100	2100	2100	209	12500	44800
30	9.5	37.5	2350	2.2	79.89	IE5	BK70-..S5E11LA6	1.8	6.2	12.5	37.5	45	2350	2350	2350	2350	2350	221	14300	47600
30	9.5	37.5	2350	2.2	79.89	IE5	BK70-..S5E11MA6	1.8	6.2	12.5	37.5	45	2100	2350	2350	2350	2350	209	14300	47600
30	9.5	32.5	2700	1.9	90.96	IE5	BK70-..S5E11LA6	1.6	5.4	10.5	32.5	39.5	2700	2700	2700	2700	2700	221	15300	49900
30	9.5	32.5	2700	1.9	90.96	IE5	BK70-..S5E11MA6	1.6	5.4	10.5	32.5	39.5	2400	2700	2700	2700	2700	209	15300	49900
30	9.5	28.5	3100	1.7	103.5	IE5	BK70-..S5E11LA6	1.4	4.8	9.6	28.5	34.5	3100	3100	3100	3100	3100	221	17200	50000
30	9.5	28.5	3100	1.7	103.5	IE5	BK70-..S5E11MA6	1.4	4.8	9.6	28.5	34.5	2700	3100	3100	3100	3100	209	17200	50000
30	9.5	24.5	3600	1.4	120.2	IE5	BK70-..S5E11LA6	1.2	4.1	8.3	24.5	29.5	3600	3600	3600	3600	3600	221	18600	50000
30	9.5	24.5	3600	1.4	120.2	IE5	BK70-..S5E11MA6	1.2	4.1	8.3	24.5	29.5	3150	3600	3600	3600	3600	209	18600	50000
30	9.5	21.5	4100	1.3	136.7	IE5	BK70-..S5E11LA6	1	3.6	7.3	21.5	26	4100	4100	4100	4100	4100	221	20700	50000
30	9.5	21.5	4100	1.3	136.7	IE5	BK70-..S5E11MA6	1	3.6	7.3	21.5	26	3600	4100	4100	4100	4100	209	20700	50000
30	9.5	19	4600	1.1	154.4	IE5	BK70-..S5E11LA6	0.95	3.2	6.4	19	23	4600	4600	4600	4600	4600	221	21900	50000
30	9.5	19	4600	1.1	154.4	IE5	BK70-..S5E11MA6	0.95	3.2	6.4	19	23	4050	4600	4600	4600	4600	209	21900	50000
30	9.5	17	5200	0.99	175.7	IE5	BK70-..S5E11LA6	0.85	2.8	5.6	17	20	5200	5200	5200	5200	5200	221	24100	50000
30	9.5	17	5200	0.99	175.7	IE5	BK70-..S5E11MA6	0.85	2.8	5.6	17	20	4650	5200	5200	5200	5200	209	24100	50000
30	9.5	15.5	5700	0.91	190.4	IE5	BK70Z-..S5E11LA6	0.75	2.6	5.2	15.5	18.5	5700	5700	5700	5700	5700	247	24100	50000
30	9.5	15.5	5700	0.91	190.4	IE5	BK70Z-..S5E11MA6	0.75	2.6	5.2	15.5	18.5	5000	5700	5700	5700	5700	236	24100	50000
30	9.5	25.5	3500	3	117.5	IE5	BK80-..S5E11LA6	1.2	4.2	8.5	25.5	30.5	3500	3500	3500	3500	3500	336	22300	75000
30	9.5	25.5	3500	3	117.5	IE5	BK80-..S5E11MA6	1.2	4.2	8.5	25.5	30.5	3100	3500	3500	3500	3500	324	22300	75000
30	9.5	22.5	3900	2.7	131.6	IE5	BK80-..S5E11LA6	1.1	3.7	7.5	22.5	27	3900	3900	3900	3900	3900	336	24900	75000
30	9.5	22.5	3900	2.7	131.6	IE5	BK80-..S5E11MA6	1.1	3.7	7.5	22.5	27	3450	3900	3900	3900	3900	324	24900	75000
30	9.5	19.5	4550	2.3	153.1	IE5	BK80-..S5E11LA6	0.95	3.2	6.5	19.5	23.5	4550	4550	4550	4550	4550	336	27200	75000
30	9.5	19.5	4550	2.3	153.1	IE5	BK80-..S5E11MA6	0.95	3.2	6.5	19.5	23.5	4050	4550	4550	4550	4550	324	27200	75000
30	9.5	17	5100	2	171.5	IE5	BK80-..S5E11LA6	0.85	2.9	5.8	17	20.5	5100	5100	5100	5100	5100	3300	30000	75000
30	9.5	17	5100	2	171.5	IE5	BK80-..S5E11MA6	0.85	2.9	5.8	17	20.5	4500	5100	5100	5100	5100	324	30000	75000
30	9.5	16.5	5300	2.2	177.6	IE5	BK80Z-..S5E11LA6	0.8	2.8	5.6	16.5	20	4700	5300	5300	5300	5300	366	30000	75000
30	9.5	15	5900	1.9	198.9	IE5	BK80Z-..S5E11LA6	0.75	2.5	5	15	18	5900	5900	5900	5900	5900	378	30000	75000
30	9.5	15	5900	1.9	198.9	IE5	BK80Z-..S5E11MA6	0.75	2.5	5	15	18	5200	5900	5900	5900	5900	366	30000	75000
30	9.5	13	6700	1.7	226.1	IE5	BK80Z-..S5E11LA6	0.65	2.2	4.4	13	15.5	6700	6700	6700	6700	6700	378	30000	75000
30	9.5	13	6700	1.7	226.1	IE5	BK80Z-..S5E11MA6	0.65	2.2											

BK-series bevel geared motors


Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 30 Nm (PN = 9.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]							
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	4.7	19100	0.97	637.7	IE5	BK90Z-..S5E11LA6	0.23	0.75	1.5	4.7	5.6	19100	19100	19100	19100	19100	643	49400	120000
30	9.5	4.7	19100	0.97	637.7	IE5	BK90Z-..S5E11MA6	0.23	0.75	1.5	4.7	5.6	16800	19100	19100	19100	19100	632	49400	120000
30	9.5	4.2	21000	0.86	713.5	IE5	BK90Z-..S5E11LA6	0.21	0.7	1.4	4.2	5	21000	21000	21000	21000	21000	643	49400	120000
30	9.5	4.2	21000	0.86	713.5	IE5	BK90Z-..S5E11MA6	0.21	0.7	1.4	4.2	5	18900	21000	21000	21000	21000	632	49400	120000

MN = 35 Nm (PN = 11 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]							
								150	500	1000	3000	3600	150	500	1000	3000	3600			
35	11	630	152	1.3	4.73	IE4	BK30-..S4E11MA6	31.5	105	210	630	760	115	130	152	152	152	65	1550	8800
35	11	630	152	1.3	4.73	IE5	BK30-..S5E11LA6	31.5	105	210	630	760	152	152	152	152	152	76	1550	8800
35	11	495	193	1.1	6.02	IE4	BK30-..S4E11MA6	24.5	83	166	495	590	146	166	193	193	193	65	1690	9600
35	11	495	193	1.1	6.02	IE5	BK30-..S5E11LA6	24.5	83	166	495	590	193	193	193	193	193	76	1690	9600
35	11	400	235	1.1	7.45	IE4	BK30-..S4E11MA6	20	67	134	400	480	181	205	235	235	235	65	2200	10400
35	11	400	235	1.1	7.45	IE5	BK30-..S5E11LA6	20	67	134	400	480	235	235	235	235	235	76	2200	10400
35	11	310	310	1	9.63	IE4	BK30-..S4E11MA6	15.5	51	103	310	370	230	265	310	310	310	65	3150	11500
35	11	310	310	1	9.63	IE5	BK30-..S5E11LA6	15.5	51	103	310	370	310	310	310	310	310	76	3150	11500
35	11	260	355	1.2	11.39	IE4	BK30-..S4E11MA6	13	43.5	87	260	315	355	355	355	355	355	65	4150	11000
35	11	260	355	1.2	11.39	IE5	BK30-..S5E11LA6	13	43.5	87	260	315	355	355	355	355	355	76	4150	11000
35	11	250	380	0.83	11.93	IE4	BK30-..S4E11MA6	12.5	41.5	83	250	300	290	325	380	380	380	65	3650	12000
35	11	250	380	0.83	11.93	IE5	BK30-..S5E11LA6	12.5	41.5	83	250	300	380	380	380	380	380	76	3650	12000
35	11	205	455	0.99	14.5	IE4	BK30-..S4E11MA6	10	34	68	205	245	345	390	455	455	455	65	4900	12000
35	11	205	455	0.99	14.5	IE5	BK30-..S5E11LA6	10	34	68	205	245	455	455	455	455	455	76	4900	12000
35	11	167	560	0.8	17.95	IE4	BK30-..S4E11MA6	8.3	27.5	55	167	200	425	480	560	560	560	65	5300	12000
35	11	167	560	0.8	17.95	IE5	BK30-..S5E11LA6	8.3	27.5	55	167	200	560	560	560	560	560	76	5300	12000
35	11	640	149	2.9	4.63	IE4	BK40-..S4E11MA6	32	107	215	640	770	112	127	149	149	149	90	430	8900
35	11	640	149	2.9	4.63	IE5	BK40-..S5E11LA6	32	107	215	640	770	149	149	149	149	149	102	430	8900
35	11	495	193	2.4	6.02	IE4	BK40-..S4E11MA6	24.5	83	166	495	590	146	166	193	193	193	90	470	9800
35	11	495	193	2.4	6.02	IE5	BK40-..S5E11LA6	24.5	83	166	495	590	193	193	193	193	193	102	470	9800
35	11	400	240	2	7.49	IE4	BK40-..S4E11MA6	20	66	133	400	480	240	240	240	240	240	90	750	10500
35	11	400	240	2	7.49	IE5	BK40-..S5E11LA6	20	66	133	400	480	240	240	240	240	240	102	750	10500
35	11	320	295	1.6	9.31	IE4	BK40-..S4E11MA6	16	53	107	320	385	225	255	295	295	295	90	1040	11200
35	11	320	295	1.6	9.31	IE5	BK40-..S5E11LA6	16	53	107	320	385	295	295	295	295	295	102	1040	11200
35	11	265	350	2	11.17	IE4	BK40-..S4E11MA6	13	44.5	89	265	320	350	350	350	350	90	4100	13100	
35	11	265	350	2	11.17	IE5	BK40-..S5E11LA6	13	44.5	89	265	320	350	350	350	350	102	4100	13100	
35	11	250	380	1.3	11.86	IE4	BK40-..S4E11MA6	12.5	42	84	250	300	285	325	380	380	380	90	1770	12200
35	11	250	380	1.3	11.86	IE5	BK40-..S5E11LA6	12.5	42	84	250	300	380	380	380	380	380	102	1770	12200
35	11	205	455	1.7	14.5	IE4	BK40-..S4E11MA6	10	34	68	205	245	345	390	455	455	455	90	4500	14300
35	11	205	455	1.7	14.5	IE5	BK40-..S5E11LA6	10	34	68	205	245	455	455	455	455	455	102	4500	14300
35	11	166	560	1.4	18.05	IE4	BK40-..S4E11MA6	8.3	27.5	55	166	199	430	485	560	560	560	90	4900	15300
35	11	166	560	1.4	18.05	IE5	BK40-..S5E11LA6	8.3	27.5	55	166	199	560	560	560	560	560	102	4900	15300
35	11	133	700	1.1	22.44	IE4	BK40-..S4E11MA6	6.6	22	44.5	133	160	530	600	700	700	700	90	5500	16500
35	11	133	700	1.1	22.44	IE5	BK40-..S5E11LA6	6.6	22	44.5	133	160	700	700	700	700	700	102	5500	16500
35	11	104	900	0.87	28.59	IE4	BK40-..S4E11MA6	5.2	17	34.5	104	125	680	770	900	900	900	90	6300	17000
35	11	104	900	0.87	28.59	IE5	BK40-..S5E11LA6	5.2	17	34.5	104	125	900	900	900	900	900	102	6300	17000
35	11	305	305	3	9.73	IE4	BK50-..S4E11MA6	15	51	102	305	365	230	260	305	305	305	120	5400	15400
35	11	305	305	3	9.73	IE5	BK50-..S5E11LA6	15	51	102	305	365	305	305	305	305	305	132	5400	15400
35	11	300	320	2.5	10	IE4	BK50-..S4E11MA6	15	50	100	300	360	240	275	320	320	320	120	1220	13200
35	11	215	435	2.4	13.95	IE4	BK50-..S4E11MA6	10.5	35.5	71	215	255	330	375	435	435	435	120	6100	17400
35	11	215	435	2.4	13.95	IE5	BK50-..S5E11LA6	10.5	35.5	71	215	255	435	435	435	435	435	132	6100	17400
35	11	167	570	1.3	17.92	IE4	BK50-..S4E11MA6	8.3	27.5	55	167	200	430	485	570	570	570	120	4600	16800
35	11	167	570	1.3	17.92	IE5	BK50-..S5E11LA6	8.3	27.5	55	167	200	570	570	570	570	570	132	4600	16800
35	11	155	600	1.7	19.33	IE4	BK50-..S4E11MA6	7.7	25.5	51	155	186	460</td							

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 11 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
35	11	45	2300	1	65.95	IE5	BK60-..S5E11LA6	2.2	7.5	15	45	54	2300	2300	2300	2300	2300	142	10900	33000
35	11	38	2700	0.84	78.13	IE4	BK60-..S4E11MA6	1.9	6.3	12.5	38	46	2050	2300	2700	2700	2700	130	11900	34000
35	11	38	2700	0.84	78.13	IE5	BK60-..S5E11LA6	1.9	6.3	12.5	38	46	2700	2700	2700	2700	2700	142	11900	34000
35	11	55	1890	2.7	54.15	IE4	BK70-..S4E11MA6	2.7	9.2	18	55	66	1430	1620	1890	1890	1890	209	9900	40200
35	11	55	1890	2.7	54.15	IE5	BK70-..S5E11LA6	2.7	9.2	18	55	66	1890	1890	1890	1890	1890	221	9900	40200
35	11	48.5	2150	2.4	61.6	IE4	BK70-..S4E11MA6	2.4	8.1	16	48.5	58	1630	1840	2150	2150	2150	209	11500	42800
35	11	48.5	2150	2.4	61.6	IE5	BK70-..S5E11LA6	2.4	8.1	16	48.5	58	2150	2150	2150	2150	2150	221	11500	42800
35	11	42.5	2450	2.1	70.23	IE4	BK70-..S4E11MA6	2.1	7.1	14	42.5	51	1860	2100	2450	2450	2450	209	12500	44800
35	11	42.5	2450	2.1	70.23	IE5	BK70-..S5E11LA6	2.1	7.1	14	42.5	51	2450	2450	2450	2450	2450	221	12500	44800
35	11	37.5	2750	1.9	79.89	IE4	BK70-..S4E11MA6	1.8	6.2	12.5	37.5	45	2100	2350	2750	2750	2750	209	14300	47600
35	11	37.5	2750	1.9	79.89	IE5	BK70-..S5E11LA6	1.8	6.2	12.5	37.5	45	2750	2750	2750	2750	2750	221	14300	47600
35	11	32.5	3150	1.6	90.96	IE4	BK70-..S4E11MA6	1.6	5.4	10.5	32.5	39.5	2400	2700	3150	3150	3150	209	15300	49900
35	11	32.5	3150	1.6	90.96	IE5	BK70-..S5E11LA6	1.6	5.4	10.5	32.5	39.5	3150	3150	3150	3150	3150	221	15300	49900
35	11	28.5	3600	1.4	103.5	IE4	BK70-..S4E11MA6	1.4	4.8	9.6	28.5	34.5	2700	3100	3600	3600	3600	209	17200	50000
35	11	28.5	3600	1.4	103.5	IE5	BK70-..S5E11LA6	1.4	4.8	9.6	28.5	34.5	3600	3600	3600	3600	3600	221	17200	50000
35	11	24.5	4200	1.2	120.2	IE4	BK70-..S4E11MA6	1.2	4.1	8.3	24.5	29.5	3150	3600	4200	4200	4200	209	18600	50000
35	11	24.5	4200	1.2	120.2	IE5	BK70-..S5E11LA6	1.2	4.1	8.3	24.5	29.5	4200	4200	4200	4200	4200	221	18600	50000
35	11	21.5	4750	1.1	136.7	IE4	BK70-..S4E11MA6	1	3.6	7.3	21.5	26	3600	4100	4750	4750	4750	209	20700	50000
35	11	21.5	4750	1.1	136.7	IE5	BK70-..S5E11LA6	1	3.6	7.3	21.5	26	4750	4750	4750	4750	4750	221	20700	50000
35	11	19	5400	0.96	154.4	IE4	BK70-..S4E11MA6	0.95	3.2	6.4	19	23	4050	4600	5400	5400	5400	209	21900	50000
35	11	19	5400	0.96	154.4	IE5	BK70-..S5E11LA6	0.95	3.2	6.4	19	23	5400	5400	5400	5400	5400	221	21900	50000
35	11	17	6100	0.85	175.7	IE4	BK70-..S4E11MA6	0.85	2.8	5.6	17	20	4650	5200	6100	6100	6100	209	24100	50000
35	11	17	6100	0.85	175.7	IE5	BK70-..S5E11LA6	0.85	2.8	5.6	17	20	6100	6100	6100	6100	6100	221	24100	50000
35	11	29	3550	2.9	102.5	IE4	BK80-..S4E11MA6	1.4	4.8	9.7	29	35	2700	3050	3550	3550	3550	324	20500	75000
35	11	29	3550	2.9	102.5	IE5	BK80-..S5E11LA6	1.4	4.8	9.7	29	35	3550	3550	3550	3550	3550	336	20500	75000
35	11	25.5	4100	2.6	117.5	IE4	BK80-..S4E11MA6	1.2	4.2	8.5	25.5	30.5	3100	3500	4100	4100	4100	324	22300	75000
35	11	25.5	4100	2.6	117.5	IE5	BK80-..S5E11LA6	1.2	4.2	8.5	25.5	30.5	4100	4100	4100	4100	4100	336	22300	75000
35	11	22.5	4600	2.3	131.6	IE4	BK80-..S4E11MA6	1.1	3.7	7.5	22.5	27	3450	3900	4600	4600	4600	324	24900	75000
35	11	22.5	4600	2.3	131.6	IE5	BK80-..S5E11LA6	1.1	3.7	7.5	22.5	27	4600	4600	4600	4600	4600	336	24900	75000
35	11	19.5	5300	2	153.1	IE4	BK80-..S4E11MA6	0.95	3.2	6.5	19.5	23.5	4050	4550	5300	5300	5300	324	27200	75000
35	11	19.5	5300	2	153.1	IE5	BK80-..S5E11LA6	0.95	3.2	6.5	19.5	23.5	5300	5300	5300	5300	5300	336	27200	75000
35	11	17	6000	1.7	171.5	IE4	BK80-..S4E11MA6	0.85	2.9	5.8	17	20.5	4500	5100	6000	6000	6000	324	30000	75000
35	11	17	6000	1.7	171.5	IE5	BK80-..S5E11LA6	0.85	2.9	5.8	17	20.5	6000	6000	6000	6000	6000	336	30000	75000
35	11	16.5	6200	1.9	177.6	IE4	BK80Z-..S4E11MA6	0.8	2.8	5.6	16.5	20	4700	5300	6200	6200	6200	366	30000	75000
35	11	16.5	6200	1.9	177.6	IE5	BK80Z-..S5E11LA6	0.8	2.8	5.6	16.5	20	6200	6200	6200	6200	6200	378	30000	75000
35	11	15	6900	1.7	198.9	IE4	BK80Z-..S4E11MA6	0.75	2.5	5	15	18	5200	5900	6900	6900	6900	366	30000	75000
35	11	15	6900	1.7	198.9	IE5	BK80Z-..S5E11LA6	0.75	2.5	5	15	18	6900	6900	6900	6900	6900	378	30000	75000
35	11	13	7900	1.5	226.1	IE4	BK80Z-..S4E11MA6	0.65	2.2	4.4	13	15.5	5900	7900	7900	7900	7900	366	30000	75000
35	11	13	7900	1.5	226.1	IE5	BK80Z-..S5E11LA6	0.65	2.2	4.4	13	15.5	7900	7900	7900	7900	7900	378	30000	75000
35	11	11.5	8800	1.3	253.3	IE4	BK80Z-..S4E11MA6	0.55	1.9	3.9	11.5	14	6700	7500	8800	8800	8800	366	30000	75000
35	11	11.5	8800	1.3	253.3	IE5	BK80Z-..S5E11LA6	0.55	1.9	3.9	11.5	14	8800	8800	8800	8800	8800	378	30000	75000
35	11	9.9	10500	1.1	300.6	IE4	BK80Z-..S4E11MA6	0.49	1.6	3.3	9.9	11.5	7900	9000	10500	10500	10500	366	30000	75000
35	11	9.9	10500	1.1	300.6	IE5	BK80Z-..S5E11LA6	0.49	1.6	3.3	9.9	11.5	10500	10500	10500	10500	10500	378	30000	75000
35	11	8.9	11700	0.98	336.7	IE4	BK80Z-..S4E11MA6	0.44	1.4	2.9	8.9	10.5	8900	10100	11700	11700	11700	366	30000	75000
35	11	8.9	11700	0.98	336.7	IE5	BK80Z-..S5E11LA6	0.44	1.4	2.9	8.9	10.5	11700	11700	11700	11700	11700	378	30000	75000
35	11	7.7	13600	0.84	389	IE4	BK80Z-..S4E11MA6	0.38	1.2	2.5	7.7	9.2	10300	11600	13600	13600	13600	366	30000	75000
35	11	7.7	13600	0.84	389	IE5	BK80Z-..S5E11LA6	0.38	1.2	2.5	7.7	9.2	13600	13600	13600	13600	13600	378	30000	75000
35	11	6	17400	1.1	499.2	IE4	BK90Z-..S4E11MA6	0.3	1	2	6	7.2	13200	14900	17400	17400	17400	632	49400	120000
35	11	6	17400	1.1	499.2	IE5	BK90Z-..S5E11LA6	0.3	1	2	6	7.2	17400	17400	17400	17400	17400	643	49400	120000
35	11	5.3	19500	0.95	558.5	IE4	BK90Z-..S4E11MA6	0.26	0.85	1.7	5.3	6.4	14800	16700	19500	19500	19500	632	49400	120000
35	11	5.3	19500	0.95	558.5	IE5	BK90Z-..S5E11LA6	0.26	0.85	1.7	5.3	6.4	19500	19500	19500	19500	19500	643	49400	120000
35	11																			

BK-series bevel geared motors

Selection - bevel geared motors - $n_1 = 3000 \text{ } 1/\text{min}$


MN = 48 Nm (PN = 15 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
48	15	630	205	0.93	4.73	IE5	BK30-..S5E11LA6	31.5	105	210	630	760	152	174	205	205	174	76	1550	8800
48	15	400	325	0.81	7.45	IE5	BK30-..S5E11LA6	20	67	134	400	480	235	270	325	325	270	76	2200	10400
48	15	260	490	0.84	11.39	IE5	BK30-..S5E11LA6	13	43.5	87	260	315	355	410	490	490	410	76	4150	11000
48	15	640	200	2.1	4.63	IE5	BK40-..S5E11LA6	32	107	215	640	770	149	170	200	200	170	102	430	8900
48	15	495	265	1.8	6.02	IE5	BK40-..S5E11LA6	24.5	83	166	495	590	193	220	265	265	220	102	470	9800
48	15	400	330	1.5	7.49	IE5	BK40-..S5E11LA6	20	66	133	400	480	240	275	330	330	275	102	750	10500
48	15	320	410	1.2	9.31	IE5	BK40-..S5E11LA6	16	53	107	320	385	295	340	410	410	340	102	1040	11200
48	15	265	480	1.5	11.17	IE5	BK40-..S5E11LA6	13	44.5	89	265	320	350	400	480	480	400	102	4100	13100
48	15	250	520	0.94	11.86	IE5	BK40-..S5E11LA6	12.5	42	84	250	300	380	435	520	520	435	102	1770	12200
48	15	205	620	1.2	14.5	IE5	BK40-..S5E11LA6	10	34	68	205	245	455	520	620	620	520	102	4500	14300
48	15	166	770	1	18.05	IE5	BK40-..S5E11LA6	8.3	27.5	55	166	199	560	640	770	770	640	102	4900	15300
48	15	133	960	0.8	22.44	IE5	BK40-..S5E11LA6	6.6	22	44.5	133	160	700	800	960	960	800	102	5500	16500
48	15	410	320	2.5	7.29	IE5	BK50-..S5E11LA6	20.5	68	137	410	490	230	265	320	320	265	132	620	111000
48	15	305	420	2.2	9.73	IE5	BK50-..S5E11LA6	15	51	102	305	365	305	350	420	420	350	132	5400	15400
48	15	300	440	1.8	10	IE5	BK50-..S5E11LA6	15	50	100	300	360	320	365	440	440	365	132	1220	13200
48	15	215	600	1.7	13.95	IE5	BK50-..S5E11LA6	10.5	35.5	71	215	255	435	500	600	600	500	132	6100	17400
48	15	167	780	0.92	17.92	IE5	BK50-..S5E11LA6	8.3	27.5	55	167	200	570	650	780	780	650	132	4600	16800
48	15	155	830	1.3	19.33	IE5	BK50-..S5E11LA6	7.7	25.5	51	155	186	600	690	830	830	690	132	6900	19200
48	15	113	1140	0.92	26.51	IE5	BK50-..S5E11LA6	5.6	18.5	37.5	113	135	830	950	1140	1140	950	132	7800	21200
48	15	215	660	3	13.85	IE5	BK60-..S5E11LA6	10.5	36	72	215	255	480	550	660	660	550	142	3850	18000
48	15	205	690	2.8	14.41	IE5	BK60-..S5E11LA6	10	34.5	69	205	245	500	570	690	690	570	142	3650	18600
48	15	186	770	2.6	16.05	IE5	BK60-..S5E11LA6	9.3	31	62	186	220	560	640	770	770	640	142	4050	18800
48	15	163	880	2.4	18.36	IE5	BK60-..S5E11LA6	8.1	27	54	163	196	640	730	880	880	730	142	4000	19900
48	15	146	980	2.3	20.54	IE5	BK60-..S5E11LA6	7.3	24	48.5	146	175	710	820	980	980	820	142	4400	20600
48	15	122	1170	2	24.45	IE5	BK60-..S5E11LA6	6.1	20	40.5	122	147	850	970	1170	1170	970	142	4850	22000
48	15	109	1310	1.8	27.36	IE5	BK60-..S5E11LA6	5.4	18	36.5	109	131	950	1090	1310	1310	1090	142	5600	23200
48	15	88	1620	1.4	33.78	IE5	BK60-..S5E11LA6	4.4	14.5	29.5	88	106	1180	1350	1620	1620	1350	142	6500	25200
48	15	79	1810	1.3	37.8	IE5	BK60-..S5E11LA6	3.9	13	26	79	95	1320	1510	1810	1810	1510	142	7300	26500
48	15	66	2150	1.1	45.05	IE5	BK60-..S5E11LA6	3.3	11	22	66	79	1570	1800	2150	2150	1800	142	8200	28300
48	15	59	2400	0.95	50.4	IE5	BK60-..S5E11LA6	2.9	9.9	19.5	59	71	1760	2000	2400	2400	2000	142	9100	29800
48	15	50	2800	0.81	58.95	IE5	BK60-..S5E11LA6	2.5	8.4	16.5	50	61	2050	2350	2800	2800	2350	142	9900	31500
48	15	97	1480	3	30.9	IE5	BK70-..S5E11LA6	4.8	16	32	97	116	1080	1230	1480	1480	1230	221	7500	33600
48	15	85	1680	2.8	35.15	IE5	BK70-..S5E11LA6	4.2	14	28	85	102	1230	1400	1680	1680	1400	221	8000	35000
48	15	74	1920	2.5	40.08	IE5	BK70-..S5E11LA6	3.7	12	24.5	74	89	1400	1600	1920	1920	1600	221	8300	36300
48	15	65	2150	2.3	45.59	IE5	BK70-..S5E11LA6	3.2	10.5	21.5	65	78	1590	1820	2150	2150	1820	221	9000	37900
48	15	55	2550	2	54.15	IE5	BK70-..S5E11LA6	2.7	9.2	18	55	66	1890	2150	2550	2550	2150	221	9900	40200
48	15	48.5	2950	1.8	61.6	IE5	BK70-..S5E11LA6	2.4	8.1	48.5	58	2150	2450	2950	2950	2450	221	11500	42800	
48	15	42.5	3350	1.5	70.23	IE5	BK70-..S5E11LA6	2.1	7.1	14	42.5	51	2450	2800	3350	3350	2800	221	12500	44800
48	15	37.5	3800	1.4	79.89	IE5	BK70-..S5E11LA6	1.8	6.2	12.5	37.5	45	2750	3150	3800	3800	3150	221	14300	47600
48	15	32.5	4350	1.2	90.96	IE5	BK70-..S5E11LA6	1.6	5.4	10.5	32.5	39.5	3150	3600	4350	4350	3600	221	15300	49900
48	15	28.5	4350	1	103.5	IE5	BK70-..S5E11LA6	1.4	4.8	9.6	28.5	34.5	3600	4100	4950	4950	4100	221	17200	50000
48	15	24.5	5700	0.9	120.2	IE5	BK70-..S5E11LA6	1.2	4.1	8.3	24.5	29.5	4200	4800	5700	5700	4800	221	18600	50000
48	15	42	3350	2.8	70.72	IE5	BK80-..S5E11LA6	2.1	7	14	42	50	2450	2800	3350	3350	2800	336	16600	68700
48	15	37.5	3800	2.6	79.22	IE5	BK80-..S5E11LA6	1.8	6.3	12.5	37.5	45	2750	3150	3800	3800	3150	336	17600	71300
48	15	32.5	4350	2.3	91.53	IE5	BK80-..S5E11LA6	1.6	5.4	10.5	32.5	39	3200	3650	4350	4350	3650	336	18300	74200
48	15	29	4900	2.1	102.5	IE5	BK80-..S5E11LA6	1.4	4.8	9.7	29	35	3550	4100	4900	4900	4100	336	20500	75000
48	15	25.5	5600	1.9	117.5	IE5	BK80-..S5E11LA6	1.2	4.2	8.5	25.5	30.5	4100	4700	5600	5600	4700	336	22300	75000
48	15	22.5	6300	1.7	131.6	IE5	BK80-..S5E11LA6	1.1	3.7	7.5	22.5	27	4600	5200	6300	6300	5200	336	24900	75000
48	15	19.5	7300	1.4	153.1	IE5	BK80-..S5E11LA6	0.95	3.2	6.5	19.5	23.5	5300	6100	7300	7300	6100	336	27200	75000
48	15	17	8200	1.3	171.5	IE5	BK80-..S5E11LA6	0.85	2.9	5.8	17	20.5	6000	6800	8200	8200	6800	336	30000	75000
48	15	16.5	8500	1.3	177.6	IE5	BK80Z-..S5E11LA6	0.8	2.8	5.6	16.5	20	6200	7100	8500	8500	7100	336	30000	75000
48	15	15	9500	1.2	198.9	IE5	BK80Z-..S5E11LA6	0.75	2.5	5	15	18	6900	7900	9500	9500	7900	336	30000	75000
48	15	13	10800	1.1	226.1	IE5	BK80Z-..S5E11LA6	0.65	2.2	4.4	13	15.5	7900	9000	10800	10800	900			

Energy Efficient Geared Motors

AC Variable Speed

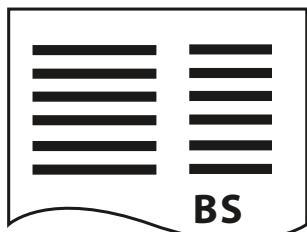

9

BS-series worm-gear motors - Selection

Description of worm-gear units	259
Sizes	259
Efficiency	259
Bauer service factors (f_B) for worm-gear motors	259
Continuous operation without switching frequency $Z \leq 1/h$	259
Switching duty	260
Ambient temperature	260
Bauer service factor	260
Explanation of shock classification	260
Key to abbreviations	261
Selection tables, worm-gear motors	261
Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$	262
Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$	276

Energy Efficient Geared Motors

AC Variable Speed

9

BS-series worm-gear motors

Description of worm-gear units

Sizes

Bauer BS-series worm-gear motors are normally supplied in eight frame sizes and with torques of 25 to 1,000 Nm. Higher torques are available on request. The gear unit is accommodated in a sturdy cast housing.

Efficiency

The efficiency of worm-gear motors depends on numerous factors, including lubrication, extent of wear, temperature and vibration. Calculated efficiency, therefore, is merely a guideline value. Please consult BAUER and state the boundary conditions if efficiency or self-locking capability are important factors for your application.

Bauer service factors (f_B) for worm-gear motors

Worm gears transmit torque by sliding friction only, which means that losses and temperature are inevitably higher than with helical-gear arrangements.

Of the numerous factors influencing the total loading of a worm-gear unit, the most important include:

- Mean torque (rated torque)
- Daily operating hours
- Severity of torque peaks (shock classification)
- Frequency of torque peaks (switching duty)
- Ambient temperature

These factors can be represented in a simplified and practical manner by **service factors**. The tables and explanations below attempt to provide an objective description of the **shock classification**, rather than a classification of the driven machinery. Experience has shown that, in addition to the torque shocks caused by the driven machinery (M_s/M_n), above all the power transmission components (clutches, chains etc.) plus the mass ratios play a decisive role in this.

See Bauer special imprint SD32 for more information.

Continuous operation without switching frequency $Z \leq 1/h$

Factor f_1 for shock classification and operating time

9

Shock classification	Operating hours per day t_d $\leq 10 \text{ min}$	$\leq 1 \text{ h}$	$> 1 \text{ h}$	$> 4 \text{ h}$	$> 8 \text{ h}$	$> 16 \text{ h}$
		$\leq 4 \text{ h}$	$\leq 8 \text{ h}$	$\leq 16 \text{ h}$	$\leq 24 \text{ h}$	
I	0,7	0,8	0,9	1,0	1,25	1,4
II	0,9	1,0	1,12	1,25	1,6	1,8
III	1,25	1,4	1,6	1,8	2,2	2,5

BS-series worm-gear motors

Description of worm-gear units

Switching duty

Factor f_2 or shock classification and switching frequency

Switching frequency in single-shift operation $t_d \leq 8$ h/d

Shock classification	$1 < Z \leq 100$	$100 < Z \leq 1000$	$1000 < Z$
I	1.25	1.4	1.6
II	1.6	1.8	2.0
III	1.8	2.0	2.2

Switching frequency in multiple-shift operation $t_d > 8$ h/d

Shock classification	$1 < Z \leq 100$	$100 < Z \leq 1000$	$1000 < Z$
I	1.4	1.6	1.8
II	1.8	2.0	2.2
III	2.0	2.2	2.5

Ambient temperature

Factor f_3 for increased ambient temperature

AT	$-10^\circ\text{C} .. +25^\circ\text{C}$	$>25^\circ\text{C}$	$>30^\circ\text{C}$	$>35^\circ\text{C}$	$>40^\circ\text{C}$	$>45^\circ\text{C}$	$>50^\circ\text{C}$	$>55^\circ\text{C}$
no Factor	1.1	1.2	1.3	1.4	1.5	1.6	Enquiry	

Bauer service factor

Bauer service factor f_B = maximum value f_1 , f_2 , f_3 (at daily operating hours $> 1\text{h}$)

For example: Shock classification II for $Z = 100$ switching operations per hour and multiple-shift operation yields a service factor $f_B = f_2 = 1.8$

Explanation of shock classification

Shock classification I:

Uniform without shock loads. All the following requirements must be satisfied:

- $Fl \leq 1.3$
- $M_x/M_N \leq 1.0$
- Shock-absorbing power transmission components (e.g. highly resilient, zero-play coupling, $\varphi N \geq 5^\circ$)

Shock classification II:

Moderate shock loads. At least one of the following conditions applies:

- $1.3 < Fl \leq 2$
- $1 \leq M_x/M_N \leq 1.4$
- Shock-neutral power transmission components (e.g. gear wheels, zero-play rigid coupling or resilient coupling with $\varphi N < 5^\circ$)

Shock classification III:

Heavy shock loads. At least one of the following conditions applies:

- $Fl > 2$
- $1.4 < M_x/M_N \leq 2.0$
- Shock-amplifying power transmission components (e.g. coupling with play or chain drive)

BS-series worm-gear motors

Description of worm-gear units


Key to abbreviations

Z	Switching duty number of switching operations per hour
t _d	Daily operating time in hours (h/d)
Fl	Factor of inertia Fl = (J _{ext} + J _{rot})/J _{rot}
J _{ext}	Mass moment of inertia of the machine to be driven, in relation to the motor's rotor shaft (kgm ²)
J _{rot}	Mass moment of inertia of the motor rotor (kgm ²)
M _x	Highest impact torque above the static torque which can occur during normal operation or in emergency situations
M _N	Required static load torque for the application
M _x /M _N	Relative torque - Factor
φ _N	Torsional offset of the resilient coupling under rated torque
UT	Ambient temperature (°C)

Selection tables, worm-gear motors

Key to abbreviations

P	Rated output
n ₂	Rated speed of the output shaft
i	Gear reduction ratio
M ₂	Rated torque at the output shaft
f _B	Bauer Service factor
F _{RN}	Maximum permissible radial force with standard solid shaft (Code -.1 und -.2)

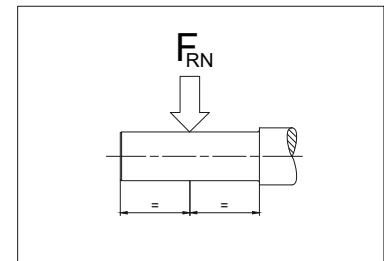

Use the selection tables to determine the size of geared motor required. The codes clearly define the Type of gear unit and output shaft (see chapter 13 "dimensional drawings worm-gear motors").


Motor power overload protection

Motor-power ratings, particularly in conjunction with four-stage and multi-stage gear units, are more than ample in some instances. Consequently, and in much the same way as with low-power motors, rated current is not a measure of gear loading and cannot be used to protect the gear unit against overloading. It is advisable to provide gears at risk from excessive load or blockage with a protective mechanism (e. g., slip clutch, slip hub, shear pin or an alternative).

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 0.76 Nm (PN = 0.12 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
0.76	0.12	83	10.1	2.5	18	IE4	BS02-..S4E04SA4-1	8.3	27.5	55	83	100	10.1	10.1	10.1	10.1	10.1	3.5	1250	-
0.76	0.12	68	11.7	2.1	22	IE4	BS02-..S4E04SA4-1	6.8	22.5	45	68	81	11.7	11.7	11.7	11.7	11.7	3.5	1250	-
0.76	0.12	55	12.9	1.9	27	IE4	BS02-..S4E04SA4-1	5.5	18.5	37	55	66	12.9	12.9	12.9	12.9	12.9	3.5	1250	-
0.76	0.12	45	15	1.7	33	IE4	BS02-..S4E04SA4-1	4.5	15	30	45	54	15	15	15	15	15	3.5	1250	-
0.76	0.12	34.5	20	1.2	43	IE4	BS02-..S4E04SA4-1	3.4	11.5	23	34.5	41.5	20	20	20	20	20	3.5	1250	-
0.76	0.12	27.5	23	0.94	54	IE4	BS02-..S4E04SA4-1	2.7	9.2	18.5	27.5	33	23	23	23	23	23	3.5	1250	-
0.76	0.12	61	14	2.4	24.25	IE4	BS04-..S4E04SA4-1	6.1	20.5	41	61	74	14	14	14	14	14	3.9	2250	-
0.76	0.12	57	14.1	2.7	26.21	IE4	BS04-..S4E04SA4-1	5.7	19	38	57	68	14.1	14.1	14.1	14.1	14.1	3.9	2250	-
0.76	0.12	47.5	16.7	2.3	31.5	IE4	BS04-..S4E04SA4-1	4.7	15.5	31.5	47.5	57	16.7	16.7	16.7	16.7	16.7	3.9	2250	-
0.76	0.12	39	20	1.8	38.42	IE4	BS04-..S4E04SA4-1	3.9	13	26	39	46.5	20	20	20	20	20	3.9	2250	-
0.76	0.12	31	24.5	1.5	47.86	IE4	BS04-..S4E04SA4-1	3.1	10	20.5	31	37.5	24.5	24.5	24.5	24.5	24.5	3.9	2250	-
0.76	0.12	24	31	1.2	61.5	IE4	BS04-..S4E04SA4-1	2.4	8.1	16	24	29	31	31	31	31	31	3.9	2250	-
0.76	0.12	23	30.5	1.2	64.06	IE4	BS04-..S4E04SA4-1	2.3	7.8	15.5	23	28	30.5	30.5	30.5	30.5	30.5	3.9	2250	-
0.76	0.12	21	35.5	1.1	71.18	IE4	BS04-..S4E04SA4-1	2.1	7	14	21	25	35.5	35.5	35.5	35.5	35.5	3.9	2250	-
0.76	0.12	19	35.5	1.1	77	IE4	BS04-..S4E04SA4-1	1.9	6.4	12.5	19	23	35.5	35.5	35.5	35.5	35.5	3.9	2250	-
0.76	0.12	16.5	44	0.85	90	IE4	BS04-..S4E04SA4-1	1.6	5.5	11	16.5	20	44	44	44	44	44	3.9	2250	-
0.76	0.12	15.5	42	0.9	93.92	IE4	BS04-..S4E04SA4-1	1.5	5.3	10.5	15.5	19	42	42	42	42	42	3.9	2250	-
0.76	0.12	25.5	31	2.9	58.15	IE4	BS06-..S4E04SA4-1	2.5	8.5	17	25.5	30.5	31	31	31	31	31	8.4	3500	-
0.76	0.12	23	33	2.4	64.06	IE4	BS06-..S4E04SA4-1	2.3	7.8	15.5	23	28	33	33	33	33	33	8.4	3500	-
0.76	0.12	21	38	2.4	71.18	IE4	BS06-..S4E04SA4-1	2.1	7	14	21	25	38	38	38	38	38	8.4	3500	-
0.76	0.12	19	39	2.2	77	IE4	BS06-..S4E04SA4-1	1.9	6.4	12.5	19	23	39	39	39	39	39	8.4	3500	-
0.76	0.12	16.5	47.5	2	90	IE4	BS06-..S4E04SA4-1	1.6	5.5	11	16.5	20	47.5	47.5	47.5	47.5	47.5	8.4	3500	-
0.76	0.12	14.5	54	1.8	103.1	IE4	BS06-..S4E04SA4-1	1.4	4.8	9.6	14.5	17	54	54	54	54	54	8.4	3500	-
0.76	0.12	12.5	58	1.6	118.8	IE4	BS06-..S4E04SA4-1	1.2	4.2	8.4	12.5	15	58	58	58	58	58	8.4	3500	-
0.76	0.12	11.5	65	1.6	129	IE4	BS06-..S4E04SA4-1	1.1	3.8	7.7	11.5	13.5	65	65	65	65	65	8.4	3500	-
0.76	0.12	10.5	69	1.4	142.2	IE4	BS06-..S4E04SA4-1	1	3.5	7	10.5	12.5	69	69	69	69	69	8.4	3500	-
0.76	0.12	10	72	1.5	146.8	IE4	BS06-..S4E04SA4-1	1	3.4	6.8	10	12	72	72	72	72	72	8.4	3500	-
0.76	0.12	8.7	83	1.1	171	IE4	BS06-..S4E04SA4-1	0.85	2.9	5.8	8.7	10.5	83	83	83	83	83	8.4	3500	-
0.76	0.12	8.6	79	1.2	174	IE4	BS06-..S4E04SA4-1	0.85	2.8	5.7	8.6	10	79	79	79	79	79	8.4	3500	-
0.76	0.12	6.8	98	0.99	220	IE4	BS06-..S4E04SA4-1	0.65	2.2	4.5	6.8	8.1	98	98	98	98	98	8.4	3500	-
0.76	0.12	5.9	111	0.89	252	IE4	BS06-..S4E04SA4-1	0.55	1.9	3.9	5.9	7.1	111	111	111	111	111	8.4	3500	-
0.76	0.12	7.5	97	1.5	200	IE4	BS10Z-..S4E04SA4-1	0.75	2.5	5	7.5	9	97	97	97	97	97	21	6000	-
0.76	0.12	5.9	123	1.5	254	IE4	BS10Z-..S4E04SA4-1	0.55	1.9	3.9	5.9	7	123	123	123	123	123	21	6000	-
0.76	0.12	4.9	142	1.3	302.5	IE4	BS10Z-..S4E04SA4-1	0.49	1.6	3.3	4.9	5.9	142	142	142	142	142	21	6000	-
0.76	0.12	4.1	169	1.1	360.3	IE4	BS10Z-..S4E04SA4-1	0.41	1.3	2.7	4.1	4.9	169	169	169	169	169	21	6000	-
0.76	0.12	3.4	200	0.95	432.4	IE4	BS10Z-..S4E04SA4-1	0.34	1.1	2.3	3.4	4.1	200	200	200	200	200	21	6000	-
0.76	0.12	7.4	97	2.9	201.4	IE4	BS20Z-..S4E04SA4-1	0.7	2.4	4.9	7.4	8.9	97	97	97	97	97	32	8000	-
0.76	0.12	5.8	125	2.4	257.8	IE4	BS20Z-..S4E04SA4-1	0.55	1.9	3.8	5.8	6.9	125	125	125	125	125	32	8000	-
0.76	0.12	4.9	143	2.1	300.1	IE4	BS20Z-..S4E04SA4-1	0.49	1.6	3.3	4.9	5.9	143	143	143	143	143	32	8000	-
0.76	0.12	4.1	169	1.9	359.9	IE4	BS20Z-..S4E04SA4-1	0.41	1.3	2.7	4.1	5	169	169	169	169	169	32	8000	-
0.76	0.12	3.4	199	1.7	430.8	IE4	BS20Z-..S4E04SA4-1	0.34	1.1	2.3	3.4	4.1	199	199	199	199	199	32	8000	-
0.76	0.12	2.7	225	1.6	539.7	IE4	BS20Z-..S4E04SA4-1	0.27	0.9	1.8	2.7	3.3	225	225	225	225	225	32	8000	-
0.76	0.12	2.4	250	1.3	619.2	IE4	BS20Z-..S4E04SA4-1	0.24	0.8	1.6	2.4	2.9	250	250	250	250	250	32	8000	-
0.76	0.12	1.9	310	0.99	763.4	IE4	BS20Z-..S4E04SA4-1	0.19	0.65	1.3	1.9	2.3	310	310	310	310	310	32	8000	-
0.76	0.12	1.4	530	0.91	1022	IE4	BS30G06-..S4E04SA4-1	0.14	0.48	0.95	1.4	1.7	530	530	530	530	530	53	10000	-

MN = 1 Nm (PN = 0.157 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1	0.157	140	8.7	2.9	10.67	IE2	BS02-..SHE04SA4-1	14	46.5	93	140	168	6.6	7.4	8.7	8.7	8.7	3.5	1250	-
1	0.157	111	10.5	2.4	13.5	IE2	BS02-..SHE04SA4-1	11	37	74	111	133	8	8.9	10.5	10.5	10.			

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1 Nm (PN = 0.157 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1	0.157	30.5	34.5	2.5	48.6	IE2	BS06..-/SHE04SA4-1	3	10	20.5	30.5	37	26.5	29.5	34.5	34.5	34.5	8.4	3500	-
1	0.157	25.5	41	2.2	58.15	IE2	BS06..-/SHE04SA4-1	2.5	8.5	17	25.5	30.5	31	35	41	41	41	8.4	3500	-
1	0.157	23	43.5	1.8	64.06	IE2	BS06..-/SHE04SA4-1	2.3	7.8	15.5	23	28	33	37	43.5	43.5	43.5	8.4	3500	-
1	0.157	21	50	1.9	71.18	IE2	BS06..-/SHE04SA4-1	2.1	7	14	21	25	38	42.5	50	50	50	8.4	3500	-
1	0.157	19	51	1.6	77	IE2	BS06..-/SHE04SA4-1	1.9	6.4	12.5	19	23	39	43.5	51	51	51	8.4	3500	-
1	0.157	16.5	62	1.6	90	IE2	BS06..-/SHE04SA4-1	1.6	5.5	11	16.5	20	47.5	53	62	62	62	8.4	3500	-
1	0.157	14.5	71	1.4	103.1	IE2	BS06..-/SHE04SA4-1	1.4	4.8	9.6	14.5	17	54	60	71	71	71	8.4	3500	-
1	0.157	12.5	77	1.2	118.8	IE2	BS06..-/SHE04SA4-1	1.2	4.2	8.4	12.5	15	58	65	77	77	77	8.4	3500	-
1	0.157	11.5	86	1.2	129	IE2	BS06..-/SHE04SA4-1	1.1	3.8	7.7	11.5	13.5	65	73	86	86	86	8.4	3500	-
1	0.157	10.5	91	1.1	142.2	IE2	BS06..-/SHE04SA4-1	1	3.5	7	10.5	12.5	69	77	91	91	91	8.4	3500	-
1	0.157	10	95	1.1	146.8	IE2	BS06..-/SHE04SA4-1	1	3.4	6.8	10	12	72	81	95	95	95	8.4	3500	-
1	0.157	8.7	109	0.8	171	IE2	BS06..-/SHE04SA4-1	0.85	2.9	5.8	8.7	10.5	83	93	109	109	109	8.4	3500	-
1	0.157	8.6	104	0.94	174	IE2	BS06..-/SHE04SA4-1	0.85	2.8	5.7	8.6	10	79	88	104	104	104	8.4	3500	-
1	0.157	7.5	128	1.2	200	IE2	BS10Z..-/SHE04SA4-1	0.75	2.5	5	7.5	9	97	108	128	128	128	21	6000	-
1	0.157	5.9	162	1.1	254	IE2	BS10Z..-/SHE04SA4-1	0.55	1.9	3.9	5.9	7	123	138	162	162	162	21	6000	-
1	0.157	4.9	187	1	302.5	IE2	BS10Z..-/SHE04SA4-1	0.49	1.6	3.3	4.9	5.9	142	159	187	187	187	21	6000	-
1	0.157	4.1	220	0.85	360.3	IE2	BS10Z..-/SHE04SA4-1	0.41	1.3	2.7	4.1	4.9	169	189	220	220	220	21	6000	-
1	0.157	7.4	128	2.2	201.4	IE2	BS20Z..-/SHE04SA4-1	0.7	2.4	4.9	7.4	8.9	97	109	128	128	128	32	8000	-
1	0.157	5.8	164	1.8	257.8	IE2	BS20Z..-/SHE04SA4-1	0.55	1.9	3.8	5.8	6.9	125	140	164	164	164	32	8000	-
1	0.157	4.9	189	1.6	300.1	IE2	BS20Z..-/SHE04SA4-1	0.49	1.6	3.3	4.9	5.9	143	160	189	189	189	32	8000	-
1	0.157	4.1	220	1.4	359.9	IE2	BS20Z..-/SHE04SA4-1	0.41	1.3	2.7	4.1	5	169	189	220	220	220	32	8000	-
1	0.157	3.4	260	1.3	430.8	IE2	BS20Z..-/SHE04SA4-1	0.34	1.1	2.3	3.4	4.1	199	220	260	260	260	32	8000	-
1	0.157	2.7	295	1.2	539.7	IE2	BS20Z..-/SHE04SA4-1	0.27	0.9	1.8	2.7	3.3	225	250	295	295	295	32	8000	-
1	0.157	2.4	330	0.99	619.2	IE2	BS20Z..-/SHE04SA4-1	0.24	0.8	1.6	2.4	2.9	250	280	330	330	330	32	8000	-

MN = 1.3 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.3	0.55	325	5.2	2.9	4.6	IE5	BS02..-/S5E06MA4	32.5	108	215	325	390	5.2	5.2	5.2	5.2	5.2	6.8	1000	-
1.3	0.55	181	9	2.8	8.25	IE5	BS02..-/S5E06MA4	18	60	121	181	215	9	9	9	9	9	6.8	1100	-
1.3	0.55	140	11.3	2.2	10.67	IE5	BS02..-/S5E06MA4	14	46.5	93	140	168	11.3	11.3	11.3	11.3	11.3	6.8	1250	-
1.3	0.55	111	13.6	1.8	13.5	IE5	BS02..-/S5E06MA4	11	37	74	111	133	13.6	13.6	13.6	13.6	13.6	6.8	1250	-
1.3	0.55	83	17.3	1.4	18	IE5	BS02..-/S5E06MA4	8.3	27.5	55	83	100	17.3	17.3	17.3	17.3	17.3	6.8	1250	-
1.3	0.55	68	20	1.2	22	IE5	BS02..-/S5E06MA4	6.8	22.5	45	68	81	20	20	20	20	20	6.8	1250	-
1.3	0.55	55	22	1.1	27	IE5	BS02..-/S5E06MA4	5.5	18.5	37	55	66	22	22	22	22	22	6.8	1250	-
1.3	0.55	45	25.5	0.97	33	IE5	BS02..-/S5E06MA4	4.5	15	30	45	54	25.5	25.5	25.5	25.5	25.5	6.8	1250	-
1.3	0.55	78	18.7	2.9	19	IE5	BS03..-/S5E06MA4	7.8	26	52	78	94	18.7	18.7	18.7	18.7	18.7	6.9	1950	-
1.3	0.55	60	22	2.5	25	IE5	BS03..-/S5E06MA4	6	20	40	60	72	22	22	22	22	22	6.9	1950	-
1.3	0.55	45	26	2.1	33	IE5	BS03..-/S5E06MA4	4.5	15	30	45	54	26	26	26	26	26	6.9	1950	-
1.3	0.55	38	32	1.7	39	IE5	BS03..-/S5E06MA4	3.8	12.5	25.5	38	46	32	32	32	32	32	6.9	1950	-
1.3	0.55	30	37.5	1.5	50	IE5	BS03..-/S5E06MA4	3	10	20	30	36	37.5	37.5	37.5	37.5	37.5	6.9	1950	-
1.3	0.55	24	42.5	1.1	62	IE5	BS03..-/S5E06MA4	2.4	8	16	24	29	42.5	42.5	42.5	42.5	42.5	6.9	1950	-
1.3	0.55	20	49.5	0.8	75	IE5	BS03..-/S5E06MA4	2	6.6	13	20	24	49.5	49.5	49.5	49.5	49.5	6.9	1950	-
1.3	0.55	139	10.8	2.9	10.73	IE5	BS04..-/S5E06MA4	13.5	46.5	93	139	167	10.8	10.8	10.8	10.8	10.8	7.3	1600	-
1.3	0.55	114	13.1	2.5	13.09	IE5	BS04..-/S5E06MA4	11	38	76	114	137	13.1	13.1	13.1	13.1	13.1	7.3	1760	-
1.3	0.55	91	16.3	2.1	16.31	IE5	BS04..-/S5E06MA4	9.1	30.5	61	91	110	16.3	16.3	16.3	16.3	16.3	7.3	1970	-
1.3	0.55	83	16.6	2	18	IE5	BS04..-/S5E06MA4	8.3	27.5	55	83	100	16.6	16.6	16.6	16.6	16.6	7.3	1950	-
1.3	0.55	71	20.5	1.8	20.96	IE5	BS04..-/S5E06MA4	7.1	23.5	47.5	71	85	20.5	20.5	20.5	20.5	20.5	7.3	2100	-
1.3	0.55	61	23.5	1.4	24.25	IE5	BS04..-/S5E06MA4	6.1	20.5	41	61	74	23.5	23.5	23.5	23.5	23.5	7.3	2250	-
1.3	0.55	57	24	1.6	26.21	IE5	BS04..-/S5E06MA4	5.7	19	38	57	68	24	24	24	24	24	7.3	2250	-
1.3	0.55	47.5	28.5	1.3	31.5	IE5	BS04..-/S5E06MA4	4.7	15.5	31.5	47.5	57	28.5	28.5	28.5	28.5	28.5	7.3	2250	-
1.3	0.55	39	34	1.1	38.42	IE5	BS04..-/S5E06MA4	3.9	13	26	39	46.5								

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.3	0.55	14.5	86	1.9	103.4	IE5	BS10-..S5E06MA4	1.4	4.8	9.6	14.5	17	86	86	86	86	86	23	5600	-
1.3	0.55	12.5	115	1.1	119.6	IE5	BS10-..S5E06MA4	1.2	4.1	8.3	12.5	15	115	115	115	115	115	23	6000	-
1.3	0.55	11.5	108	1.5	130.3	IE5	BS10-..S5E06MA4	1.1	3.8	7.6	11.5	13.5	108	108	108	108	108	23	6000	-
1.3	0.55	9.8	127	1.3	152.7	IE5	BS10-..S5E06MA4	0.95	3.2	6.5	9.8	11.5	127	127	127	127	127	23	6000	-
1.3	0.55	7.9	156	1.1	188.6	IE5	BS10-..S5E06MA4	0.75	2.6	5.3	7.9	9.5	156	156	156	156	156	23	6000	-
1.3	0.55	6.9	180	1	216.6	IE5	BS10-..S5E06MA4	0.65	2.3	4.6	6.9	8.3	180	180	180	180	180	23	6000	-
1.3	0.55	7.5	166	0.89	200	IE5	BS10Z-..S5E06MA4	0.75	2.5	5	7.5	9	166	166	166	166	166	24	6000	-
1.3	0.55	5.9	210	0.85	254	IE5	BS10Z-..S5E06MA4	0.55	1.9	3.9	5.9	7	210	210	210	210	210	24	6000	-
1.3	0.55	14.5	97	2.6	101.1	IE5	BS20-..S5E06MA4	1.4	4.9	9.8	14.5	17.5	97	97	97	97	97	34	7100	-
1.3	0.55	14	91	3	106.3	IE5	BS20-..S5E06MA4	1.4	4.7	9.4	14	16.5	91	91	91	91	91	34	7600	-
1.3	0.55	11.5	109	2.5	127.3	IE5	BS20-..S5E06MA4	1.1	3.9	7.8	11.5	14	109	109	109	109	109	34	8000	-
1.3	0.55	9.4	136	2	159.4	IE5	BS20-..S5E06MA4	0.9	3.1	6.2	9.4	11	136	136	136	136	136	34	8000	-
1.3	0.55	8.1	157	1.8	183	IE5	BS20-..S5E06MA4	0.8	2.7	5.4	8.1	9.8	157	157	157	157	157	34	8000	-
1.3	0.55	6.6	187	1.5	225.6	IE5	BS20-..S5E06MA4	0.65	2.2	4.4	6.6	7.9	187	187	187	187	187	34	8000	-
1.3	0.55	7.4	167	1.7	201.4	IE5	BS20Z-..S5E06MA4	0.7	2.4	4.9	7.4	8.9	167	167	167	167	167	35	8000	-
1.3	0.55	5.8	210	1.4	257.8	IE5	BS20Z-..S5E06MA4	0.55	1.9	3.8	5.8	6.9	210	210	210	210	210	35	8000	-
1.3	0.55	4.9	245	1.2	300.1	IE5	BS20Z-..S5E06MA4	0.49	1.6	3.3	4.9	5.9	245	245	245	245	245	35	8000	-
1.3	0.55	4.1	290	1.1	359.9	IE5	BS20Z-..S5E06MA4	0.41	1.3	2.7	4.1	5	290	290	290	290	290	35	8000	-
1.3	0.55	3.4	340	0.97	430.8	IE5	BS20Z-..S5E06MA4	0.34	1.1	2.3	3.4	4.1	340	340	340	340	340	35	8000	-
1.3	0.55	2.7	385	0.95	539.7	IE5	BS20Z-..S5E06MA4	0.27	0.9	1.8	2.7	3.3	385	385	385	385	385	35	8000	-
1.3	0.55	6.9	185	2.8	216.4	IE5	BS30-..S5E06MA4	0.65	2.3	4.6	6.9	8.3	185	185	185	185	185	51	10000	-
1.3	0.55	7.1	181	2.5	211.1	IE5	BS30Z-..S5E06MA4	0.7	2.3	4.7	7.1	8.5	181	181	181	181	181	54	10000	-
1.3	0.55	5.7	220	2.5	261.6	IE5	BS30Z-..S5E06MA4	0.55	1.9	3.8	5.7	6.8	220	220	220	220	220	54	10000	-
1.3	0.55	4.8	255	2.2	306.6	IE5	BS30Z-..S5E06MA4	0.48	1.6	3.2	4.8	5.8	255	255	255	255	255	54	10000	-
1.3	0.55	4.1	345	1.1	359.6	IE5	BS30Z-..S5E06MA4	0.41	1.3	2.7	4.1	5	345	345	345	345	345	54	10000	-
1.3	0.55	3.8	325	1.8	390.2	IE5	BS30Z-..S5E06MA4	0.38	1.2	2.5	3.8	4.6	325	325	325	325	325	54	10000	-
1.3	0.55	3.2	380	1.6	457.3	IE5	BS30Z-..S5E06MA4	0.32	1	2.1	3.2	3.9	380	380	380	380	380	54	10000	-
1.3	0.55	2.7	445	1.3	539.3	IE5	BS30Z-..S5E06MA4	0.27	0.9	1.8	2.7	3.3	445	445	445	445	445	54	10000	-
1.3	0.55	2.3	500	1.1	651	IE5	BS30Z-..S5E06MA4	0.23	0.75	1.5	2.3	2.7	500	500	500	500	500	54	10000	-
1.3	0.55	5.2	275	2.6	287.7	IE5	BS40Z-..S5E06MA4	0.5	1.7	3.4	5.2	6.2	275	275	275	275	275	68	15000	-
1.3	0.55	3.3	365	2.7	446.8	IE5	BS40Z-..S5E06MA4	0.33	1.1	2.2	3.3	4	365	365	365	365	365	68	15000	-
1.3	0.55	2.8	425	2.6	520.8	IE5	BS40Z-..S5E06MA4	0.28	0.95	1.9	2.8	3.4	425	425	425	425	425	68	15000	-
1.3	0.55	2.4	485	1.9	612.1	IE5	BS40Z-..S5E06MA4	0.24	0.8	1.6	2.4	2.9	485	485	485	485	485	68	15000	-
1.3	0.55	2	570	1.3	736.5	IE5	BS40Z-..S5E06MA4	0.2	0.65	1.3	2	2.4	570	570	570	570	570	68	15000	-
1.3	0.55	1.6	690	1.1	908.2	IE5	BS40Z-..S5E06MA4	0.16	0.55	1.1	1.6	1.9	690	690	690	690	690	68	15000	-
1.3	0.55	1.5	870	1	965.5	IE5	BS40G10-..S5E06MA4	0.15	0.5	1	1.5	1.8	870	870	870	870	870	73	15000	-
1.3	0.55	1.2	1070	0.82	1180	IE5	BS40G10-..S5E06MA4	0.12	0.42	0.8	1.2	1.5	1070	1070	1070	1070	1070	73	15000	-

MN = 1.6 Nm (PN = 0.67 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.6	0.67	325	6.4	2.3	4.6	IE4	BS02-..S4E06MA4	32.5	108	215	325	390	6.4	6.4	6.4	6.4	6.4	6.8	1000	-
1.6	0.67	275	7.6	2.6	5.4	IE4	BS02-..S4E06MA4	27.5	92	185	275	330	7.6	7.6	7.6	7.6	7.6	6.8	1000	-
1.6	0.67	220	9.2	2.7	6.75	IE4	BS02-..S4E06MA4	22	74	148	220	265	9.2	9.2	9.2	9.2	9.2	6.8	1000	-
1.6	0.67	181	11	2.3	8.25	IE4	BS02-..S4E06MA4	18	60	121	181	215	11	11	11	11	11	6.8	1100	-
1.6	0.67	140	13.9	1.8	10.67	IE4	BS02-..S4E06MA4	14	46.5	93	140	168	13.9	13.9	13.9	13.9	13.9	6.8	1250	-
1.6	0.67	111	16.8	1.5	13.5	IE4	BS02-..S4E06MA4	11	37	74	111	133	16.8	16.8	16.8	16.8	16.8	6.8	1250	-
1.6	0.67	83	21	1.2	18	IE4	BS02-..S4E06MA4	8.3	27.5	55	83	100	21	21	21	21	21	6.8	1250	-
1.6	0.67	68	24.5	1	22	IE4	BS02-..S4E06MA4	6.8	22.5	45	68	81	24.5	24.5	24.5	24.5	24.5	6.8	1250	-
1.6	0.67	55	27	0.92	27	IE4	BS02-..S4E06MA4	5.5	18.5	37	55	66	27	27	27	27	27	6.8	1250	-
1.6	0.67	78	23	2.4	19	IE4	BS03-..S4E06MA4	7.8	26	52	78	94	23	23	23	23	23	6.9	1950	-
1.6	0.67	60																		

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 1.6 Nm (PN = 0.67 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
1.6	0.67	36	47.5	1.8	41.29	IE4	BS06-../S4E06MA4	3.6	12	24	36	43.5	47.5	47.5	47.5	47.5	47.5	12	3500	-
1.6	0.67	30.5	55	1.6	48.6	IE4	BS06-../S4E06MA4	3	10	20.5	30.5	37	55	55	55	55	55	12	3500	-
1.6	0.67	25.5	66	1.4	58.15	IE4	BS06-../S4E06MA4	2.5	8.5	17	25.5	30.5	66	66	66	66	66	12	3500	-
1.6	0.67	23	69	1.1	64.06	IE4	BS06-../S4E06MA4	2.3	7.8	15.5	23	28	69	69	69	69	69	12	3500	-
1.6	0.67	21	80	1.2	71.18	IE4	BS06-../S4E06MA4	2.1	7	14	21	25	80	80	80	80	80	12	3500	-
1.6	0.67	19	82	1	77	IE4	BS06-../S4E06MA4	1.9	6.4	12.5	19	23	82	82	82	82	82	12	3500	-
1.6	0.67	16.5	100	0.97	90	IE4	BS06-../S4E06MA4	1.6	5.5	11	16.5	20	100	100	100	100	100	12	3500	-
1.6	0.67	14.5	113	0.88	103.1	IE4	BS06-../S4E06MA4	1.4	4.8	9.6	14.5	17	113	113	113	113	113	12	3500	-
1.6	0.67	37.5	47.5	2.9	39.96	IE4	BS10-../S4E06MA4	3.7	12.5	25	37.5	45	47.5	47.5	47.5	47.5	47.5	23	3800	-
1.6	0.67	31.5	57	2.5	47.59	IE4	BS10-../S4E06MA4	3.1	10.5	21	31.5	37.5	57	57	57	57	57	23	4050	-
1.6	0.67	26	67	2.2	57.12	IE4	BS10-../S4E06MA4	2.6	8.7	17.5	26	31.5	67	67	67	67	67	23	4350	-
1.6	0.67	24.5	65	2.3	60.74	IE4	BS10-../S4E06MA4	2.4	8.2	16	24.5	29.5	65	65	65	65	65	23	4550	-
1.6	0.67	20.5	85	1.9	71.96	IE4	BS10-../S4E06MA4	2	6.9	13.5	20.5	25	85	85	85	85	85	23	5000	-
1.6	0.67	17.5	99	1.5	84.36	IE4	BS10-../S4E06MA4	1.7	5.9	11.5	17.5	21	99	99	99	99	99	23	5300	-
1.6	0.67	14.5	105	1.5	103.4	IE4	BS10-../S4E06MA4	1.4	4.8	9.6	14.5	17	105	105	105	105	105	23	5600	-
1.6	0.67	12.5	141	0.85	119.6	IE4	BS10-../S4E06MA4	1.2	4.1	8.3	12.5	15	141	141	141	141	141	23	6000	-
1.6	0.67	11.5	133	1.2	130.3	IE4	BS10-../S4E06MA4	1.1	3.8	7.6	11.5	13.5	133	133	133	133	133	23	6000	-
1.6	0.67	9.8	156	1.1	152.7	IE4	BS10-../S4E06MA4	0.95	3.2	6.5	9.8	11.5	156	156	156	156	156	23	6000	-
1.6	0.67	7.9	193	0.88	188.6	IE4	BS10-../S4E06MA4	0.75	2.6	5.3	7.9	9.5	193	193	193	193	193	23	6000	-
1.6	0.67	6.9	220	0.81	216.6	IE4	BS10-../S4E06MA4	0.65	2.3	4.6	6.9	8.3	220	220	220	220	220	23	6000	-
1.6	0.67	16.5	93	2.9	88.67	IE4	BS20-../S4E06MA4	1.6	5.6	11	16.5	20	93	93	93	93	93	34	7000	-
1.6	0.67	14.5	119	2.1	101.1	IE4	BS20-../S4E06MA4	1.4	4.9	9.8	14.5	17.5	119	119	119	119	119	34	7100	-
1.6	0.67	14	112	2.4	106.3	IE4	BS20-../S4E06MA4	1.4	4.7	9.4	14	16.5	112	112	112	112	112	34	7600	-
1.6	0.67	11.5	134	2	127.3	IE4	BS20-../S4E06MA4	1.1	3.9	7.8	11.5	14	134	134	134	134	134	34	8000	-
1.6	0.67	9.4	168	1.6	159.4	IE4	BS20-../S4E06MA4	0.9	3.1	6.2	9.4	11	168	168	168	168	168	34	8000	-
1.6	0.67	8.1	193	1.4	183	IE4	BS20-../S4E06MA4	0.8	2.7	5.4	8.1	9.8	193	193	193	193	193	34	8000	-
1.6	0.67	6.6	230	1.3	225.6	IE4	BS20-../S4E06MA4	0.65	2.2	4.4	6.6	7.9	230	230	230	230	230	34	8000	-
1.6	0.67	7.4	205	1.4	201.4	IE4	BS20Z-../S4E06MA4	0.7	2.4	4.9	7.4	8.9	205	205	205	205	205	35	8000	-
1.6	0.67	5.8	260	1.1	257.8	IE4	BS20Z-../S4E06MA4	0.55	1.9	3.8	5.8	6.9	260	260	260	260	260	35	8000	-
1.6	0.67	4.9	300	0.99	300.1	IE4	BS20Z-../S4E06MA4	0.49	1.6	3.3	4.9	5.9	300	300	300	300	300	35	8000	-
1.6	0.67	4.1	355	0.9	359.9	IE4	BS20Z-../S4E06MA4	0.41	1.3	2.7	4.1	5	355	355	355	355	355	35	8000	-
1.6	0.67	8	197	2.7	186.7	IE4	BS30-../S4E06MA4	0.8	2.6	5.3	8	9.6	197	197	197	197	197	51	10000	-
1.6	0.67	6.9	225	2.3	216.4	IE4	BS30-../S4E06MA4	0.65	2.3	4.6	6.9	8.3	225	225	225	225	225	51	10000	-
1.6	0.67	7.1	220	2	211.1	IE4	BS30Z-../S4E06MA4	0.7	2.3	4.7	7.1	8.5	220	220	220	220	220	54	10000	-
1.6	0.67	5.7	275	2	261.6	IE4	BS30Z-../S4E06MA4	0.55	1.9	3.8	5.7	6.8	275	275	275	275	275	54	10000	-
1.6	0.67	4.8	315	1.8	306.6	IE4	BS30Z-../S4E06MA4	0.48	1.6	3.2	4.8	5.8	315	315	315	315	315	54	10000	-
1.6	0.67	4.1	425	0.93	359.6	IE4	BS30Z-../S4E06MA4	0.41	1.3	2.7	4.1	5	425	425	425	425	425	54	10000	-
1.6	0.67	3.8	405	1.5	390.2	IE4	BS30Z-../S4E06MA4	0.38	1.2	2.5	3.8	4.6	405	405	405	405	405	54	10000	-
1.6	0.67	3.2	465	1.3	457.3	IE4	BS30Z-../S4E06MA4	0.32	1	2.1	3.2	3.9	465	465	465	465	465	54	10000	-
1.6	0.67	2.7	550	1.1	539.3	IE4	BS30Z-../S4E06MA4	0.27	0.9	1.8	2.7	3.3	550	550	550	550	550	54	10000	-
1.6	0.67	2.3	620	0.91	651	IE4	BS30Z-../S4E06MA4	0.23	0.75	1.5	2.3	2.7	620	620	620	620	620	54	10000	-
1.6	0.67	7.6	230	3	197.1	IE4	BS40Z-../S4E06MA4	0.75	2.5	5	7.6	9.1	230	230	230	230	230	68	15000	-
1.6	0.67	5.2	340	2.1	287.7	IE4	BS40Z-../S4E06MA4	0.5	1.7	3.4	5.2	6.2	340	340	340	340	340	68	15000	-
1.6	0.67	4.2	355	3	356.8	IE4	BS40Z-../S4E06MA4	0.42	1.4	2.8	4.2	5	355	355	355	355	355	68	15000	-
1.6	0.67	3.3	450	2.2	446.8	IE4	BS40Z-../S4E06MA4	0.33	1.1	2.2	3.3	4	450	450	450	450	450	68	15000	-
1.6	0.67	2.8	520	2.1	520.8	IE4	BS40Z-../S4E06MA4	0.28	0.95	1.9	2.8	3.4	520	520	520	520	520	68	15000	-
1.6	0.67	2.4	590	1.5	612.1	IE4	BS40Z-../S4E06MA4	0.24	0.8	1.6	2.4	2.9	590	590	590	590	590	68	15000	-
1.6	0.67	2	700	1.1	736.5	IE4	BS40Z-../S4E06MA4	0.2	0.65	1.3	2	2.4	700	700	700	700	700	68	15000	-
1.6	0.67	1.6	850	0.86	908.2	IE4	BS40Z-../S4E06MA4	0.16	0.55	1.1	1.6	1.9	850	850	850	850	850	68	15000	-
1.6	0.67	1.5	1080	0.81	965.5	IE4	BS40G10-../S4E06MA4	0.15	0.5	1	1.5	1.8	1080	1080	1080	1080	1080	73	15000	-

MN = 2.4 Nm (PN = 0.37 kW)




M _N [Nm]	P _N [k
------------------------	----------------------

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.37 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	1500	1800	150	500	1000	1500	1800				
2.4	0.37	60	41	1.3	25	IE4	BS03-..S4E06LA4	6	20	40	60	72	41	41	41	41	41	6.9	1950	-	
2.4	0.37	45	48	1.1	33	IE4	BS03-..S4E06LA4	4.5	15	30	45	54	48	48	48	48	48	6.9	1950	-	
2.4	0.37	45	48	1.1	33	IE1	BS03-..SSE06MA4	4.5	15	30	45	54	36	40	44	48	48	6.9	1950	-	
2.4	0.37	38	59	0.92	39	IE4	BS03-..S4E06LA4	3.8	12.5	25.5	38	46	59	59	59	59	59	6.9	1950	-	
2.4	0.37	38	59	0.92	39	IE1	BS03-..SSE06MA4	3.8	12.5	25.5	38	46	44.5	49.5	54	59	59	6.9	1950	-	
2.4	0.37	240	11.4	2.3	6.13	IE4	BS04-..S4E06LA4	24	81	163	240	290	11.4	11.4	11.4	11.4	11.4	7.3	1300	-	
2.4	0.37	240	11.4	2.3	6.13	IE1	BS04-..SSE06MA4	24	81	163	240	290	8.6	9.5	10.5	11.4	11.4	7.3	1300	-	
2.4	0.37	167	16.7	1.8	8.93	IE1	BS04-..SSE06MA4	16.5	55	111	167	200	12.5	13.9	15.3	16.7	16.7	7.3	1500	-	
2.4	0.37	167	16.7	1.8	8.93	IE4	BS04-..S4E06LA4	16.5	55	111	167	200	16.7	16.7	16.7	16.7	16.7	7.3	1500	-	
2.4	0.37	139	20	1.6	10.73	IE1	BS04-..SSE06MA4	13.5	46.5	93	139	167	15	16.7	18.4	20	20	7.3	1600	-	
2.4	0.37	139	20	1.6	10.73	IE4	BS04-..S4E06LA4	13.5	46.5	93	139	167	20	20	20	20	20	7.3	1600	-	
2.4	0.37	114	24	1.4	13.09	IE1	BS04-..SSE06MA4	11	38	76	114	137	18.1	20	22	24	24	7.3	1760	-	
2.4	0.37	114	24	1.4	13.09	IE4	BS04-..S4E06LA4	11	38	76	114	137	24	24	24	24	24	7.3	1760	-	
2.4	0.37	91	30	1.2	16.31	IE4	BS04-..S4E06LA4	9.1	30.5	61	91	110	30	30	30	30	30	7.3	1970	-	
2.4	0.37	91	30	1.2	16.31	IE1	BS04-..SSE06MA4	9.1	30.5	61	91	110	22.5	25	27.5	30	30	7.3	1970	-	
2.4	0.37	83	30.5	1.1	18	IE4	BS04-..S4E06LA4	8.3	27.5	55	83	100	30.5	30.5	30.5	30.5	30.5	7.3	1950	-	
2.4	0.37	83	30.5	1.1	18	IE1	BS04-..SSE06MA4	8.3	27.5	55	83	100	23	25.5	28	30.5	30.5	7.3	1950	-	
2.4	0.37	71	38	0.97	20.96	IE4	BS04-..S4E06LA4	7.1	23.5	47.5	71	85	38	38	38	38	38	7.3	2100	-	
2.4	0.37	71	38	0.97	20.96	IE1	BS04-..SSE06MA4	7.1	23.5	47.5	71	85	28.5	31.5	35	38	38	7.3	2100	-	
2.4	0.37	57	44.5	0.85	26.21	IE4	BS04-..S4E06LA4	5.7	19	38	57	68	44.5	44.5	44.5	44.5	44.5	7.3	2250	-	
2.4	0.37	57	44.5	0.85	26.21	IE1	BS04-..SSE06MA4	5.7	19	38	57	68	33	37	40.5	44.5	44.5	7.3	2250	-	
2.4	0.37	106	27	2.5	14.07	IE4	BS06-..S4E06LA4	10.5	35.5	71	106	127	27	27	27	27	27	12	2200	-	
2.4	0.37	106	27	2.5	14.07	IE1	BS06-..SSE06MA4	10.5	35.5	71	106	127	20.5	22.5	25	27	27	12	2200	-	
2.4	0.37	90	31.5	2.3	16.56	IE4	BS06-..S4E06LA4	9	30	60	90	108	31.5	31.5	31.5	31.5	31.5	12	2400	-	
2.4	0.37	90	31.5	2.3	16.56	IE1	BS06-..SSE06MA4	9	30	60	90	108	23.5	26	29	31.5	31.5	12	2400	-	
2.4	0.37	75	38	2	19.82	IE4	BS06-..S4E06LA4	7.5	25	50	75	90	38	38	38	38	38	12	2500	-	
2.4	0.37	75	38	2	19.82	IE1	BS06-..SSE06MA4	7.5	25	50	75	90	28.5	31.5	34.5	38	38	12	2500	-	
2.4	0.37	61	46.5	1.7	24.25	IE1	BS06-..SSE06MA4	6.1	20.5	41	61	74	34.5	38.5	42.5	46.5	46.5	12	2600	-	
2.4	0.37	61	46.5	1.7	24.25	IE4	BS06-..S4E06LA4	6.1	20.5	41	61	74	46.5	46.5	46.5	46.5	46.5	12	2600	-	
2.4	0.37	57	45.5	1.7	26.21	IE4	BS06-..S4E06LA4	5.7	19	38	57	68	45.5	45.5	45.5	45.5	45.5	12	3000	-	
2.4	0.37	57	45.5	1.7	26.21	IE1	BS06-..SSE06MA4	5.7	19	38	57	68	34	38	42	45.5	45.5	12	3000	-	
2.4	0.37	47.5	55	1.4	31.5	IE1	BS06-..SSE06MA4	4.7	15.5	31.5	47.5	57	41	45.5	50	55	55	55	12	3200	-
2.4	0.37	47.5	55	1.4	31.5	IE4	BS06-..S4E06LA4	4.7	15.5	31.5	47.5	57	55	55	55	55	12	3200	-		
2.4	0.37	36	71	1.2	41.29	IE4	BS06-..S4E06LA4	3.6	12	24	36	43.5	71	71	71	71	71	12	3500	-	
2.4	0.37	36	71	1.2	41.29	IE1	BS06-..SSE06MA4	3.6	12	24	36	43.5	53	59	65	71	71	12	3500	-	
2.4	0.37	30.5	83	1	48.6	IE1	BS06-..SSE06MA4	3	10	20.5	30.5	37	62	69	76	83	83	12	3500	-	
2.4	0.37	30.5	83	1	48.6	IE4	BS06-..S4E06LA4	3	10	20.5	30.5	37	83	83	83	83	83	12	3500	-	
2.4	0.37	25.5	99	0.92	58.15	IE4	BS06-..S4E06LA4	2.5	8.5	17	25.5	30.5	74	82	90	99	99	12	3500	-	
2.4	0.37	69	41	3	21.61	IE4	BS10-..S4E06LA4	6.9	23	46	69	83	41	41	41	41	41	23	3000	-	
2.4	0.37	69	41	3	21.61	IE1	BS10-..SSE06MA4	6.9	23	46	69	83	31	34.5	38	41	41	23	3000	-	
2.4	0.37	56	49	2.6	26.42	IE4	BS10-..S4E06LA4	5.6	18.5	37.5	56	68	49	49	49	49	49	23	3250	-	
2.4	0.37	56	49	2.6	26.42	IE1	BS10-..SSE06MA4	5.6	18.5	37.5	56	68	37	41	45	49	49	23	3250	-	
2.4	0.37	44.5	61	2.2	33.55	IE4	BS10-..S4E06LA4	4.4	14.5	29.5	44.5	53	61	61	61	61	23	3550	-		
2.4	0.37	44.5	61	2.2	33.55	IE1	BS10-..SSE06MA4	4.4	14.5	29.5	44.5	53	45.5	50	56	61	61	23	3550	-	
2.4	0.37	37.5	71	1.9	39.96	IE4	BS10-..S4E06LA4	3.7	12.5	25	37.5	45	71	71	71	71	71	23	3800	-	
2.4	0.37	37.5	71	1.9	39.96	IE1	BS10-..SSE06MA4	3.7	12.5	25	37.5	45	53	59	65	71	71	23	3800	-	
2.4	0.37	31.5	85	1.7	47.59	IE4	BS10-..S4E06LA4	3.1	10.5	21	31.5	37.5	64	71	78	85	85	23	4050	-	
2.4	0.37	31.5	85	1.7	47.59	IE1	BS10-..SSE06MA4	3.1	10.5	21	31.5	37.5	64	71	78	85	85	23	4050	-	
2.4	0.37	26	101	1.5	57.12	IE4	BS10-..S4E06LA4	2.6	8.7	17.5	26	31.5	101	101	101	101	101	23	4350	-	
2.4	0.37	26	101	1.5	57.12	IE1	BS10-..SSE06MA4	2.6	8.7	17.5	26	31.5	76	84	92	101	101	23	4350	-	
2.4	0.37	24.5	97	1.5	60.74	IE4	BS10-..S4E06LA4	2.4	8.2	16	24.5	29.5	97	97	97	97	97	23	4550	-	
2.4	0.37	24.5	97	1.5	60.74	IE1	BS10-..SSE06MA4	2.4	8.2	16	24.5	29.5	73	81	89	97	97	23	4550	-	
2.4	0.37	20.5	127	1.3	71.96	IE4	BS10-..SSE06MA4	2	6.9	13.5	20.5	25	95	106	117	127	127	23	5000	-	
2.4	0.37	20.5	127	1.3	71.96	IE1	BS10-..S4E06LA4	2	6.9	13.5	20.5	25	127	127	127	127	127	23	5000	-	
2.4	0.37	17.5	149	1	84.36	IE4	BS10-..S4E06LA4	1.7	5.9	11.5	17.5	21	149	149	149	149	149	23	5300	-	
2.4	0.37	17.5	149	1	84.36	IE1	BS10-..SSE06MA4	1.7	5.9	11.5	17.5	21	112</td								

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.37 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.4	0.37	6.6	345	0.84	225.6	IE4	BS20-..S4E06LA4	0.65	2.2	4.4	6.6	7.9	345	345	345	345	345	34	8000	-
2.4	0.37	6.6	345	0.84	225.6	IE1	BS20-..SSE06MA4	0.65	2.2	4.4	6.6	7.9	255	285	315	345	345	34	8000	-
2.4	0.37	7.4	305	0.91	201.4	IE4	BS20Z-..S4E06LA4	0.7	2.4	4.9	7.4	8.9	305	305	305	305	305	35	8000	-
2.4	0.37	7.4	305	0.91	201.4	IE1	BS20Z-..SSE06MA4	0.7	2.4	4.9	7.4	8.9	230	255	280	305	305	35	8000	-
2.4	0.37	17.5	154	2.6	83.48	IE4	BS30-..S4E06LA4	1.7	5.9	11.5	17.5	21.5	154	154	154	154	154	51	6800	-
2.4	0.37	17.5	154	2.6	83.48	IE1	BS30-..SSE06MA4	1.7	5.9	11.5	17.5	21.5	115	128	141	154	154	51	6800	-
2.4	0.37	14	173	2.9	106.2	IE4	BS30-..S4E06LA4	1.4	4.7	9.4	14	16.5	173	173	173	173	173	51	8200	-
2.4	0.37	14	173	2.9	106.2	IE1	BS30-..SSE06MA4	1.4	4.7	9.4	14	16.5	129	144	158	173	173	51	8200	-
2.4	0.37	11.5	200	2.5	125.2	IE4	BS30-..S4E06LA4	1.1	3.9	7.9	11.5	14	200	200	200	200	200	51	8700	-
2.4	0.37	11.5	200	2.5	125.2	IE1	BS30-..SSE06MA4	1.1	3.9	7.9	11.5	14	153	170	187	200	200	51	8700	-
2.4	0.37	9.9	240	2.2	151.1	IE4	BS30-..S4E06LA4	0.95	3.3	6.6	9.9	11.5	240	240	240	240	240	51	9500	-
2.4	0.37	9.9	240	2.2	151.1	IE1	BS30-..SSE06MA4	0.95	3.3	6.6	9.9	11.5	182	200	220	240	240	51	9500	-
2.4	0.37	8	295	1.8	186.7	IE4	BS30-..S4E06LA4	0.8	2.6	5.3	8	9.6	295	295	295	295	295	51	10000	-
2.4	0.37	8	295	1.8	186.7	IE1	BS30-..SSE06MA4	0.8	2.6	5.3	8	9.6	220	245	270	295	295	51	10000	-
2.4	0.37	6.9	340	1.5	216.4	IE4	BS30-..S4E06LA4	0.65	2.3	4.6	6.9	8.3	340	340	340	340	340	51	10000	-
2.4	0.37	6.9	340	1.5	216.4	IE1	BS30-..SSE06MA4	0.65	2.3	4.6	6.9	8.3	255	285	310	340	340	51	10000	-
2.4	0.37	7.1	330	1.3	211.1	IE4	BS30Z-..S4E06LA4	0.7	2.3	4.7	7.1	8.5	330	330	330	330	330	54	10000	-
2.4	0.37	7.1	330	1.3	211.1	IE1	BS30Z-..SSE06MA4	0.7	2.3	4.7	7.1	8.5	250	275	305	330	330	54	10000	-
2.4	0.37	5.7	410	1.4	261.6	IE1	BS30Z-..SSE06MA4	0.55	1.9	3.8	5.7	6.8	310	345	375	410	410	54	10000	-
2.4	0.37	5.7	410	1.4	261.6	IE4	BS30Z-..S4E06LA4	0.55	1.9	3.8	5.7	6.8	410	410	410	410	410	54	10000	-
2.4	0.37	4.8	475	1.2	306.6	IE4	BS30Z-..S4E06LA4	0.48	1.6	3.2	4.8	5.8	475	475	475	475	475	54	10000	-
2.4	0.37	4.8	475	1.2	306.6	IE1	BS30Z-..SSE06MA4	0.48	1.6	3.2	4.8	5.8	355	395	435	475	475	54	10000	-
2.4	0.37	3.8	600	0.97	390.2	IE1	BS30Z-..SSE06MA4	0.38	1.2	2.5	3.8	4.6	455	500	550	600	600	54	10000	-
2.4	0.37	3.8	600	0.97	390.2	IE4	BS30Z-..S4E06LA4	0.38	1.2	2.5	3.8	4.6	600	600	600	600	600	54	10000	-
2.4	0.37	3.2	700	0.85	457.3	IE4	BS30Z-..S4E06LA4	0.32	1	2.1	3.2	3.9	700	700	700	700	700	54	10000	-
2.4	0.37	3.2	700	0.85	457.3	IE1	BS30Z-..SSE06MA4	0.32	1	2.1	3.2	3.9	520	580	640	700	700	54	10000	-
2.4	0.37	7.6	350	2	197.1	IE4	BS40Z-..S4E06LA4	0.75	2.5	5	7.6	9.1	350	350	350	350	350	68	15000	-
2.4	0.37	7.6	350	2	197.1	IE1	BS40Z-..SSE06MA4	0.75	2.5	5	7.6	9.1	260	290	320	350	350	68	15000	-
2.4	0.37	6	375	2.4	249.6	IE1	BS40Z-..SSE06MA4	0.6	2	4	6	7.2	280	310	345	375	375	68	15000	-
2.4	0.37	6	375	2.4	249.6	IE4	BS40Z-..S4E06LA4	0.6	2	4	6	7.2	375	375	375	375	375	68	15000	-
2.4	0.37	5.2	510	1.4	287.7	IE4	BS40Z-..S4E06LA4	0.5	1.7	3.4	5.2	6.2	510	510	510	510	510	68	15000	-
2.4	0.37	5.2	510	1.4	287.7	IE1	BS40Z-..SSE06MA4	0.5	1.7	3.4	5.2	6.2	380	425	465	510	510	68	15000	-
2.4	0.37	4.9	455	2.3	302.1	IE1	BS40Z-..SSE06MA4	0.49	1.6	3.3	4.9	5.9	340	380	415	455	455	68	15000	-
2.4	0.37	4.9	455	2.3	302.1	IE4	BS40Z-..S4E06LA4	0.49	1.6	3.3	4.9	5.9	455	455	455	455	455	68	15000	-
2.4	0.37	4.2	530	2	356.8	IE4	BS40Z-..S4E06LA4	0.42	1.4	2.8	4.2	5	530	530	530	530	530	68	15000	-
2.4	0.37	4.2	530	2	356.8	IE1	BS40Z-..SSE06MA4	0.42	1.4	2.8	4.2	5	400	445	490	530	530	68	15000	-
2.4	0.37	3.3	670	1.5	446.8	IE1	BS40Z-..SSE06MA4	0.33	1.1	2.2	3.3	4	500	560	610	670	670	68	15000	-
2.4	0.37	3.3	670	1.5	446.8	IE4	BS40Z-..S4E06LA4	0.33	1.1	2.2	3.3	4	670	670	670	670	670	68	15000	-
2.4	0.37	2.8	780	1.4	520.8	IE1	BS40Z-..SSE06MA4	0.28	0.95	1.9	2.8	3.4	590	650	720	780	780	68	15000	-
2.4	0.37	2.8	780	1.4	520.8	IE4	BS40Z-..S4E06LA4	0.28	0.95	1.9	2.8	3.4	780	780	780	780	780	68	15000	-
2.4	0.37	2.4	890	1	612.1	IE4	BS40Z-..S4E06LA4	0.24	0.8	1.6	2.4	2.9	890	890	890	890	890	68	15000	-
2.4	0.37	2.4	890	1	612.1	IE1	BS40Z-..SSE06MA4	0.24	0.8	1.6	2.4	2.9	670	740	820	890	890	68	15000	-

9

MN = 2.6 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	325	10.5	1.4	4.6	IE4	BS02-..S4E06LA4	32.5	108	215	325	390	10.1	10.5	10.5	10.5	10.5	6.8	1000	-
2.6	0.4	275	12.3	1.6	5.4	IE4	BS02-..S4E06LA4	27.5	92	185	275	330	11.8	12.3	12.3	12.3	12.3	6.8	1000	-
2.6	0.4	220	15	1.7	6.75	IE4	BS02-..S4E06LA4	22	74	148	220	265	14.5	15	15	15	15	6.8	1000	-
2.6	0.4	181	18	1.4	8.25	IE4	BS02-..S4E06LA4	18	60	121	181	215	17.3	18	18	18	18	6.8	1100	-
2.6	0.4	140	22.5	1.1	10.67	IE4	BS02-..S4E06LA4	14	46.5	93	140	168	21.5	22.5	22.5	22.5	22.5	6.8		

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 1500 \text{ 1/min}$

MN = 2.6 Nm (PN = 0.4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
2.6	0.4	36	77	1.1	41.29	IE4	BS06-../S4E06LA4	3.6	12	24	36	43.5	74	77	77	77	77	12	3500	-
2.6	0.4	30.5	90	0.97	48.6	IE4	BS06-../S4E06LA4	3	10	20.5	30.5	37	87	90	90	90	90	12	3500	-
2.6	0.4	25.5	107	0.85	58.15	IE4	BS06-../S4E06LA4	2.5	8.5	17	25.5	30.5	103	107	107	107	107	12	3500	-
2.6	0.4	69	44.5	2.8	21.61	IE4	BS10-../S4E06LA4	6.9	23	46	69	83	43	44.5	44.5	44.5	44.5	23	3000	-
2.6	0.4	56	53	2.4	26.42	IE4	BS10-../S4E06LA4	5.6	18.5	37.5	56	68	51	53	53	53	53	23	3250	-
2.6	0.4	44.5	66	2	33.55	IE4	BS10-../S4E06LA4	4.4	14.5	29.5	44.5	53	63	66	66	66	23	3550	-	
2.6	0.4	37.5	77	1.8	39.96	IE4	BS10-../S4E06LA4	3.7	12.5	25	37.5	45	74	77	77	77	77	23	3800	-
2.6	0.4	31.5	92	1.6	47.59	IE4	BS10-../S4E06LA4	3.1	10.5	21	31.5	37.5	89	92	92	92	92	23	4050	-
2.6	0.4	26	109	1.4	57.12	IE4	BS10-../S4E06LA4	2.6	8.7	17.5	26	31.5	105	109	109	109	109	23	4350	-
2.6	0.4	24.5	105	1.4	60.74	IE4	BS10-../S4E06LA4	2.4	8.2	16	24.5	29.5	101	105	105	105	105	23	4550	-
2.6	0.4	20.5	138	1.2	71.96	IE4	BS10-../S4E06LA4	2	6.9	13.5	20.5	25	133	138	138	138	138	23	5000	-
2.6	0.4	17.5	162	0.92	84.36	IE4	BS10-../S4E06LA4	1.7	5.9	11.5	17.5	21	156	162	162	162	162	23	5300	-
2.6	0.4	14.5	172	0.93	103.4	IE4	BS10-../S4E06LA4	1.4	4.8	9.6	14.5	17	165	172	172	172	172	23	5600	-
2.6	0.4	30.5	95	2.8	48.98	IE4	BS20-../S4E06LA4	3	10	20	30.5	36.5	91	95	95	95	95	34	5500	-
2.6	0.4	25.5	114	2.4	58.74	IE4	BS20-../S4E06LA4	2.5	8.5	17	25.5	30.5	110	114	114	114	114	34	5900	-
2.6	0.4	21	137	2.2	70.3	IE4	BS20-../S4E06LA4	2.1	7.1	14	21	25.5	131	137	137	137	137	34	6300	-
2.6	0.4	19.5	130	2.1	76.18	IE4	BS20-../S4E06LA4	1.9	6.5	13	19.5	23.5	125	130	130	130	130	34	6600	-
2.6	0.4	16.5	152	1.8	88.67	IE4	BS20-../S4E06LA4	1.6	5.6	11	16.5	20	146	152	152	152	152	34	7000	-
2.6	0.4	14.5	194	1.3	101.1	IE4	BS20-../S4E06LA4	1.4	4.9	9.8	14.5	17.5	187	194	194	194	194	34	7100	-
2.6	0.4	14	182	1.5	106.3	IE4	BS20-../S4E06LA4	1.4	4.7	9.4	14	16.5	175	182	182	182	182	34	7600	-
2.6	0.4	11.5	215	1.2	127.3	IE4	BS20-../S4E06LA4	1.1	3.9	7.8	11.5	14	210	215	215	215	215	34	8000	-
2.6	0.4	9.4	270	1	159.4	IE4	BS20-../S4E06LA4	0.9	3.1	6.2	9.4	11	260	270	270	270	270	34	8000	-
2.6	0.4	8.1	310	0.89	183	IE4	BS20-../S4E06LA4	0.8	2.7	5.4	8.1	9.8	300	310	310	310	310	34	8000	-
2.6	0.4	7.4	335	0.84	201.4	IE4	BS20Z-../S4E06LA4	0.7	2.4	4.9	7.4	8.9	320	335	335	335	335	35	8000	-
2.6	0.4	17.5	167	2.4	83.48	IE4	BS30-../S4E06LA4	1.7	5.9	11.5	17.5	21.5	160	167	167	167	167	51	6800	-
2.6	0.4	16.5	162	3	90.59	IE4	BS30-../S4E06LA4	1.6	5.5	11	16.5	19.5	156	162	162	162	162	51	7700	-
2.6	0.4	14	187	2.7	106.2	IE4	BS30-../S4E06LA4	1.4	4.7	9.4	14	16.5	180	187	187	187	187	51	8200	-
2.6	0.4	11.5	220	2.3	125.2	IE4	BS30-../S4E06LA4	1.1	3.9	7.9	11.5	14	210	220	220	220	220	51	8700	-
2.6	0.4	9.9	260	2.1	151.1	IE4	BS30-../S4E06LA4	0.95	3.3	6.6	9.9	11.5	250	260	260	260	260	51	9500	-
2.6	0.4	8	320	1.7	186.7	IE4	BS30-../S4E06LA4	0.8	2.6	5.3	8	9.6	305	320	320	320	320	51	10000	-
2.6	0.4	6.9	370	1.4	216.4	IE4	BS30-../S4E06LA4	0.65	2.3	4.6	6.9	8.3	355	370	370	370	370	51	10000	-
2.6	0.4	7.1	360	1.2	211.1	IE4	BS30Z-../S4E06LA4	0.7	2.3	4.7	7.1	8.5	345	360	360	360	360	54	10000	-
2.6	0.4	5.7	445	1.2	261.6	IE4	BS30Z-../S4E06LA4	0.55	1.9	3.8	5.7	6.8	430	445	445	445	445	54	10000	-
2.6	0.4	4.8	510	1.1	306.6	IE4	BS30Z-../S4E06LA4	0.48	1.6	3.2	4.8	5.8	495	510	510	510	510	54	10000	-
2.6	0.4	3.8	650	0.89	390.2	IE4	BS30Z-../S4E06LA4	0.38	1.2	2.5	3.8	4.6	630	650	650	650	650	54	10000	-
2.6	0.4	7.6	375	1.8	197.1	IE4	BS40Z-../S4E06LA4	0.75	2.5	5	7.6	9.1	360	375	375	375	375	68	15000	-
2.6	0.4	6	405	2.2	249.6	IE4	BS40Z-../S4E06LA4	0.6	2	4	6	7.2	390	405	405	405	405	68	15000	-
2.6	0.4	5.2	550	1.3	287.7	IE4	BS40Z-../S4E06LA4	0.5	1.7	3.4	5.2	6.2	530	550	550	550	550	68	15000	-
2.6	0.4	4.9	490	2.2	302.1	IE4	BS40Z-../S4E06LA4	0.49	1.6	3.3	4.9	5.9	475	490	490	490	490	68	15000	-
2.6	0.4	4.2	580	1.8	356.8	IE4	BS40Z-../S4E06LA4	0.42	1.4	2.8	4.2	5	560	580	580	580	580	68	15000	-
2.6	0.4	3.3	730	1.4	446.8	IE4	BS40Z-../S4E06LA4	0.33	1.1	2.2	3.3	4	700	730	730	730	730	68	15000	-
2.6	0.4	2.8	850	1.3	520.8	IE4	BS40Z-../S4E06LA4	0.28	0.95	1.9	2.8	3.4	820	850	850	850	850	68	15000	-
2.6	0.4	2.4	970	0.93	612.1	IE4	BS40Z-../S4E06LA4	0.24	0.8	1.6	2.4	2.9	930	970	970	970	970	68	15000	-

MN = 3.5 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
3.5	0.55	325	14.1	1.1	4.6	IE1	BS02-../SSE06LA4	32.5	108	215	325	390	10.1	11.7	14.1	14.1	14.1	6.8	1000	-
3.5	0.55	275	16.6	1.2	5.4	IE1	BS02-../SSE06LA4	27.5	92	185	275	330	11.8	13.7	16.6	16.6	16.6	6.8	1000	-
3.5	0.55	220	20	1.2	6.75	IE1	BS02-../SSE06LA4	22	74	148	220	265	14.5	16.8	20	20	20	6.8	1000	-
3.5	0.55	181	24	1	8.25	IE1	BS02-../SSE06LA4	18	60	121	181	215	17.3	20	24	24	24	6.8	1100	-
3.5	0.55	140	30.5</																	

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 3.5 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
3.5	0.55	69	60	2.1	21.61	IE1	BS10-..SSE06LA4	6.9	23	46	69	83	43	50	60	60	60	23	3000	-
3.5	0.55	56	72	1.8	26.42	IE1	BS10-..SSE06LA4	5.6	18.5	37.5	56	68	51	59	72	72	72	23	3250	-
3.5	0.55	44.5	89	1.5	33.55	IE1	BS10-..SSE06LA4	4.4	14.5	29.5	44.5	53	63	73	89	89	89	23	3550	-
3.5	0.55	37.5	104	1.3	39.96	IE1	BS10-..SSE06LA4	3.7	12.5	25	37.5	45	74	86	104	104	104	23	3800	-
3.5	0.55	31.5	124	1.2	47.59	IE1	BS10-..SSE06LA4	3.1	10.5	21	31.5	37.5	89	103	124	124	124	23	4050	-
3.5	0.55	26	147	1	57.12	IE1	BS10-..SSE06LA4	2.6	8.7	17.5	26	31.5	105	122	147	147	147	23	4350	-
3.5	0.55	24.5	142	1.1	60.74	IE1	BS10-..SSE06LA4	2.4	8.2	16	24.5	29.5	101	118	142	142	142	23	4550	-
3.5	0.55	20.5	186	0.86	71.96	IE1	BS10-..SSE06LA4	2	6.9	13.5	20.5	25	133	154	186	186	186	23	5000	-
3.5	0.55	45.5	88	3	32.87	IE1	BS20-..SSE06LA4	4.5	15	30	45.5	54	63	73	88	88	88	34	4750	-
3.5	0.55	35.5	111	2.4	42.08	IE1	BS20-..SSE06LA4	3.5	11.5	23.5	35.5	42.5	79	92	111	111	111	34	5200	-
3.5	0.55	30.5	128	2.1	48.98	IE1	BS20-..SSE06LA4	3	10	20	30.5	36.5	91	106	128	128	128	34	5500	-
3.5	0.55	29.5	118	2.3	50.44	IE1	BS20-..SSE06LA4	2.9	9.9	19.5	29.5	35.5	84	98	118	118	118	34	5700	-
3.5	0.55	25.5	154	1.8	58.74	IE1	BS20-..SSE06LA4	2.5	8.5	17	25.5	30.5	110	127	154	154	154	34	5900	-
3.5	0.55	21	184	1.6	70.3	IE1	BS20-..SSE06LA4	2.1	7.1	14	21	25.5	131	152	184	184	184	34	6300	-
3.5	0.55	19.5	175	1.5	76.18	IE1	BS20-..SSE06LA4	1.9	6.5	13	19.5	23.5	125	145	175	175	175	34	6600	-
3.5	0.55	16.5	200	1.3	88.67	IE1	BS20-..SSE06LA4	1.6	5.6	11	16.5	20	146	169	200	200	200	34	7000	-
3.5	0.55	14.5	260	0.95	101.1	IE1	BS20-..SSE06LA4	1.4	4.9	9.8	14.5	17.5	187	215	260	260	260	34	7100	-
3.5	0.55	14	245	1.1	106.3	IE1	BS20-..SSE06LA4	1.4	4.7	9.4	14	16.5	175	200	245	245	245	34	7600	-
3.5	0.55	11.5	290	0.92	127.3	IE1	BS20-..SSE06LA4	1.1	3.9	7.8	11.5	14	210	240	290	290	290	34	8000	-
3.5	0.55	25.5	158	2.9	58.64	IE1	BS30-..SSE06LA4	2.5	8.5	17	25.5	30.5	112	130	158	158	158	51	6900	-
3.5	0.55	21	174	2.8	71.17	IE1	BS30-..SSE06LA4	2.1	7	14	21	25	124	144	174	174	174	51	7000	-
3.5	0.55	17.5	220	1.8	83.48	IE1	BS30-..SSE06LA4	1.7	5.9	11.5	17.5	21.5	160	186	220	220	220	51	6800	-
3.5	0.55	16.5	215	2.2	90.59	IE1	BS30-..SSE06LA4	1.6	5.5	11	16.5	19.5	156	181	215	215	215	51	7700	-
3.5	0.55	11.5	295	1.7	125.2	IE1	BS30-..SSE06LA4	1.1	3.9	7.9	11.5	14	210	245	295	295	295	51	8700	-
3.5	0.55	9.9	350	1.5	151.1	IE1	BS30-..SSE06LA4	0.95	3.3	6.6	9.9	11.5	250	290	350	350	350	51	9500	-
3.5	0.55	8	430	1.3	186.7	IE1	BS30-..SSE06LA4	0.8	2.6	5.3	8	9.6	305	355	430	430	430	51	10000	-
3.5	0.55	6.9	495	1	216.4	IE1	BS30-..SSE06LA4	0.65	2.3	4.6	6.9	8.3	355	410	495	495	495	51	10000	-
3.5	0.55	7.1	485	0.91	211.1	IE1	BS30Z-..SSE06LA4	0.7	2.3	4.7	7.1	8.5	345	400	485	485	485	54	10000	-
3.5	0.55	5.7	600	0.93	261.6	IE1	BS30Z-..SSE06LA4	0.55	1.9	3.8	5.7	6.8	430	500	600	600	600	54	10000	-
3.5	0.55	4.8	690	0.83	306.6	IE1	BS30Z-..SSE06LA4	0.48	1.6	3.2	4.8	5.8	495	570	690	690	690	54	10000	-
3.5	0.55	7.6	510	1.4	197.1	IE1	BS40Z-..SSE06LA4	0.75	2.5	5	7.6	9.1	360	420	510	510	510	68	15000	-
3.5	0.55	6	550	1.6	249.6	IE1	BS40Z-..SSE06LA4	0.6	2	4	6	7.2	390	455	550	550	550	68	15000	-
3.5	0.55	5.2	740	0.95	287.7	IE1	BS40Z-..SSE06LA4	0.5	1.7	3.4	5.2	6.2	530	610	740	740	740	68	15000	-
3.5	0.55	4.9	660	1.6	302.1	IE1	BS40Z-..SSE06LA4	0.49	1.6	3.3	4.9	5.9	475	550	660	660	660	68	15000	-
3.5	0.55	4.2	780	1.4	356.8	IE1	BS40Z-..SSE06LA4	0.42	1.4	2.8	4.2	5	560	650	780	780	780	68	15000	-
3.5	0.55	3.3	980	1	446.8	IE1	BS40Z-..SSE06LA4	0.33	1.1	2.2	3.3	4	700	810	980	980	980	68	15000	-
3.5	0.55	2.8	1140	0.96	520.8	IE1	BS40Z-..SSE06LA4	0.28	0.95	1.9	2.8	3.4	820	950	1140	1140	1140	68	15000	-

9

MN = 5 Nm (PN = 0.78 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	325	20	2	4.6	IE4	BS03-..S4E08MA4	32.5	108	215	325	390	20	20	20	20	20	10	1070	-
5	0.78	250	26	1.7	6	IE4	BS03-..S4E08MA4	25	83	166	250	300	26	26	26	26	26	10	1170	-
5	0.78	187	34	1.4	8	IE4	BS03-..S4E08MA4	18.5	62	125	187	225	34	34	34	34	34	10	1320	-
5	0.78	150	42	1.2	10	IE4	BS03-..S4E08MA4	15	50	100	150	180	42	42	42	42	42	10	1450	-
5	0.78	111	52	1	13.5	IE4	BS03-..S4E08MA4	11	37	74	111	133	52	52	52	52	52	10	1600	-
5	0.78	220	27	2.1	6.67	IE4	BS06-..S4E08MA4	22	74	149	220	265	27	27	27	27	27	16	1550	-
5	0.78	167	36	1.7	8.93	IE4	BS06-..S4E08MA4	16.5	55	111	167	200	36	36	36	36	36	16	1710	-
5	0.78	139	43	1.5	10.73	IE4	BS06-..S4E08MA4	13.5	46.5	93	139	167	43	43	43	43	43	16	1850	-
5	0.78	106	56	1.2	14.07	IE4	BS06-..S4E08MA4	10.5	35.5	71	106	127	56	56	56	56	56	16	2200	-
5	0.78	90	66	1.1	16.56	IE4	BS06-..S4E08MA4	9	30	60	90	108	66	66	66	66	66	16	2400	-
5	0.78	76	71	0.98	19.58	IE4	BS06-..S4E08MA4	7.6	25.5	51	76	91	71	71						

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$


MN = 5 Nm (PN = 0.78 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
5	0.78	35.5	159	1.7	42.08	IE4	BS20-..S4E08MA4	3.5	11.5	23.5	35.5	42.5	159	159	159	159	159	37	5200	-
5	0.78	30.5	183	1.5	49.98	IE4	BS20-..S4E08MA4	3	10	20	30.5	36.5	183	183	183	183	183	37	5500	-
5	0.78	29.5	168	1.6	50.44	IE4	BS20-..S4E08MA4	2.9	9.9	19.5	29.5	35.5	168	168	168	168	168	37	5700	-
5	0.78	25.5	220	1.3	58.74	IE4	BS20-..S4E08MA4	2.5	8.5	17	25.5	30.5	220	220	220	220	220	37	5900	-
5	0.78	21	260	1.1	70.3	IE4	BS20-..S4E08MA4	2.1	7.1	14	21	25.5	260	260	260	260	260	37	6300	-
5	0.78	19.5	250	1.1	76.18	IE4	BS20-..S4E08MA4	1.9	6.5	13	19.5	23.5	250	250	250	250	250	37	6600	-
5	0.78	16.5	290	0.92	88.67	IE4	BS20-..S4E08MA4	1.6	5.6	11	16.5	20	290	290	290	290	290	37	7000	-
5	0.78	39.5	142	3	37.92	IE4	BS30-..S4E08MA4	3.9	13	26	39.5	47	142	142	142	142	142	55	5500	-
5	0.78	38	159	2.7	39.31	IE4	BS30-..S4E08MA4	3.8	12.5	25	38	45.5	159	159	159	159	159	55	5500	-
5	0.78	29.5	192	2.3	50.04	IE4	BS30-..S4E08MA4	2.9	9.9	19.5	29.5	35.5	192	192	192	192	192	55	5900	-
5	0.78	25.5	225	2	58.64	IE4	BS30-..S4E08MA4	2.5	8.5	17	25.5	30.5	225	225	225	225	225	55	6900	-
5	0.78	21	245	1.9	71.17	IE4	BS30-..S4E08MA4	2.1	7	14	21	25	245	245	245	245	245	55	7000	-
5	0.78	17.5	320	1.3	83.48	IE4	BS30-..S4E08MA4	1.7	5.9	11.5	17.5	21.5	320	320	320	320	320	55	6800	-
5	0.78	16.5	310	1.6	90.59	IE4	BS30-..S4E08MA4	1.6	5.5	11	16.5	19.5	310	310	310	310	310	55	7700	-
5	0.78	14	360	1.4	106.2	IE4	BS30-..S4E08MA4	1.4	4.7	9.4	14	16.5	360	360	360	360	360	55	8200	-
5	0.78	11.5	425	1.2	125.2	IE4	BS30-..S4E08MA4	1.1	3.9	7.9	11.5	14	425	425	425	425	425	55	8700	-
5	0.78	9.9	500	1.1	151.1	IE4	BS30-..S4E08MA4	0.95	3.3	6.6	9.9	11.5	500	500	500	500	500	55	9500	-
5	0.78	8	610	0.88	186.7	IE4	BS30-..S4E08MA4	0.8	2.6	5.3	8	9.6	610	610	610	610	610	55	10000	-
5	0.78	21.5	265	2.8	69.6	IE4	BS40-..S4E08MA4	2.1	7.1	14	21.5	25.5	265	265	265	265	265	68	11800	-
5	0.78	17	295	3	86.33	IE4	BS40-..S4E08MA4	1.7	5.7	11.5	17	20.5	295	295	295	295	295	68	12900	-
5	0.78	13.5	360	2.6	108.1	IE4	BS40-..S4E08MA4	1.3	4.6	9.2	13.5	16.5	360	360	360	360	360	68	14000	-
5	0.78	11.5	420	2.3	126	IE4	BS40-..S4E08MA4	1.1	3.9	7.9	11.5	14	420	420	420	420	420	68	14900	-
5	0.78	10	480	2	148.1	IE4	BS40-..S4E08MA4	1	3.3	6.7	10	12	480	480	480	480	480	68	15000	-
5	0.78	8.4	570	1.4	178.2	IE4	BS40-..S4E08MA4	0.8	2.8	5.6	8.4	10	570	570	570	570	570	68	15000	-
5	0.78	6.8	690	1.1	219.7	IE4	BS40-..S4E08MA4	0.65	2.2	4.5	6.8	8.1	690	690	690	690	690	68	15000	-
5	0.78	7.6	720	0.96	197.1	IE4	BS40Z-..S4E08MA4	0.75	2.5	5	7.6	9.1	720	720	720	720	720	71	15000	-
5	0.78	6	780	1.1	249.6	IE4	BS40Z-..S4E08MA4	0.6	2	4	6	7.2	780	780	780	780	780	71	15000	-
5	0.78	4.9	950	1.1	302.1	IE4	BS40Z-..S4E08MA4	0.49	1.6	3.3	4.9	5.9	950	950	950	950	950	71	15000	-
5	0.78	4.2	1120	0.96	356.8	IE4	BS40Z-..S4E08MA4	0.42	1.4	2.8	4.2	5	1120	1120	1120	1120	1120	71	15000	-

9


MN = 7 Nm (PN = 1.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	325	28	1.4	4.6	IE3	BS03-..SPE08LA4	32.5	108	215	325	390	26	28	28	28	28	12	1070	-
7	1.1	250	36.5	1.2	6	IE3	BS03-..SPE08LA4	25	83	166	250	300	34	36.5	36.5	36.5	36.5	12	1170	-
7	1.1	187	48	1	8	IE3	BS03-..SPE08LA4	18.5	62	125	187	225	44.5	48	48	48	48	12	1320	-
7	1.1	150	58	0.88	10	IE3	BS03-..SPE08LA4	15	50	100	150	180	54	58	58	58	58	12	1450	-
7	1.1	220	37.5	1.5	6.67	IE3	BS06-..SPE08LA4	22	74	149	220	265	35	37.5	37.5	37.5	37.5	17	1550	-
7	1.1	167	50	1.2	8.93	IE3	BS06-..SPE08LA4	16.5	55	111	167	200	47	50	50	50	50	17	1710	-
7	1.1	139	60	1.1	10.73	IE3	BS06-..SPE08LA4	13.5	46.5	93	139	167	56	60	60	60	60	17	1850	-
7	1.1	106	79	0.85	14.07	IE3	BS06-..SPE08LA4	10.5	35.5	71	106	127	74	79	79	79	79	17	2200	-
7	1.1	120	69	1.5	12.49	IE3	BS10-..SPE08LA4	12	40	80	120	144	64	69	69	69	69	28	2400	-
7	1.1	88	94	1.3	16.92	IE3	BS10-..SPE08LA4	8.8	29.5	59	88	106	87	94	94	94	94	28	2700	-
7	1.1	69	121	1	21.61	IE3	BS10-..SPE08LA4	6.9	23	46	69	83	112	121	121	121	121	28	3000	-
7	1.1	66	109	1.1	22.6	IE3	BS10-..SPE08LA4	6.6	22	44	66	79	101	109	109	109	109	28	3200	-
7	1.1	56	144	0.9	26.42	IE3	BS10-..SPE08LA4	5.6	18.5	37.5	56	68	133	144	144	144	144	28	3250	-
7	1.1	48.5	147	0.88	30.63	IE3	BS10-..SPE08LA4	4.8	16	32.5	48.5	58	137	147	147	147	147	28	3550	-
7	1.1	117	72	2.8	12.77	IE3	BS20-..SPE08LA4	11.5	39	78	117	140	67	72	72	72	72	39	3350	-
7	1.1	88	95	2.3	16.92	IE3	BS20-..SPE08LA4	8.8	29.5	59	88	106	89	95	95	95	95	39	3700	-
7	1.1	67	126	1.8	22.23	IE3	BS20-..SPE08LA4	6.7	22	44.5	67	80	117	126	126	126	126	39	4100	-
7	1.1	64	116	2	23.13	IE3	BS20-..SPE08LA4	6.4	21.5	43	64	77	108	116	116	116	116	39	4300	-
7	1.1	53	152	1.6	27.86	IE3	BS20-..SPE08LA4	5.3	17.5	35.5	53	64	141	152	152	152	152	39	4450	-
7	1.1	4																		

MN = 7 Nm (PN = 1.1 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
7	1.1	16.5	435	1.1	90.59	IE3	BS30-../SPE08LA4	1.6	5.5	11	16.5	19.5	405	435	435	435	435	56	7700	-
7	1.1	14	500	1	106.2	IE3	BS30-../SPE08LA4	1.4	4.7	9.4	14	16.5	465	500	500	500	500	56	8200	-
7	1.1	11.5	590	0.87	125.2	IE3	BS30-../SPE08LA4	1.1	3.9	7.9	11.5	14	550	590	590	590	590	56	8700	-
7	1.1	24.5	300	2.9	60.38	IE3	BS40-../SPE08LA4	2.4	8.2	16.5	24.5	29.5	275	300	300	300	300	69	11200	-
7	1.1	21.5	375	2	69.6	IE3	BS40-../SPE08LA4	2.1	7.1	14	21.5	25.5	345	375	375	375	375	69	11800	-
7	1.1	20.5	355	2.5	73.09	IE3	BS40-../SPE08LA4	2	6.8	13.5	20.5	24.5	330	355	355	355	355	69	12100	-
7	1.1	17	415	2.2	86.33	IE3	BS40-../SPE08LA4	1.7	5.7	11.5	17	20.5	385	415	415	415	415	69	12900	-
7	1.1	13.5	500	1.9	108.1	IE3	BS40-../SPE08LA4	1.3	4.6	9.2	13.5	16.5	470	500	500	500	500	69	14000	-
7	1.1	11.5	590	1.7	126	IE3	BS40-../SPE08LA4	1.1	3.9	7.9	11.5	14	540	590	590	590	590	69	14900	-
7	1.1	10	670	1.4	148.1	IE3	BS40-../SPE08LA4	1	3.3	6.7	10	12	620	670	670	670	670	69	15000	-
7	1.1	8.4	810	1	178.2	IE3	BS40-../SPE08LA4	0.8	2.8	5.6	8.4	10	750	810	810	810	810	69	15000	-
7	1.1	6.8	960	0.82	219.7	IE3	BS40-../SPE08LA4	0.65	2.2	4.5	6.8	8.1	890	960	960	960	960	69	15000	-
7	1.1	6	1100	0.82	249.6	IE3	BS40Z-../SPE08LA4	0.6	2	4	6	7.2	1020	1100	1100	1100	1100	73	15000	-
7	1.1	4.9	1330	0.8	302.1	IE3	BS40Z-../SPE08LA4	0.49	1.6	3.3	4.9	5.9	1230	1330	1330	1330	1330	73	15000	-


MN = 10 Nm (PN = 1.55 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	325	40	0.99	4.6	IE1	BS03-../SSE08LA4	32.5	108	215	325	390	26	32	40	40	40	12	1070	-
10	1.55	250	52	0.83	6	IE1	BS03-../SSE08LA4	25	83	166	250	300	34	42	52	52	52	12	1170	-
10	1.55	220	54	1	6.67	IE1	BS06-../SSE08LA4	22	74	149	220	265	35	43	54	54	54	17	1550	-
10	1.55	167	72	0.86	8.93	IE1	BS06-../SSE08LA4	16.5	55	111	167	200	47	57	72	72	72	17	1710	-
10	1.55	120	99	1.1	12.49	IE4	BS10-../S4E09SA4	12	40	80	120	144	84	99	99	99	99	32	2400	-
10	1.55	120	99	1.1	12.49	IE1	BS10-../SSE08LA4	12	40	80	120	144	64	79	99	99	99	28	2400	-
10	1.55	88	135	0.89	16.92	IE1	BS10-../SSE08LA4	8.8	29.5	59	88	106	87	108	135	135	135	28	2700	-
10	1.55	88	135	0.89	16.92	IE4	BS10-../S4E09SA4	8.8	29.5	59	88	106	115	135	135	135	32	2700	-	
10	1.55	117	103	1.9	12.77	IE4	BS20-../S4E09SA4	11.5	39	78	117	140	87	103	103	103	103	42	3350	-
10	1.55	117	103	1.9	12.77	IE1	BS20-../SSE08LA4	11.5	39	78	117	140	67	82	103	103	103	39	3350	-
10	1.55	88	137	1.6	16.92	IE4	BS20-../S4E09SA4	8.8	29.5	59	88	106	116	137	137	137	42	3700	-	
10	1.55	88	137	1.6	16.92	IE1	BS20-../SSE08LA4	8.8	29.5	59	88	106	89	109	137	137	137	39	3700	-
10	1.55	67	180	1.3	22.23	IE1	BS20-../SSE08LA4	6.7	22	44.5	67	80	117	144	180	180	180	39	4100	-
10	1.55	67	180	1.3	22.23	IE4	BS20-../S4E09SA4	6.7	22	44.5	67	80	153	180	180	180	180	42	4100	-
10	1.55	64	166	1.4	23.13	IE1	BS20-../SSE08LA4	6.4	21.5	43	64	77	108	133	166	166	166	39	4300	-
10	1.55	64	166	1.4	23.13	IE4	BS20-../S4E09SA4	6.4	21.5	43	64	77	141	166	166	166	166	42	4300	-
10	1.55	53	215	1.2	27.86	IE4	BS20-../S4E09SA4	5.3	17.5	35.5	53	64	184	215	215	215	215	42	4450	-
10	1.55	53	215	1.2	27.86	IE1	BS20-../SSE08LA4	5.3	17.5	35.5	53	64	141	173	215	215	215	39	4450	-
10	1.55	48.5	220	1.1	30.63	IE4	BS20-../S4E09SA4	4.8	16	32.5	48.5	58	187	220	220	220	220	42	4750	-
10	1.55	48.5	220	1.1	30.63	IE1	BS20-../SSE08LA4	4.8	16	32.5	48.5	58	143	176	220	220	220	39	4750	-
10	1.55	45.5	250	1.1	32.87	IE4	BS20-../S4E09SA4	4.5	15	30	45.5	54	215	250	250	250	250	42	4750	-
10	1.55	45.5	250	1.1	32.87	IE1	BS20-../SSE08LA4	4.5	15	30	45.5	54	164	200	250	250	250	39	4750	-
10	1.55	37	285	0.9	40.25	IE4	BS20-../S4E09SA4	3.7	12	24.5	37	44.5	245	285	285	285	285	42	5300	-
10	1.55	37	285	0.9	40.25	IE1	BS20-../SSE08LA4	3.7	12	24.5	37	44.5	188	230	285	285	285	39	5300	-
10	1.55	35.5	315	0.84	42.08	IE1	BS20-../SSE08LA4	3.5	11.5	23.5	35.5	42.5	205	255	315	315	315	39	5200	-
10	1.55	35.5	315	0.84	42.08	IE4	BS20-../S4E09SA4	3.5	11.5	23.5	35.5	42.5	270	315	315	315	315	42	5200	-
10	1.55	29.5	335	0.8	50.44	IE4	BS20-../S4E09SA4	2.9	9.9	19.5	29.5	35.5	285	335	335	335	335	42	5700	-
10	1.55	29.5	335	0.8	50.44	IE4	BS20-../SSE08LA4	2.9	9.9	19.5	29.5	35.5	285	335	335	335	335	42	5700	-
10	1.55	112	110	3	13.29	IE1	BS30-../SSE08LA4	11	37.5	75	112	135	71	88	110	110	110	56	3600	-
10	1.55	112	110	3	13.29	IE4	BS30-../S4E09SA4	11	37.5	75	112	135	93	110	110	110	110	60	3600	-
10	1.55	88	140	2.6	16.92	IE4	BS30-../S4E09SA4	8.8	29.5	59	88	106	119	140	140	140	60	3950	-	
10	1.55	88	140	2.6	16.92	IE1	BS30-../SSE08LA4	8.8	29.5	59	88	106	91	112	140	140	140	56	3950	-
10	1.55	71	173	2.2	20.94	IE1	BS30-../SSE08LA4	7.1	23.5	47.5	71	85	112	139	173	173	173	56	4300	-
10	1.55	71	173	2.2	20.94	IE4	BS30-../S4E09SA4	7.1	23.5	47.5	71	85	147	173	173	173	173	60	4300	-
10	1.55																			

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 1.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
10	1.55	44.5	265	2.9	33.35	IE4	BS40-..S4E09SA4	4.4	14.5	29.5	44.5	53	225	265	265	265	265	73	8300	-
10	1.55	44.5	265	2.9	33.35	IE1	BS40-..SSE08LA4	4.4	14.5	29.5	44.5	53	173	210	265	265	265	69	8300	-
10	1.55	39	275	2.8	38.13	IE4	BS40-..S4E09SA4	3.9	13	26	39	47	235	275	275	275	275	73	9400	-
10	1.55	39	275	2.8	38.13	IE1	BS40-..SSE08LA4	3.9	13	26	39	47	180	220	275	275	275	69	9400	-
10	1.55	37	315	2.5	40.37	IE4	BS40-..S4E09SA4	3.7	12	24.5	37	44.5	270	315	315	315	315	73	9000	-
10	1.55	37	315	2.5	40.37	IE1	BS40-..SSE08LA4	3.7	12	24.5	37	44.5	205	255	315	315	315	69	9000	-
10	1.55	31	370	2.2	47.69	IE4	BS40-..S4E09SA4	3.1	10	20.5	31	37.5	315	370	370	370	370	73	9600	-
10	1.55	31	370	2.2	47.69	IE1	BS40-..SSE08LA4	3.1	10	20.5	31	37.5	240	295	370	370	370	69	9600	-
10	1.55	24.5	425	2	60.38	IE1	BS40-..SSE08LA4	2.4	8.2	16.5	24.5	29.5	275	340	425	425	425	69	11200	-
10	1.55	24.5	425	2	60.38	IE4	BS40-..S4E09SA4	2.4	8.2	16.5	24.5	29.5	360	425	425	425	425	73	11200	-
10	1.55	21.5	530	1.4	69.6	IE4	BS40-..S4E09SA4	2.1	7.1	14	21.5	25.5	455	530	530	530	530	73	11800	-
10	1.55	21.5	530	1.4	69.6	IE1	BS40-..SSE08LA4	2.1	7.1	14	21.5	25.5	345	425	530	530	530	69	11800	-
10	1.55	20.5	510	1.7	73.09	IE4	BS40-..S4E09SA4	2	6.8	13.5	20.5	24.5	430	510	510	510	510	73	12100	-
10	1.55	20.5	510	1.7	73.09	IE1	BS40-..SSE08LA4	2	6.8	13.5	20.5	24.5	330	405	510	510	510	69	12100	-
10	1.55	17	590	1.5	86.33	IE1	BS40-..SSE08LA4	1.7	5.7	11.5	17	20.5	385	475	590	590	590	69	12900	-
10	1.55	17	590	1.5	86.33	IE4	BS40-..S4E09SA4	1.7	5.7	11.5	17	20.5	500	590	590	590	590	73	12900	-
10	1.55	13.5	720	1.3	108.1	IE4	BS40-..S4E09SA4	1.3	4.6	9.2	13.5	16.5	610	720	720	720	720	73	14000	-
10	1.55	13.5	720	1.3	108.1	IE1	BS40-..SSE08LA4	1.3	4.6	9.2	13.5	16.5	470	570	720	720	720	69	14000	-
10	1.55	11.5	840	1.2	126	IE4	BS40-..S4E09SA4	1.1	3.9	7.9	11.5	14	710	840	840	840	840	73	14900	-
10	1.55	11.5	840	1.2	126	IE1	BS40-..SSE08LA4	1.1	3.9	7.9	11.5	14	540	670	840	840	840	69	14900	-
10	1.55	10	960	1	148.1	IE4	BS40-..S4E09SA4	1	3.3	6.7	10	12	810	960	960	960	960	73	15000	-
10	1.55	10	960	1	148.1	IE1	BS40-..SSE08LA4	1	3.3	6.7	10	12	620	770	960	960	960	69	15000	-

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	117	144	1.4	12.77	IE2	BS20-..SHE09SA4	11.5	39	78	117	140	87	103	144	144	144	42	3350	-
14	2.2	117	144	1.4	12.77	IE5	BS20-..S5E09XA4	11.5	39	78	117	140	134	144	144	144	144	50	3350	-
14	2.2	88	191	1.1	16.92	IE5	BS20-..S5E09XA4	8.8	29.5	59	88	106	178	191	191	191	191	50	3700	-
14	2.2	88	191	1.1	16.92	IE2	BS20-..SHE09SA4	8.8	29.5	59	88	106	116	137	191	191	191	42	3700	-
14	2.2	67	250	0.91	22.23	IE2	BS20-..SHE09SA4	6.7	22	44.5	67	80	153	180	250	250	250	42	4100	-
14	2.2	67	250	0.91	22.23	IE5	BS20-..S5E09XA4	6.7	22	44.5	67	80	230	250	250	250	250	50	4100	-
14	2.2	64	230	0.98	23.13	IE5	BS20-..S5E09XA4	6.4	21.5	43	64	77	215	230	230	230	230	50	4300	-
14	2.2	64	230	0.98	23.13	IE2	BS20-..SHE09SA4	6.4	21.5	43	64	77	141	166	230	230	230	42	4300	-
14	2.2	53	300	0.82	27.86	IE5	BS20-..S5E09XA4	5.3	17.5	35.5	53	64	280	300	300	300	300	50	4450	-
14	2.2	53	300	0.82	27.86	IE2	BS20-..SHE09SA4	5.3	17.5	35.5	53	64	184	215	300	300	300	42	4450	-
14	2.2	48.5	305	0.81	30.63	IE5	BS20-..S5E09XA4	4.8	16	32.5	48.5	58	285	305	305	305	305	50	4750	-
14	2.2	48.5	305	0.81	30.63	IE2	BS20-..SHE09SA4	4.8	16	32.5	48.5	58	187	220	305	305	305	42	4750	-
14	2.2	112	154	2.1	13.29	IE2	BS30-..SHE09SA4	11	37.5	75	112	135	93	110	154	154	154	60	3600	-
14	2.2	112	154	2.1	13.29	IE5	BS30-..S5E09XA4	11	37.5	75	112	135	143	154	154	154	154	68	3600	-
14	2.2	88	196	1.8	16.92	IE5	BS30-..S5E09XA4	8.8	29.5	59	88	106	182	196	196	196	196	68	3950	-
14	2.2	88	196	1.8	16.92	IE2	BS30-..SHE09SA4	8.8	29.5	59	88	106	119	140	196	196	196	60	3950	-
14	2.2	71	240	1.6	20.94	IE2	BS30-..SHE09SA4	7.1	23.5	47.5	71	85	147	173	240	240	240	60	4300	-
14	2.2	71	240	1.6	20.94	IE5	BS30-..S5E09XA4	7.1	23.5	47.5	71	85	225	240	240	240	240	68	4300	-
14	2.2	62	250	1.5	24.06	IE2	BS30-..SHE09SA4	6.2	20.5	41.5	62	74	153	180	250	250	250	60	4600	-
14	2.2	62	250	1.5	24.06	IE5	BS30-..S5E09XA4	6.2	20.5	41.5	62	74	230	250	250	250	250	68	4600	-
14	2.2	55	310	1.3	27.07	IE2	BS30-..SHE09SA4	5.5	18	36.5	55	66	190	220	310	310	310	60	4750	-
14	2.2	55	310	1.3	27.07	IE5	BS30-..S5E09XA4	5.5	18	36.5	55	66	290	310	310	310	310	68	4750	-
14	2.2	48.5	320	1.2	30.63	IE5	BS30-..S5E09XA4	4.8	16	32.5	48.5	58	295	320	320	320	320	68	5000	-
14	2.2	48.5	320	1.2	30.63	IE2	BS30-..SHE09SA4	4.8	16	32.5	48.5	58	195	225	320	320	320	60	5000	-
14	2.2	44.5	385	1.1	33.55	IE2	BS30-..SHE09SA4	4.4	14.5	29.5	44.5	53	230	275	385	385	385	60	5200	-
14	2.2	44.5	385	1.1	33.55	IE5	BS30-..S5E09XA4	4.4	14.5	29.5	44.5	53	355	385	385	38				

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 14 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
14	2.2	24.5	600	1.4	60.38	IE2	BS40-..SHE09XA4	2.4	8.2	16.5	24.5	29.5	360	425	600	600	600	73	11200	-
14	2.2	24.5	600	1.4	60.38	IE5	BS40-..S5E09XA4	2.4	8.2	16.5	24.5	29.5	550	600	600	600	600	81	11200	-
14	2.2	21.5	750	0.99	69.6	IE2	BS40-..SHE09XA4	2.1	7.1	14	21.5	25.5	455	530	750	750	750	73	11800	-
14	2.2	21.5	750	0.99	69.6	IE5	BS40-..S5E09XA4	2.1	7.1	14	21.5	25.5	690	750	750	750	750	81	11800	-
14	2.2	20.5	710	1.2	73.09	IE5	BS40-..S5E09XA4	2	6.8	13.5	20.5	24.5	660	710	710	710	710	81	12100	-
14	2.2	20.5	710	1.2	73.09	IE2	BS40-..SHE09XA4	2	6.8	13.5	20.5	24.5	430	510	710	710	710	73	12100	-
14	2.2	17	830	1.1	86.33	IE5	BS40-..S5E09XA4	1.7	5.7	11.5	17	20.5	770	830	830	830	830	81	12900	-
14	2.2	17	830	1.1	86.33	IE2	BS40-..SHE09XA4	1.7	5.7	11.5	17	20.5	500	590	830	830	830	73	12900	-
14	2.2	13.5	1010	0.94	108.1	IE5	BS40-..S5E09XA4	1.3	4.6	9.2	13.5	16.5	940	1010	1010	1010	1010	81	14000	-
14	2.2	13.5	1010	0.94	108.1	IE2	BS40-..SHE09XA4	1.3	4.6	9.2	13.5	16.5	610	720	1010	1010	1010	73	14000	-
14	2.2	11.5	1180	0.83	126	IE5	BS40-..S5E09XA4	1.1	3.9	7.9	11.5	14	1090	1180	1180	1180	1180	81	14900	-
14	2.2	11.5	1180	0.83	126	IE2	BS40-..SHE09XA4	1.1	3.9	7.9	11.5	14	710	840	1180	1180	1180	73	14900	-

MN = 19 Nm (PN = 3 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
19	3	112	205	1.6	13.29	IE4	BS30-..S4E11SA6	11	37.5	75	112	135	205	205	205	205	205	77	3600	-
19	3	88	265	1.3	16.92	IE4	BS30-..S4E11SA6	8.8	29.5	59	88	106	265	265	265	265	265	77	3950	-
19	3	71	330	1.2	20.94	IE4	BS30-..S4E11SA6	7.1	23.5	47.5	71	85	330	330	330	330	330	77	4300	-
19	3	62	340	1.1	24.06	IE4	BS30-..S4E11SA6	6.2	20.5	41.5	62	74	340	340	340	340	340	77	4600	-
19	3	55	425	0.94	27.07	IE4	BS30-..S4E11SA6	5.5	18	36.5	55	66	425	425	425	425	425	77	4750	-
19	3	48.5	435	0.92	30.63	IE4	BS30-..S4E11SA6	4.8	16	32.5	48.5	58	435	435	435	435	435	77	5000	-
19	3	44.5	520	0.8	33.55	IE4	BS30-..S4E11SA6	4.4	14.5	29.5	44.5	53	520	520	520	520	520	77	5200	-
19	3	115	210	2.9	13.03	IE4	BS40-..S4E11SA6	11.5	38	76	115	138	210	210	210	210	210	95	5800	-
19	3	88	270	2.5	16.92	IE4	BS40-..S4E11SA6	8.8	29.5	59	88	106	270	270	270	270	270	95	6400	-
19	3	71	325	2.2	21.06	IE4	BS40-..S4E11SA6	7.1	23.5	47	71	85	325	325	325	325	325	95	6900	-
19	3	63	330	2.1	23.59	IE4	BS40-..S4E11SA6	6.3	21	42	63	76	330	330	330	330	330	95	7900	-
19	3	57	405	1.8	26.18	IE4	BS40-..S4E11SA6	5.7	19	38	57	68	405	405	405	405	405	95	7500	-
19	3	48.5	430	1.7	30.63	IE4	BS40-..S4E11SA6	4.8	16	32.5	48.5	58	430	430	430	430	430	95	8700	-
19	3	44.5	500	1.5	33.35	IE4	BS40-..S4E11SA6	4.4	14.5	29.5	44.5	53	500	500	500	500	500	95	8300	-
19	3	39	520	1.5	38.13	IE4	BS40-..S4E11SA6	3.9	13	26	39	47	520	520	520	520	520	95	9400	-
19	3	37	600	1.3	40.37	IE4	BS40-..S4E11SA6	3.7	12	24.5	37	44.5	600	600	600	600	600	95	9000	-
19	3	31	700	1.2	47.69	IE4	BS40-..S4E11SA6	3.1	10	20.5	31	37.5	700	700	700	700	700	95	9600	-
19	3	24.5	810	1.1	60.38	IE4	BS40-..S4E11SA6	2.4	8.2	16.5	24.5	29.5	810	810	810	810	810	95	11200	-
19	3	20.5	970	0.91	73.09	IE4	BS40-..S4E11SA6	2	6.8	13.5	20.5	24.5	970	970	970	970	970	95	12100	-
19	3	17	1130	0.8	86.33	IE4	BS40-..S4E11SA6	1.7	5.7	11.5	17	20.5	1130	1130	1130	1130	1130	95	12900	-

MN = 20 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
20	3.1	117	205	0.97	12.77	IE3	BS20-..SPE09XA4	11.5	39	78	117	140	134	165	205	205	205	50	3350	-
20	3.1	88	270	0.8	16.92	IE3	BS20-..SPE09XA4	8.8	29.5	59	88	106	178	215	270	270	270	50	3700	-
20	3.1	112	220	1.5	13.29	IE3	BS30-..SPE09XA4	11	37.5	75	112	135	143	176	220	220	220	68	3600	-
20	3.1	88	280	1.3	16.92	IE3	BS30-..SPE09XA4	8.8	29.5	59	88	106	182	220	280	280	280	68	3950	-
20	3.1	71	345	1.1	20.94	IE3	BS30-..SPE09XA4	7.1	23.5	47.5	71	85	225	275	345	345	345	68	4300	-
20	3.1	62	360	1	24.06	IE3	BS30-..SPE09XA4	6.2	20.5	41.5	62	74	230	285	360	360	360	68	4600	-
20	3.1	55	445	0.89	27.07	IE3	BS30-..SPE09XA4	5.5	18	36.5	55	66	290	355	445	445	445	68	4750	-
20	3.1	48.5	455	0.87	30.63	IE3	BS30-..SPE09XA4	4.8	16	32.5	48.5	58	295	365	455	455	455	68	5000	-
20	3.1	115	220	2.8	13.03	IE3	BS40-..SPE09XA4	11.5	38	76	115	1								

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 1500 \text{ } 1/\text{min}$

MN = 25.5 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
25.5	4	112	280	1.2	13.29	IE3	BS30-..SPE11SA6	11	37.5	75	112	135	205	240	280	280	280	77	3600	-
25.5	4	88	355	1	16.92	IE3	BS30-..SPE11SA6	8.8	29.5	59	88	106	265	305	355	355	355	77	3950	-
25.5	4	71	440	0.86	20.94	IE3	BS30-..SPE11SA6	7.1	23.5	47.5	71	85	330	380	440	440	440	77	4300	-
25.5	4	62	460	0.8	24.06	IE3	BS30-..SPE11SA6	6.2	20.5	41.5	62	74	340	395	460	460	460	77	4600	-
25.5	4	115	280	2.2	13.03	IE3	BS40-..SPE11SA6	11.5	38	76	115	138	210	240	280	280	280	95	5800	-
25.5	4	88	365	1.8	16.92	IE3	BS40-..SPE11SA6	8.8	29.5	59	88	106	270	315	365	365	365	95	6400	-
25.5	4	71	440	1.6	21.06	IE3	BS40-..SPE11SA6	7.1	23.5	47	71	85	325	375	440	440	440	95	6900	-
25.5	4	63	445	1.5	23.59	IE3	BS40-..SPE11SA6	6.3	21	42	63	76	330	380	445	445	445	95	7900	-
25.5	4	57	540	1.4	26.18	IE3	BS40-..SPE11SA6	5.7	19	38	57	68	405	470	540	540	540	95	7500	-
25.5	4	48.5	570	1.3	30.63	IE3	BS40-..SPE11SA6	4.8	16	32.5	48.5	58	430	495	570	570	570	95	8700	-
25.5	4	44.5	680	1.1	33.35	IE3	BS40-..SPE11SA6	4.4	14.5	29.5	44.5	53	500	580	680	680	680	95	8300	-
25.5	4	39	700	1.1	38.13	IE3	BS40-..SPE11SA6	3.9	13	26	39	47	520	610	700	700	700	95	9400	-
25.5	4	37	810	0.98	40.37	IE3	BS40-..SPE11SA6	3.7	12	24.5	37	44.5	600	700	810	810	810	95	9000	-
25.5	4	31	940	0.88	47.69	IE3	BS40-..SPE11SA6	3.1	10	20.5	31	37.5	700	810	940	940	940	95	9600	-

MN = 26.5 Nm (PN = 4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
26.5	4	112	290	1.1	13.29	IE5	BS30-..S5E11MA6	11	37.5	75	112	135	290	290	290	290	290	77	3600	-
26.5	4	88	370	0.97	16.92	IE5	BS30-..S5E11MA6	8.8	29.5	59	88	106	370	370	370	370	370	77	3950	-
26.5	4	71	460	0.83	20.94	IE5	BS30-..S5E11MA6	7.1	23.5	47.5	71	85	460	460	460	460	460	77	4300	-
26.5	4	115	290	2.1	13.03	IE5	BS40-..S5E11MA6	11.5	38	76	115	138	290	290	290	290	290	95	5800	-
26.5	4	88	380	1.8	16.92	IE5	BS40-..S5E11MA6	8.8	29.5	59	88	106	380	380	380	380	380	95	6400	-
26.5	4	71	455	1.6	21.06	IE5	BS40-..S5E11MA6	7.1	23.5	47	71	85	455	455	455	455	455	95	6900	-
26.5	4	63	460	1.5	23.59	IE5	BS40-..S5E11MA6	6.3	21	42	63	76	460	460	460	460	460	95	7900	-
26.5	4	57	560	1.3	26.18	IE5	BS40-..S5E11MA6	5.7	19	38	57	68	560	560	560	560	560	95	7500	-
26.5	4	48.5	600	1.2	30.63	IE5	BS40-..S5E11MA6	4.8	16	32.5	48.5	58	600	600	600	600	600	95	8700	-
26.5	4	44.5	700	1.1	33.35	IE5	BS40-..S5E11MA6	4.4	14.5	29.5	44.5	53	700	700	700	700	700	95	8300	-
26.5	4	39	730	1.1	38.13	IE5	BS40-..S5E11MA6	3.9	13	26	39	47	730	730	730	730	730	95	9400	-
26.5	4	37	840	0.95	40.37	IE5	BS40-..S5E11MA6	3.7	12	24.5	37	44.5	840	840	840	840	840	95	9000	-
26.5	4	31	980	0.84	47.69	IE5	BS40-..S5E11MA6	3.1	10	20.5	31	37.5	980	980	980	980	980	95	9600	-

MN = 35 Nm (PN = 5.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
35	5.5	112	385	0.86	13.29	IE5	BS30-..S5E11LA6	11	37.5	75	112	135	385	385	385	385	385	89	3600	-
35	5.5	112	385	0.86	13.29	IE4	BS30-..S4E11MA6	11	37.5	75	112	135	290	330	385	385	385	77	3600	-
35	5.5	115	385	1.6	13.03	IE4	BS40-..S4E11MA6	11.5	38	76	115	138	290	330	385	385	385	95	5800	-
35	5.5	115	385	1.6	13.03	IE5	BS40-..S5E11LA6	11.5	38	76	115	138	385	385	385	385	385	107	5800	-
35	5.5	88	500	1.3	16.92	IE5	BS40-..S4E11MA6	8.8	29.5	59	88	106	380	430	500	500	500	107	6400	-
35	5.5	71	600	1.2	21.06	IE4	BS40-..S4E11MA6	7.1	23.5	47	71	85	455	510	600	600	600	95	6900	-
35	5.5	71	600	1.2	21.06	IE5	BS40-..S5E11LA6	7.1	23.5	47	71	85	600	600	600	600	600	107	6900	-
35	5.5	63	610	1.1	23.59	IE4	BS40-..S4E11MA6	6.3	21	42	63	76	460	520	610	610	610	95	7900	-
35	5.5	63	610	1.1	23.59	IE5	BS40-..S5E11LA6	6.3	21	42	63	76	610	610	610	610	610	107	7900	-
35	5.5	57	750	0.98	26.18	IE4	BS40-..S4E11MA6	5.7	19	38	57	68	560	640	750	750	750	95	7500	-
35	5.5	57	750	0.98	26.18	IE5	BS40-..S5E11LA6	5.7	19	38	57	68	750	750	750	750	750	107	7500	-
35	5.5	48.5	790	0.95	30.63	IE4	BS40-..S4E11MA6	4.8	16	32.5	48.5	58	600	670	790	790	790	95	8700	-
35	5.5	48.5	790	0.95	30.63	IE5	BS40-..S5E11LA6	4.8	16	32.5	48.5	58	790	790	790	790	790	107	8700	-
35	5.5	44.5	930	0.84	33.35	IE5	BS40-..S5E11LA6	4.4	14.5	29.5	44.5	53	930	930	930	930	930	107	8300	

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 1500 \text{ } \frac{1}{\text{min}}$

MN = 48 Nm (PN = 7.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	1500	1800	150	500	1000	1500	1800			
48	7.5	71	820	0.86	21.06	IE3	BS40-../SPE11LA6	7.1	23.5	47	71	85	600	690	820	820	820	107	6900	-
48	7.5	63	830	0.82	23.59	IE3	BS40-../SPE11LA6	6.3	21	42	63	76	610	690	830	830	830	107	7900	-

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 0.65 Nm (PN = 0.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
0.65	0.2	166	8.6	2.9	18	IE5	BS02-..S5E04SA4-1	8.3	27.5	55	166	200	8.6	8.6	8.6	8.6	8.6	3.5	1250	-
0.65	0.2	136	10	2.5	22	IE5	BS02-..S5E04SA4-1	6.8	22.5	45	136	163	10	10	10	10	10	3.5	1250	-
0.65	0.2	111	11	2.3	27	IE5	BS02-..S5E04SA4-1	5.5	18.5	37	111	133	11	11	11	11	11	3.5	1250	-
0.65	0.2	90	12.8	1.9	33	IE5	BS02-..S5E04SA4-1	4.5	15	30	90	109	12.8	12.8	12.8	12.8	12.8	3.5	1250	-
0.65	0.2	69	17.3	1.4	43	IE5	BS02-..S5E04SA4-1	3.4	11.5	23	69	83	17.3	17.3	17.3	17.3	17.3	3.5	1250	-
0.65	0.2	55	20	1.1	54	IE5	BS02-..S5E04SA4-1	2.7	9.2	18.5	55	66	20	20	20	20	20	3.5	1250	-
0.65	0.2	42.5	23	0.86	70	IE5	BS02-..S5E04SA4-1	2.1	7.1	14	42.5	51	23	23	23	23	23	3.5	1250	-
0.65	0.2	123	11.9	2.8	24.25	IE5	BS04-..S5E04SA4-1	6.1	20.5	41	123	148	11.9	11.9	11.9	11.9	11.9	3.9	2250	-
0.65	0.2	95	14.3	2.7	31.5	IE5	BS04-..S5E04SA4-1	4.7	15.5	31.5	95	114	14.3	14.3	14.3	14.3	14.3	3.9	2250	-
0.65	0.2	78	17.2	2.1	38.42	IE5	BS04-..S5E04SA4-1	3.9	13	26	78	93	17.2	17.2	17.2	17.2	17.2	3.9	2250	-
0.65	0.2	62	21	1.8	47.86	IE5	BS04-..S5E04SA4-1	3.1	10	20.5	62	75	21	21	21	21	21	3.9	2250	-
0.65	0.2	48.5	26.5	1.4	61.5	IE5	BS04-..S5E04SA4-1	2.4	8.1	16	48.5	58	26.5	26.5	26.5	26.5	26.5	3.9	2250	-
0.65	0.2	46.5	26	1.4	64.06	IE5	BS04-..S5E04SA4-1	2.3	7.8	15.5	46.5	56	26	26	26	26	26	3.9	2250	-
0.65	0.2	42	30.5	1.2	71.18	IE5	BS04-..S5E04SA4-1	2.1	7	14	42	50	30.5	30.5	30.5	30.5	30.5	3.9	2250	-
0.65	0.2	38.5	30.5	1.2	77	IE5	BS04-..S5E04SA4-1	1.9	6.4	12.5	38.5	46.5	30.5	30.5	30.5	30.5	30.5	3.9	2250	-
0.65	0.2	33	38	1	90	IE5	BS04-..S5E04SA4-1	1.6	5.5	11	33	40	38	38	38	38	38	3.9	2250	-
0.65	0.2	31.5	36	1.1	93.92	IE5	BS04-..S5E04SA4-1	1.5	5.3	10.5	31.5	38	36	36	36	36	3.9	2250	-	
0.65	0.2	29	42.5	0.89	102.9	IE5	BS04-..S5E04SA4-1	1.4	4.8	9.7	29	34.5	42.5	42.5	42.5	42.5	3.9	2250	-	
0.65	0.2	25.5	43	0.88	117	IE5	BS04-..S5E04SA4-1	1.2	4.2	8.5	25.5	30.5	43	43	43	43	43	3.9	2250	-
0.65	0.2	24	50	0.81	123	IE5	BS04-..S5E04SA4-1	1.2	4	8.1	24	29	50	50	50	50	50	3.9	2250	-
0.65	0.2	46.5	28	2.8	64.06	IE5	BS06-..S5E04SA4-1	2.3	7.8	15.5	46.5	56	28	28	28	28	28	8.4	3500	-
0.65	0.2	42	32.5	2.9	71.18	IE5	BS06-..S5E04SA4-1	2.1	7	14	42	50	32.5	32.5	32.5	32.5	32.5	8.4	3500	-
0.65	0.2	38.5	33.5	2.5	77	IE5	BS06-..S5E04SA4-1	1.9	6.4	12.5	38.5	46.5	33.5	33.5	33.5	33.5	33.5	8.4	3500	-
0.65	0.2	33	40.5	2.4	90	IE5	BS06-..S5E04SA4-1	1.6	5.5	11	33	40	40.5	40.5	40.5	40.5	40.5	8.4	3500	-
0.65	0.2	29	46	2.2	103.1	IE5	BS06-..S5E04SA4-1	1.4	4.8	9.6	29	34.5	46	46	46	46	46	8.4	3500	-
0.65	0.2	25	50	1.9	118.8	IE5	BS06-..S5E04SA4-1	1.2	4.2	8.4	25	30	50	50	50	50	50	8.4	3500	-
0.65	0.2	23	56	1.9	129	IE5	BS06-..S5E04SA4-1	1.1	3.8	7.7	23	27.5	56	56	56	56	56	8.4	3500	-
0.65	0.2	21	59	1.7	142.2	IE5	BS06-..S5E04SA4-1	1	3.5	7	21	25	59	59	59	59	59	8.4	3500	-
0.65	0.2	20	62	1.7	146.8	IE5	BS06-..S5E04SA4-1	1	3.4	6.8	20	24.5	62	62	62	62	62	8.4	3500	-
0.65	0.2	17.5	71	1.2	171	IE5	BS06-..S5E04SA4-1	0.85	2.9	5.8	17.5	21	71	71	71	71	71	8.4	3500	-
0.65	0.2	17	67	1.4	174	IE5	BS06-..S5E04SA4-1	0.85	2.8	5.7	17	20.5	67	67	67	67	67	8.4	3500	-
0.65	0.2	13.5	84	1.2	220	IE5	BS06-..S5E04SA4-1	0.65	2.2	4.5	13.5	16	84	84	84	84	84	8.4	3500	-
0.65	0.2	11.5	95	1	252	IE5	BS06-..S5E04SA4-1	0.55	1.9	3.9	11.5	14	95	95	95	95	95	8.4	3500	-
0.65	0.2	9.5	116	0.91	315.3	IE5	BS06-..S5E04SA4-1	0.47	1.5	3.1	9.5	11	116	116	116	116	116	8.4	3500	-
0.65	0.2	8.3	130	0.84	358.9	IE5	BS06-..S5E04SA4-1	0.41	1.3	2.7	8.3	10	130	130	130	130	130	8.4	3500	-
0.65	0.2	15	83	1.8	200	IE5	BS10Z-..S5E04SA4-1	0.75	2.5	5	15	18	83	83	83	83	83	21	6000	-
0.65	0.2	11.5	105	1.7	254	IE5	BS10Z-..S5E04SA4-1	0.55	1.9	3.9	11.5	14	105	105	105	105	105	21	6000	-
0.65	0.2	9.9	121	1.6	302.5	IE5	BS10Z-..S5E04SA4-1	0.49	1.6	3.3	9.9	11.5	121	121	121	121	121	21	6000	-
0.65	0.2	8.3	145	1.3	360.3	IE5	BS10Z-..S5E04SA4-1	0.41	1.3	2.7	8.3	9.9	145	145	145	145	145	21	6000	-
0.65	0.2	6.9	171	1.1	432.4	IE5	BS10Z-..S5E04SA4-1	0.34	1.1	2.3	6.9	8.3	171	171	171	171	171	21	6000	-
0.65	0.2	5.5	205	0.91	544.8	IE5	BS10Z-..S5E04SA4-1	0.27	0.9	1.8	5.5	6.6	205	205	205	205	205	21	6000	-
0.65	0.2	4.6	230	0.82	638.7	IE5	BS10Z-..S5E04SA4-1	0.23	0.75	1.5	4.6	5.6	230	230	230	230	230	21	6000	-
0.65	0.2	11.5	107	2.8	257.8	IE5	BS20Z-..S5E04SA4-1	0.55	1.9	3.8	11.5	13.5	107	107	107	107	107	32	8000	-
0.65	0.2	9.9	122	2.4	300.1	IE5	BS20Z-..S5E04SA4-1	0.49	1.6	3.3	9.9	11.5	122	122	122	122	122	32	8000	-
0.65	0.2	8.3	145	2.2	359.9	IE5	BS20Z-..S5E04SA4-1	0.41	1.3	2.7	8.3	10	145	145	145	145	145	32	8000	-
0.65	0.2	6.9	170	1.9	430.8	IE5	BS20Z-..S5E04SA4-1	0.34	1.1	2.3	6.9	8.3	170	170	170	170	170	32	8000	-
0.65	0.2	5.5	192	1.9	539.7	IE5	BS20Z-..S5E04SA4-1	0.27	0.9	1.8	5.5	6.6	192	192	192	192	192	32	8000	-
0.65	0.2	4.8	215	1.5	619.2	IE5	BS20Z-..S5E04SA4-1	0.24	0.8	1.6	4.8	5.8	215	215	215	215	215	32	8000	-
0.65	0.2	3.9	265	1.2	763.4	IE5	BS20Z-..S5E04SA4-1	0.19	0.65	1.3	3.9	4.7	265	265	265	265	265	32	8000	-
0.65	0.2	2.9	455	1.1	1022	IE5	BS30G06-..S5E04SA4-1	0.14	0.48	0.95	2.9	3.5	455	455	455	455	455	53	10000	-
0.65	0.2	2.5	520	0.93	1176	IE5	BS30G06-..S5E04SA4-1	0.12	0.42	0.85	2.5	3	520	520	520	520	520	53	10000	-

MN = 0.8 Nm (PN = 0.25 kW)




M_N [Nm]	P_N [kW]	n₂ [1/min]	M₂ [Nm]	f_B [-]	i [:1]	IE- Classe	Type	Speed range n₂ [1/min] at motor speed n₁ [1/min]					Torque range M₂ [Nm] at motor speed n₁ [1/min]					m [kg]	F_{RN} [N]	F_{RV} [N]
150	500	1000	3000	3600	150	500	1000	3000	3600											

<tbl_r cells="20"

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$


MN = 0.8 Nm (PN = 0.25 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
0.8	0.25	42	37.5	1	71.18	IE5	BS04-../S5E04SA4-1	2.1	7	14	42	50	35.5	37.5	37.5	37.5	37.5	3.9	2250	-	
0.8	0.25	38.5	37.5	1	77	IE5	BS04-../S5E04SA4-1	1.9	6.4	12.5	38.5	46.5	35.5	37.5	37.5	37.5	37.5	3.9	2250	-	
0.8	0.25	33	46.5	0.81	90	IE5	BS04-../S5E04SA4-1	1.6	5.5	11	33	40	44	46.5	46.5	46.5	46.5	46.5	3.9	2250	-
0.8	0.25	31.5	44	0.86	93.92	IE5	BS04-../S5E04SA4-1	1.5	5.3	10.5	31.5	38	42	44	44	44	44	44	3.9	2250	-
0.8	0.25	51	33	2.8	58.15	IE5	BS06-../S5E04SA4-1	2.5	8.5	17	51	61	31	33	33	33	33	8.4	3500	-	
0.8	0.25	46.5	34.5	2.3	64.06	IE5	BS06-../S5E04SA4-1	2.3	7.8	15.5	46.5	56	33	34.5	34.5	34.5	34.5	34.5	8.4	3500	-
0.8	0.25	42	40	2.3	71.18	IE5	BS06-../S5E04SA4-1	2.1	7	14	42	50	38	40	40	40	40	8.4	3500	-	
0.8	0.25	38.5	41	2.1	77	IE5	BS06-../S5E04SA4-1	1.9	6.4	12.5	38.5	46.5	39	41	41	41	41	8.4	3500	-	
0.8	0.25	33	50	1.9	90	IE5	BS06-../S5E04SA4-1	1.6	5.5	11	33	40	47.5	50	50	50	50	8.4	3500	-	
0.8	0.25	29	56	1.8	103.1	IE5	BS06-../S5E04SA4-1	1.4	4.8	9.6	29	34.5	54	56	56	56	56	8.4	3500	-	
0.8	0.25	25	61	1.5	118.8	IE5	BS06-../S5E04SA4-1	1.2	4.2	8.4	25	30	58	61	61	61	61	8.4	3500	-	
0.8	0.25	23	69	1.5	129	IE5	BS06-../S5E04SA4-1	1.1	3.8	7.7	23	27.5	65	69	69	69	69	8.4	3500	-	
0.8	0.25	21	72	1.3	142.2	IE5	BS06-../S5E04SA4-1	1	3.5	7	21	25	69	72	72	72	72	8.4	3500	-	
0.8	0.25	20	76	1.4	146.8	IE5	BS06-../S5E04SA4-1	1	3.4	6.8	20	24.5	72	76	76	76	76	8.4	3500	-	
0.8	0.25	17.5	87	1	171	IE5	BS06-../S5E04SA4-1	0.85	2.9	5.8	17.5	21	83	87	87	87	87	8.4	3500	-	
0.8	0.25	17	83	1.2	174	IE5	BS06-../S5E04SA4-1	0.85	2.8	5.7	17	20.5	79	83	83	83	83	8.4	3500	-	
0.8	0.25	13.5	103	0.94	220	IE5	BS06-../S5E04SA4-1	0.65	2.2	4.5	13.5	16	98	103	103	103	103	8.4	3500	-	
0.8	0.25	11.5	116	0.85	252	IE5	BS06-../S5E04SA4-1	0.55	1.9	3.9	11.5	14	111	116	116	116	116	8.4	3500	-	
0.8	0.25	15	102	1.4	200	IE5	BS10Z-../S5E04SA4-1	0.75	2.5	5	15	18	97	102	102	102	102	21	6000	-	
0.8	0.25	11.5	130	1.4	254	IE5	BS10Z-../S5E04SA4-1	0.55	1.9	3.9	11.5	14	123	130	130	130	130	21	6000	-	
0.8	0.25	9.9	150	1.3	302.5	IE5	BS10Z-../S5E04SA4-1	0.49	1.6	3.3	9.9	11.5	142	150	150	150	150	21	6000	-	
0.8	0.25	8.3	178	1.1	360.3	IE5	BS10Z-../S5E04SA4-1	0.41	1.3	2.7	8.3	9.9	169	178	178	178	178	21	6000	-	
0.8	0.25	6.9	210	0.9	432.4	IE5	BS10Z-../S5E04SA4-1	0.34	1.1	2.3	6.9	8.3	200	210	210	210	210	21	6000	-	
0.8	0.25	14.5	103	2.7	201.4	IE5	BS20Z-../S5E04SA4-1	0.7	2.4	4.9	14.5	17.5	97	103	103	103	103	32	8000	-	
0.8	0.25	11.5	131	2.2	257.8	IE5	BS20Z-../S5E04SA4-1	0.55	1.9	3.8	11.5	13.5	125	131	131	131	131	32	8000	-	
0.8	0.25	9.9	151	2	300.1	IE5	BS20Z-../S5E04SA4-1	0.49	1.6	3.3	9.9	11.5	143	151	151	151	151	32	8000	-	
0.8	0.25	8.3	178	1.8	359.9	IE5	BS20Z-../S5E04SA4-1	0.41	1.3	2.7	8.3	10	169	178	178	178	178	32	8000	-	
0.8	0.25	6.9	210	1.6	430.8	IE5	BS20Z-../S5E04SA4-1	0.34	1.1	2.3	6.9	8.3	199	210	210	210	210	32	8000	-	
0.8	0.25	5.5	235	1.5	539.7	IE5	BS20Z-../S5E04SA4-1	0.27	0.9	1.8	5.5	6.6	225	235	235	235	235	32	8000	-	
0.8	0.25	4.8	265	1.2	619.2	IE5	BS20Z-../S5E04SA4-1	0.24	0.8	1.6	4.8	5.8	250	265	265	265	265	32	8000	-	
0.8	0.25	3.9	325	0.94	763.4	IE5	BS20Z-../S5E04SA4-1	0.19	0.65	1.3	3.9	4.7	310	325	325	325	325	32	8000	-	
0.8	0.25	2.9	560	0.87	1022	IE5	BS30G06-../S5E04SA4-1	0.14	0.48	0.95	2.9	3.5	530	560	560	560	560	53	10000	-	

9

MN = 1 Nm (PN = 0.315 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
1	0.315	280	8.7	2.9	10.67	IE4	BS02-../S4E04SA4-1	14	46.5	93	280	335	6.6	7.4	8.7	8.7	8.7	3.5	1250	-	
1	0.315	220	10.5	2.4	13.5	IE4	BS02-../S4E04SA4-1	11	37	74	220	265	8	8.9	10.5	10.5	10.5	3.5	1250	-	
1	0.315	166	13.3	1.9	18	IE4	BS02-../S4E04SA4-1	8.3	27.5	55	166	200	10.1	11.3	13.3	13.3	13.3	3.5	1250	-	
1	0.315	136	15.3	1.6	22	IE4	BS02-../S4E04SA4-1	6.8	22.5	45	136	163	11.7	13	15.3	15.3	15.3	3.5	1250	-	
1	0.315	111	17	1.5	27	IE4	BS02-../S4E04SA4-1	5.5	18.5	37	111	133	12.9	14.4	17	17	17	3.5	1250	-	
1	0.315	90	19.8	1.3	33	IE4	BS02-../S4E04SA4-1	4.5	15	30	90	109	15	16.8	19.8	19.8	19.8	19.8	3.5	1250	-
1	0.315	69	26.5	0.9	43	IE4	BS02-../S4E04SA4-1	3.4	11.5	23	69	83	20	22.5	26.5	26.5	26.5	26.5	3.5	1250	-
1	0.315	183	12.5	2.8	16.31	IE4	BS04-../S4E04SA4-1	9.1	30.5	61	183	220	9.5	10.6	12.5	12.5	12.5	3.9	1970	-	
1	0.315	166	12.7	2.7	18	IE4	BS04-../S4E04SA4-1	8.3	27.5	55	166	200	9.7	10.8	12.7	12.7	12.7	3.9	1950	-	
1	0.315	143	15.9	2.3	20.96	IE4	BS04-../S4E04SA4-1	7.1	23.5	47.5	143	171	12.1	13.5	15.9	15.9	15.9	3.9	2100	-	
1	0.315	123	18.4	1.8	24.25	IE4	BS04-../S4E04SA4-1	6.1	20.5	41	123	148	14	15.6	18.4	18.4	18.4	18.4	3.9	2250	-
1	0.315	114	18.6	2	26.21	IE4	BS04-../S4E04SA4-1	5.7	19	38	114	137	14.1	15.8	18.6	18.6	18.6	3.9	2250	-	
1	0.315	95	22	1.7	31.5	IE4	BS04-../S4E04SA4-1	4.7	15.5	31.5	95	114	16.7	18.7	22	22	22	3.9	2250	-	
1	0.315	78	26.5	1.4	38.42	IE4	BS04-../S4E04SA4-1	3.9	13	26	78	93	20	22.5	26.5	26.5	26.5	3.9	2250	-	
1	0.315	6																			

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1 Nm (PN = 0.315 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1	0.315	15	128	1.2	200	IE4	BS10Z-../S4E04SA4-1	0.75	2.5	5	15	18	97	108	128	128	128	21	6000	-
1	0.315	11.5	162	1.1	254	IE4	BS10Z-../S4E04SA4-1	0.55	1.9	3.9	11.5	14	123	138	162	162	162	21	6000	-
1	0.315	9.9	187	1	302.5	IE4	BS10Z-../S4E04SA4-1	0.49	1.6	3.3	9.9	11.5	142	159	187	187	187	21	6000	-
1	0.315	8.3	220	0.85	360.3	IE4	BS10Z-../S4E04SA4-1	0.41	1.3	2.7	8.3	9.9	169	189	220	220	220	21	6000	-
1	0.315	14.5	128	2.2	201.4	IE4	BS20Z-../S4E04SA4-1	0.7	2.4	4.9	14.5	17.5	97	109	128	128	128	32	8000	-
1	0.315	11.5	164	1.8	257.8	IE4	BS20Z-../S4E04SA4-1	0.55	1.9	3.8	11.5	13.5	125	140	164	164	164	32	8000	-
1	0.315	9.9	189	1.6	300.1	IE4	BS20Z-../S4E04SA4-1	0.49	1.6	3.3	9.9	11.5	143	160	189	189	189	32	8000	-
1	0.315	8.3	220	1.4	359.9	IE4	BS20Z-../S4E04SA4-1	0.41	1.3	2.7	8.3	10	169	189	220	220	220	32	8000	-
1	0.315	6.9	260	1.3	430.8	IE4	BS20Z-../S4E04SA4-1	0.34	1.1	2.3	6.9	8.3	199	220	260	260	260	32	8000	-
1	0.315	5.5	295	1.2	539.7	IE4	BS20Z-../S4E04SA4-1	0.27	0.9	1.8	5.5	6.6	225	250	295	295	295	32	8000	-
1	0.315	4.8	330	0.99	619.2	IE4	BS20Z-../S4E04SA4-1	0.24	0.8	1.6	4.8	5.8	250	280	330	330	330	32	8000	-

MN = 1.3 Nm (PN = 0.4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.3	0.4	650	5.2	2.9	4.6	IE5	BS02-../S5E06MA4	32.5	108	215	650	780	5.2	5.2	5.2	5.2	5.2	6.8	1000	-
1.3	0.4	360	9	2.8	8.25	IE5	BS02-../S5E06MA4	18	60	121	360	435	9	9	9	9	9	6.8	1100	-
1.3	0.4	280	11.3	2.2	10.67	IE5	BS02-../S5E06MA4	14	46.5	93	280	335	11.3	11.3	11.3	11.3	11.3	6.8	1250	-
1.3	0.4	220	13.6	1.8	13.5	IE5	BS02-../S5E06MA4	11	37	74	220	265	13.6	13.6	13.6	13.6	13.6	6.8	1250	-
1.3	0.4	166	17.3	1.4	18	IE5	BS02-../S5E06MA4	8.3	27.5	55	166	200	17.3	17.3	17.3	17.3	17.3	6.8	1250	-
1.3	0.4	136	20	1.2	22	IE5	BS02-../S5E06MA4	6.8	22.5	45	136	163	20	20	20	20	20	6.8	1250	-
1.3	0.4	111	22	1.1	27	IE5	BS02-../S5E06MA4	5.5	18.5	37	111	133	22	22	22	22	22	6.8	1250	-
1.3	0.4	90	25.5	0.97	33	IE5	BS02-../S5E06MA4	4.5	15	30	90	109	25.5	25.5	25.5	25.5	25.5	6.8	1250	-
1.3	0.4	157	18.7	2.9	19	IE5	BS03-../S5E06MA4	7.8	26	52	157	189	18.7	18.7	18.7	18.7	18.7	6.9	1950	-
1.3	0.4	120	22	2.5	25	IE5	BS03-../S5E06MA4	6	20	40	120	144	22	22	22	22	22	6.9	1950	-
1.3	0.4	90	26	2.1	33	IE5	BS03-../S5E06MA4	4.5	15	30	90	109	26	26	26	26	26	6.9	1950	-
1.3	0.4	76	32	1.7	39	IE5	BS03-../S5E06MA4	3.8	12.5	25.5	76	92	32	32	32	32	32	6.9	1950	-
1.3	0.4	60	37.5	1.5	50	IE5	BS03-../S5E06MA4	3	10	20	60	72	37.5	37.5	37.5	37.5	37.5	6.9	1950	-
1.3	0.4	48	42.5	1.1	62	IE5	BS03-../S5E06MA4	2.4	8	16	48	58	42.5	42.5	42.5	42.5	42.5	6.9	1950	-
1.3	0.4	40	49.5	0.8	75	IE5	BS03-../S5E06MA4	2	6.6	13	40	48	49.5	49.5	49.5	49.5	49.5	6.9	1950	-
1.3	0.4	275	10.8	2.9	10.73	IE5	BS04-../S5E06MA4	13.5	46.5	93	275	335	10.8	10.8	10.8	10.8	10.8	7.3	1600	-
1.3	0.4	225	13.1	2.5	13.09	IE5	BS04-../S5E06MA4	11	38	76	225	275	13.1	13.1	13.1	13.1	13.1	7.3	1760	-
1.3	0.4	183	16.3	2.1	16.31	IE5	BS04-../S5E06MA4	9.1	30.5	61	183	220	16.3	16.3	16.3	16.3	16.3	7.3	1970	-
1.3	0.4	166	16.6	2	18	IE5	BS04-../S5E06MA4	8.3	27.5	55	166	200	16.6	16.6	16.6	16.6	16.6	7.3	1950	-
1.3	0.4	143	20.5	1.8	20.96	IE5	BS04-../S5E06MA4	7.1	23.5	47.5	143	171	20.5	20.5	20.5	20.5	20.5	7.3	2100	-
1.3	0.4	123	23.5	1.4	24.25	IE5	BS04-../S5E06MA4	6.1	20.5	41	123	148	23.5	23.5	23.5	23.5	23.5	7.3	2250	-
1.3	0.4	114	24	1.6	26.21	IE5	BS04-../S5E06MA4	5.7	19	38	114	137	24	24	24	24	24	7.3	2250	-
1.3	0.4	95	28.5	1.3	31.5	IE5	BS04-../S5E06MA4	4.7	15.5	31.5	95	114	28.5	28.5	28.5	28.5	28.5	7.3	2250	-
1.3	0.4	78	34	1.1	38.42	IE5	BS04-../S5E06MA4	3.9	13	26	78	93	34	34	34	34	34	7.3	2250	-
1.3	0.4	62	42	0.9	47.86	IE5	BS04-../S5E06MA4	3.1	10	20.5	62	75	42	42	42	42	42	7.3	2250	-
1.3	0.4	95	29.5	2.7	31.5	IE5	BS06-../S5E06MA4	4.7	15.5	31.5	95	114	29.5	29.5	29.5	29.5	29.5	12	3200	-
1.3	0.4	72	38.5	2.2	41.29	IE5	BS06-../S5E06MA4	3.6	12	24	72	87	38.5	38.5	38.5	38.5	38.5	12	3500	-
1.3	0.4	61	45	1.9	48.6	IE5	BS06-../S5E06MA4	3	10	20.5	61	74	45	45	45	45	45	12	3500	-
1.3	0.4	51	53	1.7	58.15	IE5	BS06-../S5E06MA4	2.5	8.5	17	51	61	53	53	53	53	53	12	3500	-
1.3	0.4	46.5	56	1.4	64.06	IE5	BS06-../S5E06MA4	2.3	7.8	15.5	46.5	56	56	56	56	56	12	3500	-	
1.3	0.4	42	65	1.4	71.18	IE5	BS06-../S5E06MA4	2.1	7	14	42	50	65	65	65	65	65	12	3500	-
1.3	0.4	38.5	67	1.3	77	IE5	BS06-../S5E06MA4	1.9	6.4	12.5	38.5	46.5	67	67	67	67	67	12	3500	-
1.3	0.4	33	81	1.2	90	IE5	BS06-../S5E06MA4	1.6	5.5	11	33	40	81	81	81	81	81	12	3500	-
1.3	0.4	29	92	1.1	103.1	IE5	BS06-../S5E06MA4	1.4	4.8	9.6	29	34.5	92	92	92	92	92	12	3500	-
1.3	0.4	25	100	0.94	118.8	IE5	BS06-../S5E06MA4	1.2	4.2	8.4	25	30	100	100	100	100	100	12	3500	-
1.3	0.4	23	112	0.93	129	IE5	BS06-../S5E06MA4	1.1	3.8	7.7	23	27.5	112	112	112	112	112	12	3500	-
1.3	0.4	21	118	0.83	142.2	IE5	BS06-../S5E06MA4	1</td												

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.3 Nm (PN = 0.4 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.3	0.4	13	187	1.5	225.6	IE5	BS20-..S5E06MA4	0.65	2.2	4.4	13	15.5	187	187	187	187	187	34	8000	-
1.3	0.4	14.5	167	1.7	201.4	IE5	BS20Z-..S5E06MA4	0.7	2.4	4.9	14.5	17.5	167	167	167	167	167	35	8000	-
1.3	0.4	11.5	210	1.4	257.8	IE5	BS20Z-..S5E06MA4	0.55	1.9	3.8	11.5	13.5	210	210	210	210	210	35	8000	-
1.3	0.4	9.9	245	1.2	300.1	IE5	BS20Z-..S5E06MA4	0.49	1.6	3.3	9.9	11.5	245	245	245	245	245	35	8000	-
1.3	0.4	8.3	290	1.1	359.9	IE5	BS20Z-..S5E06MA4	0.41	1.3	2.7	8.3	10	290	290	290	290	290	35	8000	-
1.3	0.4	6.9	340	0.97	430.8	IE5	BS20Z-..S5E06MA4	0.34	1.1	2.3	6.9	8.3	340	340	340	340	340	35	8000	-
1.3	0.4	5.5	385	0.95	539.7	IE5	BS20Z-..S5E06MA4	0.27	0.9	1.8	5.5	6.6	385	385	385	385	385	35	8000	-
1.3	0.4	13.5	185	2.8	216.4	IE5	BS30-..S5E06MA4	0.65	2.3	4.6	13.5	16.5	185	185	185	185	185	51	10000	-
1.3	0.4	14	181	2.5	211.1	IE5	BS30Z-..S5E06MA4	0.7	2.3	4.7	14	17	181	181	181	181	181	54	10000	-
1.3	0.4	11	220	2.5	261.6	IE5	BS30Z-..S5E06MA4	0.55	1.9	3.8	11	13.5	220	220	220	220	220	54	10000	-
1.3	0.4	9.7	255	2.2	306.6	IE5	BS30Z-..S5E06MA4	0.48	1.6	3.2	9.7	11.5	255	255	255	255	255	54	10000	-
1.3	0.4	8.3	345	1.1	359.6	IE5	BS30Z-..S5E06MA4	0.41	1.3	2.7	8.3	10	345	345	345	345	345	54	10000	-
1.3	0.4	7.6	325	1.8	390.2	IE5	BS30Z-..S5E06MA4	0.38	1.2	2.5	7.6	9.2	325	325	325	325	325	54	10000	-
1.3	0.4	6.5	380	1.6	457.3	IE5	BS30Z-..S5E06MA4	0.32	1	2.1	6.5	7.8	380	380	380	380	380	54	10000	-
1.3	0.4	5.5	445	1.3	539.3	IE5	BS30Z-..S5E06MA4	0.27	0.9	1.8	5.5	6.6	445	445	445	445	445	54	10000	-
1.3	0.4	4.6	500	1.1	651	IE5	BS30Z-..S5E06MA4	0.23	0.75	1.5	4.6	5.5	500	500	500	500	500	54	10000	-
1.3	0.4	10	275	2.6	287.7	IE5	BS40Z-..S5E06MA4	0.5	1.7	3.4	10	12.5	275	275	275	275	275	68	15000	-
1.3	0.4	6.7	365	2.7	446.8	IE5	BS40Z-..S5E06MA4	0.33	1.1	2.2	6.7	8	365	365	365	365	365	68	15000	-
1.3	0.4	5.7	425	2.6	520.8	IE5	BS40Z-..S5E06MA4	0.28	0.95	1.9	5.7	6.9	425	425	425	425	425	68	15000	-
1.3	0.4	4.9	485	1.9	612.1	IE5	BS40Z-..S5E06MA4	0.24	0.8	1.6	4.9	5.8	485	485	485	485	485	68	15000	-
1.3	0.4	4	570	1.3	736.5	IE5	BS40Z-..S5E06MA4	0.2	0.65	1.3	4	4.8	570	570	570	570	570	68	15000	-
1.3	0.4	3.3	690	1.1	908.2	IE5	BS40Z-..S5E06MA4	0.16	0.55	1.1	3.3	3.9	690	690	690	690	690	68	15000	-
1.3	0.4	3.1	870	1	965.5	IE5	BS40G10-..S5E06MA4	0.15	0.5	1	3.1	3.7	870	870	870	870	870	73	15000	-
1.3	0.4	2.5	1070	0.82	1180	IE5	BS40G10-..S5E06MA4	0.12	0.42	0.8	2.5	3	1070	1070	1070	1070	1070	73	15000	-

MN = 1.75 Nm (PN = 0.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [::1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.75	0.55	650	7	2.1	4.6	IE5	BS02-..S5E06MA4	32.5	108	215	650	780	7	7	7	7	7	6.8	1000	-
1.75	0.55	550	8.3	2.4	5.4	IE5	BS02-..S5E06MA4	27.5	92	185	550	660	8.3	8.3	8.3	8.3	8.3	6.8	1000	-
1.75	0.55	440	10.1	2.5	6.75	IE5	BS02-..S5E06MA4	22	74	148	440	530	10.1	10.1	10.1	10.1	10.1	6.8	1000	-
1.75	0.55	360	12.1	2.1	8.25	IE5	BS02-..S5E06MA4	18	60	121	360	435	12.1	12.1	12.1	12.1	12.1	6.8	1100	-
1.75	0.55	280	15.3	1.6	10.67	IE5	BS02-..S5E06MA4	14	46.5	93	280	335	15.3	15.3	15.3	15.3	15.3	6.8	1250	-
1.75	0.55	220	18.4	1.4	13.5	IE5	BS02-..S5E06MA4	11	37	74	220	265	18.4	18.4	18.4	18.4	18.4	6.8	1250	-
1.75	0.55	166	23	1.1	18	IE5	BS02-..S5E06MA4	8.3	27.5	55	166	200	23	23	23	23	23	6.8	1250	-
1.75	0.55	136	26.5	0.93	22	IE5	BS02-..S5E06MA4	6.8	22.5	45	136	163	26.5	26.5	26.5	26.5	26.5	6.8	1250	-
1.75	0.55	111	29.5	0.84	27	IE5	BS02-..S5E06MA4	5.5	18.5	37	111	133	29.5	29.5	29.5	29.5	29.5	6.8	1250	-
1.75	0.55	220	18.4	3	13.5	IE5	BS03-..S5E06MA4	11	37	74	220	265	18.4	18.4	18.4	18.4	18.4	6.9	1600	-
1.75	0.55	157	25	2.2	19	IE5	BS03-..S5E06MA4	7.8	26	52	157	189	25	25	25	25	25	6.9	1950	-
1.75	0.55	120	30	1.8	25	IE5	BS03-..S5E06MA4	6	20	40	120	144	30	30	30	30	30	6.9	1950	-
1.75	0.55	90	35	1.6	33	IE5	BS03-..S5E06MA4	4.5	15	30	90	109	35	35	35	35	35	6.9	1950	-
1.75	0.55	76	43.5	1.3	39	IE5	BS03-..S5E06MA4	3.8	12.5	25.5	76	92	43.5	43.5	43.5	43.5	43.5	6.9	1950	-
1.75	0.55	60	50	1.1	50	IE5	BS03-..S5E06MA4	3	10	20	60	72	50	50	50	50	50	6.9	1950	-
1.75	0.55	48	57	0.83	62	IE5	BS03-..S5E06MA4	2.4	8	16	48	58	57	57	57	57	57	6.9	1950	-
1.75	0.55	335	12.1	2.5	8.93	IE5	BS04-..S5E06MA4	16.5	55	111	335	400	12.1	12.1	12.1	12.1	12.1	7.3	1500	-
1.75	0.55	275	14.6	2.2	10.73	IE5	BS04-..S5E06MA4	13.5	46.5	93	275	335	14.6	14.6	14.6	14.6	14.6	7.3	1600	-
1.75	0.55	225	17.6	1.9	13.09	IE5	BS04-..S5E06MA4	11	38	76	225	275	17.6	17.6	17.6	17.6	17.6	7.3	1760	-
1.75	0.55	183	21.5	1.6	16.31	IE5	BS04-..S5E06MA4	9.1	30.5	61	183	220	21.5	21.5	21.5	21.5	21.5	7.3	1970	-
1.75	0.55	166	22	1.5	18	IE5	BS04-..S5E06MA4	8.3	27.5	55	166	200	22	22	22	22	22	7.3	1950	-
1.75	0.55	143	27.5	1.3	20.96	IE5	BS04-..S5E06MA4	7.1	23.5	47.5	143	171	27.5	27.5	27.5	27.5	27.5	7.3	2100	-
1.75	0.55	123	32	1.1	24.25	IE5	BS04-..S5E06MA4	6.1	20.5	41	123	148	32	32	32	32	32	7.3	2250</	

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 1.75 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
1.75	0.55	49	71	2.1	60.74	IE5	BS10-..S5E06MA4	2.4	8.2	16	49	59	71	71	71	71	71	23	4550	-
1.75	0.55	41.5	93	1.7	71.96	IE5	BS10-..S5E06MA4	2	6.9	13.5	41.5	50	93	93	93	93	93	23	5000	-
1.75	0.55	35.5	109	1.4	84.36	IE5	BS10-..S5E06MA4	1.7	5.9	11.5	35.5	42.5	109	109	109	109	109	23	5300	-
1.75	0.55	29	115	1.4	103.4	IE5	BS10-..S5E06MA4	1.4	4.8	9.6	29	34.5	115	115	115	115	115	23	5600	-
1.75	0.55	23	145	1.1	130.3	IE5	BS10-..S5E06MA4	1.1	3.8	7.6	23	27.5	145	145	145	145	145	23	6000	-
1.75	0.55	19.5	171	0.96	152.7	IE5	BS10-..S5E06MA4	0.95	3.2	6.5	19.5	23.5	171	171	171	171	171	23	6000	-
1.75	0.55	15.5	210	0.8	188.6	IE5	BS10-..S5E06MA4	0.75	2.6	5.3	15.5	19	210	210	210	210	210	23	6000	-
1.75	0.55	33.5	102	2.6	88.67	IE5	BS20-..S5E06MA4	1.6	5.6	11	33.5	40.5	102	102	102	102	102	34	7000	-
1.75	0.55	29.5	130	1.9	101.1	IE5	BS20-..S5E06MA4	1.4	4.9	9.8	29.5	35.5	130	130	130	130	130	34	7100	-
1.75	0.55	28	122	2.2	106.3	IE5	BS20-..S5E06MA4	1.4	4.7	9.4	28	33.5	122	122	122	122	122	34	7600	-
1.75	0.55	23.5	147	1.8	127.3	IE5	BS20-..S5E06MA4	1.1	3.9	7.8	23.5	28	147	147	147	147	147	34	8000	-
1.75	0.55	18.5	184	1.5	159.4	IE5	BS20-..S5E06MA4	0.9	3.1	6.2	18.5	22.5	184	184	184	184	184	34	8000	-
1.75	0.55	16	210	1.3	183	IE5	BS20-..S5E06MA4	0.8	2.7	5.4	16	19.5	210	210	210	210	210	34	8000	-
1.75	0.55	13	250	1.1	225.6	IE5	BS20-..S5E06MA4	0.65	2.2	4.4	13	15.5	250	250	250	250	250	34	8000	-
1.75	0.55	14.5	225	1.2	201.4	IE5	BS20Z-..S5E06MA4	0.7	2.4	4.9	14.5	17.5	225	225	225	225	225	35	8000	-
1.75	0.55	11.5	285	1	257.8	IE5	BS20Z-..S5E06MA4	0.55	1.9	3.8	11.5	13.5	285	285	285	285	285	35	8000	-
1.75	0.55	9.9	330	0.91	300.1	IE5	BS20Z-..S5E06MA4	0.49	1.6	3.3	9.9	11.5	330	330	330	330	330	35	8000	-
1.75	0.55	8.3	390	0.82	359.9	IE5	BS20Z-..S5E06MA4	0.41	1.3	2.7	8.3	10	390	390	390	390	390	35	8000	-
1.75	0.55	19.5	177	3	151.1	IE5	BS30-..S5E06MA4	0.95	3.3	6.6	19.5	23.5	177	177	177	177	177	51	9500	-
1.75	0.55	16	215	2.5	186.7	IE5	BS30-..S5E06MA4	0.8	2.6	5.3	16	19	215	215	215	215	215	51	10000	-
1.75	0.55	13.5	245	2.1	216.4	IE5	BS30-..S5E06MA4	0.65	2.3	4.6	13.5	16.5	245	245	245	245	245	51	10000	-
1.75	0.55	14	240	1.8	211.1	IE5	BS30Z-..S5E06MA4	0.7	2.3	4.7	14	17	240	240	240	240	240	54	10000	-
1.75	0.55	11	300	1.9	261.6	IE5	BS30Z-..S5E06MA4	0.55	1.9	3.8	11	13.5	300	300	300	300	300	54	10000	-
1.75	0.55	9.7	345	1.7	306.6	IE5	BS30Z-..S5E06MA4	0.48	1.6	3.2	9.7	11.5	345	345	345	345	345	54	10000	-
1.75	0.55	8.3	465	0.85	359.6	IE5	BS30Z-..S5E06MA4	0.41	1.3	2.7	8.3	10	465	465	465	465	465	54	10000	-
1.75	0.55	7.6	440	1.3	390.2	IE5	BS30Z-..S5E06MA4	0.38	1.2	2.5	7.6	9.2	440	440	440	440	440	54	10000	-
1.75	0.55	6.5	510	1.2	457.3	IE5	BS30Z-..S5E06MA4	0.32	1	2.1	6.5	7.8	510	510	510	510	510	54	10000	-
1.75	0.55	5.5	600	0.99	539.3	IE5	BS30Z-..S5E06MA4	0.27	0.9	1.8	5.5	6.6	600	600	600	600	600	54	10000	-
1.75	0.55	4.6	680	0.83	651	IE5	BS30Z-..S5E06MA4	0.23	0.75	1.5	4.6	5.5	680	680	680	680	680	54	10000	-
1.75	0.55	15	255	2.7	197.1	IE5	BS40Z-..S5E06MA4	0.75	2.5	5	15	18	255	255	255	255	255	68	15000	-
1.75	0.55	10	370	1.9	287.7	IE5	BS40Z-..S5E06MA4	0.5	1.7	3.4	10	12.5	370	370	370	370	370	68	15000	-
1.75	0.55	8.4	390	2.7	356.8	IE5	BS40Z-..S5E06MA4	0.42	1.4	2.8	8.4	10	390	390	390	390	390	68	15000	-
1.75	0.55	6.7	490	2	446.8	IE5	BS40Z-..S5E06MA4	0.33	1.1	2.2	6.7	8	490	490	490	490	490	68	15000	-
1.75	0.55	5.7	570	1.9	520.8	IE5	BS40Z-..S5E06MA4	0.28	0.95	1.9	5.7	6.9	570	570	570	570	570	68	15000	-
1.75	0.55	4.9	650	1.4	612.1	IE5	BS40Z-..S5E06MA4	0.24	0.8	1.6	4.9	5.8	650	650	650	650	650	68	15000	-
1.75	0.55	4	770	0.97	736.5	IE5	BS40Z-..S5E06MA4	0.2	0.65	1.3	4	4.8	770	770	770	770	770	68	15000	-

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [1:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.75	650	9.7	1.5	4.6	IE5	BS02-..S5E06LA4	32.5	108	215	650	780	9.7	9.7	9.7	9.7	9.7	6.8	1000	-
2.4	0.55	650	9.7	1.5	4.6	IE3	BS02-..SPE06MA4	32.5	108	215	650	780	7.2	8	8.9	9.7	9.7	6.8	1000	-
2.4	0.55	550	11.4	1.8	5.4	IE5	BS02-..S5E06LA4	27.5	92	185	550	660	11.4	11.4	11.4	11.4	11.4	6.8	1000	-
2.4	0.55	550	11.4	1.8	5.4	IE3	BS02-..SPE06MA4	27.5	92	185	550	660	8.5	9.5	10.4	11.4	11.4	6.8	1000	-
2.4	0.55	440	13.9	1.8	6.75	IE5	BS02-..S5E06LA4	22	74	148	440	530	13.9	13.9	13.9	13.9	13.9	6.8	1000	-
2.4	0.55	440	13.9	1.8	6.75	IE3	BS02-..SPE06MA4	22	74	148	440	530	10.4	11.6	12.7	13.9	13.9	6.8	1000	-
2.4	0.55	360	16.6	1.5	8.25	IE5	BS02-..S5E06LA4	18	60	121	360	435	16.6	16.6	16.6	16.6	16.6	6.8	1100	-
2.4	0.55	360	16.6	1.5	8.25	IE3	BS02-..SPE06MA4	18	60	121	360	435	12.4	13.8	15.2	16.6	16.6	6.8	1100	-
2.4	0.55	280	20.5	1.2	10.67	IE5	BS02-..S5E06LA4	14	46.5	93	280	335	20.5	20.5	20.5	20.5	20.5	6.8	1250	-
2.4	0.55	280	20.5	1.2	10.67	IE3	BS02-..SPE06MA4	14	46.5	93	280	335	15.7	17.4	19.2	20.5	20.5	6.8	1250	-
2.4	0.55	220	25	0.99	13.5	IE5	BS02-..S5E06LA4	11	37	74	220	265	25	25	25	25	25	6.8	1250	-
2.4	0.55	22																		


MN = 2.4 Nm (PN = 0.55 kW)

M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [>1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.55	183	30	1.2	16.31	IE3	BS04-..SPE06MA4	9.1	30.5	61	183	220	22.5	25	27.5	30	30	7.3	1970	-
2.4	0.55	166	30.5	1.1	18	IE5	BS04-..S5E06LA4	8.3	27.5	55	166	200	30.5	30.5	30.5	30.5	30.5	7.3	1950	-
2.4	0.55	166	30.5	1.1	18	IE3	BS04-..SPE06MA4	8.3	27.5	55	166	200	23	25.5	28	30.5	30.5	7.3	1950	-
2.4	0.55	143	38	0.97	20.96	IE5	BS04-..S5E06LA4	7.1	23.5	47.5	143	171	38	38	38	38	38	7.3	2100	-
2.4	0.55	143	38	0.97	20.96	IE3	BS04-..SPE06MA4	7.1	23.5	47.5	143	171	28.5	31.5	35	38	38	7.3	2100	-
2.4	0.55	114	44.5	0.85	26.21	IE5	BS04-..S5E06LA4	5.7	19	38	114	137	44.5	44.5	44.5	44.5	44.5	7.3	2250	-
2.4	0.55	114	44.5	0.85	26.21	IE3	BS04-..SPE06MA4	5.7	19	38	114	137	33	37	40.5	44.5	44.5	7.3	2250	-
2.4	0.55	210	27	2.5	14.07	IE5	BS06-..S5E06LA4	10.5	35.5	71	210	255	27	27	27	27	27	12	2200	-
2.4	0.55	210	27	2.5	14.07	IE3	BS06-..SPE06MA4	10.5	35.5	71	210	255	20.5	22.5	25	27	27	12	2200	-
2.4	0.55	181	31.5	2.3	16.56	IE5	BS06-..S5E06LA4	9	30	60	181	215	31.5	31.5	31.5	31.5	31.5	12	2400	-
2.4	0.55	181	31.5	2.3	16.56	IE3	BS06-..SPE06MA4	9	30	60	181	215	23.5	26	29	31.5	31.5	12	2400	-
2.4	0.55	151	38	2	19.82	IE5	BS06-..S5E06LA4	7.5	25	50	151	181	38	38	38	38	38	12	2500	-
2.4	0.55	151	38	2	19.82	IE3	BS06-..SPE06MA4	7.5	25	50	151	181	28.5	31.5	34.5	38	38	12	2500	-
2.4	0.55	123	46.5	1.7	24.25	IE5	BS06-..S5E06LA4	6.1	20.5	41	123	148	46.5	46.5	46.5	46.5	46.5	12	2600	-
2.4	0.55	123	46.5	1.7	24.25	IE3	BS06-..SPE06MA4	6.1	20.5	41	123	148	34.5	38.5	42.5	46.5	46.5	12	2600	-
2.4	0.55	114	45.5	1.7	26.21	IE5	BS06-..S5E06LA4	5.7	19	38	114	137	45.5	45.5	45.5	45.5	45.5	12	3000	-
2.4	0.55	114	45.5	1.7	26.21	IE3	BS06-..SPE06MA4	5.7	19	38	114	137	34	38	42	45.5	45.5	12	3000	-
2.4	0.55	95	55	1.4	31.5	IE5	BS06-..S5E06LA4	4.7	15.5	31.5	95	114	55	55	55	55	55	12	3200	-
2.4	0.55	95	55	1.4	31.5	IE3	BS06-..SPE06MA4	4.7	15.5	31.5	95	114	41	45.5	50	55	55	12	3200	-
2.4	0.55	72	71	1.2	41.29	IE5	BS06-..S5E06LA4	3.6	12	24	72	87	71	71	71	71	71	12	3500	-
2.4	0.55	72	71	1.2	41.29	IE3	BS06-..SPE06MA4	3.6	12	24	72	87	53	59	65	71	71	12	3500	-
2.4	0.55	61	83	1	48.6	IE5	BS06-..S5E06LA4	3	10	20.5	61	74	83	83	83	83	83	12	3500	-
2.4	0.55	61	83	1	48.6	IE3	BS06-..SPE06MA4	3	10	20.5	61	74	62	69	76	83	83	12	3500	-
2.4	0.55	51	99	0.92	58.15	IE5	BS06-..S5E06LA4	2.5	8.5	17	51	61	99	99	99	99	99	12	3500	-
2.4	0.55	51	99	0.92	58.15	IE3	BS06-..SPE06MA4	2.5	8.5	17	51	61	74	82	90	99	99	12	3500	-
2.4	0.55	138	41	3	21.61	IE5	BS10-..S5E06LA4	6.9	23	46	138	166	41	41	41	41	41	23	3000	-
2.4	0.55	138	41	3	21.61	IE3	BS10-..SPE06MA4	6.9	23	46	138	166	34.5	38	41	41	41	23	3000	-
2.4	0.55	113	49	2.6	26.42	IE5	BS10-..S5E06LA4	5.6	18.5	37.5	113	136	49	49	49	49	49	23	3250	-
2.4	0.55	113	49	2.6	26.42	IE3	BS10-..SPE06MA4	5.6	18.5	37.5	113	136	37	41	45	49	49	23	3250	-
2.4	0.55	89	61	2.2	33.55	IE5	BS10-..S5E06LA4	4.4	14.5	29.5	89	107	61	61	61	61	61	23	3550	-
2.4	0.55	89	61	2.2	33.55	IE3	BS10-..SPE06MA4	4.4	14.5	29.5	89	107	45.5	50	56	61	61	23	3550	-
2.4	0.55	75	71	1.9	39.96	IE5	BS10-..S5E06LA4	3.7	12.5	25	75	90	71	71	71	71	71	23	3800	-
2.4	0.55	75	71	1.9	39.96	IE3	BS10-..SPE06MA4	3.7	12.5	25	75	90	53	59	65	71	71	23	3800	-
2.4	0.55	63	85	1.7	47.59	IE5	BS10-..S5E06LA4	3.1	10.5	21	63	75	85	85	85	85	85	23	4050	-
2.4	0.55	63	85	1.7	47.59	IE3	BS10-..SPE06MA4	3.1	10.5	21	63	75	64	71	78	85	85	23	4050	-
2.4	0.55	52	101	1.5	57.12	IE5	BS10-..S5E06LA4	2.6	8.7	17.5	52	63	101	101	101	101	101	23	4350	-
2.4	0.55	52	101	1.5	57.12	IE3	BS10-..SPE06MA4	2.6	8.7	17.5	52	63	76	84	92	101	101	23	4350	-
2.4	0.55	49	97	1.5	60.74	IE5	BS10-..S5E06LA4	2.4	8.2	16	49	59	97	97	97	97	97	23	4550	-
2.4	0.55	49	97	1.5	60.74	IE3	BS10-..SPE06MA4	2.4	8.2	16	49	59	73	81	89	97	97	23	4550	-
2.4	0.55	41.5	127	1.3	71.96	IE5	BS10-..S5E06LA4	2	6.9	13.5	41.5	50	127	127	127	127	127	23	5000	-
2.4	0.55	41.5	127	1.3	71.96	IE3	BS10-..SPE06MA4	2	6.9	13.5	41.5	50	95	106	117	127	127	23	5000	-
2.4	0.55	35.5	149	1	84.36	IE5	BS10-..S5E06LA4	1.7	5.9	11.5	35.5	42.5	149	149	149	149	149	23	5300	-
2.4	0.55	35.5	149	1	84.36	IE3	BS10-..SPE06MA4	1.7	5.9	11.5	35.5	42.5	112	124	137	149	149	23	5300	-
2.4	0.55	29	158	1	103.4	IE5	BS10-..S5E06LA4	1.4	4.8	9.6	29	34.5	119	132	145	158	158	23	5600	-
2.4	0.55	29	158	1	103.4	IE3	BS10-..SPE06MA4	1.4	4.8	9.6	29	34.5	119	132	145	158	158	23	5600	-
2.4	0.55	23	200	0.82	130.3	IE5	BS10-..S5E06LA4	1.1	3.8	7.6	23	27.5	200	200	200	200	200	23	6000	-
2.4	0.55	23	200	0.82	130.3	IE3	BS10-..SPE06MA4	1.1	3.8	7.6	23	27.5	150	166	183	200	200	23	6000	-
2.4	0.55	51	105	2.6	58.74	IE5	BS20-..S5E06LA4	2.5	8.5	17	51	61	105	105	105	105	105	34	5900	-
2.4	0.55	51	105	2.6	58.74	IE3	BS20-..SPE06MA4	2.5	8.5	17	51	61	79	88	96	105	105	34	5900	-
2.4	0.55	42.5	126	2.4	70.3	IE5	BS20-..S5E06LA4	2.1	7.1	14	42.5	51	126	126	126	126	126	34	6300	-
2.4	0.55	42.5	126	2.4	70.3	IE3	BS20-..SPE06MA4	2.1	7.1	14	42.5	51	94	105	115	126	126	34	6300	-
2.4	0.55	39	120	2.2	76.18	IE5	BS20-..S5E06LA4	1.9	6.5	13	39	47	120	120	120	120	120	34	6600	-
2.4	0.55	39	120	2.2	76.18	IE3	BS20-..SPE06MA4	1.9	6.5	13	39	47	90	100	110	120	120	34	6600	-
2.4	0.55	33.5	140	1.9	88.67	IE5	BS20-..SPE06MA4	1.6	5.6	11	33.5	40.5	140	140	140	140	140	34	7000	-
2.4	0.55	33.5	140	1.9	88.67	IE3	BS20-..SPE06MA4	1.6	5.6	11	33.5	40.5	105	117	128	140	140	34	7000	-
2.4	0.55	29.5	179	1.4	101.1	IE5	BS20-..S5E06LA4	1.4	4.9	9.8	29.5	35.5								

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 2.4 Nm (PN = 0.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
2.4	0.55	13.5	340	1.5	216.4	IE5	BS30-../S5E06LA4	0.65	2.3	4.6	13.5	16.5	340	340	340	340	340	51	10000	-
2.4	0.55	13.5	340	1.5	216.4	IE3	BS30-../SPE06MA4	0.65	2.3	4.6	13.5	16.5	255	285	310	340	340	51	10000	-
2.4	0.55	14	330	1.3	211.1	IE5	BS30Z-../S5E06LA4	0.7	2.3	4.7	14	17	330	330	330	330	330	54	10000	-
2.4	0.55	14	330	1.3	211.1	IE3	BS30Z-../SPE06MA4	0.7	2.3	4.7	14	17	250	275	305	330	330	54	10000	-
2.4	0.55	11	410	1.4	261.6	IE5	BS30Z-../S5E06LA4	0.55	1.9	3.8	11	13.5	410	410	410	410	410	54	10000	-
2.4	0.55	11	410	1.4	261.6	IE3	BS30Z-../SPE06MA4	0.55	1.9	3.8	11	13.5	310	345	375	410	410	54	10000	-
2.4	0.55	9.7	475	1.2	306.6	IE5	BS30Z-../S5E06LA4	0.48	1.6	3.2	9.7	11.5	475	475	475	475	475	54	10000	-
2.4	0.55	9.7	475	1.2	306.6	IE3	BS30Z-../SPE06MA4	0.48	1.6	3.2	9.7	11.5	355	395	435	475	475	54	10000	-
2.4	0.55	7.6	600	0.97	390.2	IE5	BS30Z-../S5E06LA4	0.38	1.2	2.5	7.6	9.2	600	600	600	600	600	54	10000	-
2.4	0.55	7.6	600	0.97	390.2	IE3	BS30Z-../SPE06MA4	0.38	1.2	2.5	7.6	9.2	455	500	550	600	600	54	10000	-
2.4	0.55	6.5	700	0.85	457.3	IE5	BS30Z-../S5E06LA4	0.32	1	2.1	6.5	7.8	700	700	700	700	700	54	10000	-
2.4	0.55	6.5	700	0.85	457.3	IE3	BS30Z-../SPE06MA4	0.32	1	2.1	6.5	7.8	520	580	640	700	700	54	10000	-
2.4	0.55	15	350	2	197.1	IE5	BS40Z-../S5E06LA4	0.75	2.5	5	15	18	350	350	350	350	350	68	15000	-
2.4	0.55	15	350	2	197.1	IE3	BS40Z-../SPE06MA4	0.75	2.5	5	15	18	260	290	320	350	350	68	15000	-
2.4	0.55	12	375	2.4	249.6	IE5	BS40Z-../S5E06LA4	0.6	2	4	12	14	375	375	375	375	375	68	15000	-
2.4	0.55	12	375	2.4	249.6	IE3	BS40Z-../SPE06MA4	0.6	2	4	12	14	280	310	345	375	375	68	15000	-
2.4	0.55	10	510	1.4	287.7	IE5	BS40Z-../S5E06LA4	0.5	1.7	3.4	10	12.5	510	510	510	510	510	68	15000	-
2.4	0.55	10	510	1.4	287.7	IE3	BS40Z-../SPE06MA4	0.5	1.7	3.4	10	12.5	380	425	465	510	510	68	15000	-
2.4	0.55	9.9	455	2.3	302.1	IE5	BS40Z-../S5E06LA4	0.49	1.6	3.3	9.9	11.5	455	455	455	455	455	68	15000	-
2.4	0.55	9.9	455	2.3	302.1	IE3	BS40Z-../SPE06MA4	0.49	1.6	3.3	9.9	11.5	340	380	415	455	455	68	15000	-
2.4	0.55	8.4	530	2	356.8	IE5	BS40Z-../S5E06LA4	0.42	1.4	2.8	8.4	10	530	530	530	530	530	68	15000	-
2.4	0.55	8.4	530	2	356.8	IE3	BS40Z-../SPE06MA4	0.42	1.4	2.8	8.4	10	400	445	490	530	530	68	15000	-
2.4	0.55	6.7	670	1.5	446.8	IE5	BS40Z-../S5E06LA4	0.33	1.1	2.2	6.7	8	670	670	670	670	670	68	15000	-
2.4	0.55	6.7	670	1.5	446.8	IE3	BS40Z-../SPE06MA4	0.33	1.1	2.2	6.7	8	500	560	610	670	670	68	15000	-
2.4	0.55	5.7	780	1.4	520.8	IE5	BS40Z-../S5E06LA4	0.28	0.95	1.9	5.7	6.9	780	780	780	780	780	68	15000	-
2.4	0.55	5.7	780	1.4	520.8	IE3	BS40Z-../SPE06MA4	0.28	0.95	1.9	5.7	6.9	590	650	720	780	780	68	15000	-
2.4	0.55	4.9	890	1	612.1	IE5	BS40Z-../S5E06LA4	0.24	0.8	1.6	4.9	5.8	890	890	890	890	890	68	15000	-
2.4	0.55	4.9	890	1	612.1	IE3	BS40Z-../SPE06MA4	0.24	0.8	1.6	4.9	5.8	670	740	820	890	890	68	15000	-

MN = 3.5 Nm (PN = 1.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]	
								150	500	1000	3000	3600	150	500	1000	3000	3600				
3.5	1.1	650	14.1	1.1	4.6	IE4	BS02-../S4E06LA4	32.5	108	215	650	780	10.1	11.7	14.1	14.1	14.1	6.8	1000	-	
3.5	1.1	550	16.6	1.2	5.4	IE4	BS02-../S4E06LA4	27.5	92	185	550	660	11.8	13.7	16.6	16.6	16.6	6.8	1000	-	
3.5	1.1	440	20	1.2	6.75	IE4	BS02-../S4E06LA4	22	74	148	440	530	14.5	16.8	20	20	20	6.8	1000	-	
3.5	1.1	360	24	1	8.25	IE4	BS02-../S4E06LA4	18	60	121	360	435	17.3	20	24	24	24	6.8	1100	-	
3.5	1.1	280	30.5	0.82	10.67	IE4	BS02-../S4E06LA4	14	46.5	93	280	335	21.5	25	30.5	30.5	30.5	6.8	1250	-	
3.5	1.1	220	36.5	1.5	13.5	IE4	BS03-../S4E06LA4	11	37	74	220	265	26	30.5	36.5	36.5	36.5	36.5	6.9	1600	-
3.5	1.1	157	50	1.1	19	IE4	BS03-../S4E06LA4	7.8	26	52	157	189	36	41.5	50	50	50	50	6.9	1950	-
3.5	1.1	120	60	0.91	25	IE4	BS03-../S4E06LA4	6	20	40	120	144	43	50	60	60	60	6.9	1950	-	
3.5	1.1	485	16.7	1.6	6.13	IE4	BS04-../S4E06LA4	24	81	163	485	580	11.9	13.8	16.7	16.7	16.7	7.3	1300	-	
3.5	1.1	335	24	1.2	8.93	IE4	BS04-../S4E06LA4	16.5	55	111	335	400	17.4	20	24	24	24	7.3	1500	-	
3.5	1.1	275	29	1.1	10.73	IE4	BS04-../S4E06LA4	13.5	46.5	93	275	335	20.5	24	29	29	29	7.3	1600	-	
3.5	1.1	225	35	0.94	13.09	IE4	BS04-../S4E06LA4	11	38	76	225	275	25	29	35	35	35	7.3	1760	-	
3.5	1.1	183	43.5	0.8	16.31	IE4	BS04-../S4E06LA4	9.1	30.5	61	183	220	31	36	43.5	43.5	43.5	7.3	1970	-	
3.5	1.1	335	25	2.4	8.93	IE4	BS06-../S4E06LA4	16.5	55	111	335	400	18	20.5	25	25	25	12	1710	-	
3.5	1.1	275	30	2.1	10.73	IE4	BS06-../S4E06LA4	13.5	46.5	93	275	335	21.5	25	30	30	30	12	1850	-	
3.5	1.1	210	39.5	1.7	14.07	IE4	BS06-../S4E06LA4	10.5	35.5	71	210	255	28	33	39.5	39.5	39.5	12	2200	-	
3.5	1.1	181	46	1.6	16.56	IE4	BS06-../S4E06LA4	9	30	60	181	215	33	38	46	46	46	12	2400	-	
3.5	1.1	151	55	1.4	19.82	IE4	BS06-../S4E06LA4	7.5	25	50	151	181	39.5	45.5	55	55	55	12	2500	-	
3.5	1.1	123	67	1.1	24.25	IE4	BS06-../S4E06LA4	6.1	20.5	41	123	148	48.5	56	67	67	67	12	2600	-	
3.5</																					

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 3.5 Nm (PN = 1.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
3.5	1.1	29.5	260	0.95	101.1	IE4	BS20-..S4E06LA4	1.4	4.9	9.8	29.5	35.5	187	215	260	260	34	7100	-	
3.5	1.1	28	245	1.1	106.3	IE4	BS20-..S4E06LA4	1.4	4.7	9.4	28	33.5	175	200	245	245	34	7600	-	
3.5	1.1	23.5	290	0.92	127.3	IE4	BS20-..S4E06LA4	1.1	3.9	7.8	23.5	28	210	240	290	290	34	8000	-	
3.5	1.1	51	158	2.9	58.64	IE4	BS30-..S4E06LA4	2.5	8.5	17	51	61	112	130	158	158	51	6900	-	
3.5	1.1	42	174	2.8	71.17	IE4	BS30-..S4E06LA4	2.1	7	14	42	50	124	144	174	174	51	7000	-	
3.5	1.1	35.5	220	1.8	83.48	IE4	BS30-..S4E06LA4	1.7	5.9	11.5	35.5	43	160	186	220	220	51	6800	-	
3.5	1.1	33	215	2.2	90.59	IE4	BS30-..S4E06LA4	1.6	5.5	11	33	39.5	156	181	215	215	51	7700	-	
3.5	1.1	28	250	2	106.2	IE4	BS30-..S4E06LA4	1.4	4.7	9.4	28	33.5	180	205	250	250	51	8200	-	
3.5	1.1	23.5	295	1.7	125.2	IE4	BS30-..S4E06LA4	1.1	3.9	7.9	23.5	28.5	210	245	295	295	51	8700	-	
3.5	1.1	19.5	350	1.5	151.1	IE4	BS30-..S4E06LA4	0.95	3.3	6.6	19.5	23.5	250	290	350	350	51	9500	-	
3.5	1.1	16	430	1.3	186.7	IE4	BS30-..S4E06LA4	0.8	2.6	5.3	16	19	305	355	430	430	51	10000	-	
3.5	1.1	13.5	495	1	216.4	IE4	BS30-..S4E06LA4	0.65	2.3	4.6	13.5	16.5	355	410	495	495	51	10000	-	
3.5	1.1	14	485	0.91	211.1	IE4	BS30Z-..S4E06LA4	0.7	2.3	4.7	14	17	345	400	485	485	54	10000	-	
3.5	1.1	11	600	0.93	261.6	IE4	BS30Z-..S4E06LA4	0.55	1.9	3.8	11	13.5	430	500	600	600	54	10000	-	
3.5	1.1	9.7	690	0.83	306.6	IE4	BS30Z-..S4E06LA4	0.48	1.6	3.2	9.7	11.5	495	570	690	690	54	10000	-	
3.5	1.1	15	510	1.4	197.1	IE4	BS40Z-..S4E06LA4	0.75	2.5	5	15	18	360	420	510	510	68	15000	-	
3.5	1.1	12	550	1.6	249.6	IE4	BS40Z-..S4E06LA4	0.6	2	4	12	14	390	455	550	550	68	15000	-	
3.5	1.1	10	740	0.95	287.7	IE4	BS40Z-..S4E06LA4	0.5	1.7	3.4	10	12.5	530	610	740	740	68	15000	-	
3.5	1.1	9.9	660	1.6	302.1	IE4	BS40Z-..S4E06LA4	0.49	1.6	3.3	9.9	11.5	475	550	660	660	68	15000	-	
3.5	1.1	8.4	780	1.4	356.8	IE4	BS40Z-..S4E06LA4	0.42	1.4	2.8	8.4	10	560	650	780	780	68	15000	-	
3.5	1.1	6.7	980	1	446.8	IE4	BS40Z-..S4E06LA4	0.33	1.1	2.2	6.7	8	700	810	980	980	68	15000	-	
3.5	1.1	5.7	1140	0.96	520.8	IE4	BS40Z-..S4E06LA4	0.28	0.95	1.9	5.7	6.9	820	950	1140	1140	68	15000	-	

MN = 5 Nm (PN = 1.55 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
5	1.55	650	20	2	4.6	IE5	BS03-..S5E08MA4	32.5	108	215	650	780	20	20	20	20	20	10	1070	-
5	1.55	500	26	1.7	6	IE5	BS03-..S5E08MA4	25	83	166	500	600	26	26	26	26	26	10	1170	-
5	1.55	375	34	1.4	8	IE5	BS03-..S5E08MA4	18.5	62	125	375	450	34	34	34	34	34	10	1320	-
5	1.55	300	42	1.2	10	IE5	BS03-..S5E08MA4	15	50	100	300	360	42	42	42	42	42	10	1450	-
5	1.55	220	52	1	13.5	IE5	BS03-..S5E08MA4	11	37	74	220	265	52	52	52	52	52	10	1600	-
5	1.55	445	27	2.1	6.67	IE5	BS06-..S5E08MA4	22	74	149	445	530	27	27	27	27	27	16	1550	-
5	1.55	335	36	1.7	8.93	IE5	BS06-..S5E08MA4	16.5	55	111	335	400	36	36	36	36	36	16	1710	-
5	1.55	275	43	1.5	10.73	IE5	BS06-..S5E08MA4	13.5	46.5	93	275	335	43	43	43	43	43	16	1850	-
5	1.55	210	56	1.2	14.07	IE5	BS06-..S5E08MA4	10.5	35.5	71	210	255	56	56	56	56	56	16	2200	-
5	1.55	181	66	1.1	16.56	IE5	BS06-..S5E08MA4	9	30	60	181	215	66	66	66	66	66	16	2400	-
5	1.55	153	71	0.98	19.58	IE5	BS06-..S5E08MA4	7.6	25.5	51	153	183	71	71	71	71	71	16	2700	-
5	1.55	151	79	0.95	19.82	IE5	BS06-..S5E08MA4	7.5	25	50	151	181	79	79	79	79	79	16	2500	-
5	1.55	114	95	0.8	26.21	IE5	BS06-..S5E08MA4	5.7	19	38	114	137	95	95	95	95	95	16	3000	-
5	1.55	240	49.5	2.2	12.49	IE5	BS10-..S5E08MA4	12	40	80	240	285	49.5	49.5	49.5	49.5	49.5	27	2400	-
5	1.55	177	67	1.8	16.92	IE5	BS10-..S5E08MA4	8.8	29.5	59	177	210	67	67	67	67	67	27	2700	-
5	1.55	138	86	1.4	21.61	IE5	BS10-..S5E08MA4	6.9	23	46	138	166	86	86	86	86	86	27	3000	-
5	1.55	132	77	1.5	22.6	IE5	BS10-..S5E08MA4	6.6	22	44	132	159	77	77	77	77	77	27	3200	-
5	1.55	113	103	1.3	26.42	IE5	BS10-..S5E08MA4	5.6	18.5	37.5	113	136	103	103	103	103	103	27	3250	-
5	1.55	97	105	1.2	30.63	IE5	BS10-..S5E08MA4	4.8	16	32.5	97	117	110	110	110	110	110	37	3550	-
5	1.55	89	127	1.1	33.55	IE5	BS10-..S5E08MA4	4.4	14.5	29.5	89	107	127	127	127	127	127	37	3550	-
5	1.55	75	149	0.93	39.96	IE5	BS10-..S5E08MA4	3.7	12.5	25	75	90	149	149	149	149	149	27	3800	-
5	1.55	63	178	0.81	47.59	IE5	BS10-..S5E08MA4	3.1	10.5	21	63	75	178	178	178	178	178	27	4050	-
5	1.55	134	90	2.6	22.23	IE5	BS20-..S5E08MA4	6.7	22	44.5	134	161	90	90	90	90	90	37	4100	-
5	1.55	129	83	2.7	23.13	IE5	BS20-..S5E08MA4	6.4	21.5	43	129	155	83	83	83	83	83	37	4300	-
5	1.55	107	108	2.3	27.86	IE5	BS20-..S5E08MA4	5.3	17.5	35.5	107	129	108	108	108	108	108	37	4450	-
5	1.55	97	110	2.3	30.63	IE5	BS20-..S5E08MA4	4.8	16	32.5	97	117	110	110	110	110	110	37	4750	-
5	1.55	91	126	2.1	32.87	IE5	BS20-..S5E08MA4	4.5	15	30	91	109	126	126	126	126	126	37	4750	-
5	1.55	74	144	1.8																

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 5 Nm (PN = 1.55 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
5	1.55	19.5	500	1.1	151.1	IE5	BS30-../S5E08MA4	0.95	3.3	6.6	19.5	23.5	500	500	500	500	500	55	9500	-
5	1.55	16	610	0.88	186.7	IE5	BS30-../S5E08MA4	0.8	2.6	5.3	16	19	610	610	610	610	610	55	10000	-
5	1.55	43	265	2.8	69.6	IE5	BS40-../S5E08MA4	2.1	7.1	14	43	51	265	265	265	265	265	68	11800	-
5	1.55	34.5	295	3	86.33	IE5	BS40-../S5E08MA4	1.7	5.7	11.5	34.5	41.5	295	295	295	295	295	68	12900	-
5	1.55	27.5	360	2.6	108.1	IE5	BS40-../S5E08MA4	1.3	4.6	9.2	27.5	33	360	360	360	360	360	68	14000	-
5	1.55	23.5	420	2.3	126	IE5	BS40-../S5E08MA4	1.1	3.9	7.9	23.5	28.5	420	420	420	420	420	68	14900	-
5	1.55	20	480	2	148.1	IE5	BS40-../S5E08MA4	1	3.3	6.7	20	24	480	480	480	480	480	68	15000	-
5	1.55	16.5	570	1.4	178.2	IE5	BS40-../S5E08MA4	0.8	2.8	5.6	16.5	20	570	570	570	570	570	68	15000	-
5	1.55	13.5	690	1.1	219.7	IE5	BS40-../S5E08MA4	0.65	2.2	4.5	13.5	16	690	690	690	690	690	68	15000	-
5	1.55	15	720	0.96	197.1	IE5	BS40Z-../S5E08MA4	0.75	2.5	5	15	18	720	720	720	720	720	71	15000	-
5	1.55	12	780	1.1	249.6	IE5	BS40Z-../S5E08MA4	0.6	2	4	12	14	780	780	780	780	780	71	15000	-
5	1.55	9.9	950	1.1	302.1	IE5	BS40Z-../S5E08MA4	0.49	1.6	3.3	9.9	11.5	950	950	950	950	950	71	15000	-
5	1.55	8.4	1120	0.96	356.8	IE5	BS40Z-../S5E08MA4	0.42	1.4	2.8	8.4	10	1120	1120	1120	1120	1120	71	15000	-

MN = 7 Nm (PN = 2.2 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	650	28	1.4	4.6	IE4	BS03-../S4E08MA4	32.5	108	215	650	780	20	23.5	28	28	28	10	1070	-
7	2.2	650	28	1.4	4.6	IE5	BS03-../S5E08LA4	32.5	108	215	650	780	26	28	28	28	28	12	1070	-
7	2.2	500	36.5	1.2	6	IE4	BS03-../S4E08MA4	25	83	166	500	600	26	31	36.5	36.5	36.5	10	1170	-
7	2.2	500	36.5	1.2	6	IE5	BS03-../S5E08LA4	25	83	166	500	600	34	36.5	36.5	36.5	36.5	12	1170	-
7	2.2	375	48	1	8	IE4	BS03-../S4E08MA4	18.5	62	125	375	450	34	40.5	48	48	48	10	1320	-
7	2.2	375	48	1	8	IE5	BS03-../S5E08LA4	18.5	62	125	375	450	44.5	48	48	48	48	12	1320	-
7	2.2	300	58	0.88	10	IE4	BS03-../S4E08MA4	15	50	100	300	360	42	49.5	58	58	58	10	1450	-
7	2.2	300	58	0.88	10	IE5	BS03-../S5E08LA4	15	50	100	300	360	54	58	58	58	58	12	1450	-
7	2.2	445	37.5	1.5	6.67	IE4	BS06-../S4E08MA4	22	74	149	445	530	27	31.5	37.5	37.5	37.5	16	1550	-
7	2.2	445	37.5	1.5	6.67	IE5	BS06-../S5E08LA4	22	74	149	445	530	35	37.5	37.5	37.5	37.5	17	1550	-
7	2.2	335	50	1.2	8.93	IE4	BS06-../S4E08MA4	16.5	55	111	335	400	36	42.5	50	50	50	16	1710	-
7	2.2	335	50	1.2	8.93	IE5	BS06-../S5E08LA4	16.5	55	111	335	400	47	50	50	50	50	17	1710	-
7	2.2	275	60	1.1	10.73	IE4	BS06-../S4E08MA4	13.5	46.5	93	275	335	43	51	60	60	60	16	1850	-
7	2.2	275	60	1.1	10.73	IE5	BS06-../S5E08LA4	13.5	46.5	93	275	335	56	60	60	60	60	17	1850	-
7	2.2	210	79	0.85	14.07	IE4	BS06-../S4E08MA4	10.5	35.5	71	210	255	56	67	79	79	79	16	2200	-
7	2.2	210	79	0.85	14.07	IE5	BS06-../S5E08LA4	10.5	35.5	71	210	255	74	79	79	79	79	17	2200	-
7	2.2	240	69	1.5	12.49	IE4	BS10-../S4E08MA4	12	40	80	240	285	49.5	58	69	69	69	27	2400	-
7	2.2	240	69	1.5	12.49	IE5	BS10-../S5E08LA4	12	40	80	240	285	64	69	69	69	69	28	2400	-
7	2.2	177	94	1.3	16.92	IE4	BS10-../S4E08MA4	8.8	29.5	59	177	210	67	79	94	94	94	27	2700	-
7	2.2	177	94	1.3	16.92	IE5	BS10-../S5E08LA4	8.8	29.5	59	177	210	87	94	94	94	94	28	2700	-
7	2.2	138	121	1	21.61	IE4	BS10-../S4E08MA4	6.9	23	46	138	166	86	101	121	121	121	27	3000	-
7	2.2	138	121	1	21.61	IE5	BS10-../S5E08LA4	6.9	23	46	138	166	112	121	121	121	121	28	3000	-
7	2.2	132	109	1.1	22.6	IE4	BS10-../S4E08MA4	6.6	22	44	132	159	77	92	109	109	109	27	3200	-
7	2.2	132	109	1.1	22.6	IE5	BS10-../S5E08LA4	6.6	22	44	132	159	101	109	109	109	109	28	3200	-
7	2.2	113	144	0.9	26.42	IE4	BS10-../S4E08MA4	5.6	18.5	37.5	113	136	103	121	144	144	144	27	3250	-
7	2.2	113	144	0.9	26.42	IE5	BS10-../S5E08LA4	5.6	18.5	37.5	113	136	133	144	144	144	144	28	3250	-
7	2.2	97	147	0.88	30.63	IE4	BS10-../S4E08MA4	4.8	16	32.5	97	117	105	124	147	147	147	27	3550	-
7	2.2	97	147	0.88	30.63	IE5	BS10-../S5E08LA4	4.8	16	32.5	97	117	137	147	147	147	147	28	3550	-
7	2.2	230	72	2.8	12.77	IE4	BS20-../S4E08MA4	11.5	39	78	230	280	51	61	72	72	72	37	3350	-
7	2.2	230	72	2.8	12.77	IE5	BS20-../S5E08LA4	11.5	39	78	230	280	67	72	72	72	72	39	3350	-
7	2.2	177	95	2.3	16.92	IE4	BS20-../S4E08MA4	8.8	29.5	59	177	210	68	80	95	95	95	37	3700	-
7	2.2	177	95	2.3	16.92	IE5	BS20-../S5E08LA4	8.8	29.5	59	177	210	89	95	95	95	95	39	3700	-
7	2.2	134	126	1.8	22.23	IE4	BS20-../S4E08MA4	6.7	22	44.5	134	161	90	106	126	126	126	37	4100	-
7	2.2	134	126	1.8	22.23	IE5	BS20-../S5E08LA4	6.7	22	44.5	134	161	117	126	126	126	126	39	4100	-
7	2.2	129	116	2	23.13	IE4	BS20-../S4E08MA4	6.4	21.5	43	129	155	83	98	116	116	116	37	4300	-
7	2.2	129	116	2	23.13	IE5	BS20-../S5E08LA4	6.4</td												

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 7 Nm (PN = 2.2 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
7	2.2	124	126	2.9	24.06	IE4	BS30-..S4E08MA4	6.2	20.5	41.5	124	149	90	106	126	126	126	55	4600	-
7	2.2	124	126	2.9	24.06	IE5	BS30-..S5E08LA4	6.2	20.5	41.5	124	149	117	126	126	126	126	56	4600	-
7	2.2	110	157	2.5	27.07	IE4	BS30-..S4E08MA4	5.5	18	36.5	110	132	112	132	157	157	157	55	4750	-
7	2.2	110	157	2.5	27.07	IE5	BS30-..S5E08LA4	5.5	18	36.5	110	132	146	157	157	157	157	56	4750	-
7	2.2	97	160	2.5	30.63	IE4	BS30-..S4E08MA4	4.8	16	32.5	97	117	114	135	160	160	160	55	5000	-
7	2.2	97	160	2.5	30.63	IE5	BS30-..S5E08LA4	4.8	16	32.5	97	117	149	160	160	160	160	56	5000	-
7	2.2	89	192	2.2	33.55	IE4	BS30-..S4E08MA4	4.4	14.5	29.5	89	107	137	162	192	192	192	55	5200	-
7	2.2	89	192	2.2	33.55	IE5	BS30-..S5E08LA4	4.4	14.5	29.5	89	107	178	192	192	192	192	56	5200	-
7	2.2	79	199	2.1	37.92	IE4	BS30-..S4E08MA4	3.9	13	26	79	94	142	167	199	199	199	55	5500	-
7	2.2	79	199	2.1	37.92	IE5	BS30-..S5E08LA4	3.9	13	26	79	94	184	199	199	199	199	56	5500	-
7	2.2	76	220	1.9	39.31	IE4	BS30-..S4E08MA4	3.8	12.5	25	76	91	159	187	220	220	220	55	5500	-
7	2.2	76	220	1.9	39.31	IE5	BS30-..S5E08LA4	3.8	12.5	25	76	91	205	220	220	220	220	56	5500	-
7	2.2	59	265	1.7	50.04	IE4	BS30-..S4E08MA4	2.9	9.9	19.5	59	71	192	225	265	265	265	55	5900	-
7	2.2	59	265	1.7	50.04	IE5	BS30-..S5E08LA4	2.9	9.9	19.5	59	71	250	265	265	265	265	56	5900	-
7	2.2	51	315	1.5	58.64	IE4	BS30-..S4E08MA4	2.5	8.5	17	51	61	225	265	315	315	315	55	6900	-
7	2.2	51	315	1.5	58.64	IE5	BS30-..S5E08LA4	2.5	8.5	17	51	61	290	315	315	315	315	56	6900	-
7	2.2	42	345	1.4	71.17	IE4	BS30-..S4E08MA4	2.1	7	14	42	50	245	290	345	345	345	55	7000	-
7	2.2	42	345	1.4	71.17	IE5	BS30-..S5E08LA4	2.1	7	14	42	50	320	345	345	345	345	56	7000	-
7	2.2	35.5	445	0.9	83.48	IE4	BS30-..S4E08MA4	1.7	5.9	11.5	35.5	43	320	375	445	445	445	55	6800	-
7	2.2	35.5	445	0.9	83.48	IE5	BS30-..S5E08LA4	1.7	5.9	11.5	35.5	43	415	445	445	445	445	56	6800	-
7	2.2	33	435	1.1	90.59	IE4	BS30-..S4E08MA4	1.6	5.5	11	33	39.5	310	365	435	435	435	55	7700	-
7	2.2	33	435	1.1	90.59	IE5	BS30-..S5E08LA4	1.6	5.5	11	33	39.5	405	435	435	435	435	56	7700	-
7	2.2	28	500	1	106.2	IE4	BS30-..S4E08MA4	1.4	4.7	9.4	28	33.5	360	425	500	500	500	55	8200	-
7	2.2	28	500	1	106.2	IE5	BS30-..S5E08LA4	1.4	4.7	9.4	28	33.5	465	500	500	500	500	56	8200	-
7	2.2	23.5	590	0.87	125.2	IE4	BS30-..S4E08MA4	1.1	3.9	7.9	23.5	28.5	425	500	590	590	590	55	8700	-
7	2.2	23.5	590	0.87	125.2	IE5	BS30-..S5E08LA4	1.1	3.9	7.9	23.5	28.5	550	590	590	590	590	56	8700	-
7	2.2	49.5	300	2.9	60.38	IE4	BS40-..S4E08MA4	2.4	8.2	16.5	49.5	59	210	250	300	300	300	68	11200	-
7	2.2	49.5	300	2.9	60.38	IE5	BS40-..S5E08LA4	2.4	8.2	16.5	49.5	59	275	300	300	300	300	69	11200	-
7	2.2	43	375	2	69.6	IE4	BS40-..S4E08MA4	2.1	7.1	14	43	51	265	315	375	375	375	68	11800	-
7	2.2	43	375	2	69.6	IE5	BS40-..S5E08LA4	2.1	7.1	14	43	51	345	375	375	375	375	69	11800	-
7	2.2	41	355	2.5	73.09	IE4	BS40-..S4E08MA4	2	6.8	13.5	41	49	255	300	355	355	355	68	12100	-
7	2.2	41	355	2.5	73.09	IE5	BS40-..S5E08LA4	2	6.8	13.5	41	49	330	355	355	355	355	69	12100	-
7	2.2	34.5	415	2.2	86.33	IE4	BS40-..S4E08MA4	1.7	5.7	11.5	34.5	41.5	295	350	415	415	415	68	12900	-
7	2.2	34.5	415	2.2	86.33	IE5	BS40-..S5E08LA4	1.7	5.7	11.5	34.5	41.5	385	415	415	415	415	69	12900	-
7	2.2	27.5	500	1.9	108.1	IE4	BS40-..S4E08MA4	1.3	4.6	9.2	27.5	33	360	425	500	500	500	68	14000	-
7	2.2	27.5	500	1.9	108.1	IE5	BS40-..S5E08LA4	1.3	4.6	9.2	27.5	33	470	500	500	500	500	69	14000	-
7	2.2	23.5	590	1.7	126	IE4	BS40-..S4E08MA4	1.1	3.9	7.9	23.5	28.5	420	495	590	590	590	68	14900	-
7	2.2	20	670	1.4	148.1	IE4	BS40-..S4E08MA4	1	3.3	6.7	20	24	480	560	670	670	670	68	15000	-
7	2.2	20	670	1.4	148.1	IE5	BS40-..S5E08LA4	1	3.3	6.7	20	24	620	670	670	670	670	69	15000	-
7	2.2	16.5	810	1	178.2	IE4	BS40-..S4E08MA4	0.8	2.8	5.6	16.5	20	570	680	810	810	810	68	15000	-
7	2.2	16.5	810	1	178.2	IE5	BS40-..S5E08LA4	0.8	2.8	5.6	16.5	20	750	810	810	810	810	69	15000	-
7	2.2	13.5	960	0.82	219.7	IE4	BS40-..S4E08MA4	0.65	2.2	4.5	13.5	16	690	810	960	960	960	68	15000	-
7	2.2	13.5	960	0.82	219.7	IE5	BS40-..S5E08LA4	0.65	2.2	4.5	13.5	16	890	960	960	960	960	69	15000	-
7	2.2	12	1100	0.82	249.6	IE4	BS40Z-..S4E08MA4	0.6	2	4	12	14	780	920	1100	1100	1100	71	15000	-
7	2.2	12	1100	0.82	249.6	IE5	BS40Z-..S5E08LA4	0.6	2	4	12	14	1020	1100	1100	1100	1100	73	15000	-
7	2.2	9.9	1330	0.8	302.1	IE4	BS40Z-..S4E08MA4	0.49	1.6	3.3	9.9	11.5	950	1120	1330	1330	1330	71	15000	-
7	2.2	9.9	1330	0.8	302.1	IE5	BS40Z-..S5E08LA4	0.49	1.6	3.3	9.9	11.5	1230	1330	1330	1330	1330	73	15000	-

9

MN = 10 Nm (PN = 3.1 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
10	3.1	650	40	0.99	4.6	IE3	BS03-..SPE08LA4	32.5	108	215	650	780	26	32	40	40				

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 10 Nm (PN = 3.1 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
10	3.1	124	180	2	24.06	IE3	BS30-.SPE08LA4	6.2	20.5	41.5	124	149	117	144	180	180	180	56	4600	-
10	3.1	110	220	1.8	27.07	IE3	BS30-.SPE08LA4	5.5	18	36.5	110	132	146	179	220	220	220	56	4750	-
10	3.1	97	225	1.7	30.63	IE3	BS30-.SPE08LA4	4.8	16	32.5	97	117	149	183	225	225	225	56	5000	-
10	3.1	89	275	1.5	33.55	IE3	BS30-.SPE08LA4	4.4	14.5	29.5	89	107	178	220	275	275	275	56	5200	-
10	3.1	79	280	1.5	37.92	IE3	BS30-.SPE08LA4	3.9	13	26	79	94	184	225	280	280	280	56	5500	-
10	3.1	76	315	1.4	39.31	IE3	BS30-.SPE08LA4	3.8	12.5	25	76	91	205	250	315	315	315	56	5500	-
10	3.1	59	385	1.2	50.04	IE3	BS30-.SPE08LA4	2.9	9.9	19.5	59	71	250	305	385	385	385	56	5900	-
10	3.1	51	450	1	58.64	IE3	BS30-.SPE08LA4	2.5	8.5	17	51	61	290	360	450	450	450	56	6900	-
10	3.1	42	495	0.96	71.17	IE3	BS30-.SPE08LA4	2.1	7	14	42	50	320	395	495	495	495	56	7000	-
10	3.1	89	265	2.9	33.35	IE3	BS40-.SPE08LA4	4.4	14.5	29.5	89	107	173	210	265	265	265	69	8300	-
10	3.1	78	275	2.8	38.13	IE3	BS40-.SPE08LA4	3.9	13	26	78	94	180	220	275	275	275	69	9400	-
10	3.1	74	315	2.5	40.37	IE3	BS40-.SPE08LA4	3.7	12	24.5	74	89	205	255	315	315	315	69	9000	-
10	3.1	62	370	2.2	47.69	IE3	BS40-.SPE08LA4	3.1	10	20.5	62	75	240	295	370	370	370	69	9600	-
10	3.1	49.5	425	2	60.38	IE3	BS40-.SPE08LA4	2.4	8.2	16.5	49.5	59	275	340	425	425	425	69	11200	-
10	3.1	43	530	1.4	69.6	IE3	BS40-.SPE08LA4	2.1	7.1	14	43	51	345	425	530	530	530	69	11800	-
10	3.1	41	510	1.7	73.09	IE3	BS40-.SPE08LA4	2	6.8	13.5	41	49	330	405	510	510	510	69	12100	-
10	3.1	34.5	590	1.5	86.33	IE3	BS40-.SPE08LA4	1.7	5.7	11.5	34.5	41.5	385	475	590	590	590	69	12900	-
10	3.1	27.5	720	1.3	108.1	IE3	BS40-.SPE08LA4	1.3	4.6	9.2	27.5	33	470	570	720	720	720	69	14000	-
10	3.1	23.5	840	1.2	126	IE3	BS40-.SPE08LA4	1.1	3.9	7.9	23.5	28.5	540	670	840	840	840	69	14900	-
10	3.1	20	960	1	148.1	IE3	BS40-.SPE08LA4	1	3.3	6.7	20	24	620	770	960	960	960	69	15000	-

MN = 13 Nm (PN = 4 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
13	4	240	129	0.83	12.49	IE4	BS10-.S4E09SA4	12	40	80	240	285	84	99	129	129	129	32	2400	-
13	4	230	134	1.5	12.77	IE4	BS20-.S4E09SA4	11.5	39	78	230	280	87	103	134	134	134	42	3350	-
13	4	177	178	1.2	16.92	IE4	BS20-.S4E09SA4	8.8	29.5	59	177	210	116	137	178	178	178	42	3700	-
13	4	134	230	0.98	22.23	IE4	BS20-.S4E09SA4	6.7	22	44.5	134	161	153	180	230	230	230	42	4100	-
13	4	129	215	1.1	23.13	IE4	BS20-.S4E09SA4	6.4	21.5	43	129	155	141	166	215	215	215	42	4300	-
13	4	107	280	0.88	27.86	IE4	BS20-.S4E09SA4	5.3	17.5	35.5	107	129	184	215	280	280	280	42	4450	-
13	4	97	285	0.87	30.63	IE4	BS20-.S4E09SA4	4.8	16	32.5	97	117	187	220	285	285	285	42	4750	-
13	4	91	325	0.82	32.87	IE4	BS20-.S4E09SA4	4.5	15	30	91	109	215	250	325	325	325	42	4750	-
13	4	225	143	2.3	13.29	IE4	BS30-.S4E09SA4	11	37.5	75	225	270	93	110	143	143	143	60	3600	-
13	4	177	182	2	16.92	IE4	BS30-.S4E09SA4	8.8	29.5	59	177	210	119	140	182	182	182	60	3950	-
13	4	143	225	1.7	20.94	IE4	BS30-.S4E09SA4	7.1	23.5	47.5	143	171	147	173	225	225	225	60	4300	-
13	4	124	230	1.6	24.06	IE4	BS30-.S4E09SA4	6.2	20.5	41.5	124	149	153	180	230	230	230	60	4600	-
13	4	110	290	1.4	27.07	IE4	BS30-.S4E09SA4	5.5	18	36.5	110	132	190	220	290	290	290	60	4750	-
13	4	97	295	1.3	30.63	IE4	BS30-.S4E09SA4	4.8	16	32.5	97	117	195	225	295	295	295	60	5000	-
13	4	89	355	1.2	33.55	IE4	BS30-.S4E09SA4	4.4	14.5	29.5	89	107	230	275	355	355	355	60	5200	-
13	4	79	365	1.1	37.92	IE4	BS30-.S4E09SA4	3.9	13	26	79	94	240	280	365	365	365	60	5500	-
13	4	76	410	1	39.31	IE4	BS30-.S4E09SA4	3.8	12.5	25	76	91	270	315	410	410	410	60	5500	-
13	4	59	500	0.9	50.04	IE4	BS30-.S4E09SA4	2.9	9.9	19.5	59	71	325	385	500	500	500	60	5900	-
13	4	127	225	3	23.59	IE4	BS40-.S4E09SA4	6.3	21	42	127	152	148	174	225	225	225	73	7900	-
13	4	114	275	2.7	26.18	IE4	BS40-.S4E09SA4	5.7	19	38	114	137	182	210	275	275	275	73	7500	-
13	4	97	290	2.5	30.63	IE4	BS40-.S4E09SA4	4.8	16	32.5	97	117	192	225	290	290	290	73	8700	-
13	4	89	345	2.2	33.35	IE4	BS40-.S4E09SA4	4.4	14.5	29.5	89	107	225	265	345	345	345	73	8300	-
13	4	78	360	2.2	38.13	IE4	BS40-.S4E09SA4	3.9	13	26	78	94	235	275	360	360	360	73	9400	-
13	4	74	410	1.9	40.37	IE4	BS40-.S4E09SA4	3.7	12	24.5	74	89	270	315	410	410	410	73	9000	-
13	4	62	480	1.7	47.69	IE4	BS40-.S4E09SA4	3.1	10	20.5	62	75	315	370	480	480	480	73	9600	-
13	4	49.5	550	1.5	60.38	IE4	BS40-.S4E09SA4	2.4	8.2	16.5	49.5	59	360	425	550	550	550	73	11200	-
13	4	43	690	1.1	69.6	IE4	BS40-.S4E09SA4	2.1	7.1	14	43	51	455	530	690	690	690	73	11800	-
13	4	41	660	1.3	73.09	IE4	BS40-.S4E09SA4	2	6.8	13.5	41	49	430	510	660	660	660	73	12100	-
13	4	34.5	770	1.2	86.33	IE4	BS40-.S4E09SA4	1.7	5.7	11.5	34.5	41.5	500	590	770	770	770	73</		

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$


MN = 17.5 Nm (PN = 5.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
17.5	5.5	177	245	1.5	16.92	IE5	BS30-..S5E09XA4	8.8	29.5	59	177	210	182	220	245	245	245	68	3950	-
17.5	5.5	143	300	1.2	20.94	IE4	BS30-..S4E11SA6	7.1	23.5	47.5	143	171	300	300	300	300	300	77	4300	-
17.5	5.5	143	300	1.2	20.94	IE5	BS30-..S5E09XA4	7.1	23.5	47.5	143	171	225	275	300	300	300	68	4300	-
17.5	5.5	124	315	1.2	24.06	IE4	BS30-..S4E11SA6	6.2	20.5	41.5	124	149	315	315	315	315	315	77	4600	-
17.5	5.5	124	315	1.2	24.06	IE5	BS30-..S5E09XA4	6.2	20.5	41.5	124	149	230	285	315	315	315	68	4600	-
17.5	5.5	110	390	1	27.07	IE4	BS30-..S4E11SA6	5.5	18	36.5	110	132	390	390	390	390	390	77	4750	-
17.5	5.5	110	390	1	27.07	IE5	BS30-..S5E09XA4	5.5	18	36.5	110	132	290	355	390	390	390	68	4750	-
17.5	5.5	97	400	0.99	30.63	IE4	BS30-..S4E11SA6	4.8	16	32.5	97	117	400	400	400	400	400	77	5000	-
17.5	5.5	97	400	0.99	30.63	IE5	BS30-..S5E09XA4	4.8	16	32.5	97	117	295	365	400	400	400	68	5000	-
17.5	5.5	89	480	0.87	33.55	IE4	BS30-..S4E11SA6	4.4	14.5	29.5	89	107	480	480	480	480	480	77	5200	-
17.5	5.5	89	480	0.87	33.55	IE5	BS30-..S5E09XA4	4.4	14.5	29.5	89	107	355	440	480	480	480	68	5200	-
17.5	5.5	79	495	0.84	37.92	IE4	BS30-..S4E11SA6	3.9	13	26	79	94	495	495	495	495	495	77	5500	-
17.5	5.5	79	495	0.84	37.92	IE5	BS30-..S5E09XA4	3.9	13	26	79	94	365	455	495	495	495	68	5500	-
17.5	5.5	177	250	2.7	16.92	IE4	BS40-..S4E11SA6	8.8	29.5	59	177	210	250	250	250	250	250	95	6400	-
17.5	5.5	177	250	2.7	16.92	IE5	BS40-..S5E09XA4	8.8	29.5	59	177	210	186	230	250	250	250	81	6400	-
17.5	5.5	142	300	2.3	21.06	IE4	BS40-..S4E11SA6	7.1	23.5	47	142	170	300	300	300	300	300	95	6900	-
17.5	5.5	142	300	2.3	21.06	IE5	BS40-..S5E09XA4	7.1	23.5	47	142	170	220	275	300	300	300	81	6900	-
17.5	5.5	127	305	2.2	23.59	IE4	BS40-..S4E11SA6	6.3	21	42	127	152	305	305	305	305	305	95	7900	-
17.5	5.5	127	305	2.2	23.59	IE5	BS40-..S5E09XA4	6.3	21	42	127	152	225	275	305	305	305	81	7900	-
17.5	5.5	114	375	2	26.18	IE4	BS40-..S4E11SA6	5.7	19	38	114	137	375	375	375	375	375	95	7500	-
17.5	5.5	114	375	2	26.18	IE5	BS40-..S5E09XA4	5.7	19	38	114	137	275	340	375	375	375	81	7500	-
17.5	5.5	97	395	1.9	30.63	IE4	BS40-..S4E11SA6	4.8	16	32.5	97	117	395	395	395	395	395	95	8700	-
17.5	5.5	97	395	1.9	30.63	IE5	BS40-..S5E09XA4	4.8	16	32.5	97	117	290	360	395	395	395	81	8700	-
17.5	5.5	89	465	1.7	33.35	IE4	BS40-..S4E11SA6	4.4	14.5	29.5	89	107	465	465	465	465	465	95	8300	-
17.5	5.5	89	465	1.7	33.35	IE5	BS40-..S5E09XA4	4.4	14.5	29.5	89	107	345	425	465	465	465	81	8300	-
17.5	5.5	78	485	1.6	38.13	IE4	BS40-..S4E11SA6	3.9	13	26	78	94	485	485	485	485	485	95	9400	-
17.5	5.5	78	485	1.6	38.13	IE5	BS40-..S5E09XA4	3.9	13	26	78	94	360	445	485	485	485	81	9400	-
17.5	5.5	74	550	1.4	40.37	IE4	BS40-..S4E11SA6	3.7	12	24.5	74	89	550	550	550	550	550	95	9000	-
17.5	5.5	74	550	1.4	40.37	IE5	BS40-..S5E09XA4	3.7	12	24.5	74	89	410	510	550	550	550	81	9000	-
17.5	5.5	62	650	1.3	47.69	IE4	BS40-..S4E11SA6	3.1	10	20.5	62	75	650	650	650	650	650	95	9600	-
17.5	5.5	62	650	1.3	47.69	IE5	BS40-..S5E09XA4	3.1	10	20.5	62	75	480	590	650	650	650	81	9600	-
17.5	5.5	49.5	750	1.1	60.38	IE4	BS40-..S4E11SA6	2.4	8.2	16.5	49.5	59	750	750	750	750	750	95	11200	-
17.5	5.5	49.5	750	1.1	60.38	IE5	BS40-..S5E09XA4	2.4	8.2	16.5	49.5	59	550	680	750	750	750	81	11200	-
17.5	5.5	41	890	0.98	73.09	IE4	BS40-..S4E11SA6	2	6.8	13.5	41	49	890	890	890	890	890	95	12100	-
17.5	5.5	41	890	0.98	73.09	IE5	BS40-..S5E09XA4	2	6.8	13.5	41	49	660	810	890	890	890	81	12100	-
17.5	5.5	34.5	1040	0.86	86.33	IE4	BS40-..S4E11SA6	1.7	5.7	11.5	34.5	41.5	770	950	1040	1040	1040	81	12900	-
17.5	5.5	34.5	1040	0.86	86.33	IE5	BS40-..S5E09XA4	1.7	5.7	11.5	34.5	41.5	660	810	1020	1020	1020	81	12900	-

9

MN = 20 Nm (PN = 6.3 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
20	6.3	230	205	0.97	12.77	IE5	BS20-..S5E09XA4	11.5	39	78	230	280	134	165	205	205	181	50	3350	-
20	6.3	177	270	0.8	16.92	IE5	BS20-..S5E09XA4	8.8	29.5	59	177	210	178	215	270	270	235	50	3700	-
20	6.3	225	220	1.5	13.29	IE5	BS30-..S5E09XA4	11	37.5	75	225	270	143	176	220	220	193	68	3600	-
20	6.3	177	280	1.3	16.92	IE5	BS30-..S5E09XA4	8.8	29.5	59	177	210	182	220	280	280	245	68	3950	-
20	6.3	143	345	1.1	20.94	IE5	BS30-..S5E09XA4	7.1	23.5	47.5	143	171	225	275	345	345	300	68	4300	-
20	6.3	124	360	1	24.06	IE5	BS30-..S5E09XA4	6.2	20.5	41.5	124	149	230	285	360	360	315	68	4600	-
20	6.3	110	445	0.89	27.07	IE5	BS30-..S5E09XA4	5.5	18	36.5	110	132	290	355	445	445	390	68	4750	-
20	6.3	97	455	0.87	30.63	IE5	BS30-..S5E09XA4	4.8	16	32.5	97	117	295	365	455	455	400	68	5000	-
20	6.3	230	220	2.8	13.03	IE5	BS40-..S5E09XA4	11.5	38	76	230	275	143	177	220	220	193	81	5800	-
20	6.3	177	285	2.3	16.92	IE5	BS40-..S5E09XA4	8.8	29.5	59	177	210	186	230	285	285	250	81	6400	-
20	6.3	142	345																	

BS-series worm-gear motors

Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$


MN = 24 Nm (PN = 7.5 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
24	7.5	225	260	1.3	13.29	IE4	BS30-..S4E11SA6	11	37.5	75	225	270	205	235	260	260	260	77	3600	-
24	7.5	225	260	1.3	13.29	IE5	BS30-..S5E11MA6	11	37.5	75	225	270	260	260	260	260	260	77	3600	-
24	7.5	177	335	1.1	16.92	IE4	BS30-..S4E11SA6	8.8	29.5	59	177	210	265	300	335	335	335	77	3950	-
24	7.5	177	335	1.1	16.92	IE5	BS30-..S5E11MA6	8.8	29.5	59	177	210	335	335	335	335	335	77	3950	-
24	7.5	143	415	0.91	20.94	IE4	BS30-..S4E11SA6	7.1	23.5	47.5	143	171	330	370	415	415	415	77	4300	-
24	7.5	143	415	0.91	20.94	IE5	BS30-..S5E11MA6	7.1	23.5	47.5	143	171	415	415	415	415	415	77	4300	-
24	7.5	124	430	0.85	24.06	IE4	BS30-..S4E11SA6	6.2	20.5	41.5	124	149	340	385	430	430	430	77	4600	-
24	7.5	124	430	0.85	24.06	IE5	BS30-..S5E11MA6	6.2	20.5	41.5	124	149	430	430	430	430	430	77	4600	-
24	7.5	230	265	2.3	13.03	IE4	BS40-..S4E11SA6	11.5	38	76	230	275	210	235	265	265	265	95	5800	-
24	7.5	230	265	2.3	13.03	IE5	BS40-..S5E11MA6	11.5	38	76	230	275	265	265	265	265	265	95	5800	-
24	7.5	177	345	1.9	16.92	IE4	BS40-..S4E11SA6	8.8	29.5	59	177	210	270	305	345	345	345	95	6400	-
24	7.5	177	345	1.9	16.92	IE5	BS40-..S5E11MA6	8.8	29.5	59	177	210	345	345	345	345	345	95	6400	-
24	7.5	142	410	1.7	21.06	IE4	BS40-..S4E11SA6	7.1	23.5	47	142	170	325	370	410	410	410	95	6900	-
24	7.5	142	410	1.7	21.06	IE5	BS40-..S5E11MA6	7.1	23.5	47	142	170	410	410	410	410	410	95	6900	-
24	7.5	127	415	1.6	23.59	IE4	BS40-..S4E11SA6	6.3	21	42	127	152	330	375	415	415	415	95	7900	-
24	7.5	127	415	1.6	23.59	IE5	BS40-..S5E11MA6	6.3	21	42	127	152	415	415	415	415	415	95	7900	-
24	7.5	114	510	1.4	26.18	IE4	BS40-..S4E11SA6	5.7	19	38	114	137	405	460	510	510	510	95	7500	-
24	7.5	114	510	1.4	26.18	IE5	BS40-..S5E11MA6	5.7	19	38	114	137	510	510	510	510	510	95	7500	-
24	7.5	97	540	1.4	30.63	IE4	BS40-..S4E11SA6	4.8	16	32.5	97	117	430	485	540	540	540	95	8700	-
24	7.5	97	540	1.4	30.63	IE5	BS40-..S5E11MA6	4.8	16	32.5	97	117	540	540	540	540	540	95	8700	-
24	7.5	89	640	1.2	33.35	IE4	BS40-..S4E11SA6	4.4	14.5	29.5	89	107	500	570	640	640	640	95	8300	-
24	7.5	89	640	1.2	33.35	IE5	BS40-..S5E11MA6	4.4	14.5	29.5	89	107	640	640	640	640	640	95	8300	-
24	7.5	78	660	1.2	38.13	IE4	BS40-..S4E11SA6	3.9	13	26	78	94	520	590	660	660	660	95	9400	-
24	7.5	78	660	1.2	38.13	IE5	BS40-..S5E11MA6	3.9	13	26	78	94	660	660	660	660	660	95	9400	-
24	7.5	74	760	1	40.37	IE4	BS40-..S4E11SA6	3.7	12	24.5	74	89	600	680	760	760	760	95	9000	-
24	7.5	74	760	1	40.37	IE5	BS40-..S5E11MA6	3.7	12	24.5	74	89	760	760	760	760	760	95	9000	-
24	7.5	62	890	0.93	47.69	IE4	BS40-..S4E11SA6	3.1	10	20.5	62	75	700	790	890	890	890	95	9600	-
24	7.5	62	890	0.93	47.69	IE5	BS40-..S5E11MA6	3.1	10	20.5	62	75	890	890	890	890	890	95	9600	-
24	7.5	49.5	1020	0.84	60.38	IE4	BS40-..S4E11SA6	2.4	8.2	16.5	49.5	59	810	920	1020	1020	1020	95	11200	-
24	7.5	49.5	1020	0.84	60.38	IE5	BS40-..S5E11MA6	2.4	8.2	16.5	49.5	59	1020	1020	1020	1020	1020	95	11200	-

9

MN = 30 Nm (PN = 9.5 kW)




M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
30	9.5	225	330	1	13.29	IE5	BS30-..S5E11LA6	11	37.5	75	225	270	330	330	330	330	330	89	3600	-
30	9.5	225	330	1	13.29	IE5	BS30-..S5E11MA6	11	37.5	75	225	270	290	330	330	330	330	77	3600	-
30	9.5	177	420	0.85	16.92	IE5	BS30-..S5E11LA6	8.8	29.5	59	177	210	420	420	420	420	420	89	3950	-
30	9.5	177	420	0.85	16.92	IE5	BS30-..S5E11MA6	8.8	29.5	59	177	210	370	420	420	420	420	77	3950	-
30	9.5	230	330	1.8	13.03	IE5	BS40-..S5E11LA6	11.5	38	76	230	275	330	330	330	330	330	107	5800	-
30	9.5	230	330	1.8	13.03	IE5	BS40-..S5E11MA6	11.5	38	76	230	275	290	330	330	330	330	95	5800	-
30	9.5	177	430	1.6	16.92	IE5	BS40-..S5E11LA6	8.8	29.5	59	177	210	430	430	430	430	430	107	6400	-
30	9.5	177	430	1.6	16.92	IE5	BS40-..S5E11MA6	8.8	29.5	59	177	210	380	430	430	430	430	95	6400	-
30	9.5	142	510	1.4	21.06	IE5	BS40-..S5E11LA6	7.1	23.5	47	142	170	510	510	510	510	510	107	6900	-
30	9.5	142	510	1.4	21.06	IE5	BS40-..S5E11MA6	7.1	23.5	47	142	170	455	510	510	510	510	95	6900	-
30	9.5	127	520	1.3	23.59	IE5	BS40-..S5E11LA6	6.3	21	42	127	152	520	520	520	520	520	107	7900	-
30	9.5	127	520	1.3	23.59	IE5	BS40-..S5E11MA6	6.3	21	42	127	152	460	520	520	520	520	95	7900	-
30	9.5	114	640	1.1	26.18	IE5	BS40-..S5E11LA6	5.7	19	38	114	137	640	640	640	640	640	107	7500	-
30	9.5	97	670	1.1	30.63	IE5	BS40-..S5E11LA6	4.8	16	32.5	97	117	670	670	670	670	670	107	8700	-
30	9.5	97	670	1.1	30.63	IE5	BS40-..S5E11MA6	4.8	16	32.5	97	117	600	670	670	670	670	95	8700	-
30	9.5	89	800	0.97	33.35	IE5	BS40-..S5E11LA6	4.4	14.5	29.5	89	107	800	800	800	800	800	107	8300	-
30	9.5	89	800	0.97	33.35	IE5	BS40-..S5E11MA6	4.4	14.5	29.5	89	107	700	800	800	800	800	95	8300	-
30	9.5	78	830	0.93	38.13	IE5	BS40-..S5E11LA6	3.9	13	26	78									

BS-series worm-gear motors


Selection - worm-gear motors - $n_1 = 3000 \text{ } 1/\text{min}$

MN = 35 Nm (PN = 11 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
35	11	142	600	1.2	21.06	IE4	BS40-..S4E11MA6	7.1	23.5	47	142	170	455	510	600	600	600	95	6900	-
35	11	142	600	1.2	21.06	IE5	BS40-..S5E11LA6	7.1	23.5	47	142	170	600	600	600	600	600	107	6900	-
35	11	127	610	1.1	23.59	IE4	BS40-..S4E11MA6	6.3	21	42	127	152	460	520	610	610	610	95	7900	-
35	11	127	610	1.1	23.59	IE5	BS40-..S5E11LA6	6.3	21	42	127	152	610	610	610	610	610	107	7900	-
35	11	114	750	0.98	26.18	IE4	BS40-..S4E11MA6	5.7	19	38	114	137	560	640	750	750	750	95	7500	-
35	11	114	750	0.98	26.18	IE5	BS40-..S5E11LA6	5.7	19	38	114	137	750	750	750	750	750	107	7500	-
35	11	97	790	0.95	30.63	IE4	BS40-..S4E11MA6	4.8	16	32.5	97	117	600	670	790	790	790	95	8700	-
35	11	97	790	0.95	30.63	IE5	BS40-..S5E11LA6	4.8	16	32.5	97	117	790	790	790	790	790	107	8700	-
35	11	89	930	0.84	33.35	IE4	BS40-..S4E11MA6	4.4	14.5	29.5	89	107	700	800	930	930	930	95	8300	-
35	11	89	930	0.84	33.35	IE5	BS40-..S5E11LA6	4.4	14.5	29.5	89	107	930	930	930	930	930	107	8300	-
35	11	78	970	0.8	38.13	IE4	BS40-..S4E11MA6	3.9	13	26	78	94	730	830	970	970	970	95	9400	-
35	11	78	970	0.8	38.13	IE5	BS40-..S5E11LA6	3.9	13	26	78	94	970	970	970	970	970	107	9400	-


MN = 48 Nm (PN = 15 kW)



M _N [Nm]	P _N [kW]	n ₂ [1/min]	M ₂ [Nm]	f _B [-]	i [:1]	IE- Classe	Type	Speed range n ₂ [1/min] at motor speed n ₁ [1/min]					Torque range M ₂ [Nm] at motor speed n ₁ [1/min]					m [kg]	F _{RN} [N]	F _{RV} [N]
								150	500	1000	3000	3600	150	500	1000	3000	3600			
48	15	230	530	1.2	13.03	IE5	BS40-..S5E11LA6	11.5	38	76	230	275	385	440	530	530	440	107	5800	-
48	15	177	690	0.97	16.92	IE5	BS40-..S5E11LA6	8.8	29.5	59	177	210	500	570	690	690	570	107	6400	-
48	15	142	820	0.86	21.06	IE5	BS40-..S5E11LA6	7.1	23.5	47	142	170	600	690	820	820	690	107	6900	-
48	15	127	830	0.82	23.59	IE5	BS40-..S5E11LA6	6.3	21	42	127	152	610	690	830	830	690	107	7900	-

Energy Efficient Geared Motors

AC Variable Speed

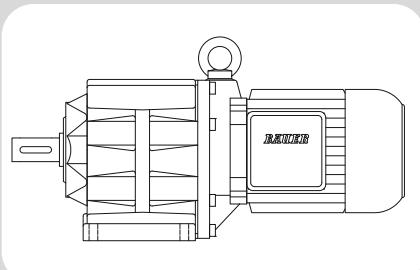

10

BG-series helical-gearred motors - Dimensions

Dimension - Standard	293
BG04	293
BG05	294
BG06	295
BG10-BG10Z	296
BG10X-BG10XZ	298
BG15	301
BG20-BG20Z	302
BG30-BG30Z	304
BG40-BG40Z	306
BG50-BG50Z	308
BG60-BG60Z	310
BG70 - BG70Z	312
BG80-BG80Z	314
BG90-BG90Z	316
BG100-BG100Z	318
Dimension - Tandem Gearbox	321
BG06G04	321
BG10G06	322
BG10XG06	324
BG20G06	326
BG30G06	328
BG40G10	330
BG50G10	332
BG60G20	334
BG70G20	336
BG80G40	338
BG90G50	340
BG100G50	342

Energy Efficient Geared Motors

AC Variable Speed


10

BG-series helical-gear motors


Dimension - Standard

BG04

Foot mounting
Code -11/

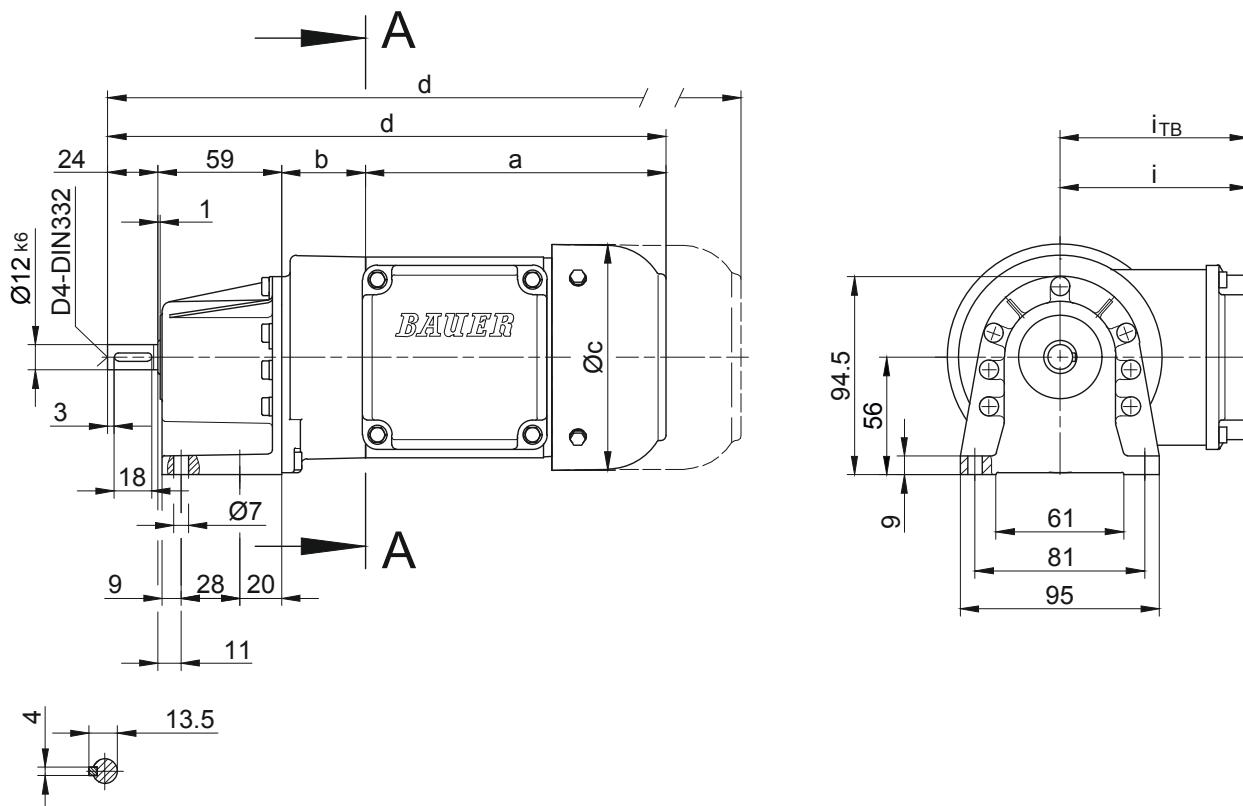

Flange with clearance holes
Code -31/

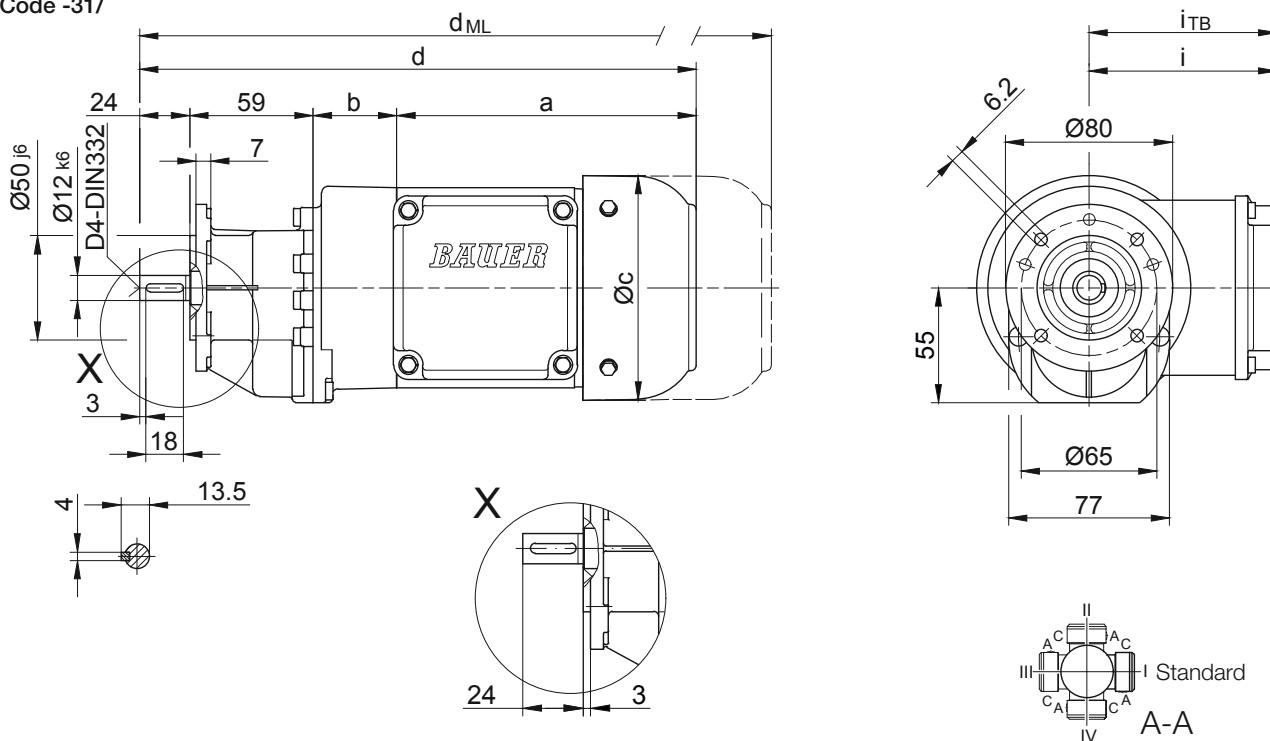

Type	a	b	c	d	i	Design with motor extensions				
						i_{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d_{ML}	d_{ML}	d_{ML}	-
BG04-../S04S	142.5	40	110.5	265.5	90	112	309	353	396.5	-
Dimensions in millimetres (mm)										

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BG-series helical-gear motors

Dimension - Standard

BG05




Foot mounting

Code -11/

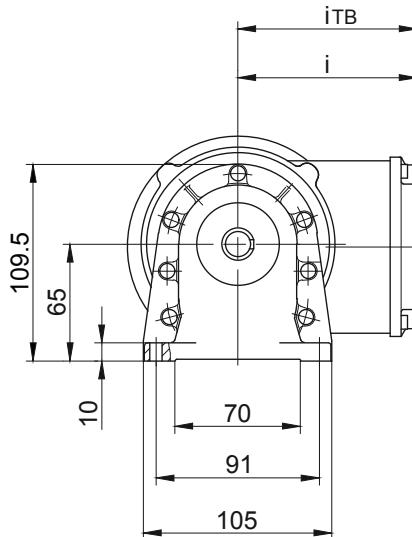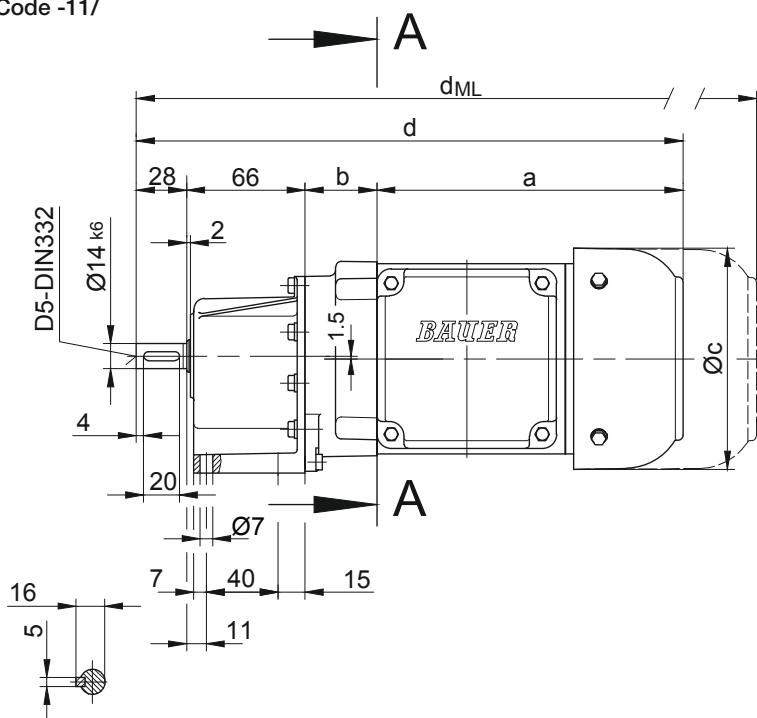

Flange with clearance holes

Code -31/

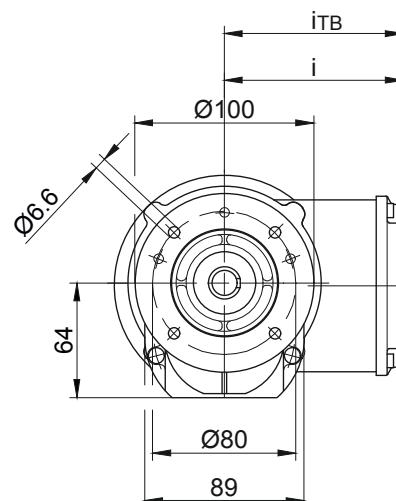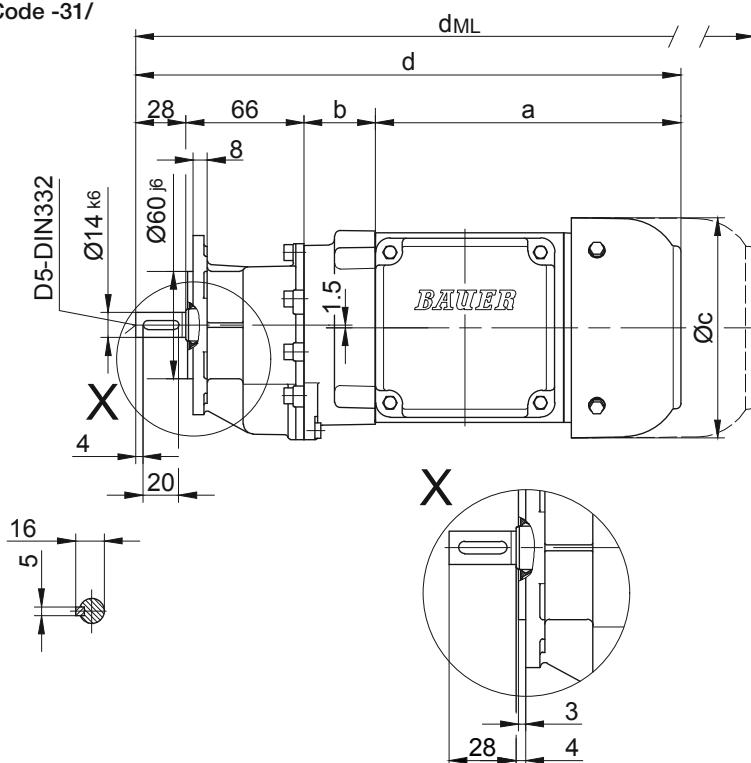

Type	a	b	c	d	i	Design with motor extensions			
						i _{TB}	Brake	Encoder	Brake with Encoder
							d _{ML}	d _{ML}	d _{ML}
BG05-../S04S	142.5	38	110.5	274.5	90	112	318	362	405.5
BG05-../S..06 (M, L)	170.5	40	123	304.5	99	119	346.5	407	444.5

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gear motors

Dimension - Standard


BG06

Foot mounting
Code -11/

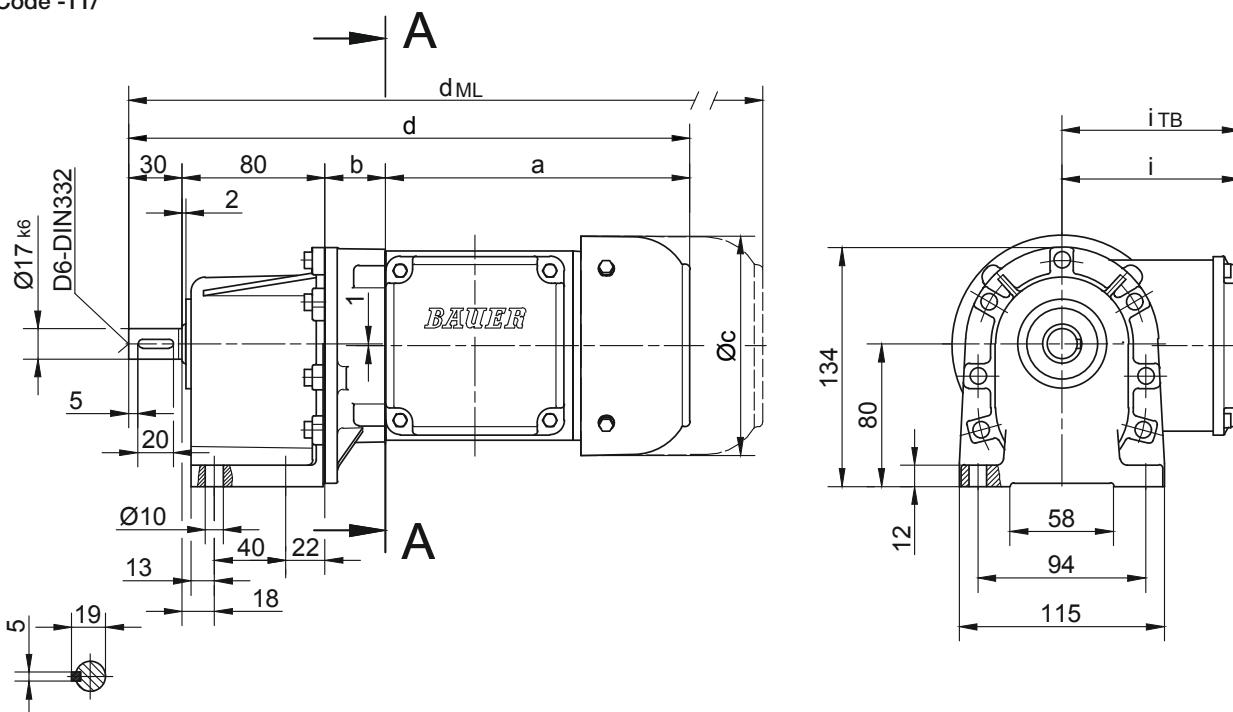

Flange with clearance holes

Code -31/

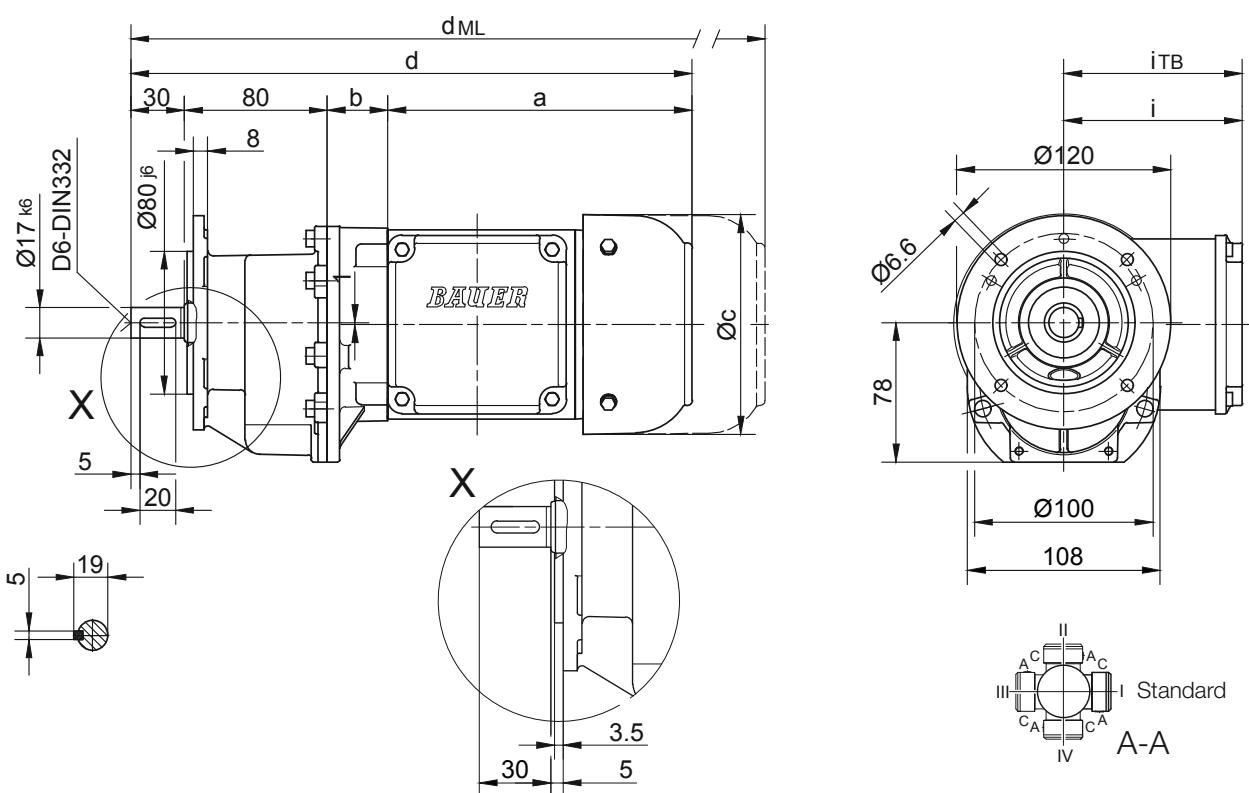

Type	a	b	c	d	i	Design with motor extensions								
						i _{TB}	Brake		Encoder		Brake with Encoder		Back Stop	
							d _{ML}	d _{ML}						
BG06-../S04S	142.5	32	110.5	284.5	90	112	328	372	415.5	-				
BG06-../S..06 (M, L)	170.5	34	123	314.5	99	119	356.5	417	454.5	-				
BG06-../S..08 (M, L)	199.5	78	156	387.5	114.5	136.5	453.5	499.5	561	-				

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gear motors

Dimension - Standard

BG10-BG10Z

Foot mounting with clearance holes


Code -11/

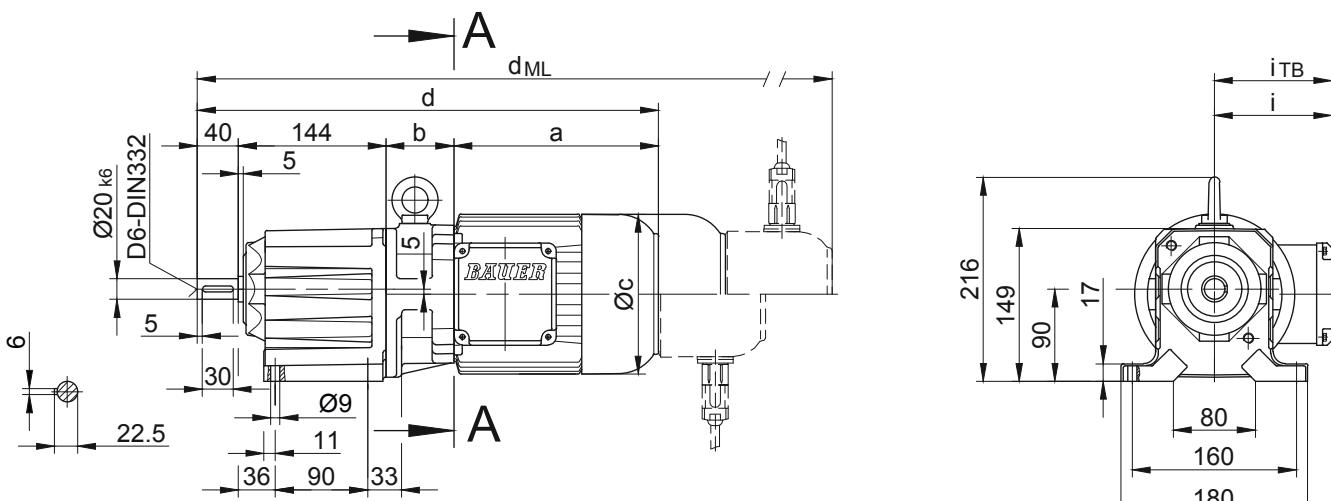

Flange with clearance holes

Code -37/

(Code-27/)

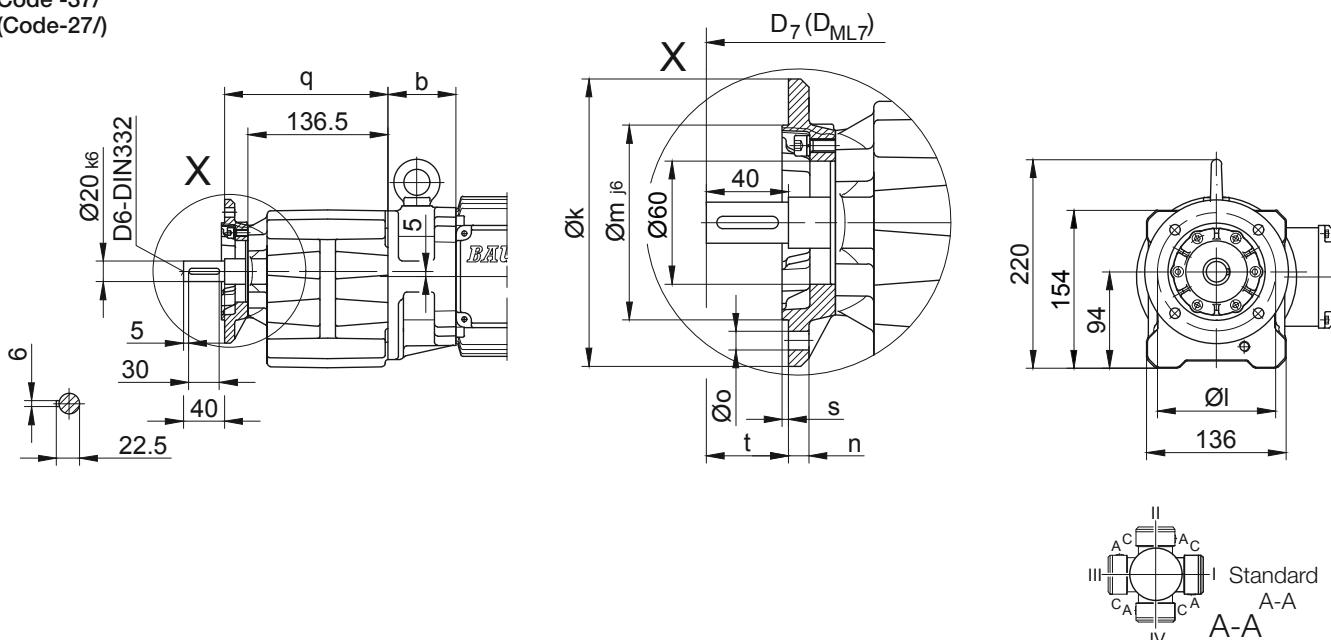

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{M₇}
BG10..	Code -37V/	140	115	95	10	9	159.5	3	40.5	d+15.5	d _{M₇} +15.5
BG10..	Code -27V/	120	100	80	8	6.6	154.5	3	45.5	d+15.5	d _{M₇} +15.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG10Z-../S04S	142.5	86	110.5	412.5	90	112	456	500	543.5	-
BG10-../S..06 (M, L)	170.5	62	123	416.5	99	119	458.5	519	556.5	-
BG10Z-../S..06 (M, L)	170.5	88	123	442.5	99	119	484.5	545	582.5	-
BG10-../S..08 (M, L)	199.5	66	156	449.5	114.5	136.5	515.5	561.5	623	-
BG10Z-../S..08 (M, L)	199.5	132	156	515.5	114.5	136.5	581.5	627.5	689	-
BG10-../S..09 (S, X)	250.5	80.5	176	515	124	157	608	622.5	712	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BG-series helical-gear motors

Dimension - Standard

BG10-BG10Z



Flange with tapped holes

Code -71/

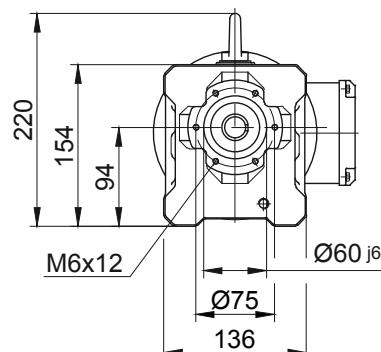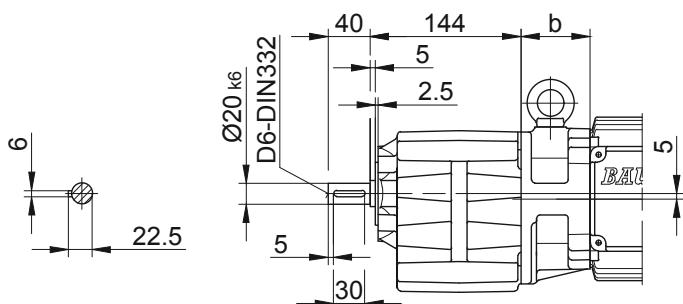



Foot with tapped holes left and right

Code -61LR/

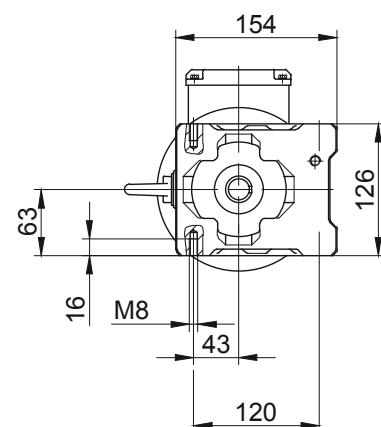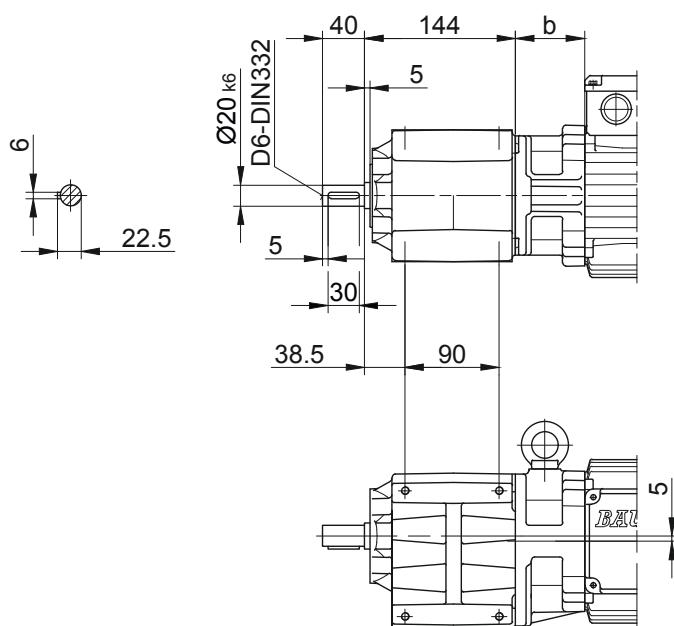

Foot plate left

Code -91L/

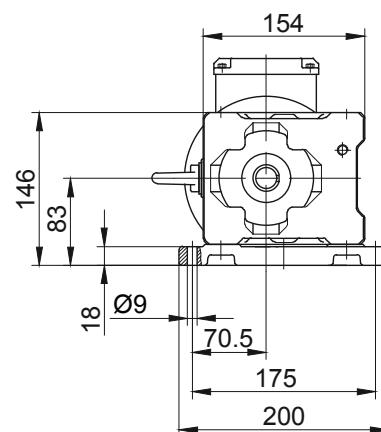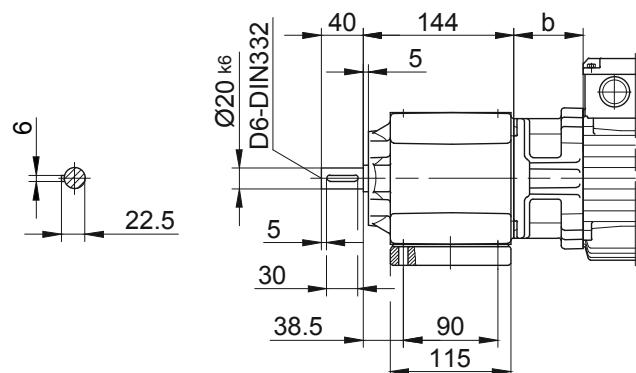

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gear motors

Dimension - Standard

BG10X-BG10XZ

Foot mounting with clearance holes

Code -11/

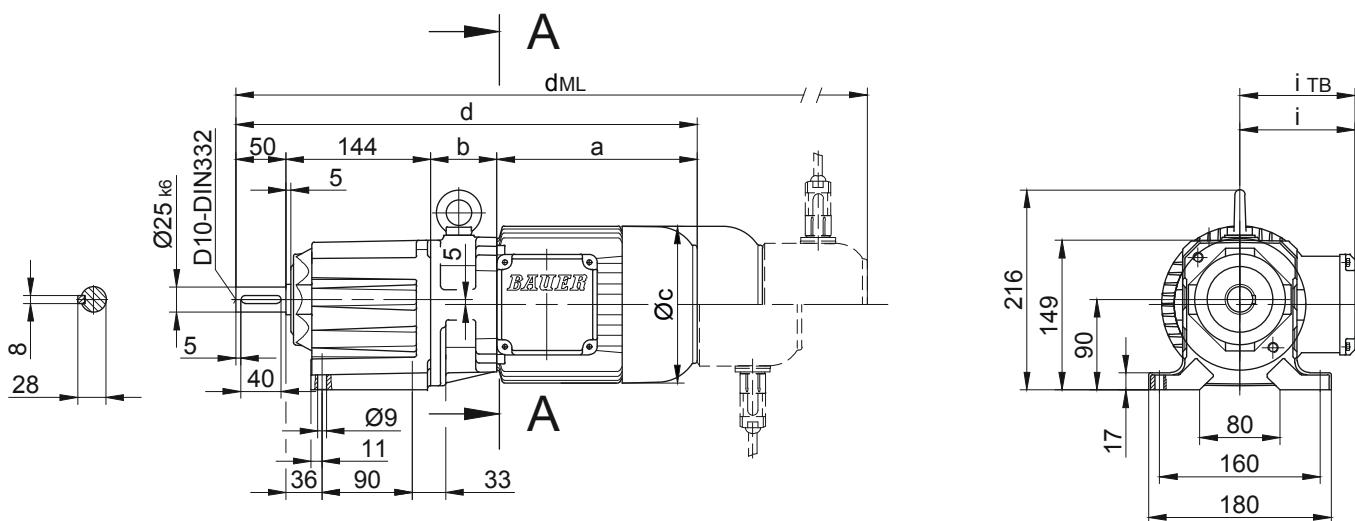


Flange with clearance holes

Code -37/

(Code-27/)

10

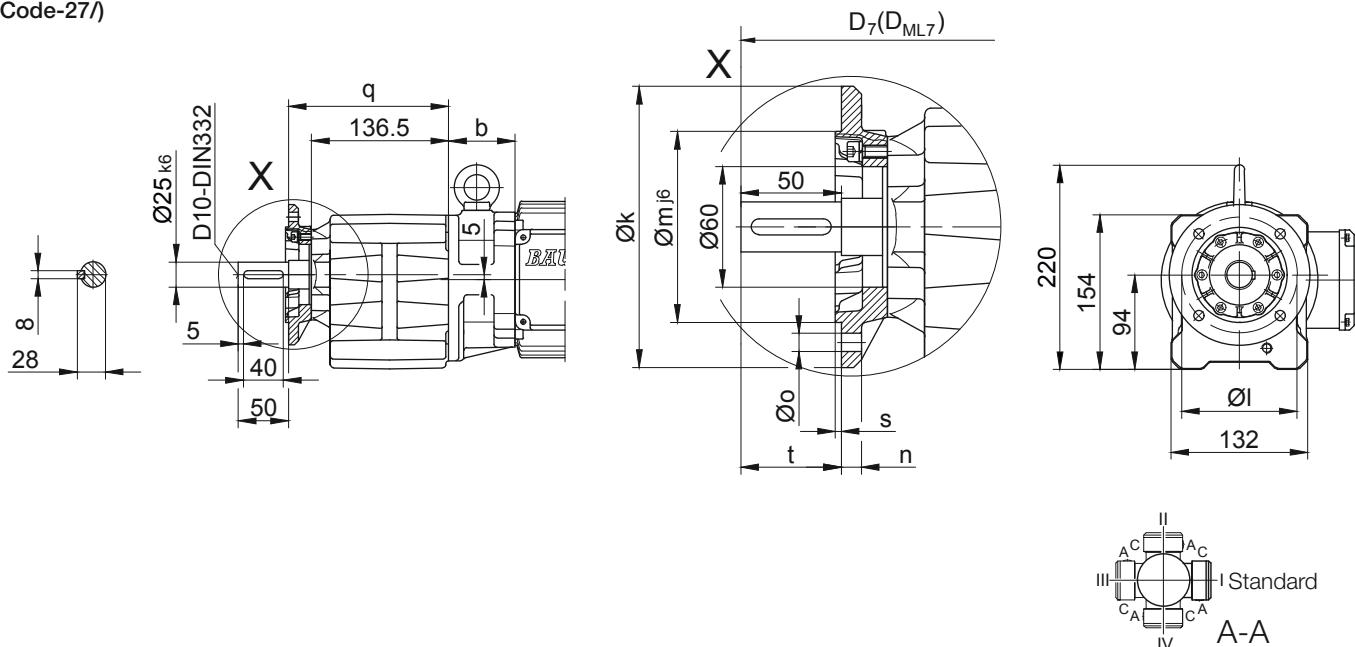

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG10X..	Code -37V/	140	115	95	10	9	159.5	3	50.5	d+15.5	d _{ML} +15.5
BG10X..	Code -27V/	120	100	80	8	6.6	154.5	3	55.5	d+15.5	d _{ML} +15.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG10XZ-.../S04S	142.5	86	110.5	422.5	90	112	466	510	553.5	-
BG10X-.../S..06 (M, L)	170.5	62	123	426.5	99	119	468.5	529	566.5	-
BG10XZ-.../S..06 (M, L)	170.5	88	123	452.5	99	119	494.5	555	592.5	-
BG10X-.../S..08 (M, L)	199.5	66	156	459.5	114.5	136.5	525.5	571.5	633	-
BG10XZ-.../S..08 (M, L)	199.5	132	156	525.5	114.5	136.5	591.5	637.5	699	-
BG10X-.../S..09 (S, X)	250.5	80.5	176	525	124	157	618	632.5	722	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BG-series helical-gear motors

Dimension - Standard

BG10X-BG10XZ



Flange with tapped holes

Code -71/


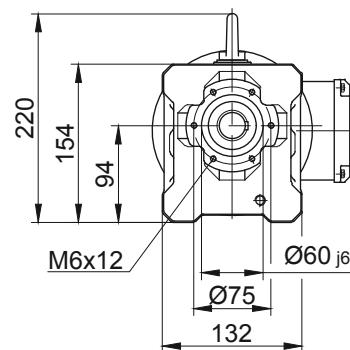
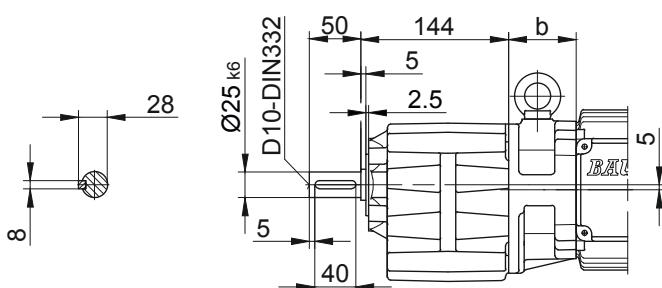


Foot with tapped holes left and right

Code -61LR/

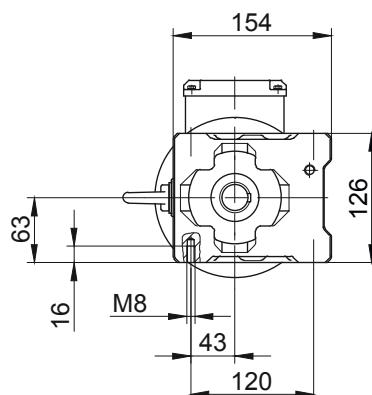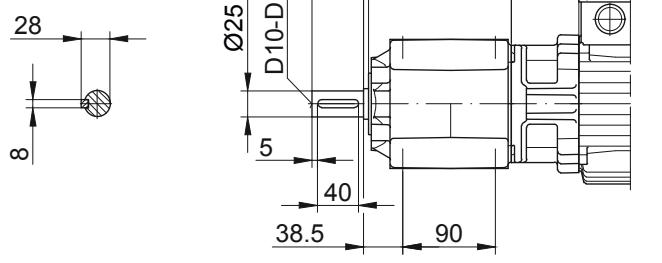

Foot plate left
Code -91L/

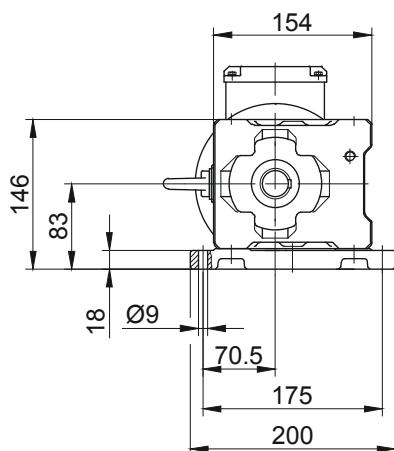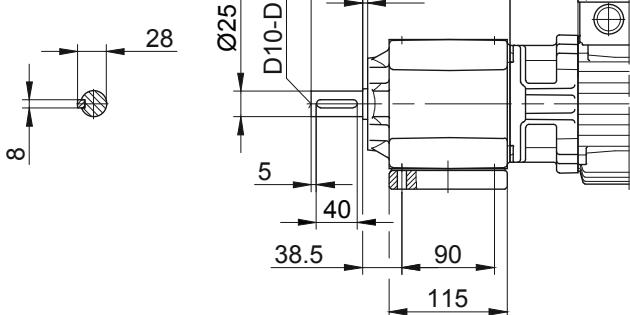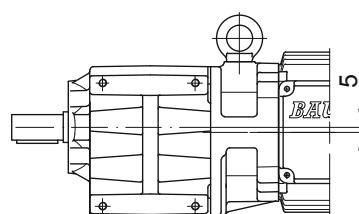

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Energy Efficient Geared Motors

AC Variable Speed


10

BG-series helical-gear motors

Dimension - Standard

BG15

Foot mounting with clearance holes
Code -11/

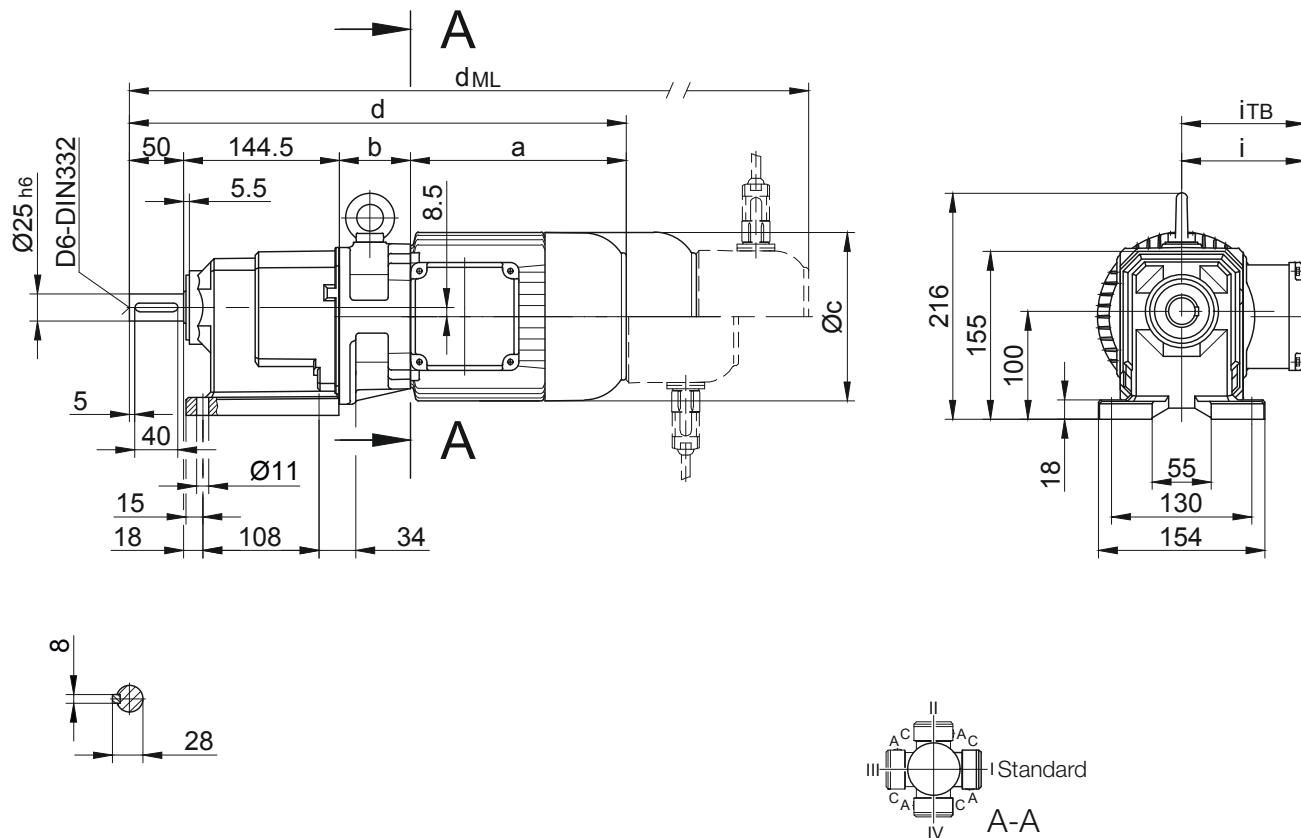

10

Type	a	b	c	d	i	Design with motor extensions				
						i_{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG15-../S..06 (M, L)	170.5	62	123	427	99	119	469	529.5	567	-
BG15-../S..08 (M, L)	199.5	66	156	460	114.5	136.5	526	572	633.5	-
BG15-../S..09 (S, X)	250.5	80.5	176	525.5	124	157	618.5	633	722.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gear motors

Dimension - Standard

BG20-BG20Z


Foot mounting with clearance holes

Code -11/

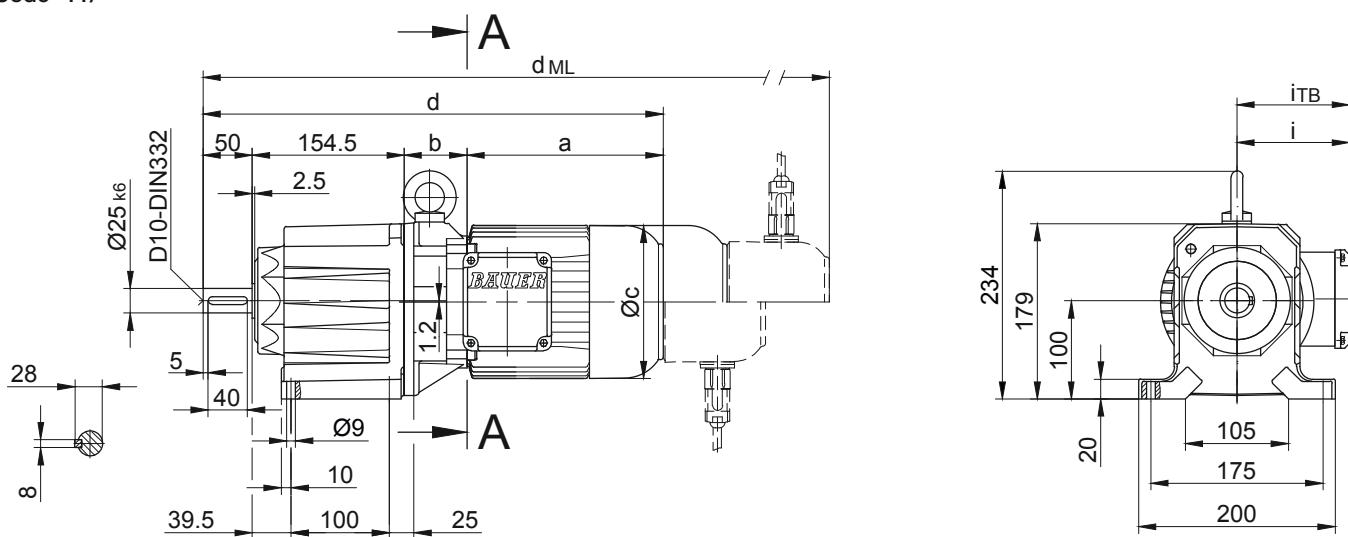

Flange with clearance holes

Code -37/
(Code-47/)

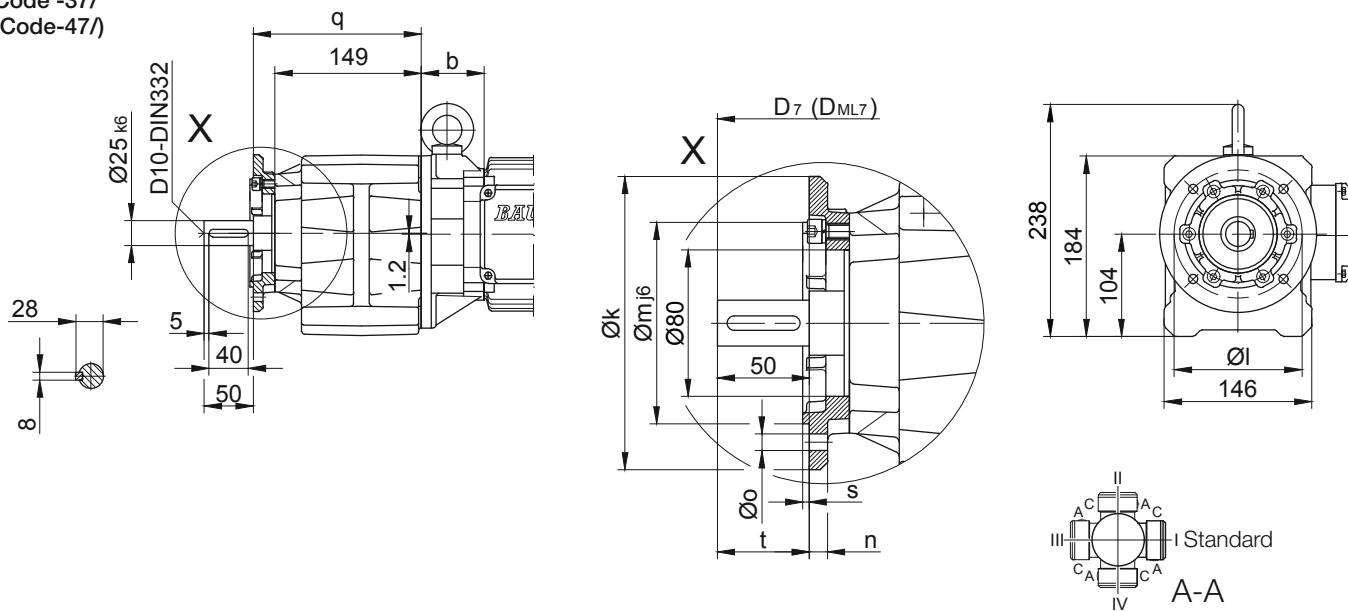

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG20..	Code -37V/	160	130	110	10	9	171	3.5	50.5	d+16.5	d _{ML} +16.5
BG20..	Code -47V/	200	165	130	12	11	178	3.5	43.5	d+16.5	d _{ML} +16.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG20Z-../S04S	142.5	100	110.5	447	90	112	490.5	534.5	578	-
BG20-../S..06 (M, L)	170.5	60	123	435	99	119	477	537.5	575	-
BG20Z-../S..06 (M, L)	170.5	102	123	477	99	119	519	579.5	617	-
BG20-../S..08 (M, L)	199.5	64	156	468	114.5	136.5	534	580	641.5	-
BG20Z-../S..08 (M, L)	199.5	146	156	550	114.5	136.5	616	662	723.5	-
BG20-../S..09 (S, X)	250.5	78.5	176	533.5	124	157	626.5	641	730.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BG-series helical-gear motors

Dimension - Standard

BG20-BG20Z



Flange with tapped holes

Code -71/

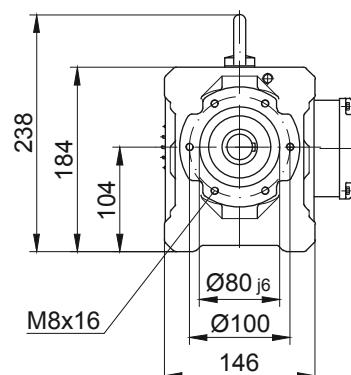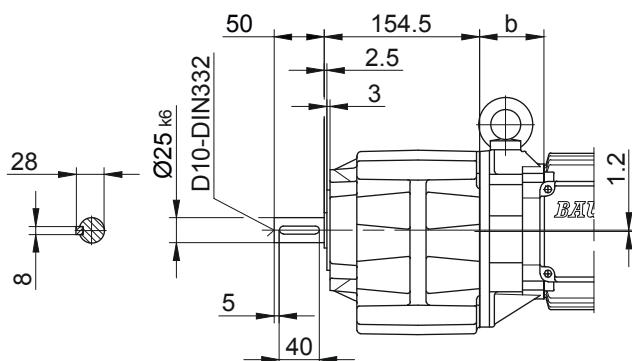




Foot with tapped holes left and right

Code -61LR/

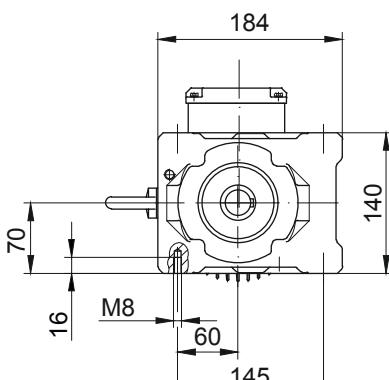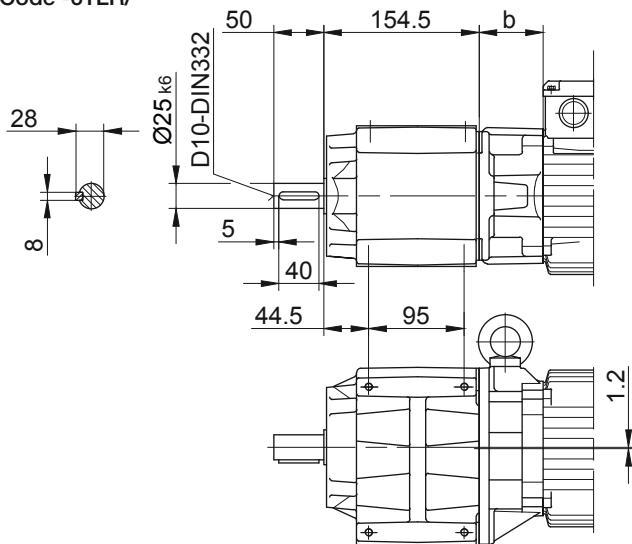

Foot mounting right with clearance holes

Code -01R/

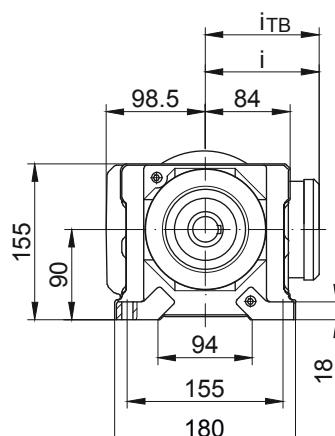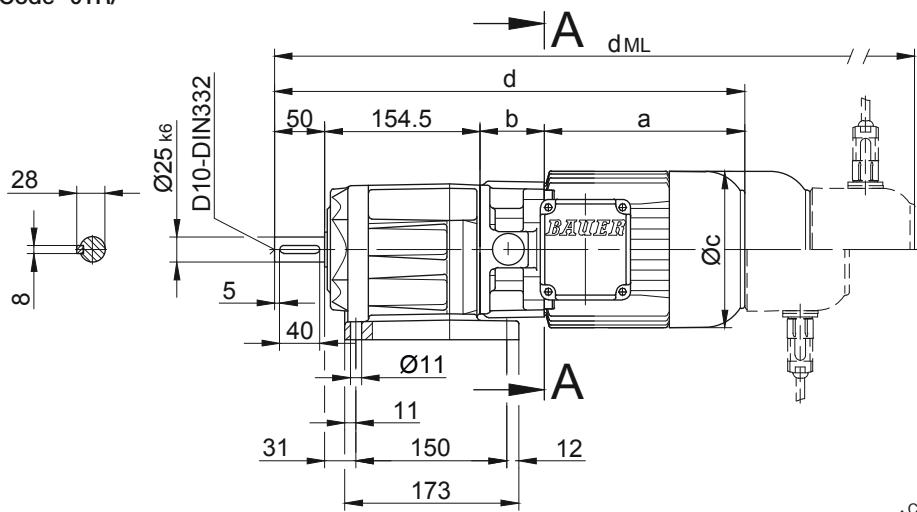

only for BG20-01R!

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gear motors

Dimension - Standard

BG30-BG30Z

Foot mounting with clearance holes


Code -11/

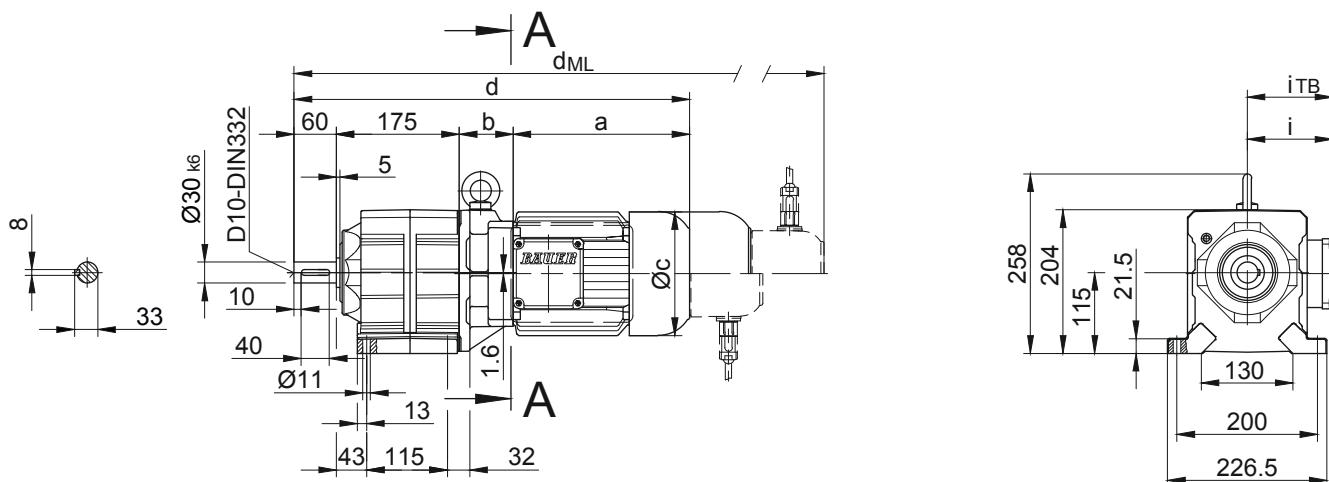

Flange with clearance holes

Code -37/

(Code-27/)

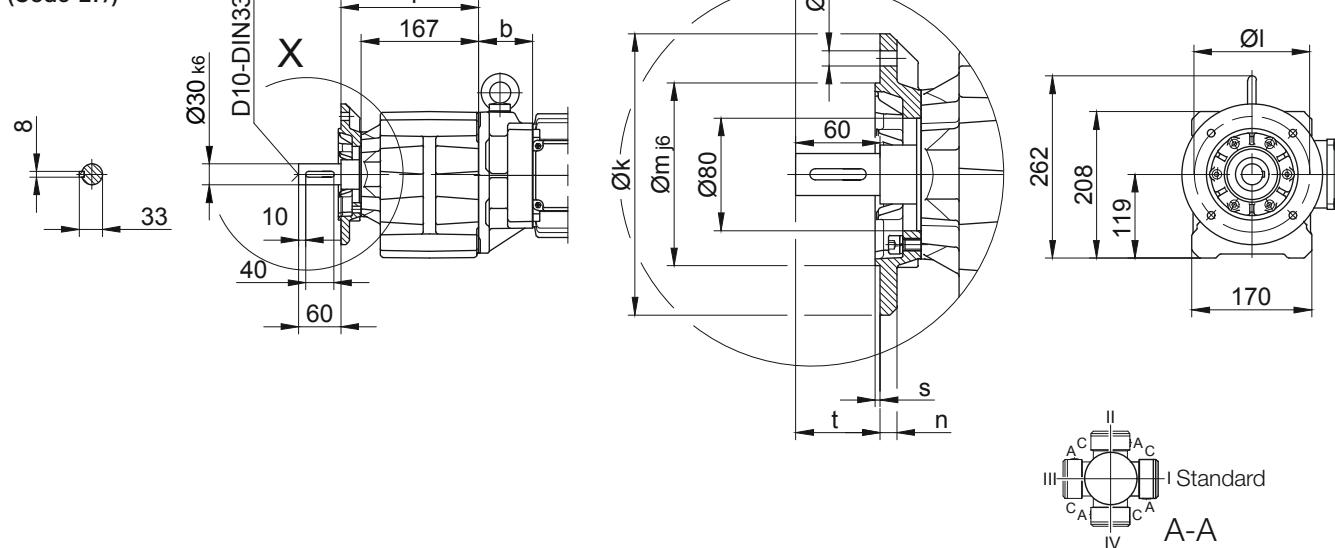

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG30..	Code -37/	200	165	130	12	11	196	3.5	60.5	d+21	d _{ML} +21
BG30..	Code -27/	160	130	110	10	9	189	3.5	67.5	d+21	d _{ML} +21

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	d _{ML}
BG30-../S..06 (M, L)	170.5	58	123	463.5	99	119	505.5	566	603.5	-
BG30Z-../S..06 (M, L)	170.5	133.5	123	539	99	119	581	641.5	679	-
BG30-../S..08 (M, L)	199.5	62	156	496.5	114.5	136.5	562.5	608.5	670	-
BG30Z-../S..08 (M, L)	199.5	137.5	156	572	114.5	136.5	638	684	745.5	-
BG30-../S..09 (S, X)	250.5	76.5	176	562	124	157	655	727	759	-
BG30Z-../S..09 (S, X)	250.5	152	176	637.5	124	157	730.5	802.5	834.5	-
BG30-../S..11 (S, M, L)	319	83	218	637	165	176	735	744.5	837	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.




BG-series helical-gearred motors

Dimension - Standard

BG30-BG30Z




Flange with tapped holes

Code -71/

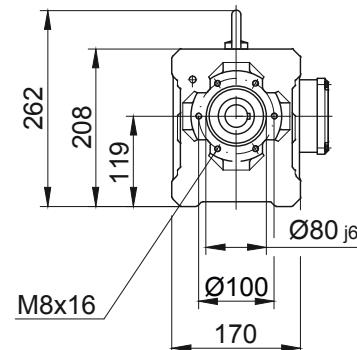
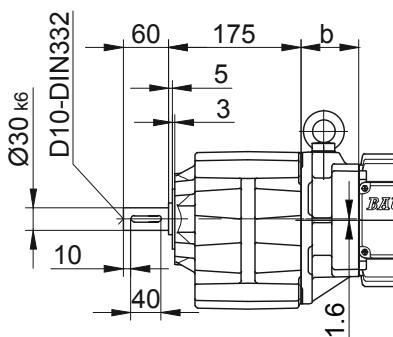
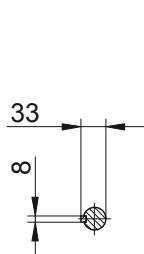


Foot with tapped holes left and right

Code -61LR/

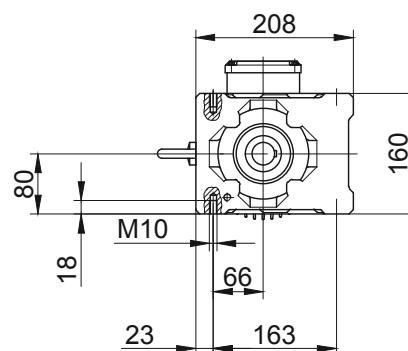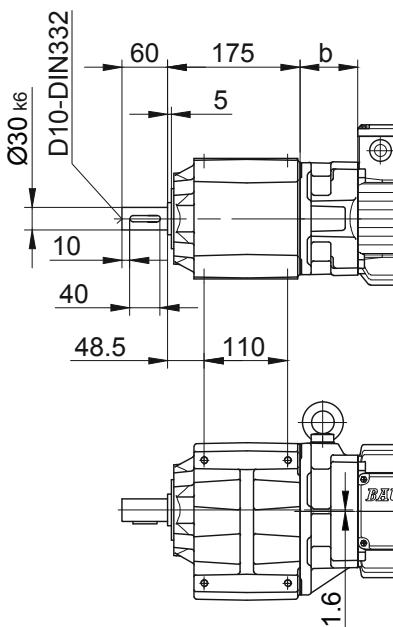

Foot plate left
Code -91L/

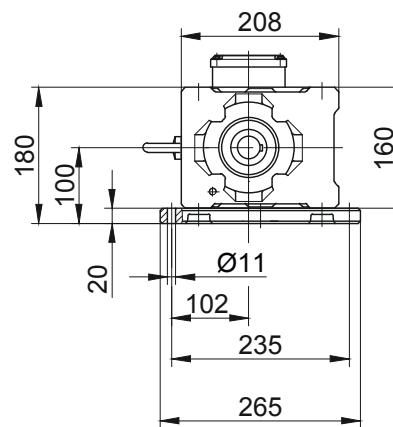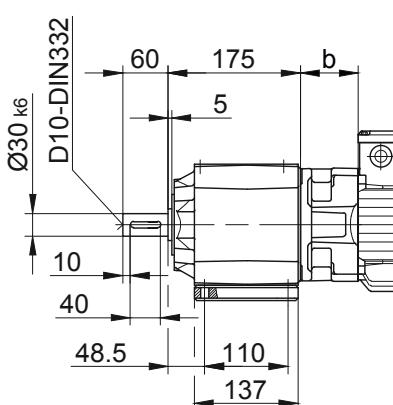

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gear motors

Dimension - Standard

BG40-BG40Z

Foot mounting with clearance holes

Code -11/

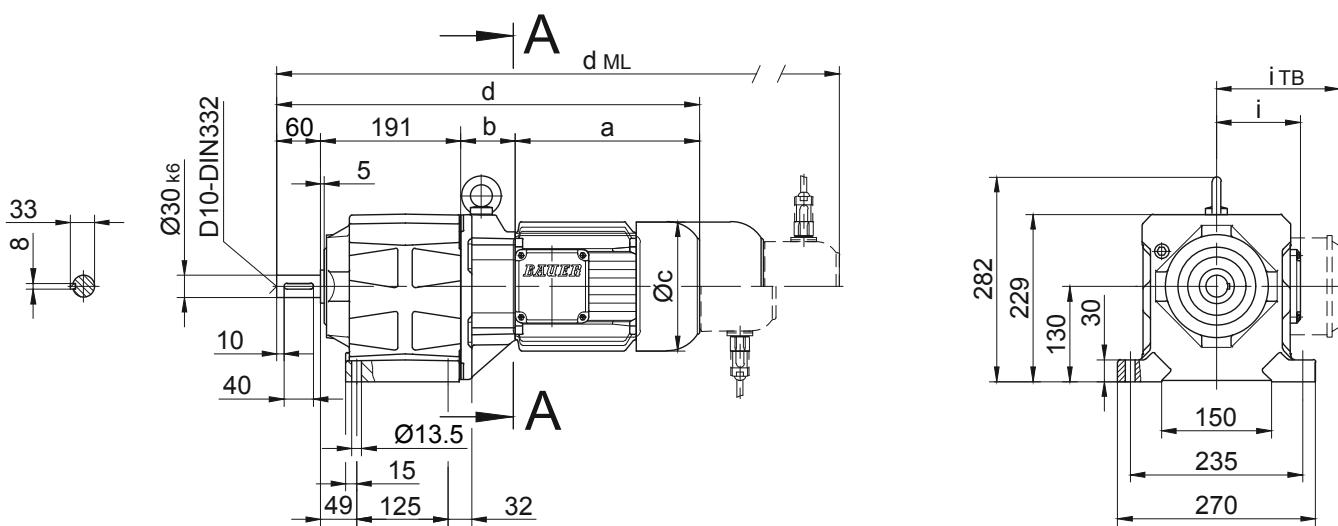


Flange with clearance holes

Code -37/

(Code-47/)

10

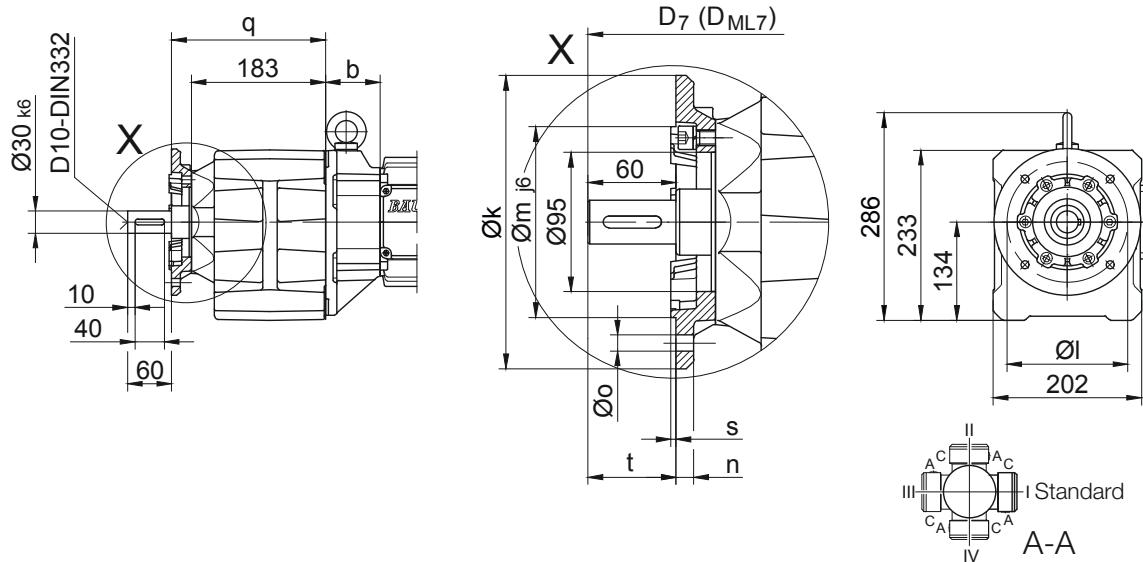

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG40..	Code -37/	200	165	130	12	11	210	3.5	61	d+19	d _{ML} +19
BG40..	Code -47/	250	215	180	16	13.5	219	4	52	d+19	d _{ML} +19

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG40Z-..S..06 (M, L)	170.5	138.5	123	560	99	119	602	662.5	700	-
BG40-..S..08 (M, L)	199.5	60	156	510.5	114.5	136.5	576.5	622.5	684	-
BG40Z-..S..08 (M, L)	199.5	142.5	156	593	114.5	136.5	659	705	766.5	-
BG40-..S..09 (S, X)	250.5	74.5	176	576	124	157	669	683.5	773	-
BG40Z-..S..09 (S, X)	250.5	157	176	658.5	124	157	751.5	766	855.5	-
BG40-..S..11 (S, M, L)	319	81	218	651	165	176	749	758.5	851	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BG-series helical-gear motors

Dimension - Standard

BG40-BG40Z



Flange with tapped holes

Code -71/

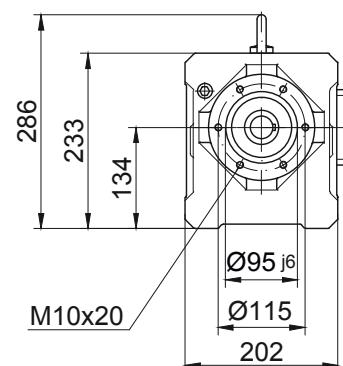
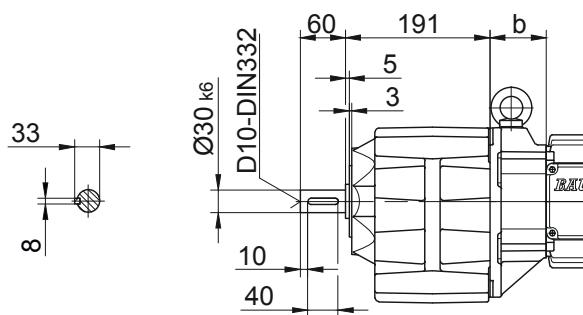


Foot with tapped holes left and right

Code -61LR/

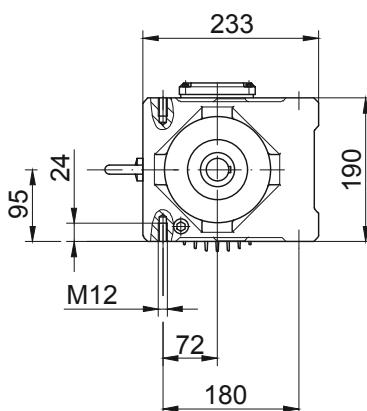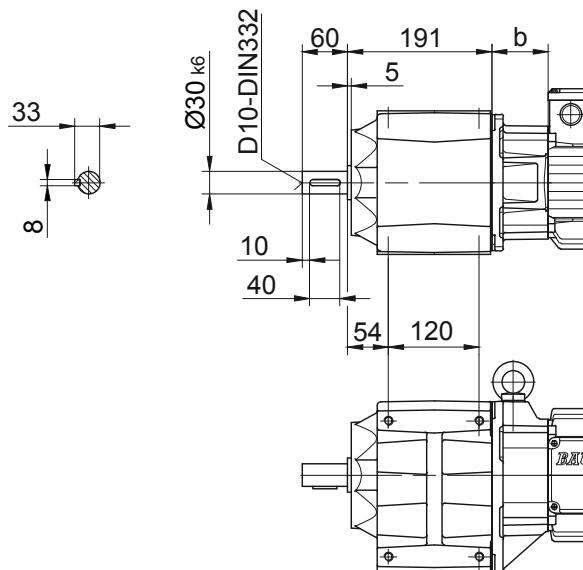

Foot plate left
Code -91L/

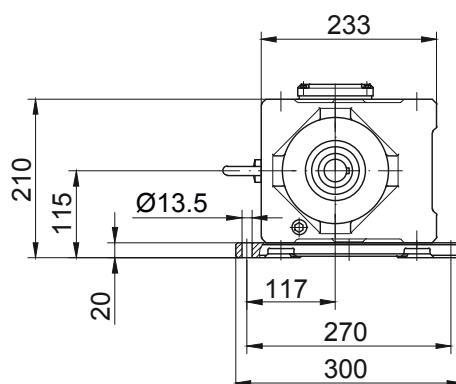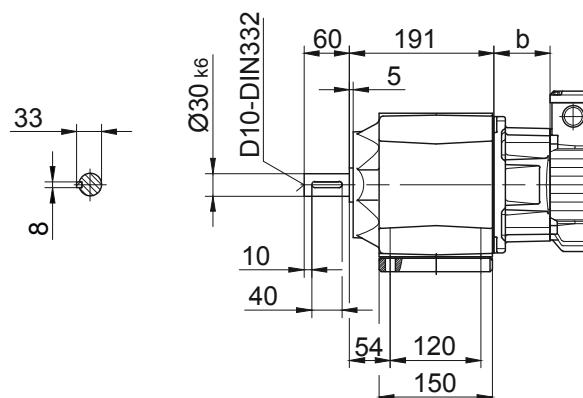

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gear motors

Dimension - Standard

BG50-BG50Z

Foot mounting with clearance holes


Code -11/

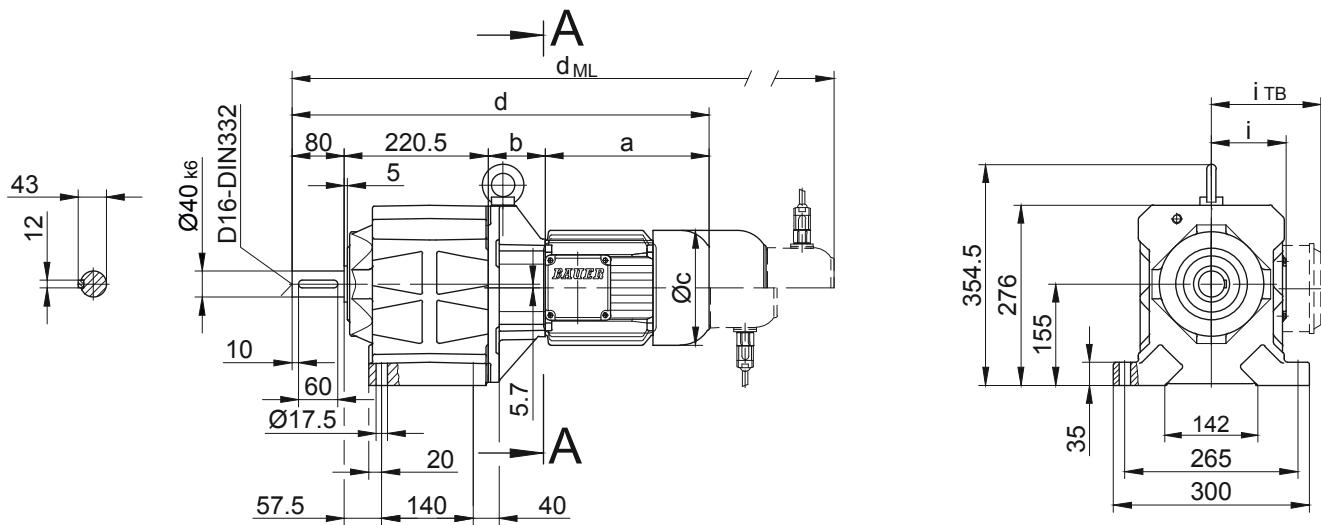

Flange with clearance holes

Code -37/

(Code-27/)

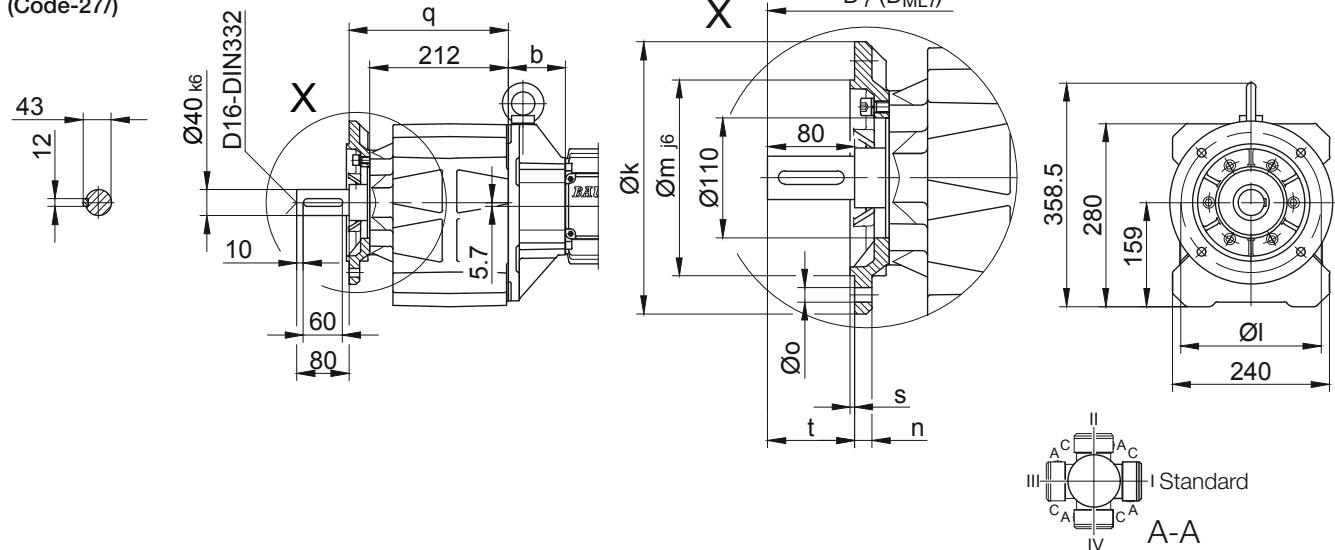

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG50..	Code -37/	250	215	180	16	13.5	244	4	80.5	d+23.5	d _{ML} +23.5
BG50..	Code -27/	200	165	130	12	11	241	3.5	83.5	d+23.5	d _{ML} +23.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i _{TB}	Design with motor extensions			
							Brake	Encoder	Brake with Encoder	Back Stop
BG50Z-..S..06 (M, L)	170.5	155	123	626	99	119	668	728.5	766	-
BG50-..S..08 (M, L)	199.5	73	156	573	114.5	136.5	639	685	746.5	-
BG50Z-..S..08 (M, L)	199.5	159	156	659	114.5	136.5	725	771	832.5	-
BG50-..S..09 (S, X)	250.5	87.5	176	638.5	124	157	731.5	746	835.5	-
BG50Z-..S..09 (S, X)	250.5	173.5	176	724.5	124	157	817.5	832	921.5	-
BG50-..S..11 (S, M, L)	319	94	218	713.5	165	176	811.5	821	913.5	-

Dimensions in millimetres (mm)




The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gear motors

Dimension - Standard




BG50-BG50Z

Flange with tapped holes
Code -71/

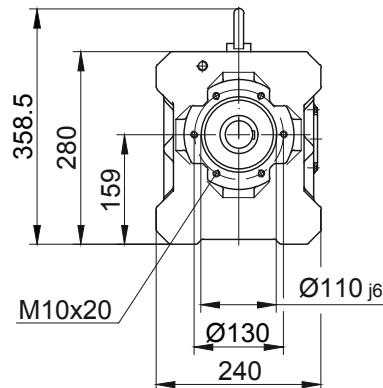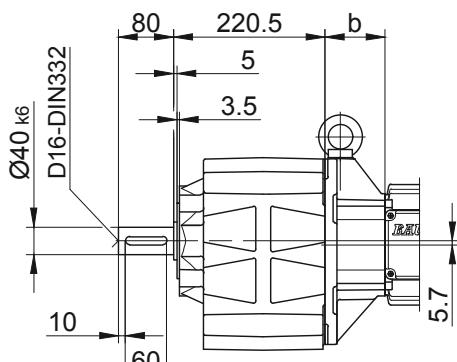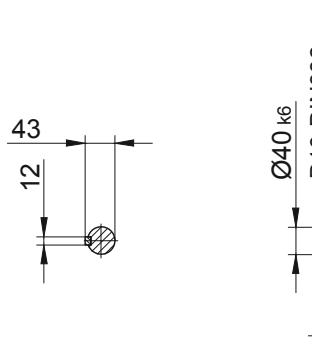

Foot with tapped holes left and right

Code -61LR/

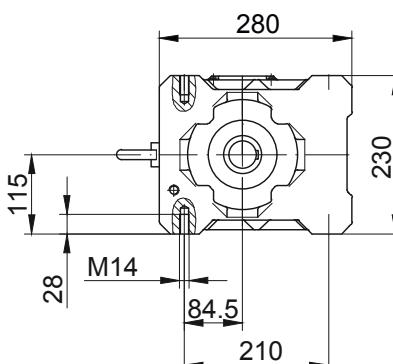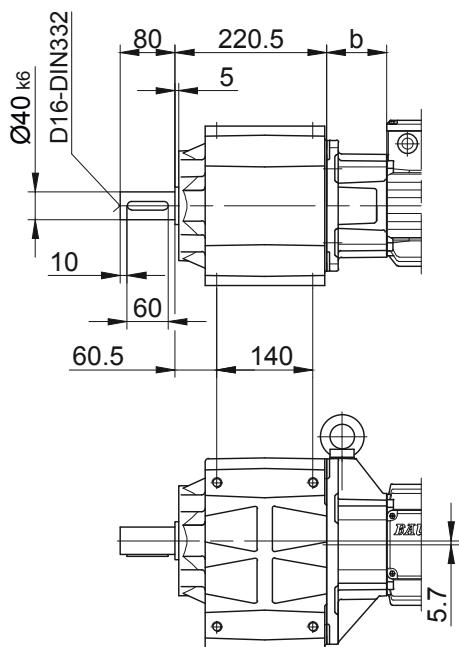

10


BG-series helical-gear motors

Dimension - Standard

BG60-BG60Z

Foot mounting with clearance holes


Code -11/

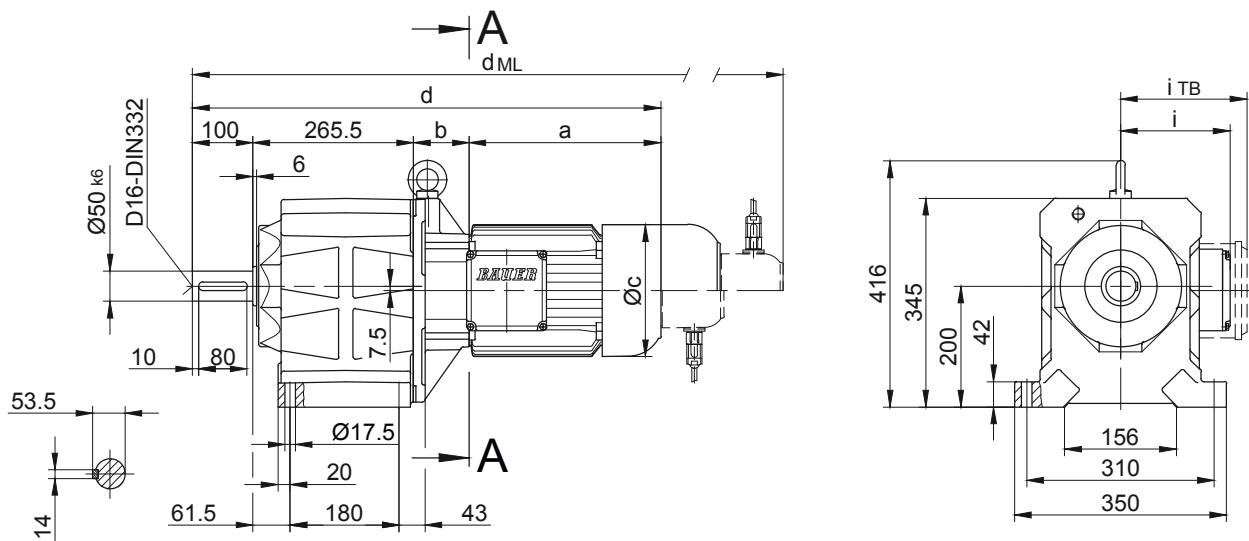

Flange with clearance holes

Code -37/

(Code-27/)

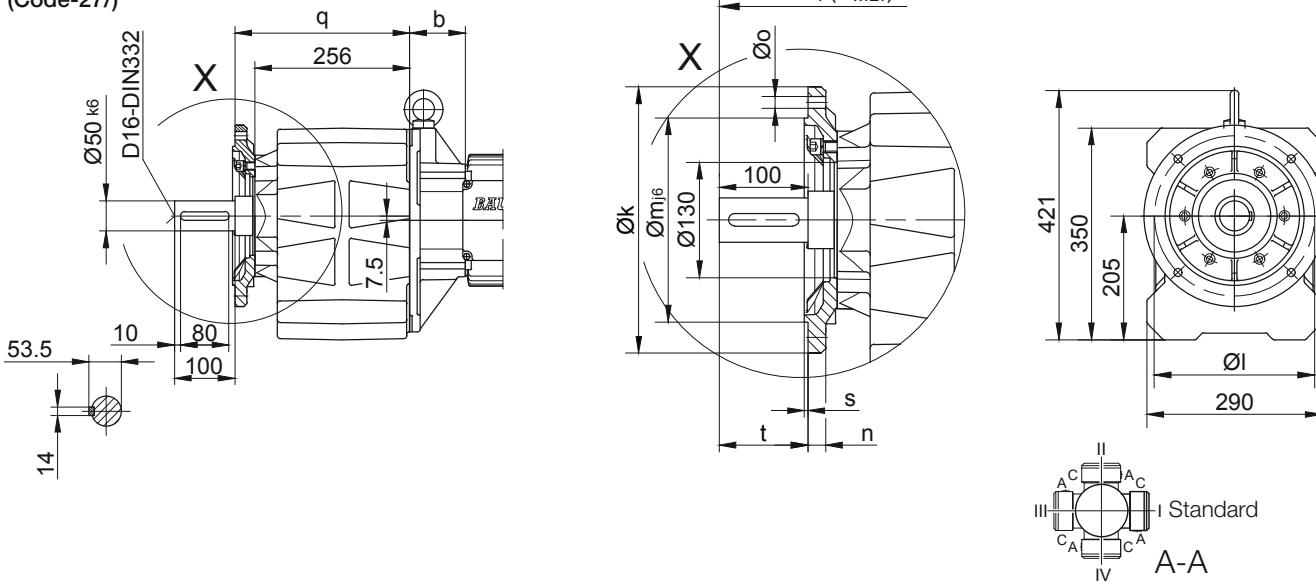

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG60..	Code -37/	300	265	230	20	13.5	289	4	100.5	d+23.5	d _{ML} +23.5
BG60..	Code -27/	250	215	180	16	13.5	286	4	103.5	d+23.5	d _{ML} +23.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG60Z-..S..08 (M, L)	199.5	181	156	746	114.5	136.5	812	858	919.5	-
BG60-..S..09 (S, X)	250.5	85.5	176	701.5	124	157	794.5	809	898.5	-
BG60Z-..S..09 (S, X)	250.5	195.5	176	811.5	124	157	904.5	919	1008.5	-
BG60-..S..11 (S, M, L)	319	92	218	776.5	165	176	874.5	884	976.5	-
BG60Z-..S..11 (S, M, L)	319	202	218	886.5	165	176	984.5	994	1086.5	-

Dimensions in millimetres (mm)




The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gearred motors




Dimension - Standard

BG60-BG60Z

Flange with tapped holes
Code -71/

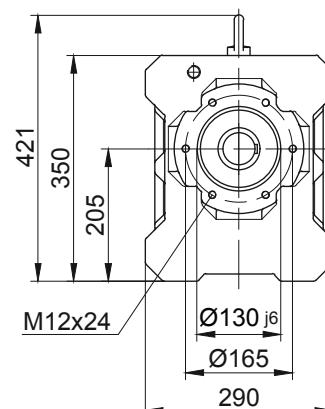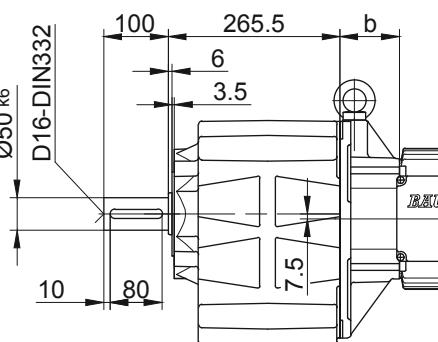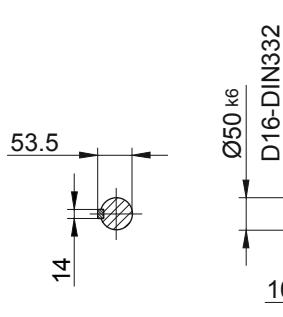

Foot with tapped holes left and right
Code -61LR/

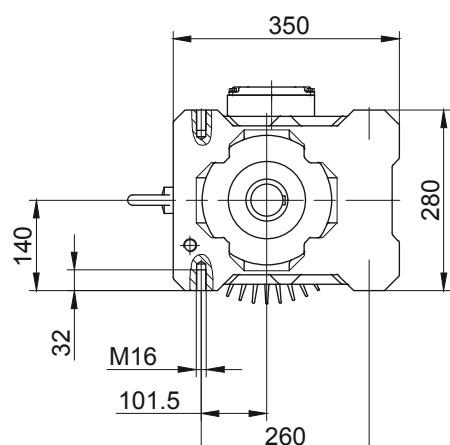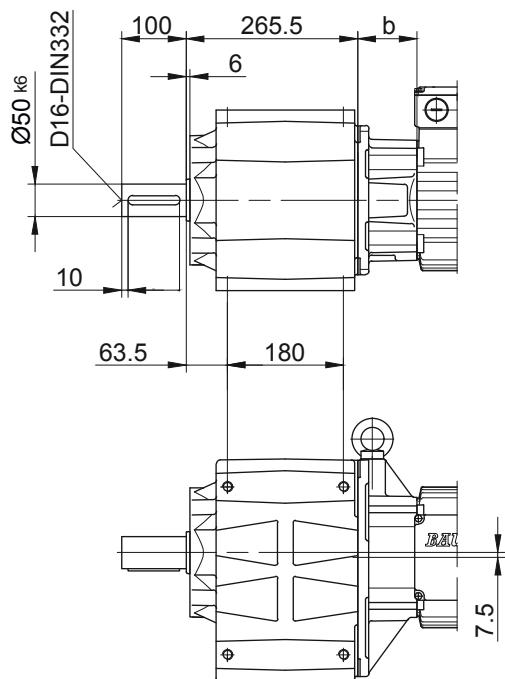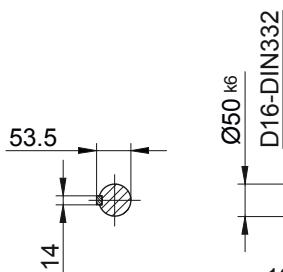

10


BG-series helical-gearred motors

Dimension - Standard

BG70 - BG70Z

Foot mounting with clearance holes

Code -11/

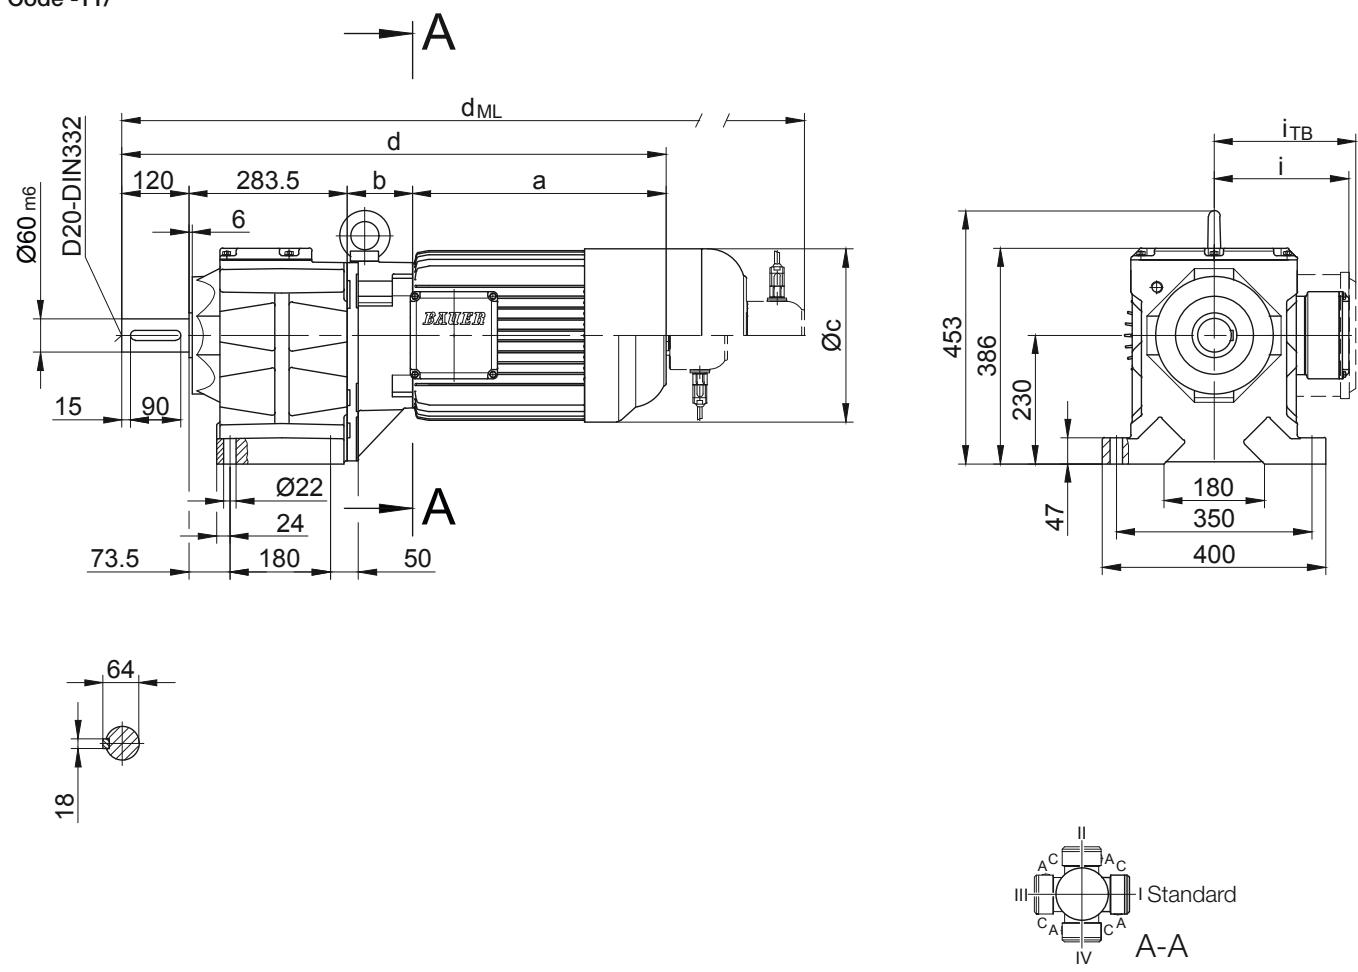

10

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG70..	Code -37/	350	300	250	20	17.5	314	5	120.5	d+30.5	d _{ML} +30.5
BG70..	Code -27/	300	265	230	20	13.5	322	4	113.5	d+30.5	d _{ML} +30.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG70Z-..S..08 (M, L)	199.5	202	156	805	114.5	136.5	871	917	978.5	-
BG70-..S..09 (S, X)	250.5	83.5	176	737.5	124	157	830.5	845	934.5	-
BG70Z-..S..09 (S, X)	250.5	216.5	176	870.5	124	157	963.5	978	1067.5	-
BG70-..S..11 (S, M, L)	319	90	218	812.5	165	176	910.5	920	1012.5	-
BG70Z-..S..11 (S, M, L)	319	223	218	945.5	165	176	1043.5	1053	1145.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gear motors





Dimension - Standard

BG70 - BG70Z

Flange with clearance holes




Code -37/

(Code -27/)

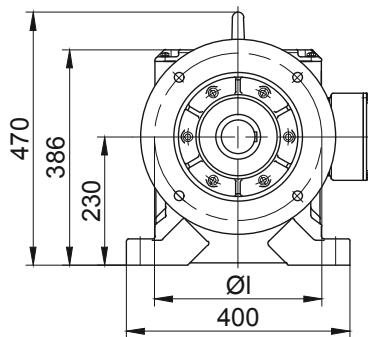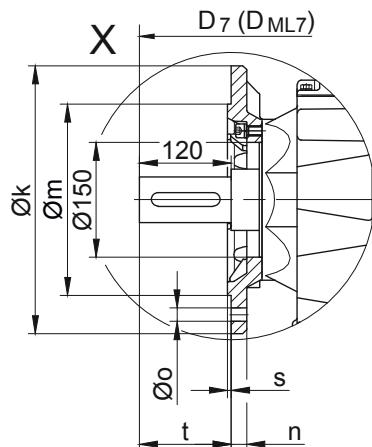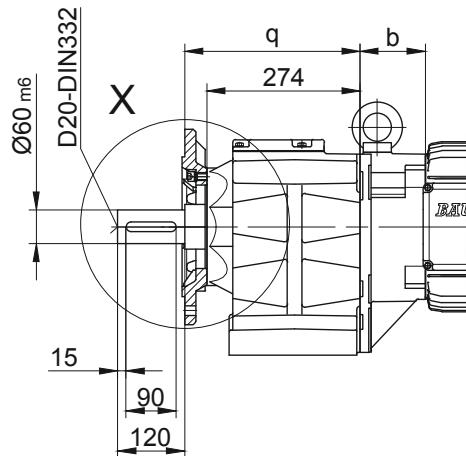

Flange with tapped holes

Code -71/

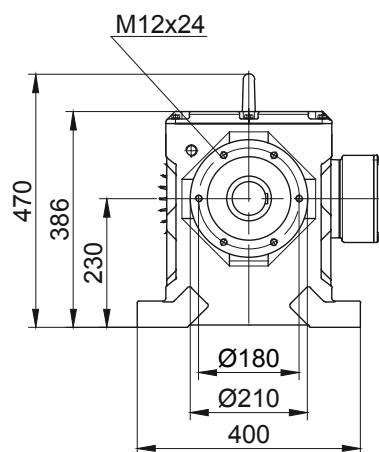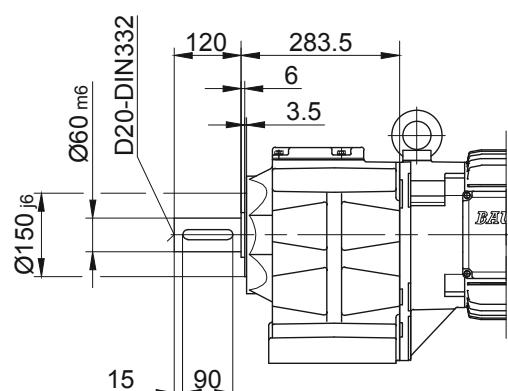


BG-series helical-gear motors

Dimension - Standard

BG80-BG80Z

Foot mounting with clearance holes

Code -11/

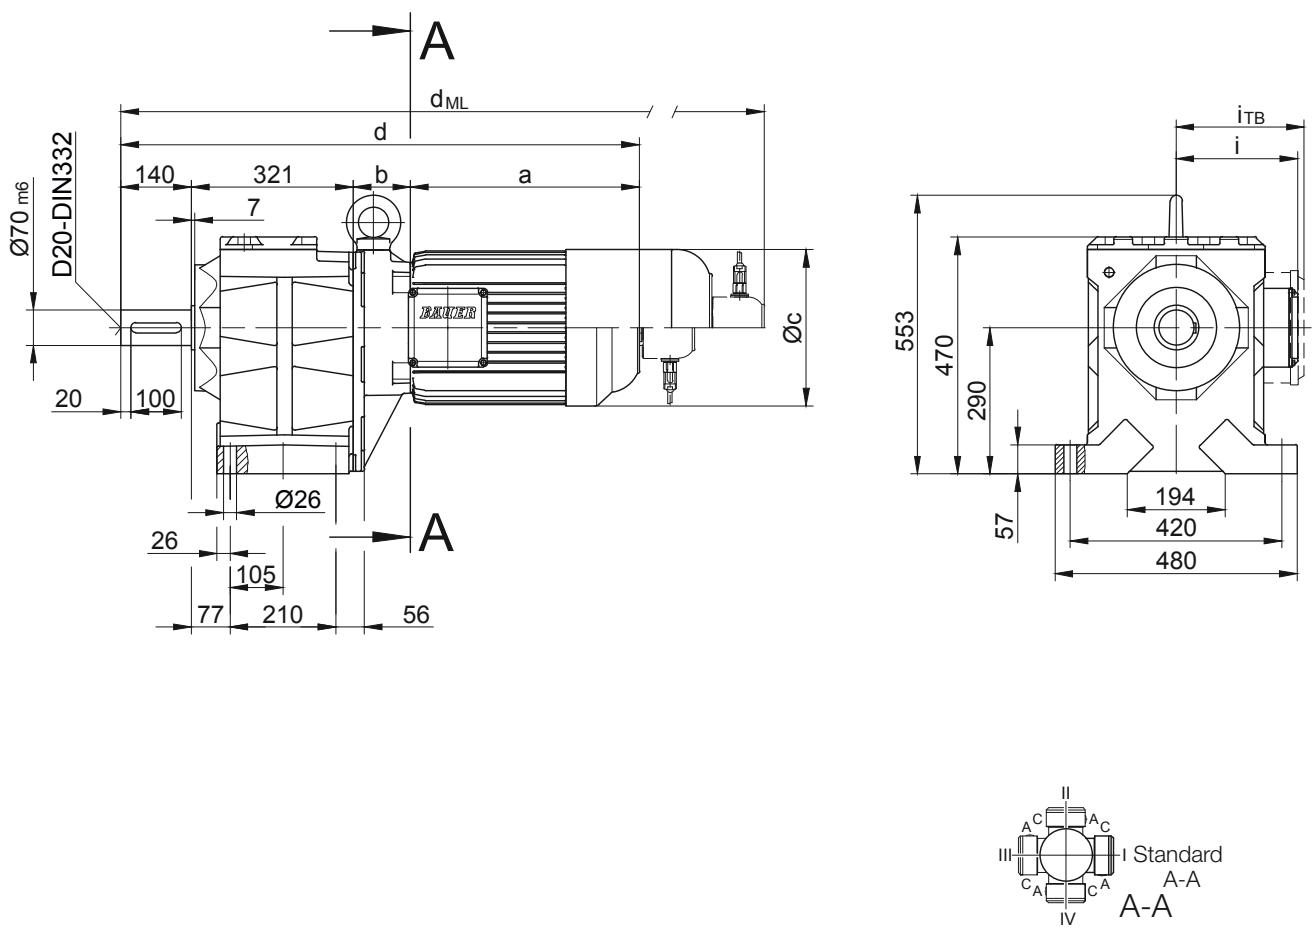

10

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG80..	Code -37/	400	350	300	20	4 x 17.5	345	5	141	d+24	d _{ML} +24
BG80..	Code -27/	350	300	250	20	4 x 17.5	345	5	141	d+24	d _{ML} +24
BG80..	Code -47/	450	400	350	22	8 x 17.5	355	5	131	d+24	d _{ML} +24

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions								
						i _{TB}	Brake		Encoder		Brake with Encoder		Back Stop	
							d _{ML}	d _{ML}						
BG80Z-..S..09 (S, X)	250.5	252.5	176	964	124	157	1057	1071.5	1161	-				
BG80-..S..11 (S, M, L)	319	87	218	867	165	176	965	974.5	1067	-				
BG80Z-..S..11 (S, M, L)	319	259	218	1039	165	176	1137	1146.5	1067	-				

Dimensions in millimetres (mm)




The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gear motors



Dimension - Standard

BG80-BG80Z

Flange with clearance holes
Code -37/
(Code -27/)
(Code -47/)

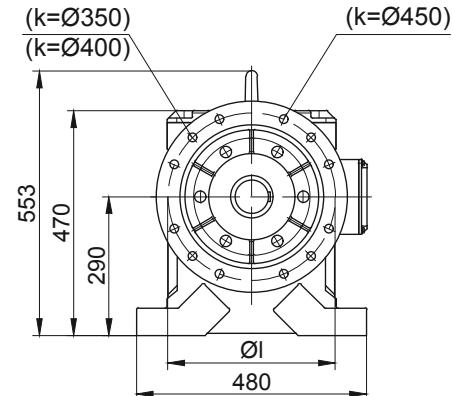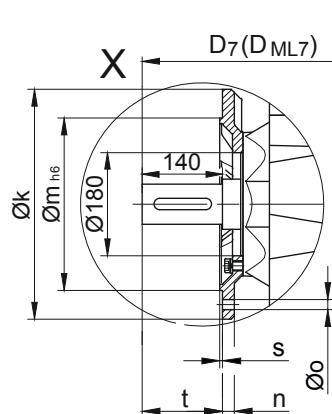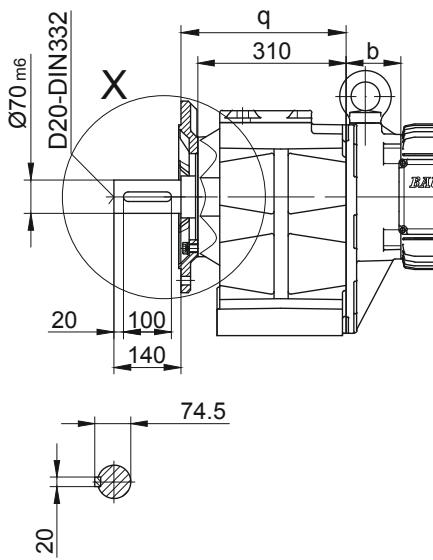

Flange with tapped holes
Code -71/

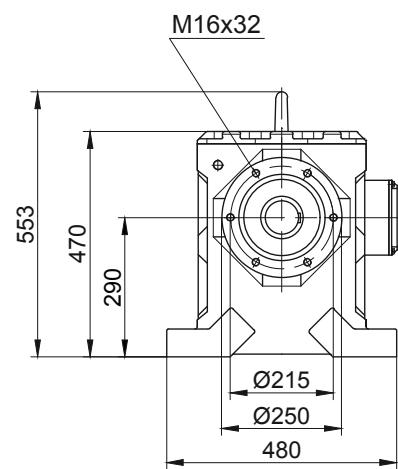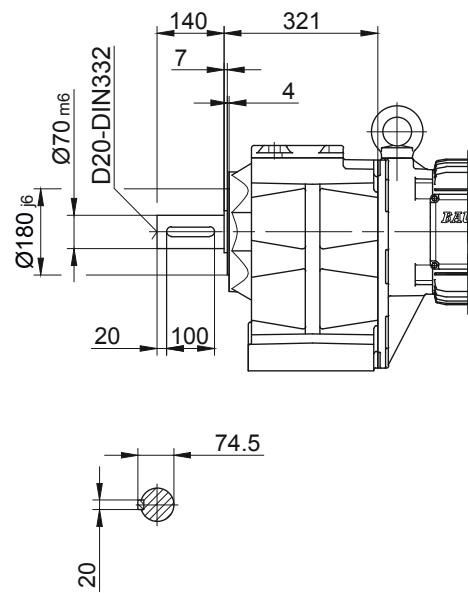


BG-series helical-gear motors

Dimension - Standard

BG90-BG90Z

Foot mounting with clearance holes

Code -11/

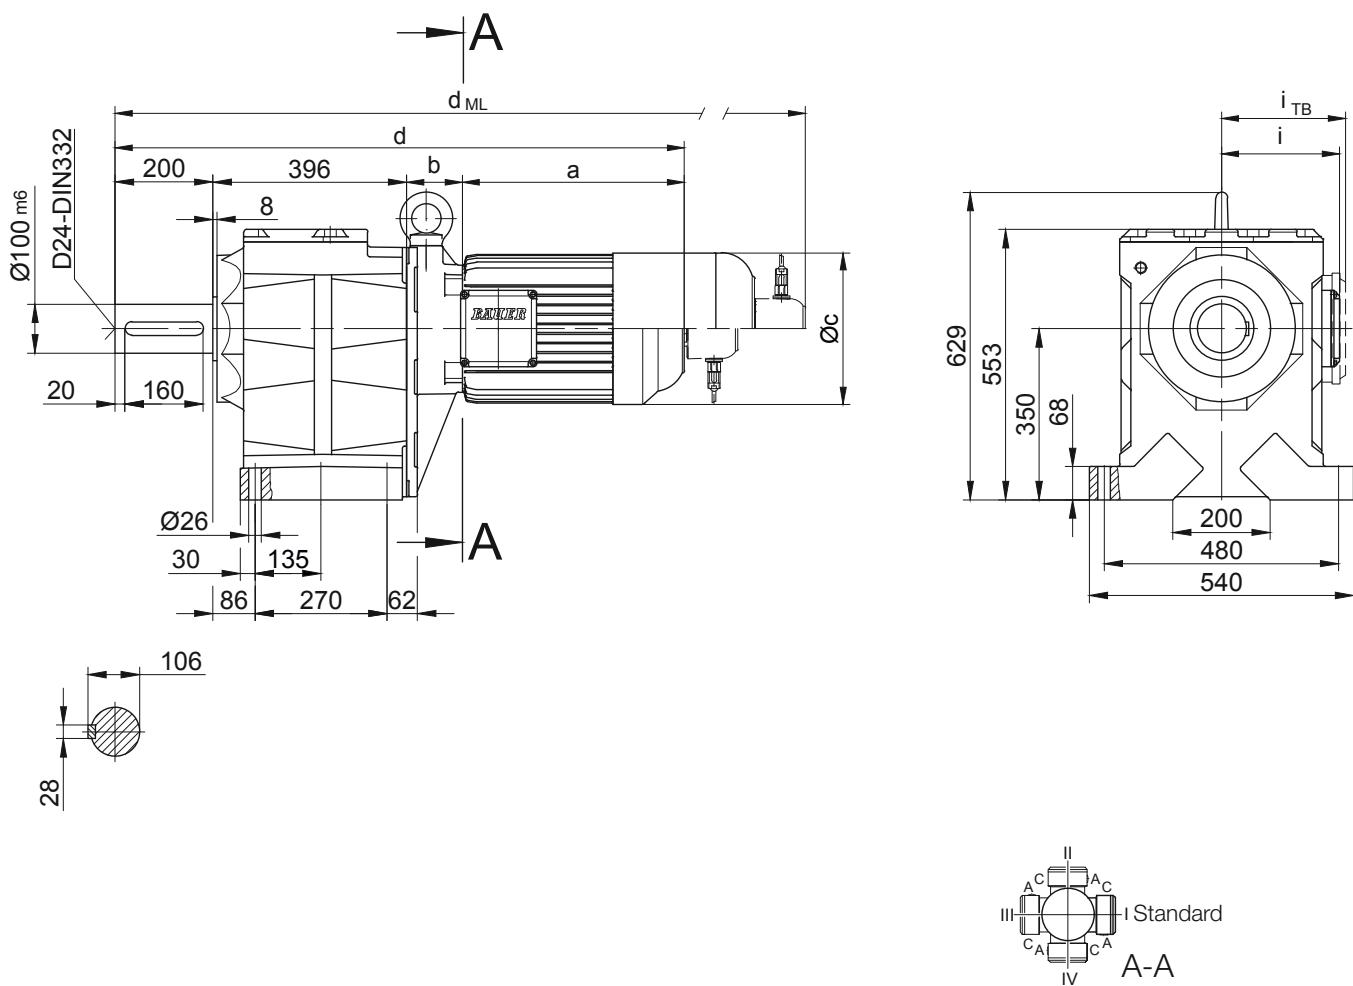

10

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG90..	Code -37/	450	400	350	22	17.5	439	5	201	d+43	d _{ML} +43
BG90..	Code -47/	550	500	450	22	17.5	444	5	196	d+43	d _{ML} +43

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG90Z-..S..09 (S, X)	250.5	267	176	1113.5	124	157	1206.5	1221	1310.5	-
BG90Z-..S..11 (S, M, L)	319	273.5	218	1188.5	165	176	1286.5	1296	1388.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gearred motors




Dimension - Standard

BG90-BG90Z

Flange with clearance holes



Code -37/

(Code -47/)

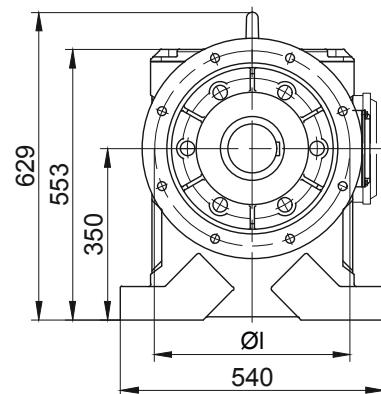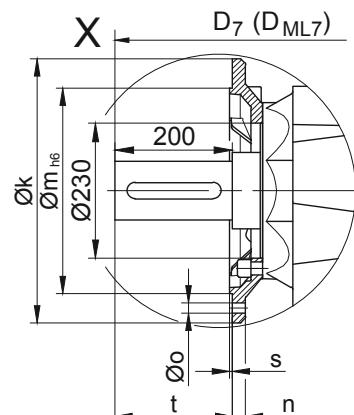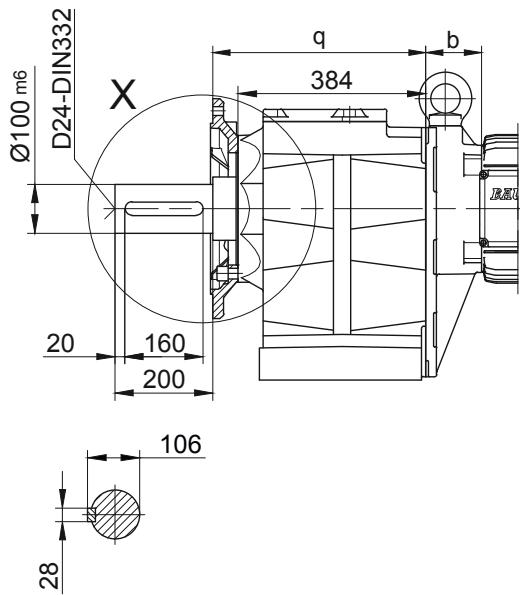

Flange with tapped holes

Code -71/

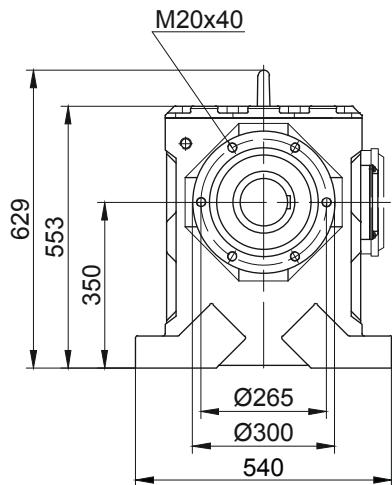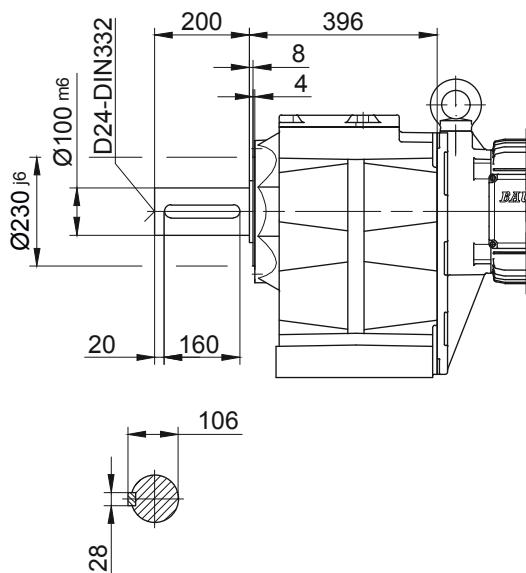


BG-series helical-gear motors

Dimension - Standard

BG100-BG100Z

Foot mounting with clearance holes

Code -11/

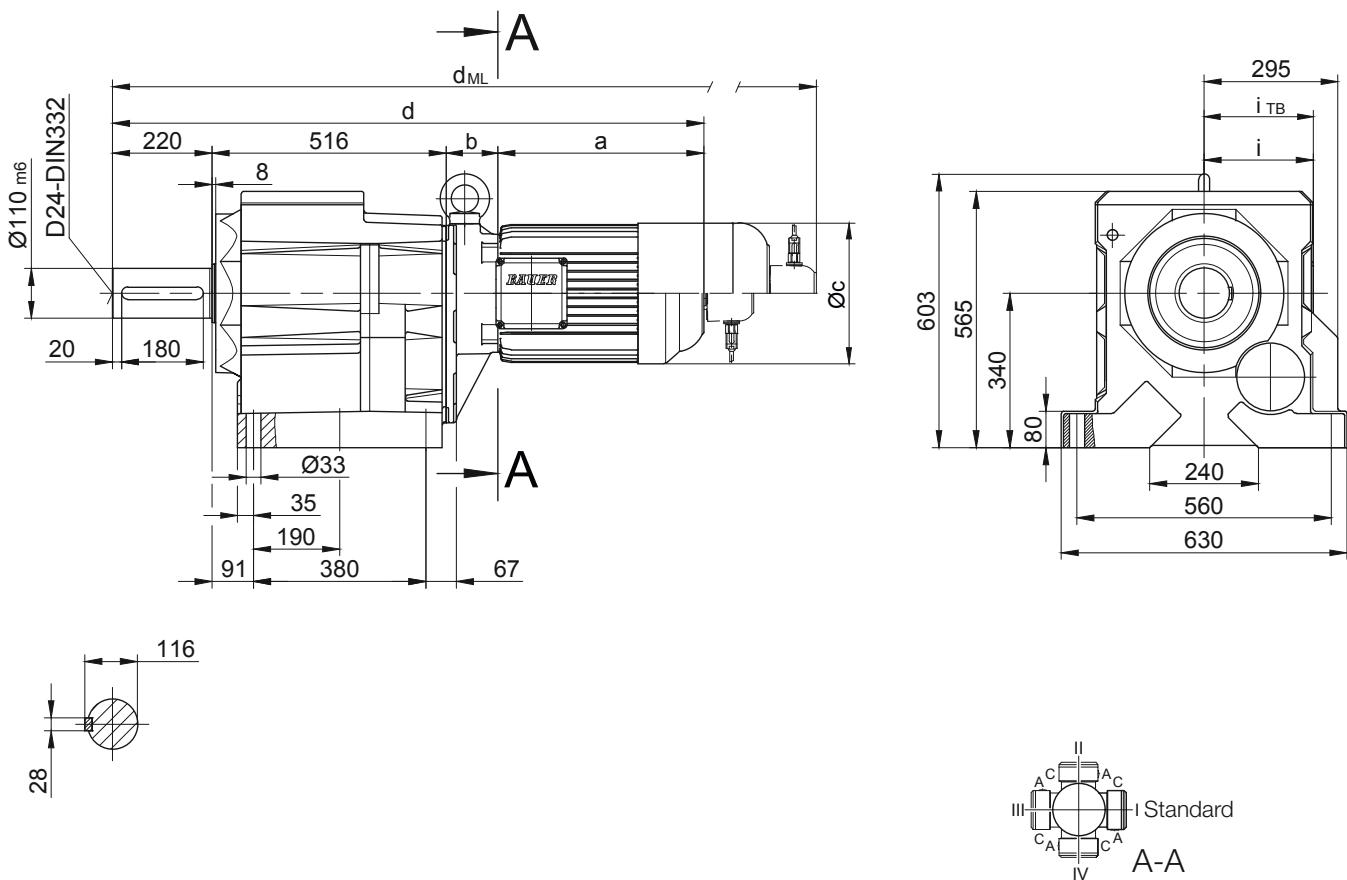

10

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG100..	Code -37/	550	500	450	22	17.5	558	5	220	d+42	d _{ML} +42
BG100..	Code -47/	660	600	550	25	22	552	6	227	d+42	d _{ML} +42

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG100Z-..S..09 (S, X)	250.5	252.5	176	1239	124	157	1332	1346.5	1436	-
BG100-..S..11 (S, M, L)	319	87	218	1142	165	176	1240	1249.5	1342	-
BG100Z-..S..11 (S, M, L)	319	259	218	1314	165	176	1412	1421.5	1514	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gear motors


Dimension - Standard

BG100-BG100Z

Flange with clearance holes


Code -37/

(Code -47/)

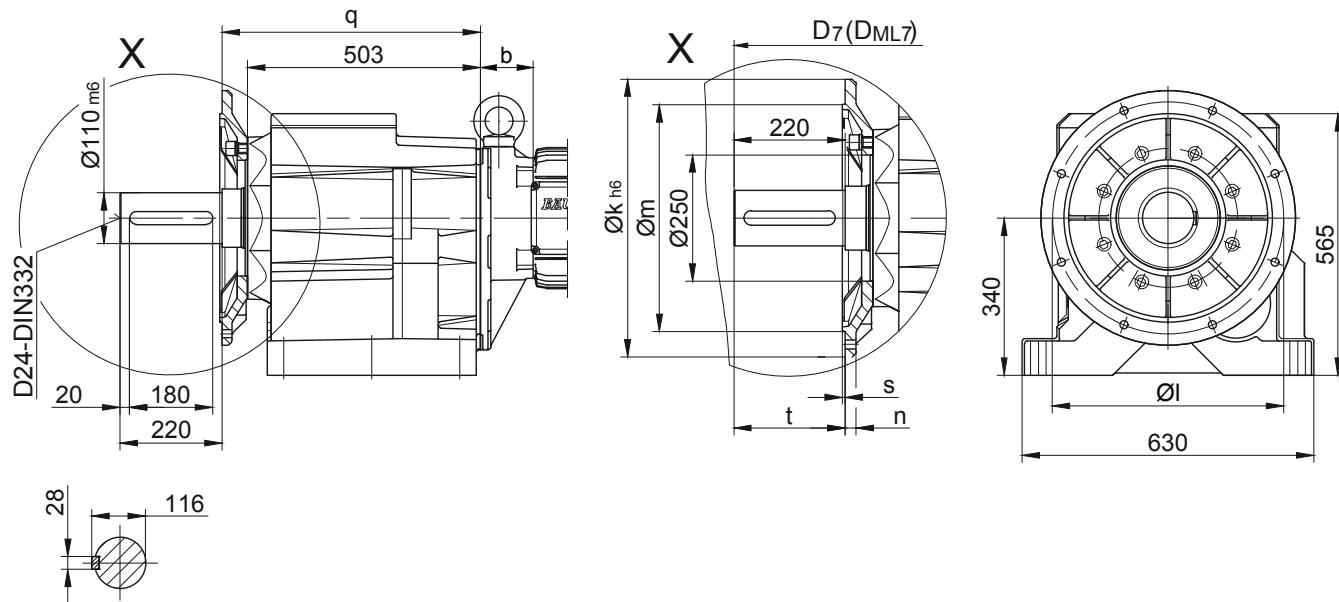

Flange with tapped holes

Code -71/

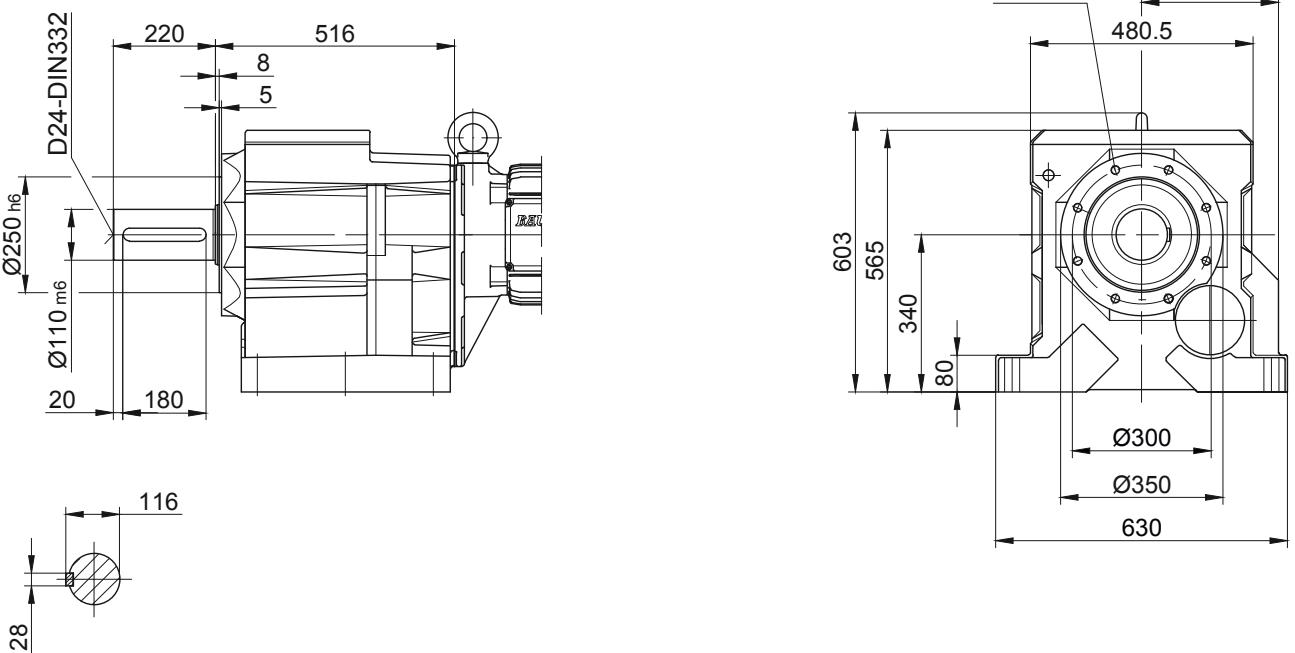

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Energy Efficient Geared Motors

AC Variable Speed


10

BG-series helical-gearred motors


Dimension - Tandem Gearbox

BG06G04

Foot mounting
Code -11/

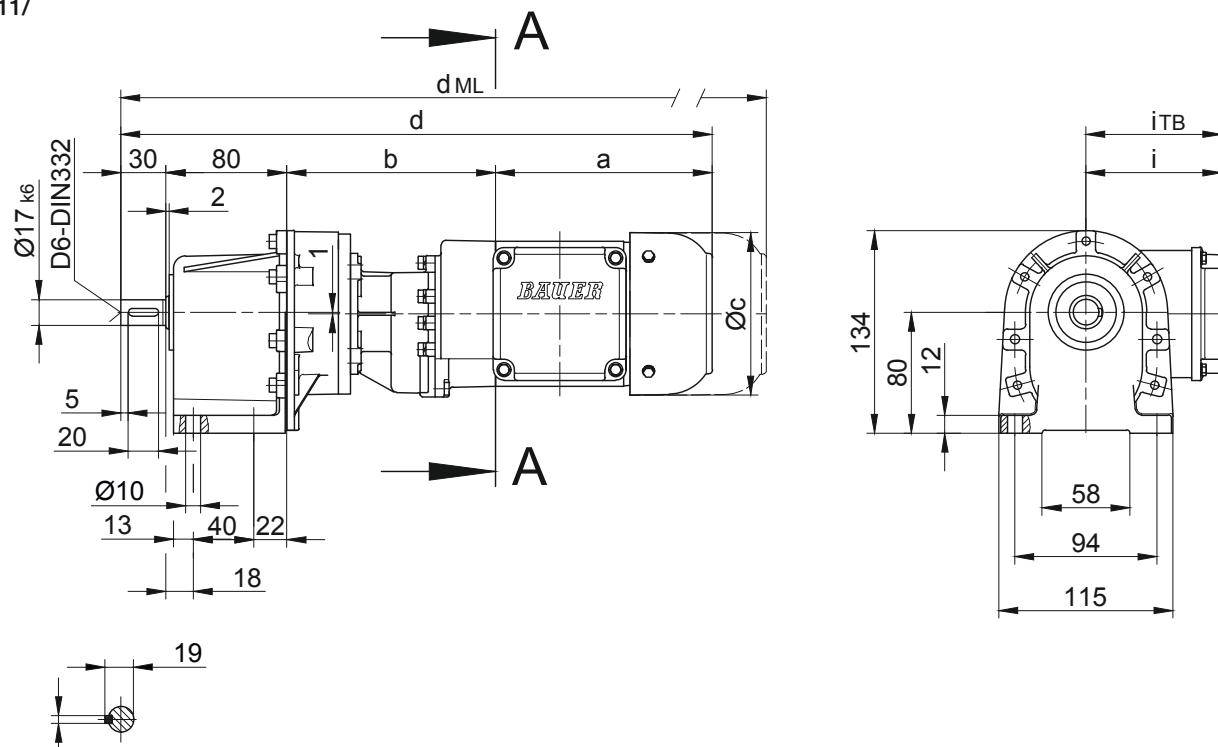

Flange with clearance holes
Code -31/

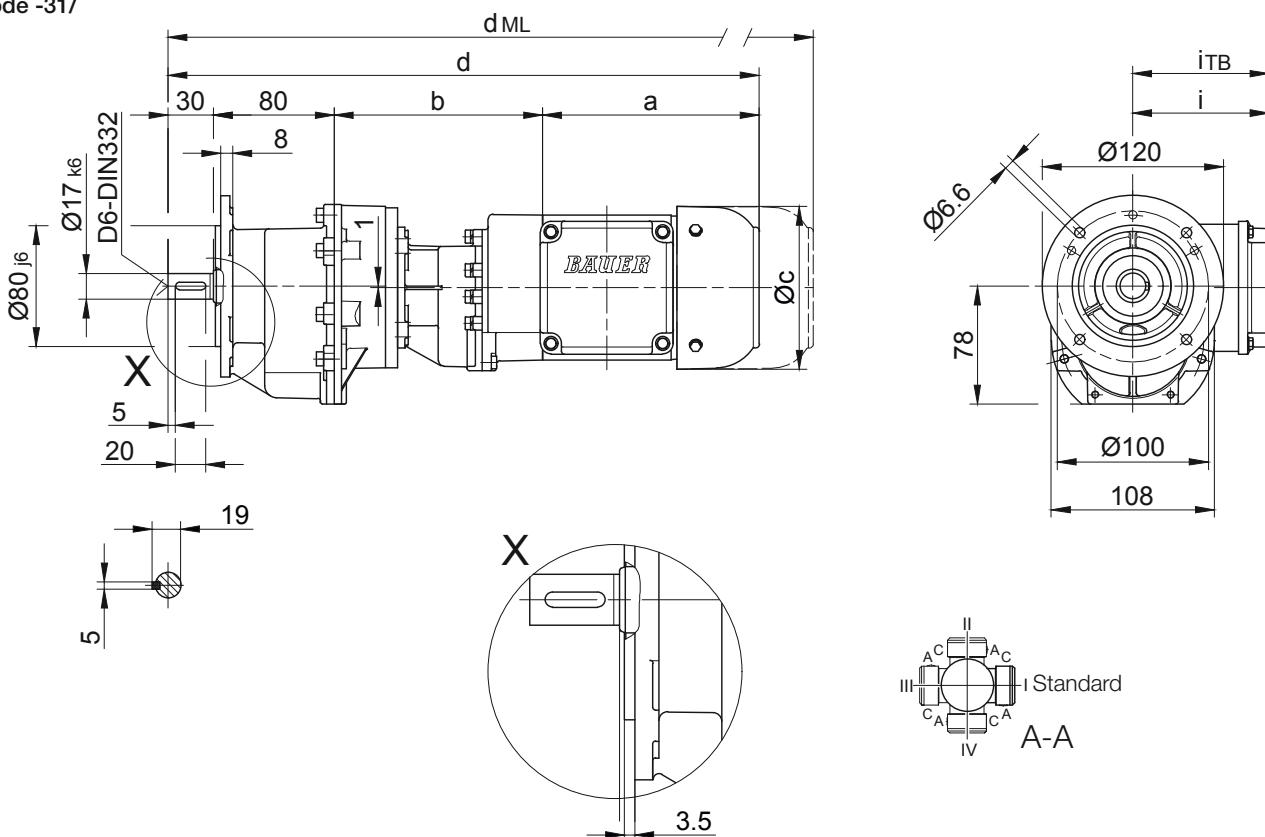

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG06G04-..S04S	142.5	134	110.5	386.5	90	112	430	474	517.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG10G06

Foot mounting with clearance holes


Code -11/

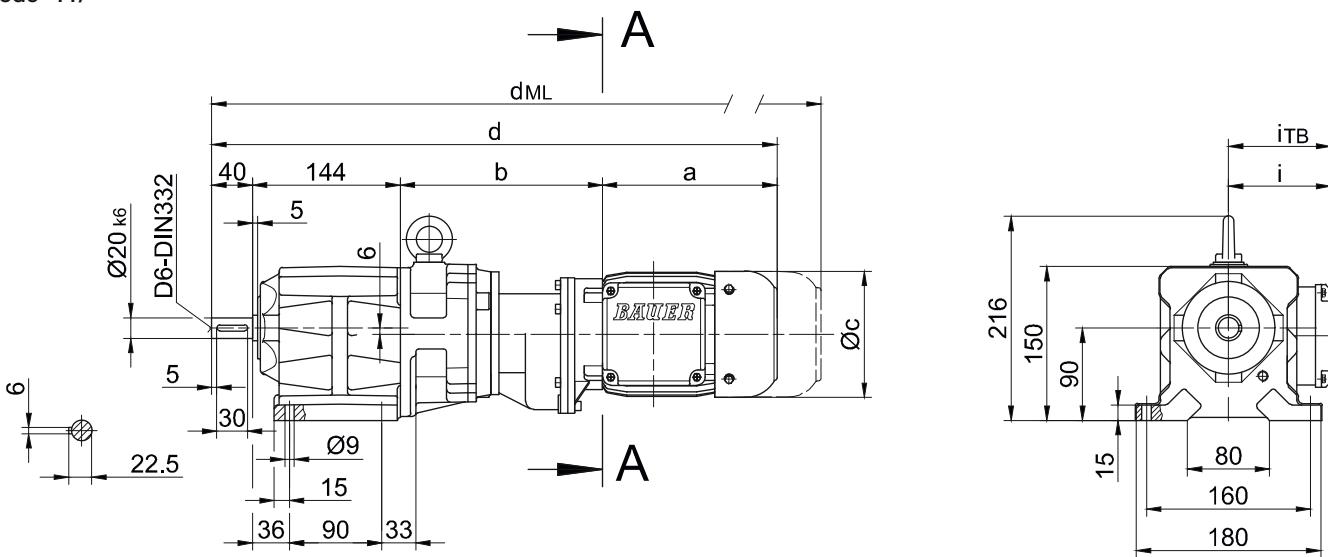

Flange with clearance holes

Code -37/

(Code -27/)

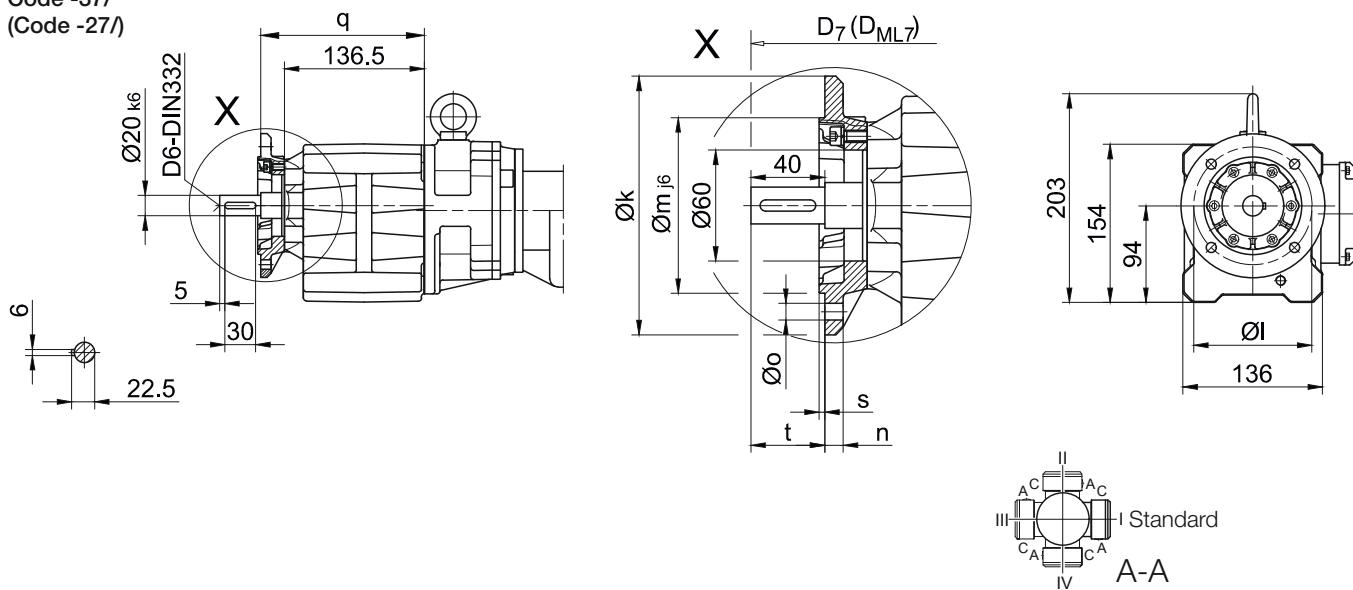

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG10..	Code -37V/	140	115	95	10	9	159.5	3	40.5	d+15.5	d _{ML} +15.5
BG10..	Code -27V/	120	100	80	8	6.6	154.5	3	45.5	d+15.5	d _{ML} +15.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG10G06.../S04S	142.5	195	110.5	521.5	90	112	565	609	652.5	-
BG10G06.../S..06 (M, L)	170.5	197	123	551.5	99	119	593.5	654	691.5	-
BG10G06.../S..08 (M, L)	199.5	241	156	624.5	114.5	136.5	690.5	736.5	798	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gearred motors

Dimension - Tandem Gearbox



BG10G06

Flange with tapped holes
Code -71/

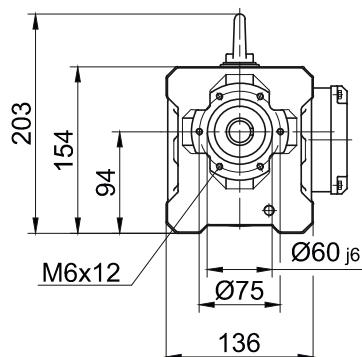
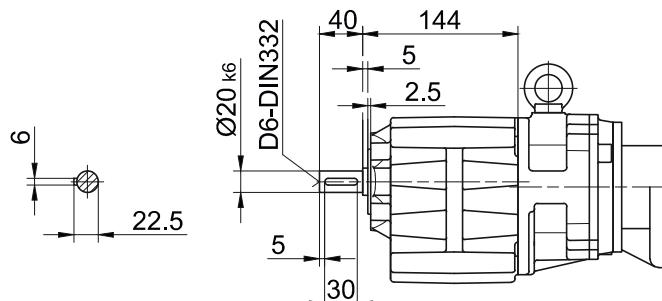


Foot with tapped holes left and right

Code -61LR/

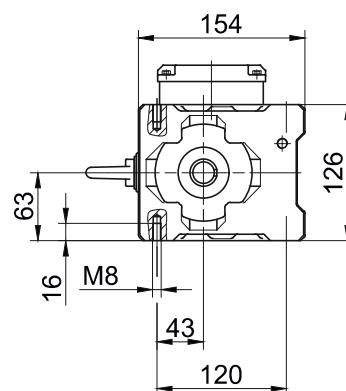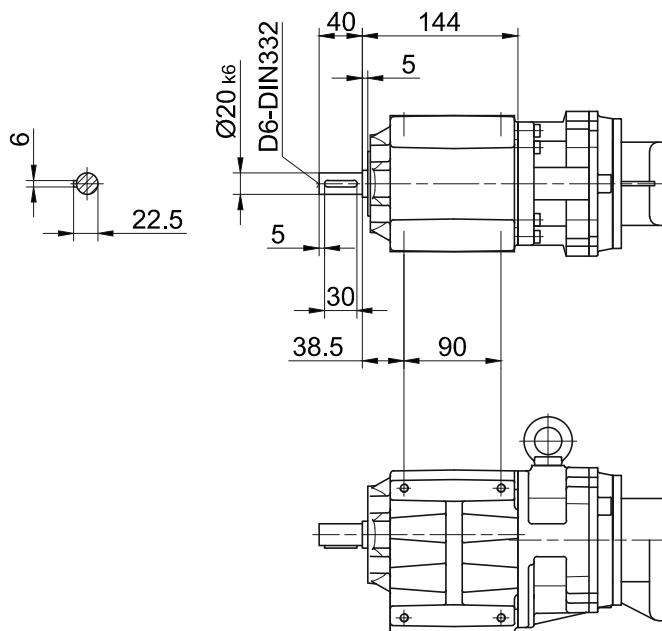

Foot plate left
Code -91L/

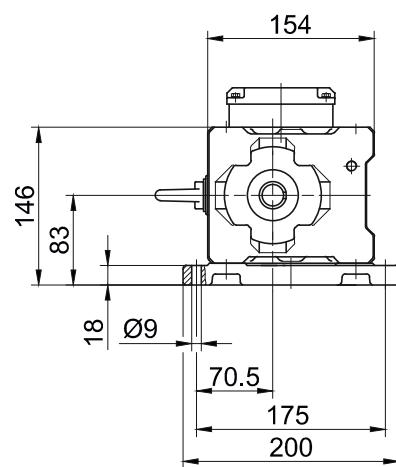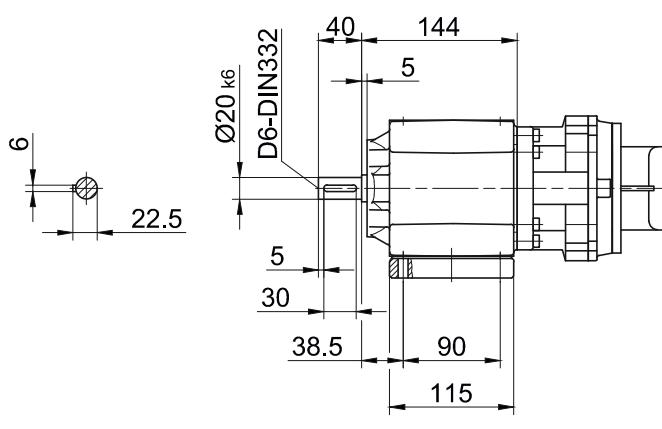

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG10XG06

Foot mounting with clearance holes

Code -11/


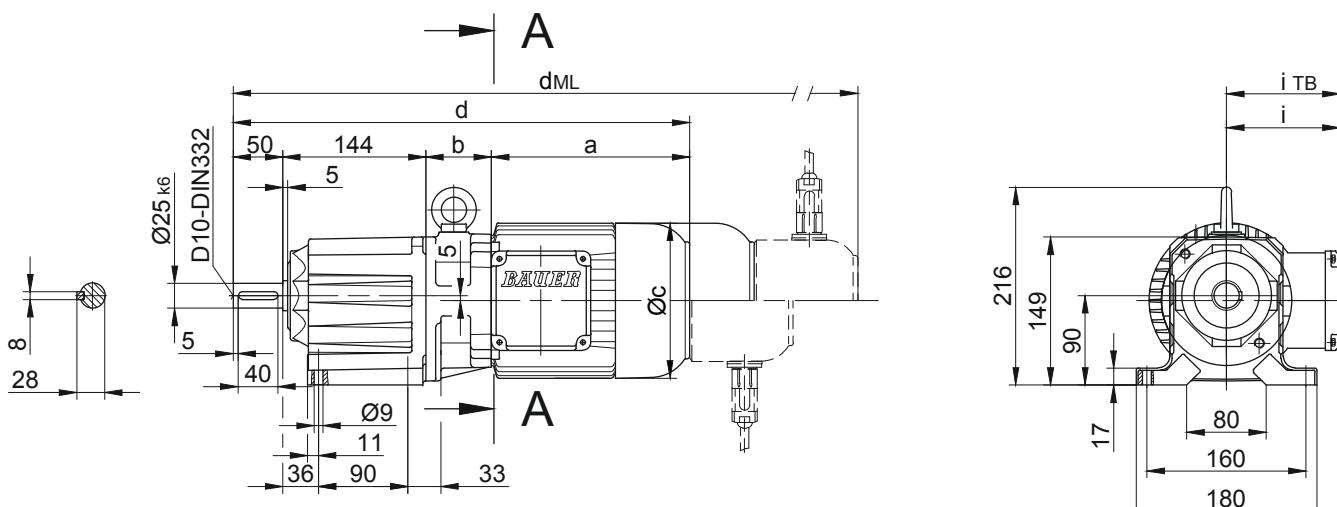


Flange with clearance holes

Code -37/

(Code -27/)

10

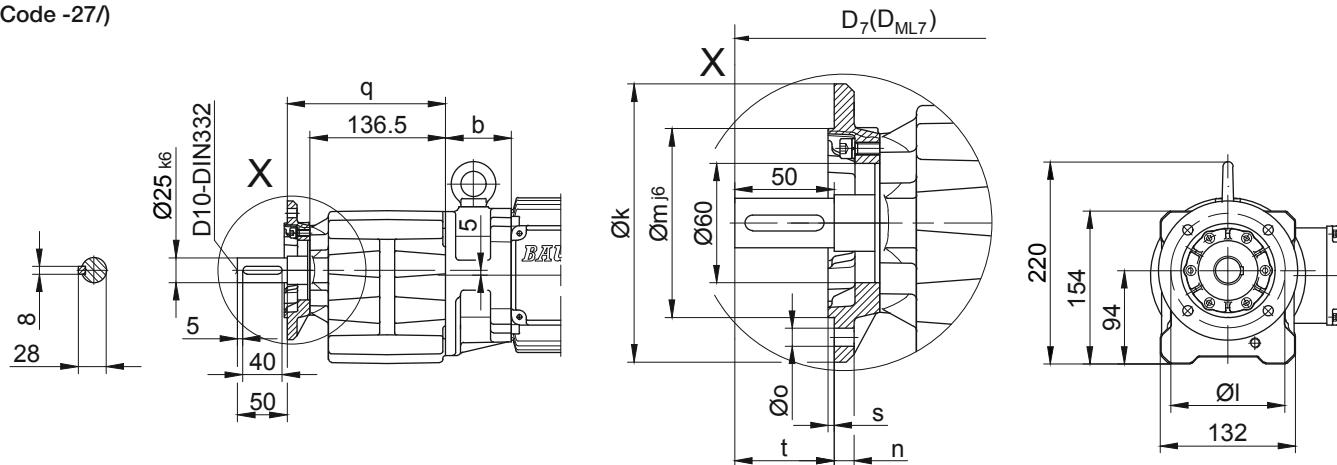

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG10X..	Code -37V/	140	115	95	10	9	159.5	3	50.5	d+15.5	d _{ML} +15.5
BG10X..	Code -27V/	120	100	80	8	6.6	154.5	3	55.5	d+15.5	d _{ML} +15.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG10XG06-../S04S	142.5	195	110.5	531.5	90	112	575	619	662.5	-
BG10XG06-../S..06 (M, L)	170.5	197	123	561.5	99	119	603.5	664	701.5	-
BG10XG06-../S..08 (M, L)	199.5	241	156	634.5	114.5	136.5	700.5	746.5	808	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gearred motors



Dimension - Tandem Gearbox

BG10XG06



Flange with tapped holes
Code -71/

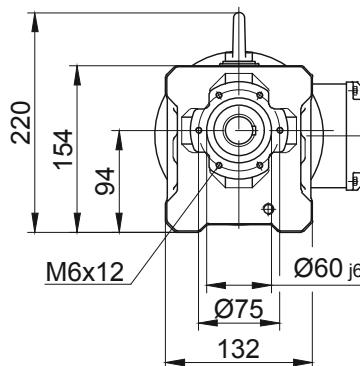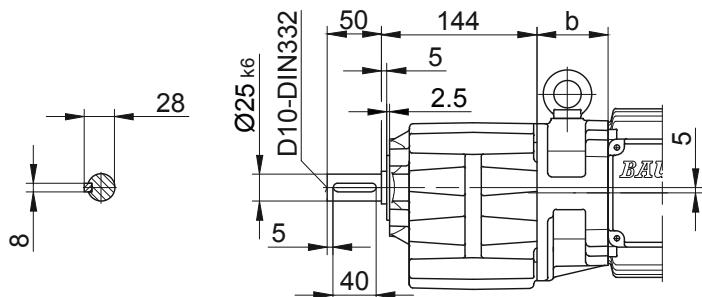

Foot with tapped holes left and right
Code -61LR/

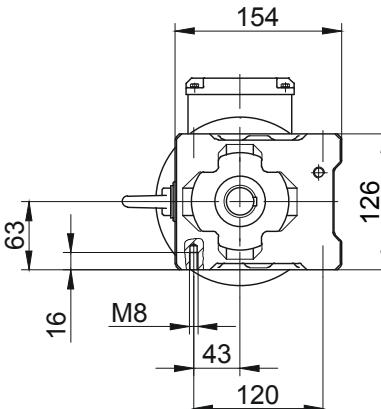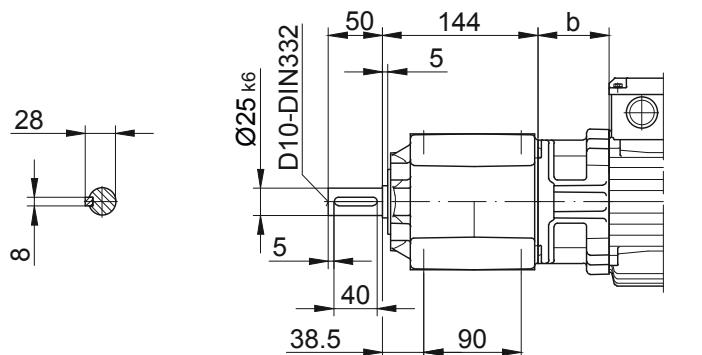

Foot plate left
Code -91L/

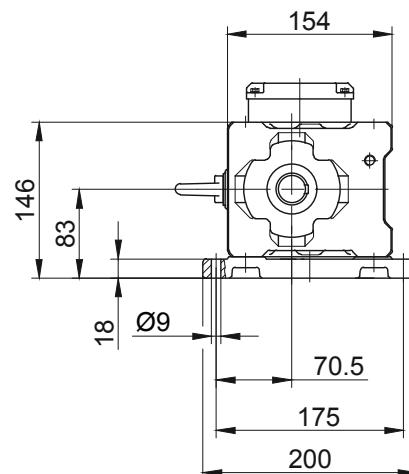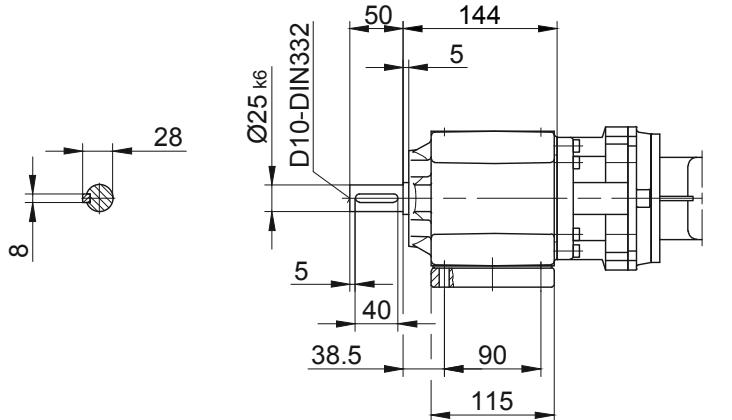

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG20G06

Foot mounting with clearance holes


Code -11/

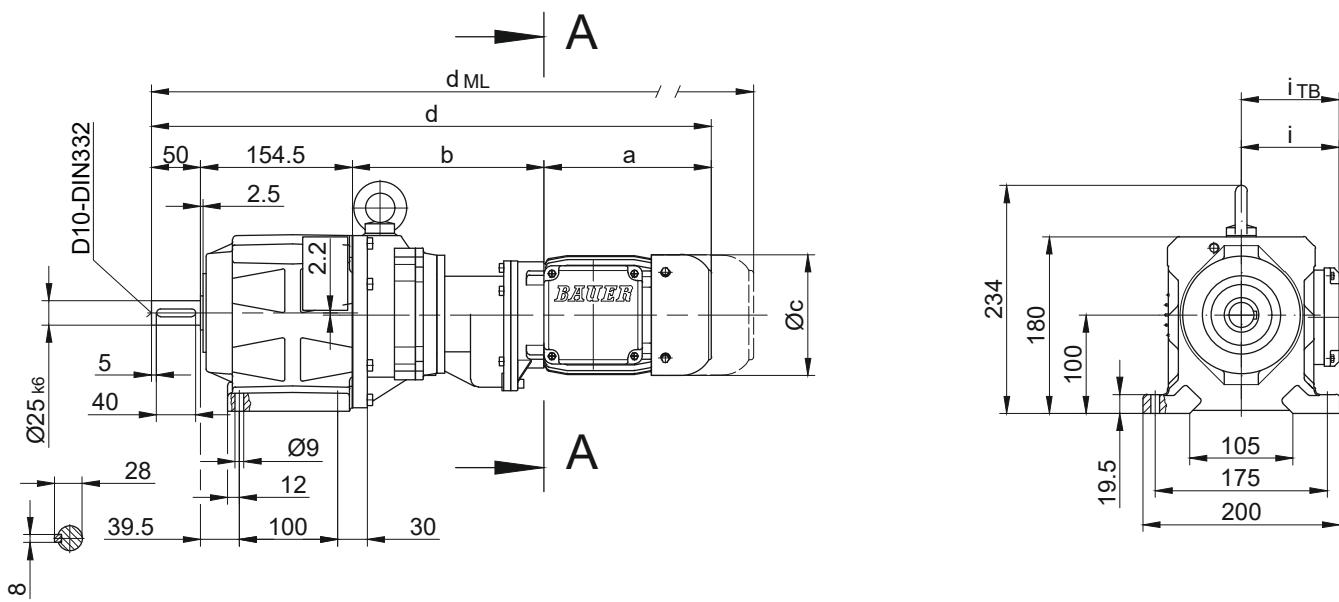

Flange with clearance holes

Code -37/

(Code -47/)

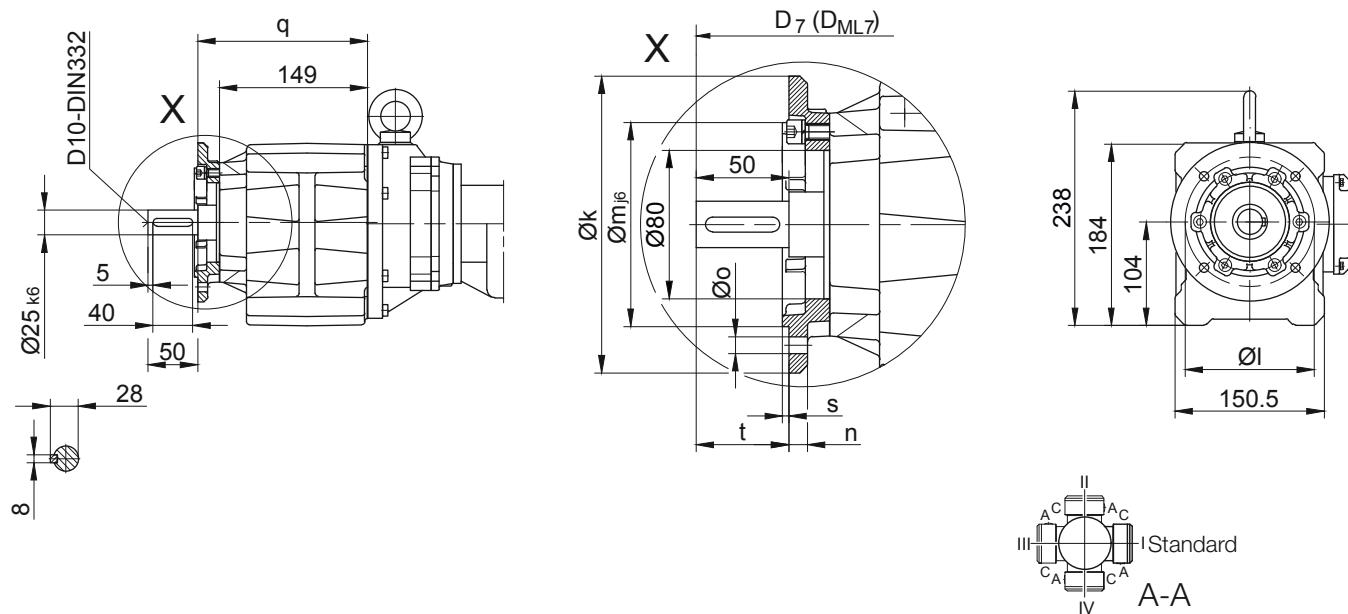

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG20..	Code -37V/	160	130	110	10	9	171	3.5	50.5	d+16.5	d _{ML} +16.5
BG20..	Code -47V/	200	165	130	12	11	178	3.5	43.5	d+16.5	d _{ML} +16.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG20G06.../S04S	142.5	193	110.5	540	90	112	583.5	627.5	671	-
BG20G06.../S..06 (M, L)	170.5	195	123	570	99	119	612	672.5	710	-
BG20G06.../S..08 (M, L)	199.5	239	156	643	114.5	136.5	709	755	816.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG20G06


Flange with tapped holes

Code -71/

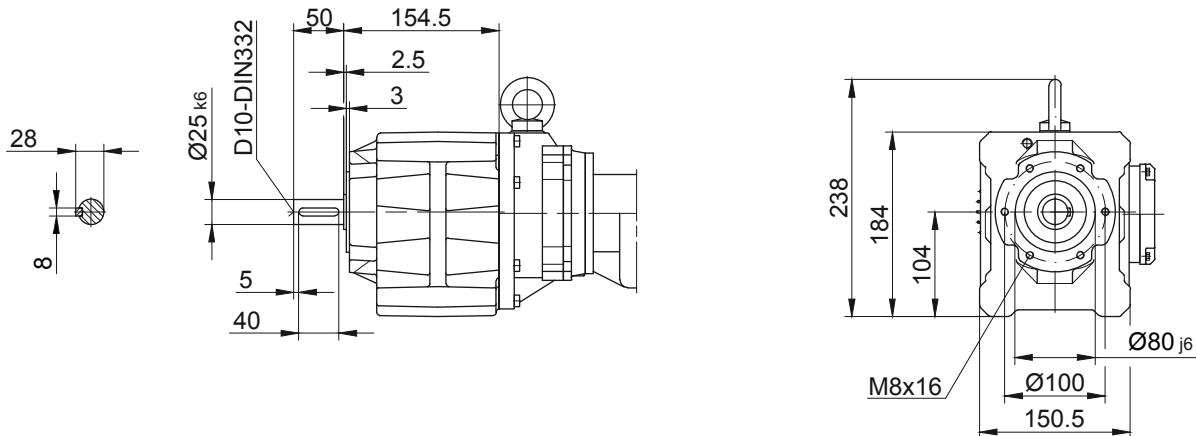


Foot with tapped holes left and right

Code -61LR/

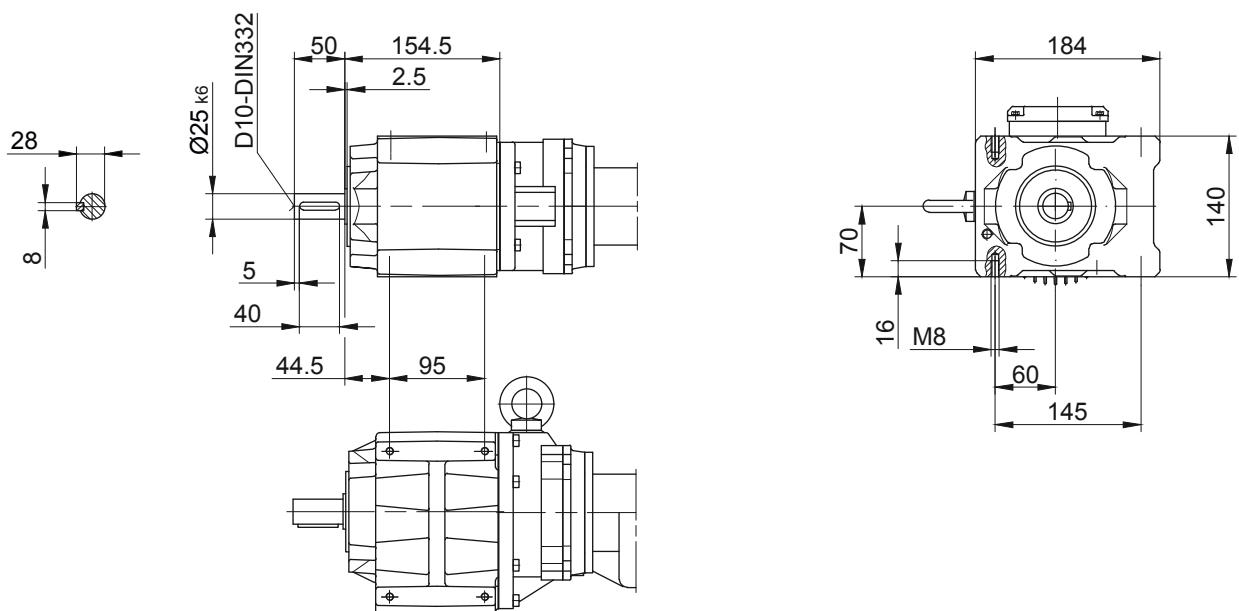

Foot mounting right with clearance holes

Code -91R/(-91L)

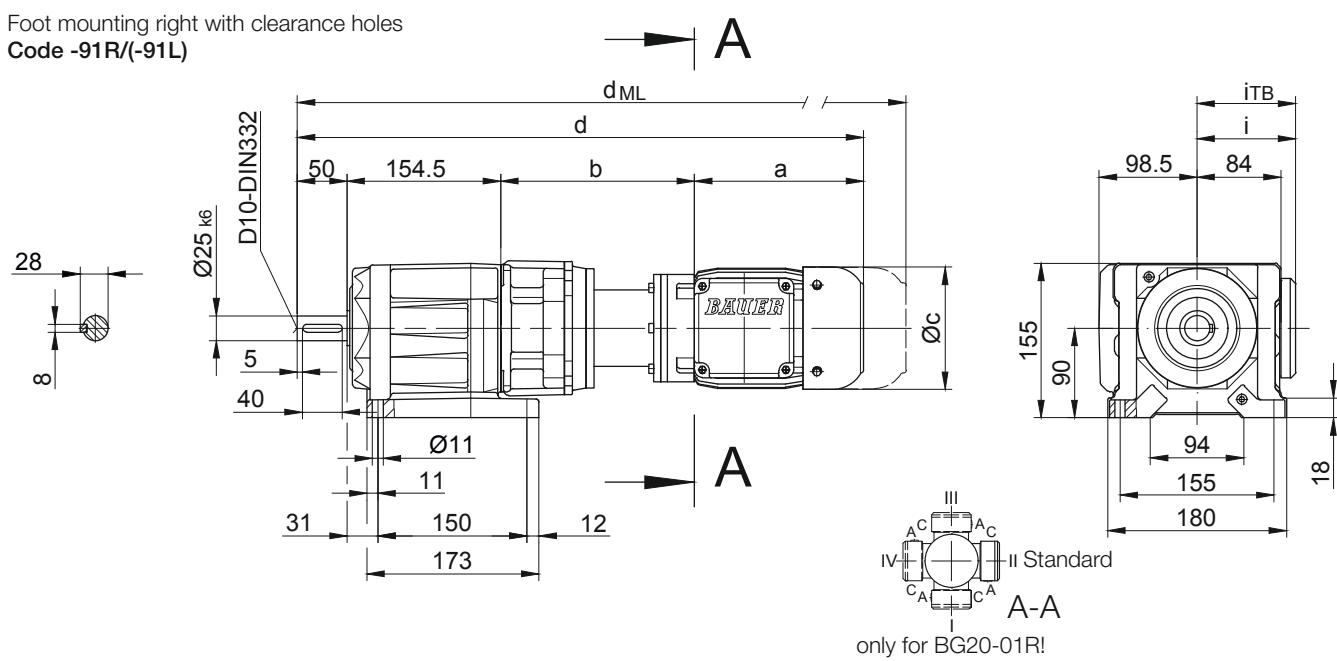

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG30G06

Foot mounting with clearance holes

Code -11/

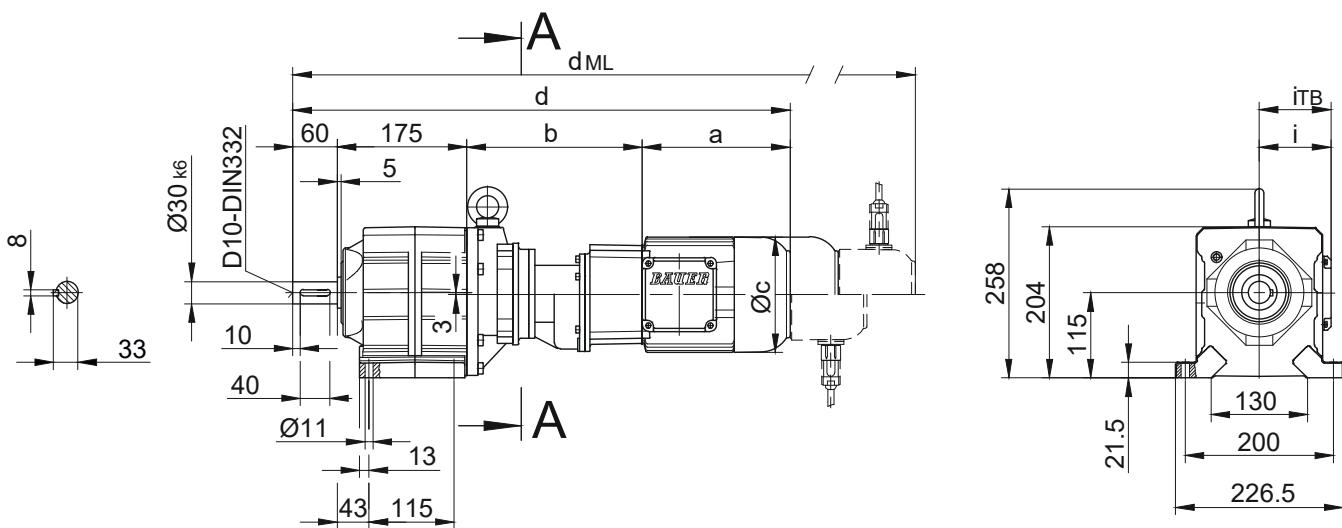


Flange with clearance holes

Code -37/

(Code -27/)

10

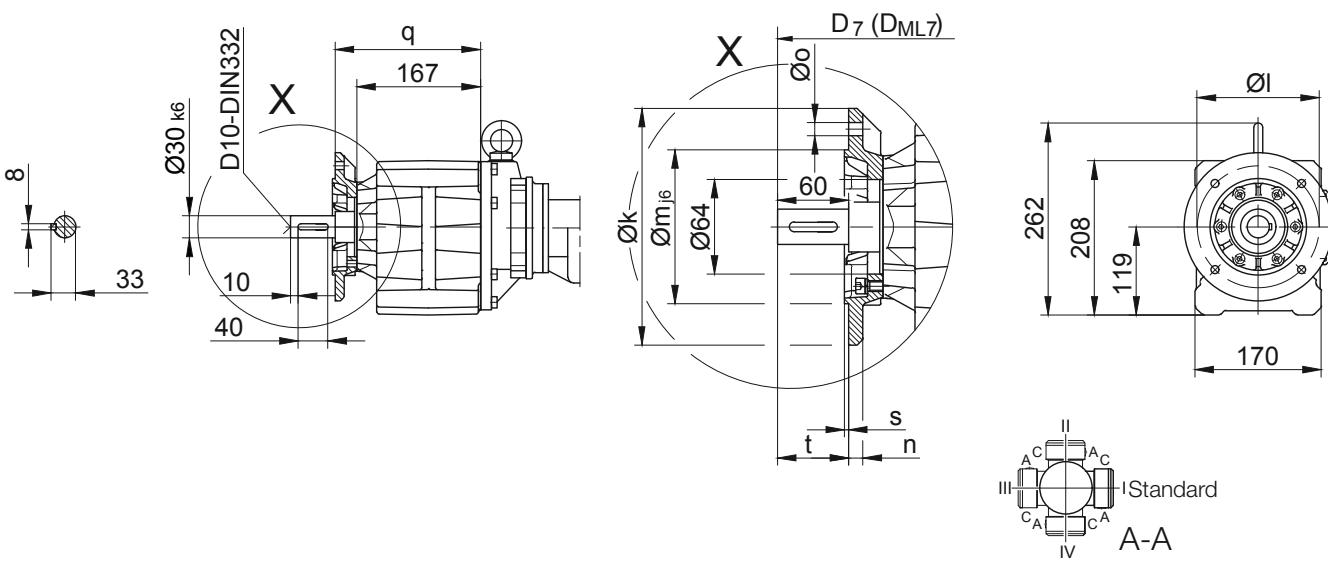

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG30..	Code -37/	200	165	130	12	11	196	3.5	60.5	d+21	d _{ML} +21
BG30..	Code -27/	160	130	110	10	9	189	3.5	67.5	d+21	d _{ML} +21

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	
									d _{ML}	d _{ML}
BG30G06.../S04S	142.5	191	110.5	568.5	90	112	612	656	699.5	-
BG30G06.../S..06 (M, L)	170.5	193	123	598.5	99	119	640.5	701	738.5	-
BG30G06.../S..08 (M, L)	199.5	237	156	671.5	114.5	136.5	737.5	783.5	845	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG30G06


Flange with tapped holes

Code -71/

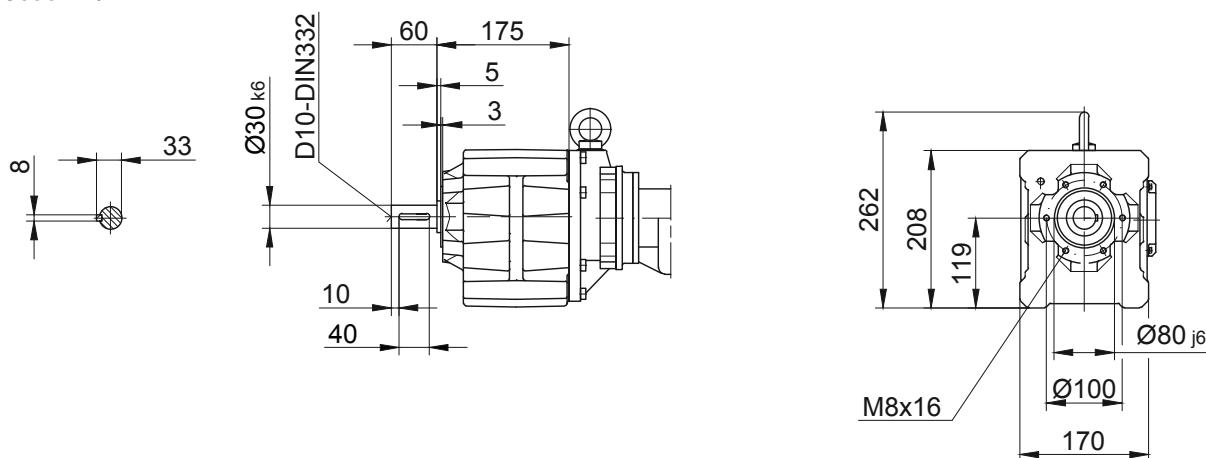


Foot with tapped holes left and right

Code -61LR/

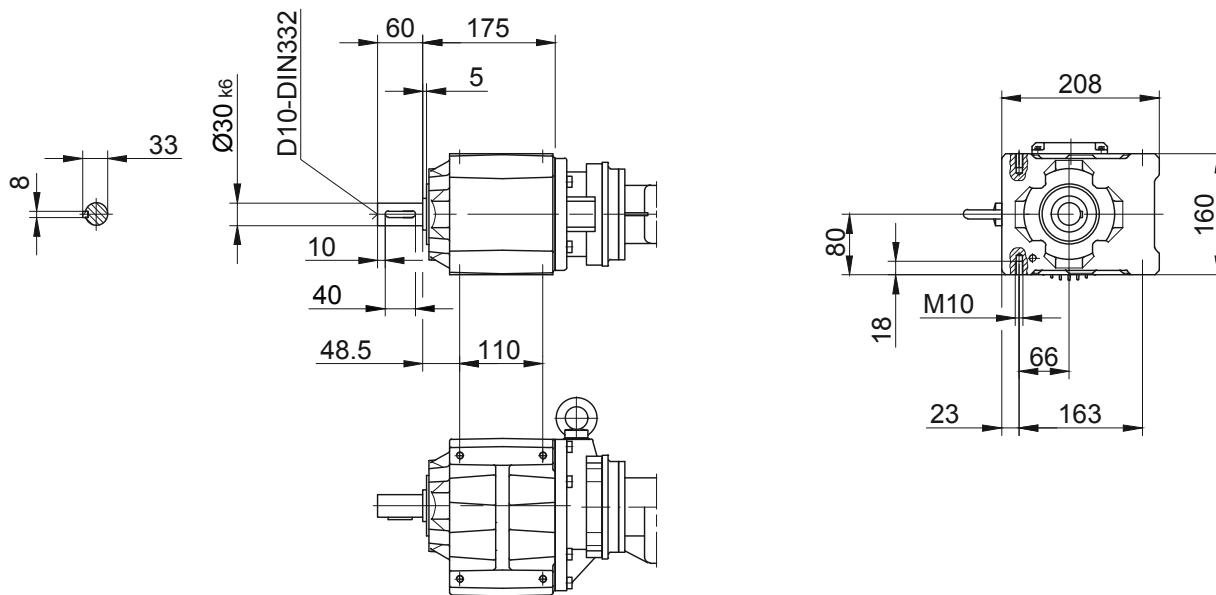

Foot plate left

Code -91L/

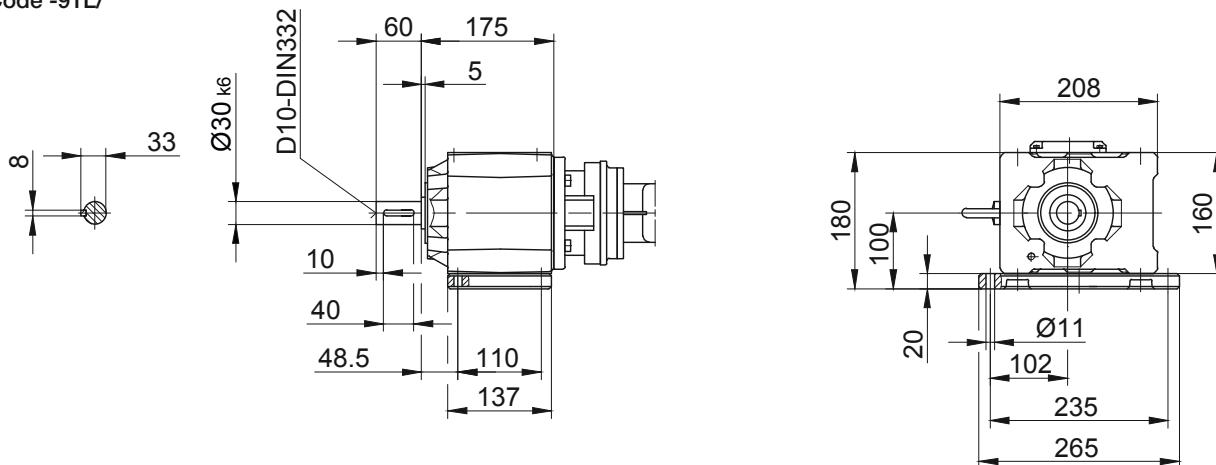

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG40G10

Foot mounting with clearance holes


Code -11/

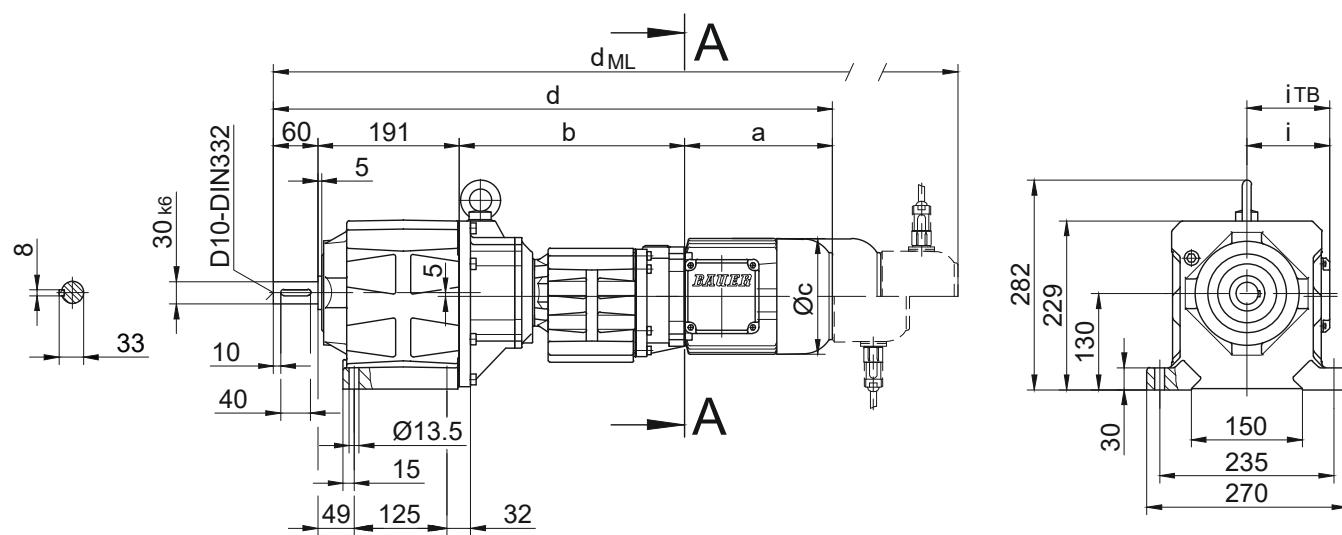

Flange with clearance holes

Code -37/

(Code -47/)

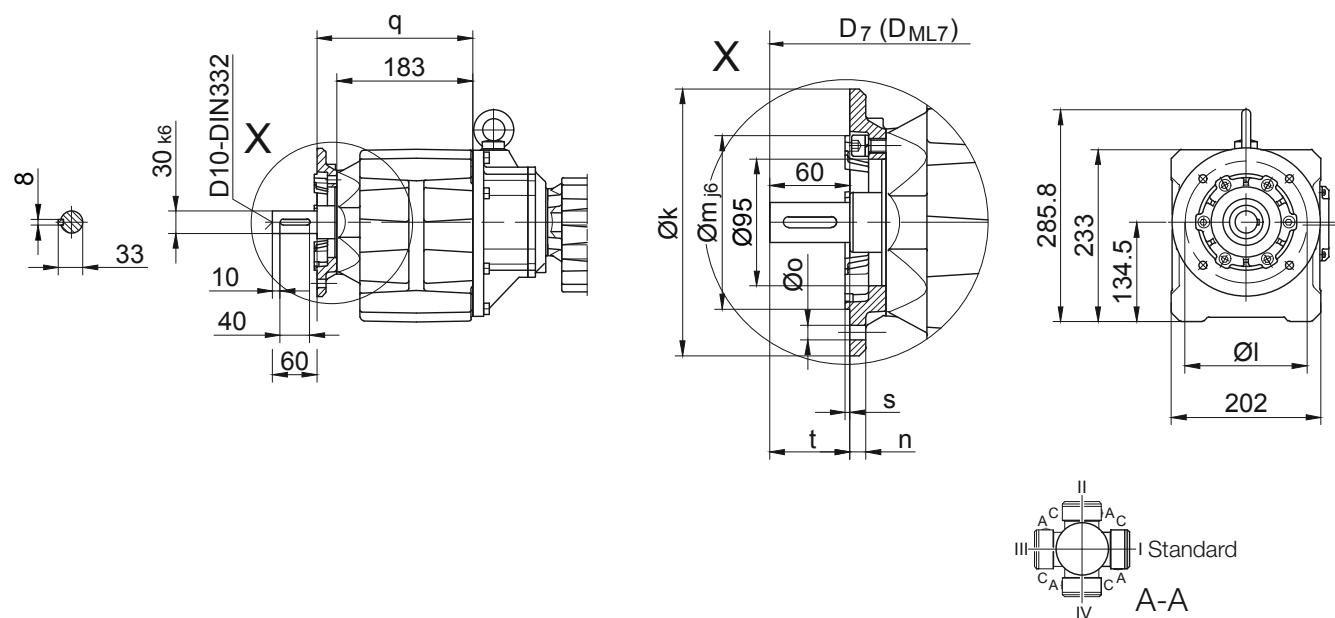

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG40..	Code -37/	200	165	130	12	11	210	3.5	61	d+19	d _{ML} +19
BG40..	Code -47/	250	215	180	16	13.5	219	4	52	d+19	d _{ML} +19

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i_{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG40G10-../S..06 (M, L)	170.5	300	123	721.5	99	119	763.5	824	861.5	-
BG40G10-../S..08 (M, L)	199.5	304	156	754.5	114.5	136.5	820.5	866.5	928	-
BG40G10-../S..09 (S, X)	250.5	318.5	176	820	124	157	913	927.5	1017	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG40G10



Flange with tapped holes

Code -71/

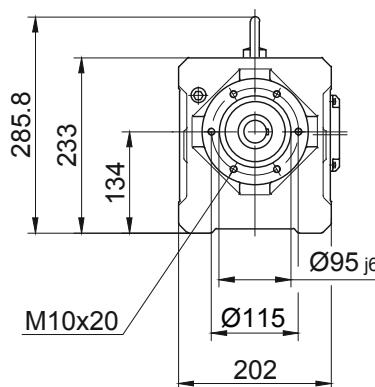
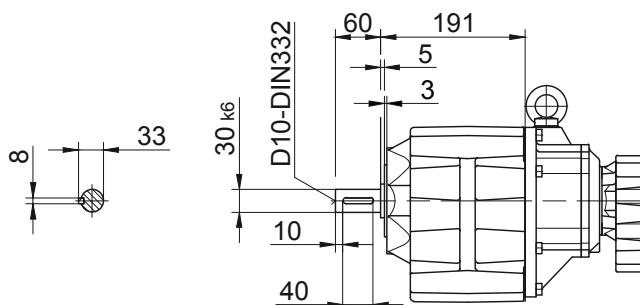


Foot with tapped holes left and right

Code -61LR/

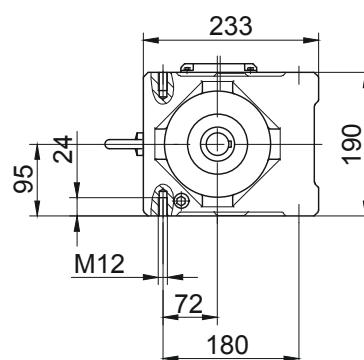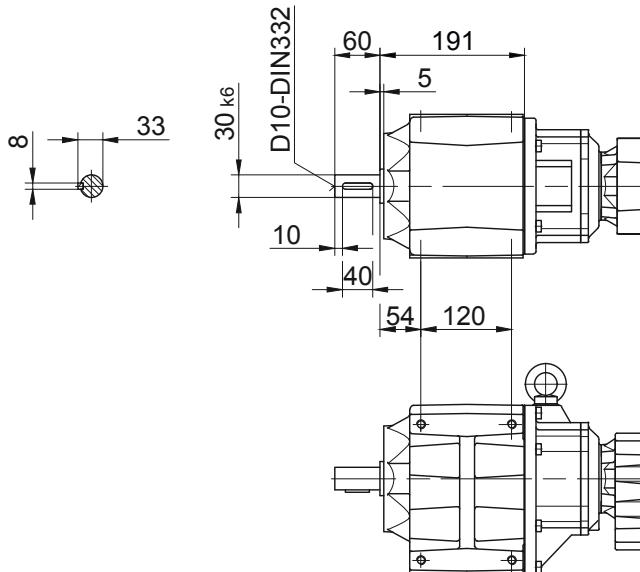

Foot plate left
Code -91L/

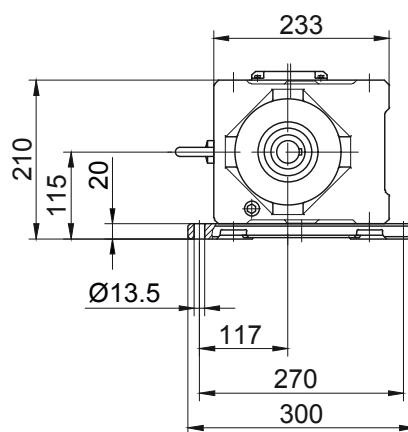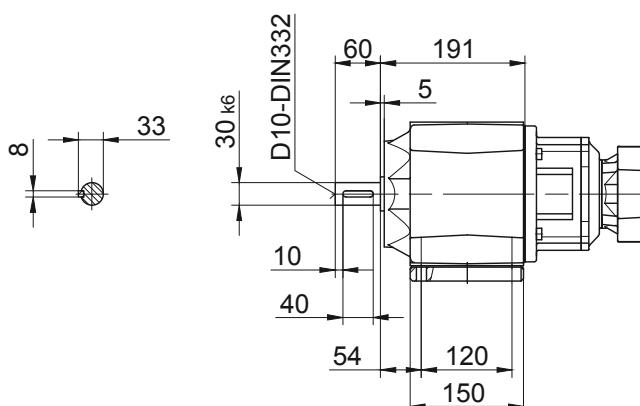

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG50G10

Foot mounting with clearance holes

Code -11/

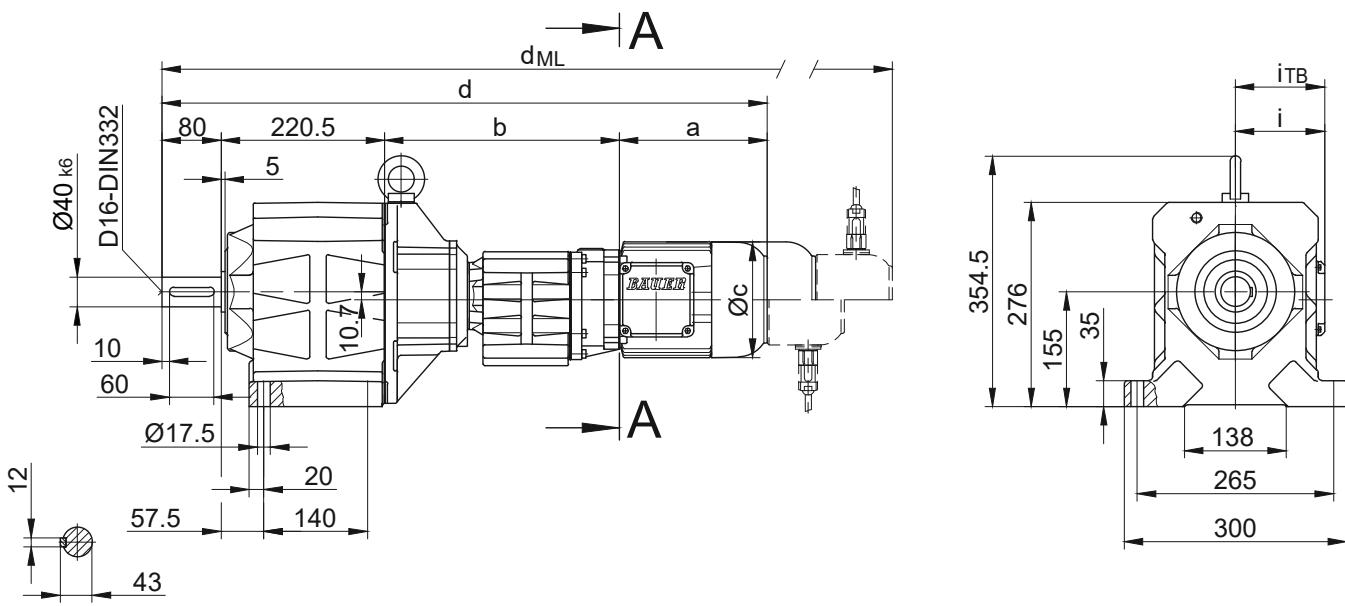


Flange with clearance holes

Code -37/

(Code -27/)

10

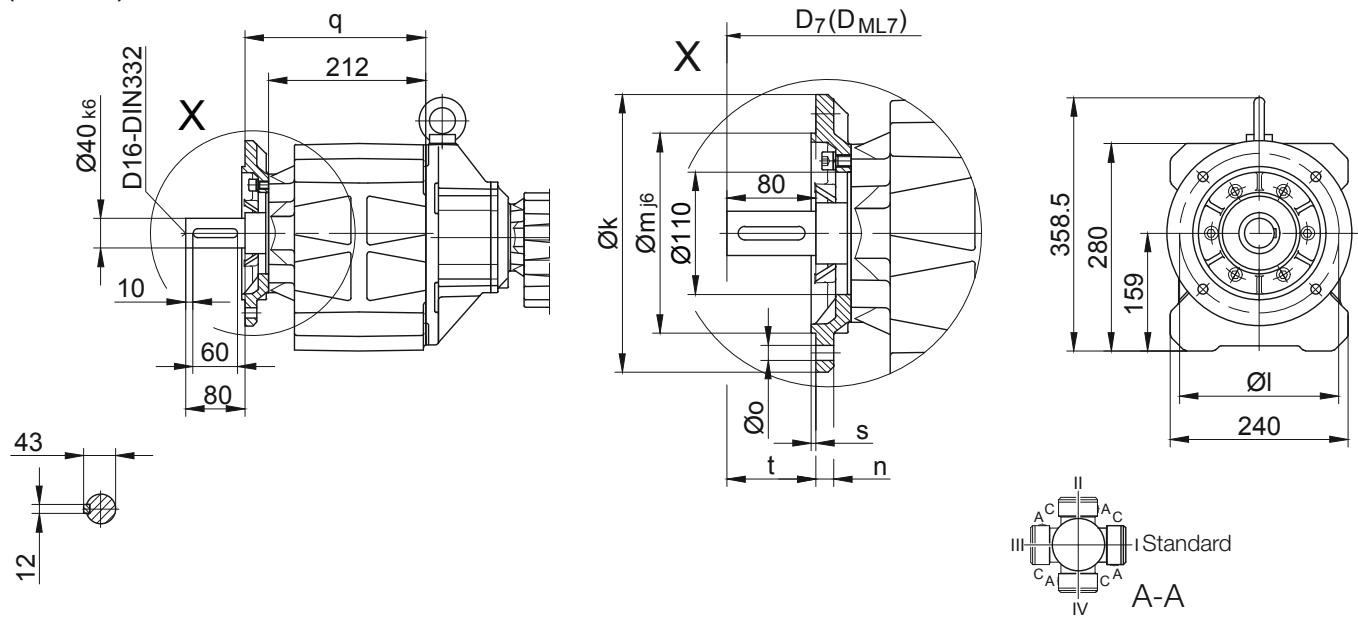

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG50..	Code -37/	250	215	180	16	13.5	244	4	80.5	d+23.5	d _{ML} +23.5
BG50..	Code -27/	200	165	130	12	11	241	3.5	83.5	d+23.5	d _{ML} +23.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG50G10-..S..06 (M, L)	170.5	313	123	784	99	119	826	886.5	924	-
BG50G10-..S..08 (M, L)	199.5	317	156	817	114.5	136.5	883	929	990.5	-
BG50G10-..S..09 (S, X)	250.5	331.5	176	882.5	124	157	975.5	990	1079.5	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gearred motors


Dimension - Tandem Gearbox

BG50G10

Flange with tapped holes
Code -71/

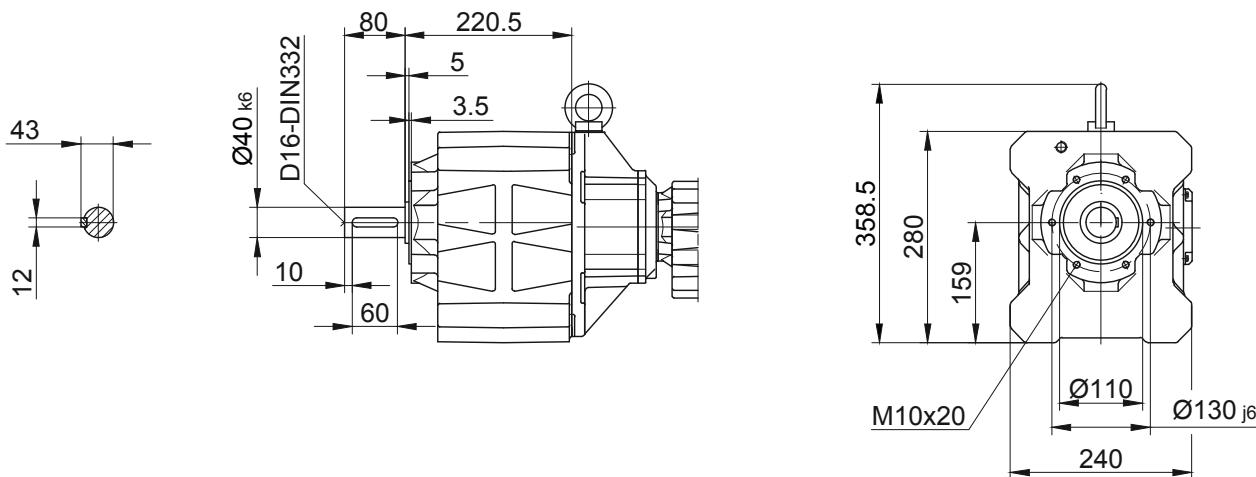

Foot with tapped holes left and right
Code -61LR/

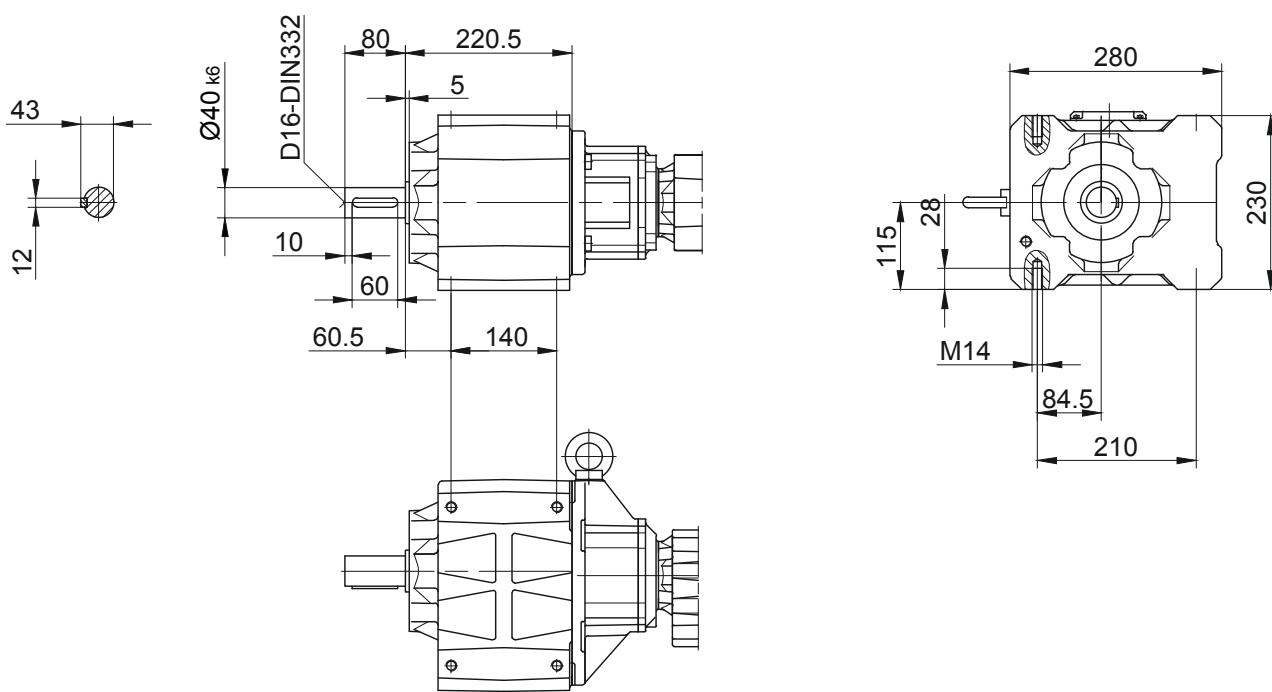

10


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG60G20

Foot mounting with clearance holes


Code -11/

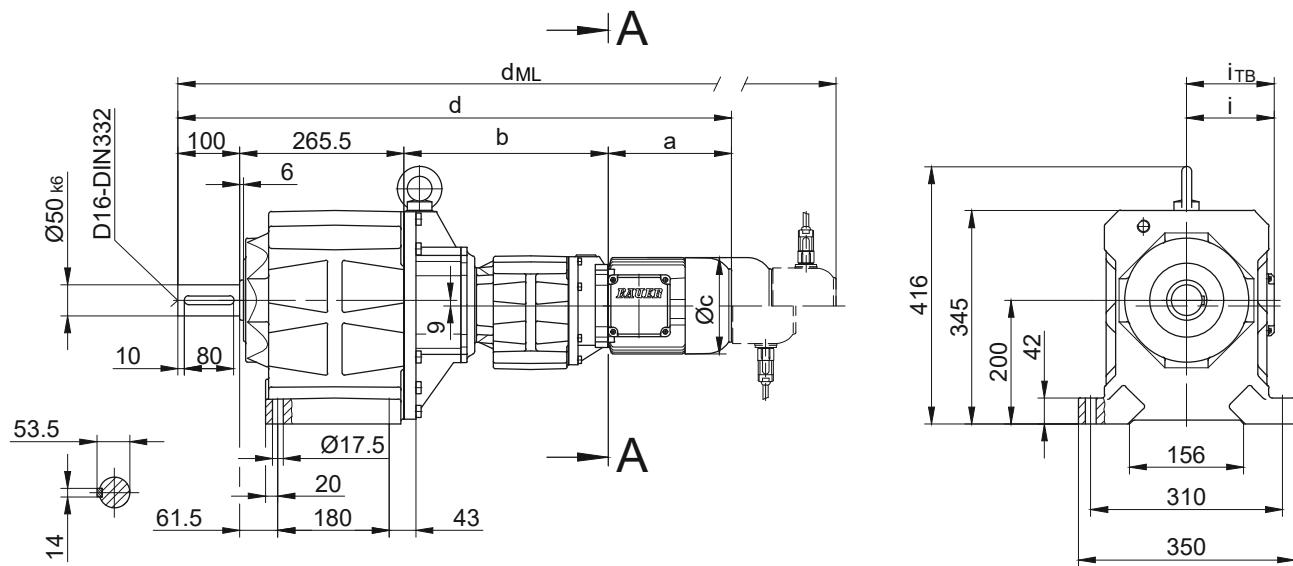

Flange with clearance holes

Code -37/

(Code -27/)

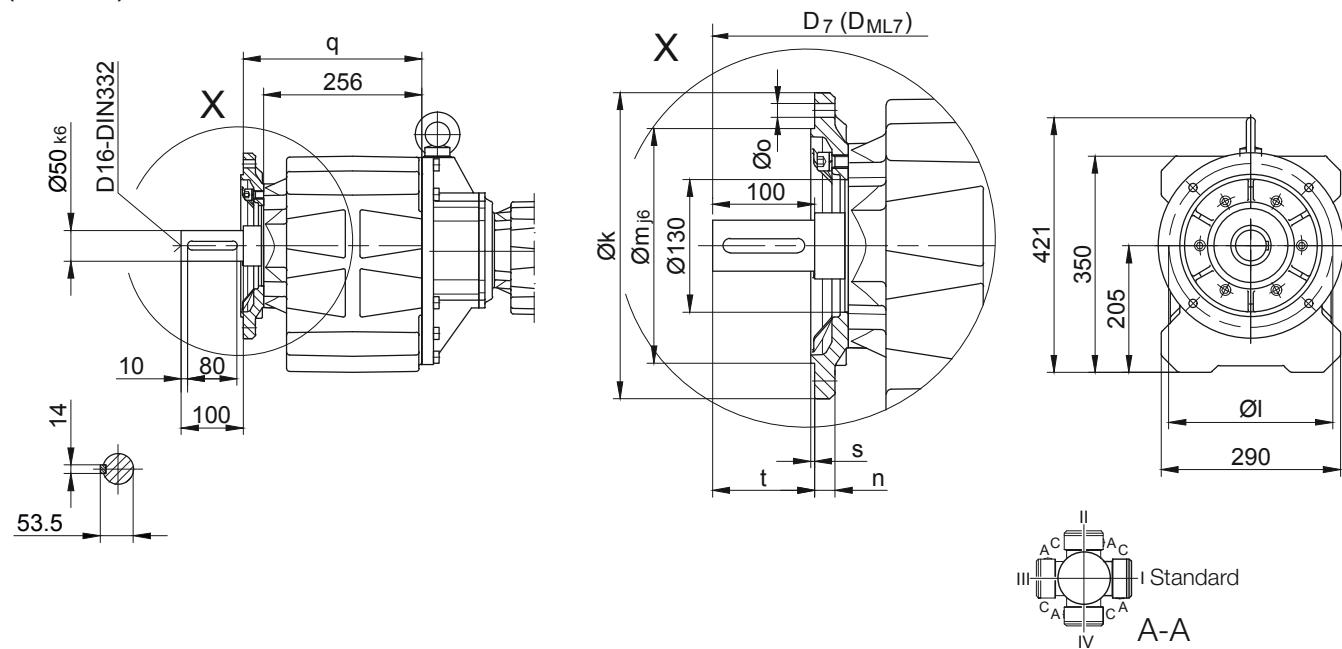

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG60..	Code -37/	300	265	230	20	13.5	289	4	100.5	d+23.5	d _{ML} +23.5
BG60..	Code -27/	250	215	180	16	13.5	286	4	103.5	d+23.5	d _{ML} +23.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG60G20.../S..06 (M, L)	170.5	326	123	862	99	119	904	964.5	1002	-
BG60G20.../S..08 (M, L)	199.5	330	156	895	114.5	136.5	961	1007	1068.5	-
BG60G20.../S..09 (S, X)	250.5	344.5	176	960.5	124	157	1053.5	1068	1157.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG60G20



Flange with tapped holes

Code -71/

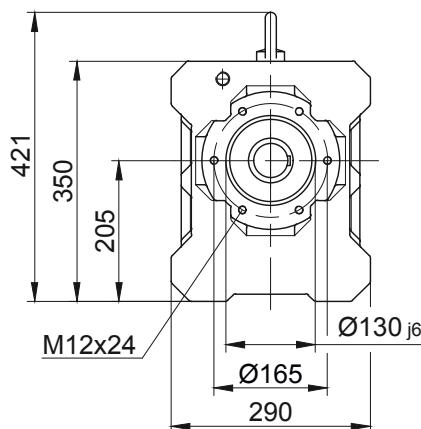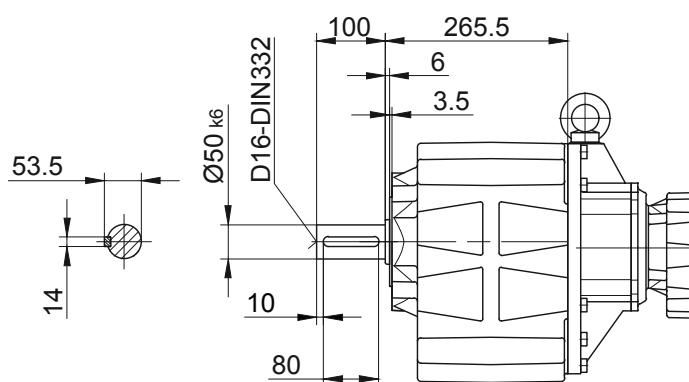

Foot with tapped holes left and right

Code -61LR/

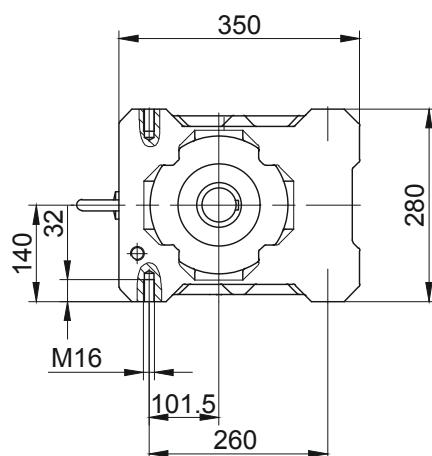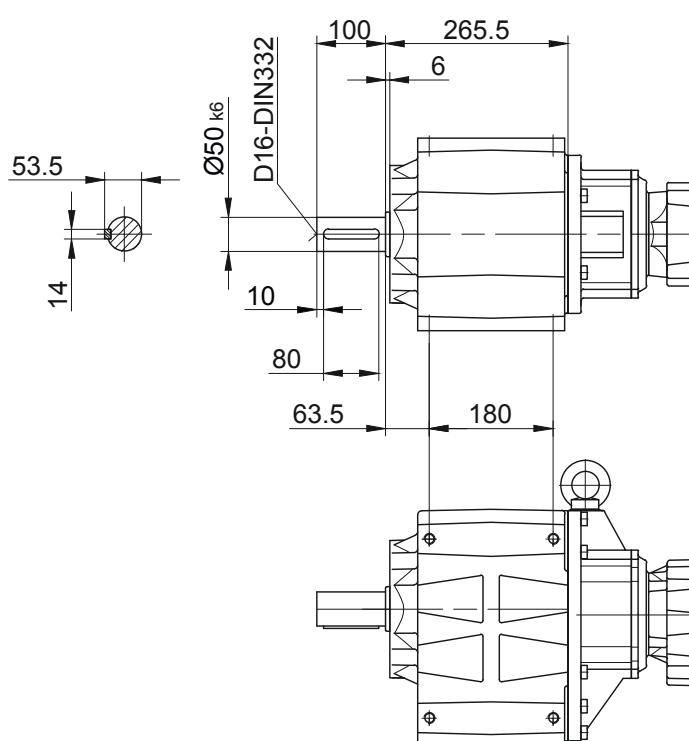

10


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG70G20

Foot mounting with clearance holes

Code -11/

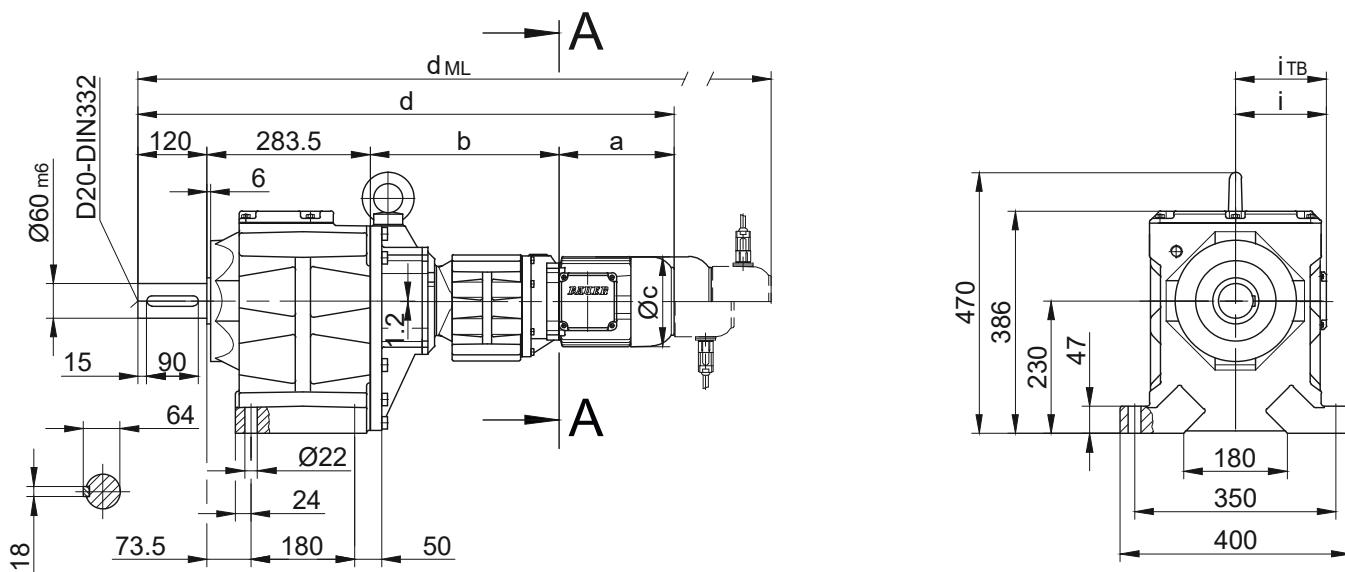


Flange with clearance holes

Code -37/

(Code -27/)

10

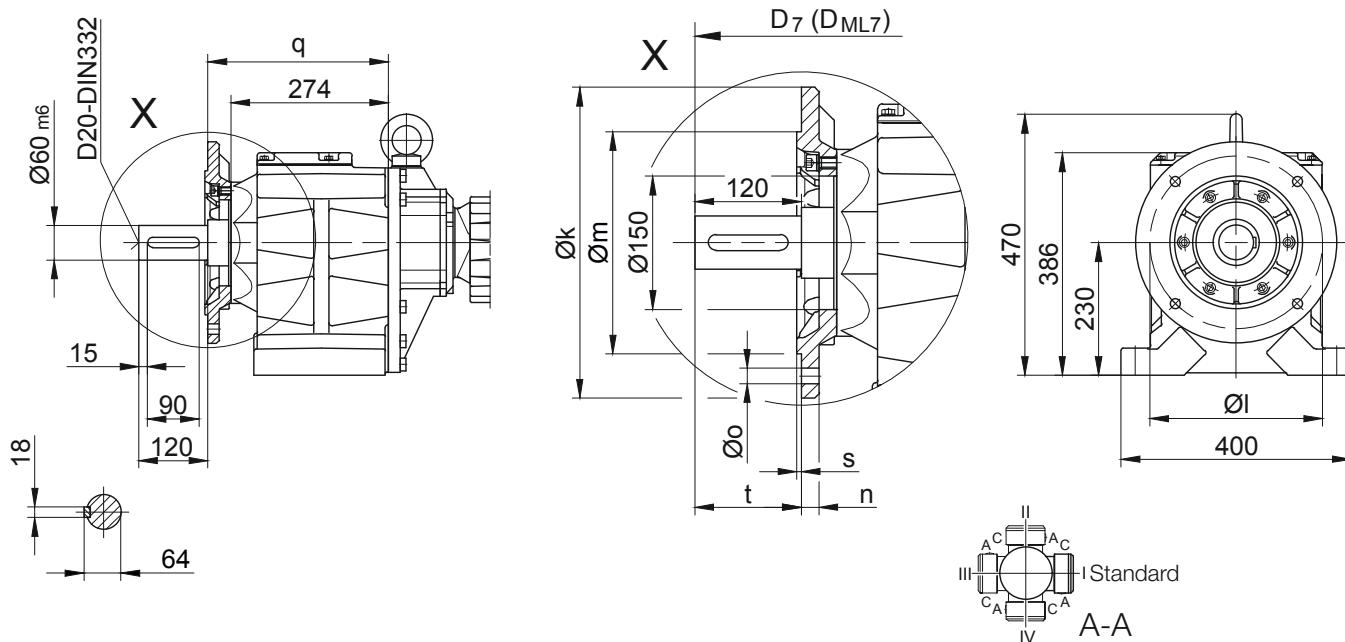

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG70..	Code -37/	350	300	250	20	17.5	314	5	120.5	d+30.5	d _{ML} +30.5
BG70..	Code -27/	300	265	230	20	13.5	322	4	113.5	d+30.5	d _{ML} +30.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG70G20-../S..06 (M, L)	170.5	324	123	898	99	119	940	1000.5	1038	-
BG70G20-../S..08 (M, L)	199.5	328	156	931	114.5	136.5	997	1043	1104.5	-
BG70G20-../S..09 (S, X)	250.5	342.5	176	996.5	124	157	1089.5	1104	1193.5	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG70G20

Flange with tapped holes
Code -71/

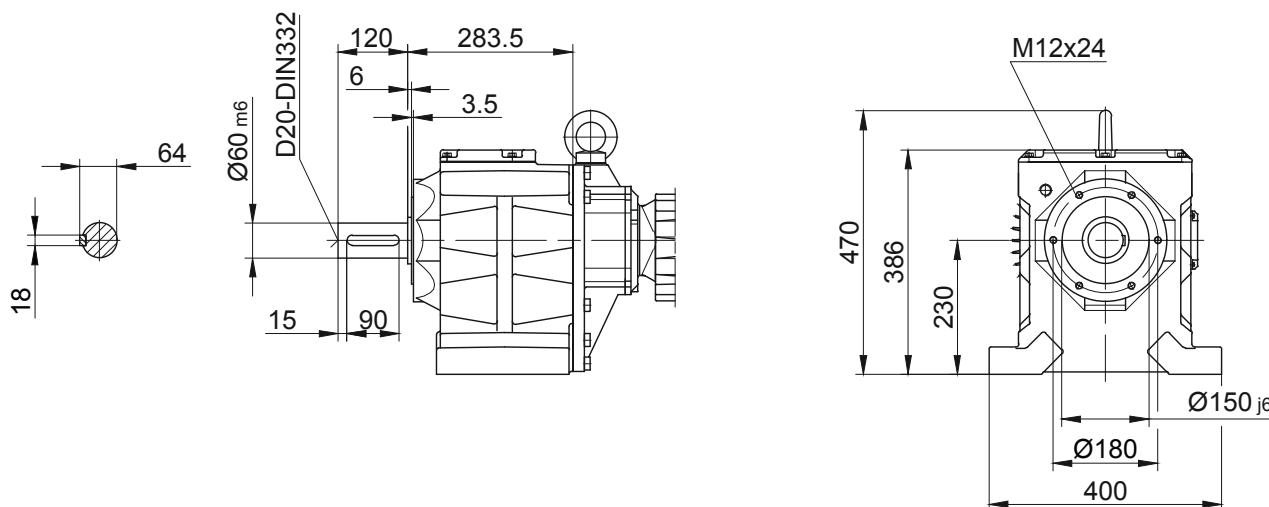


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG80G40

Foot mounting with clearance holes

Code -11/

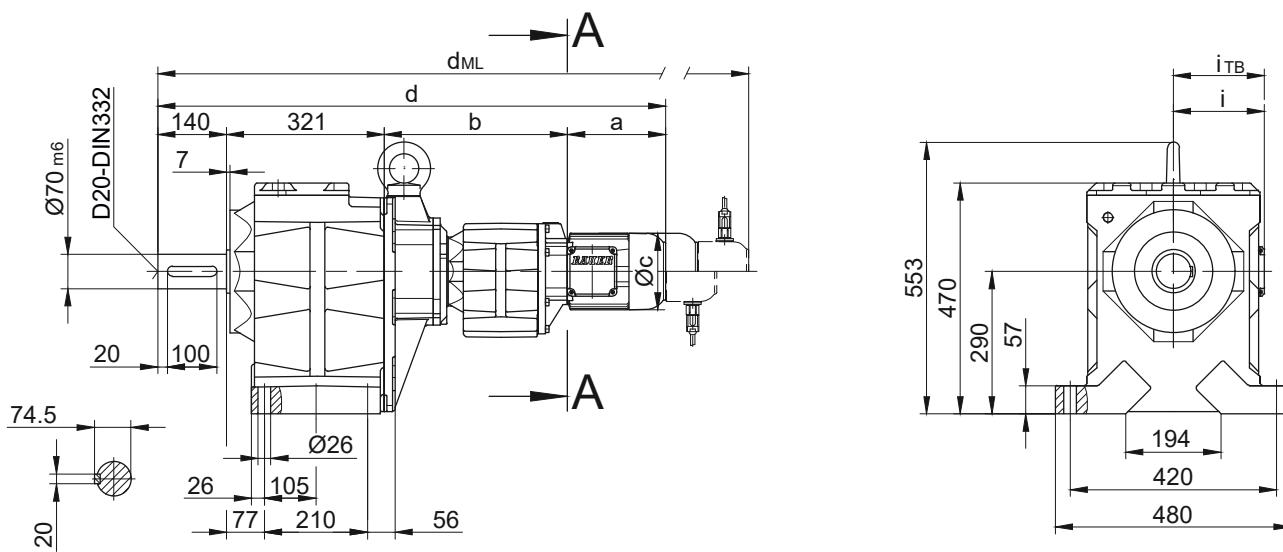


Flange with clearance holes

Code -37/

(Code -27/)

(Code -47/)

10

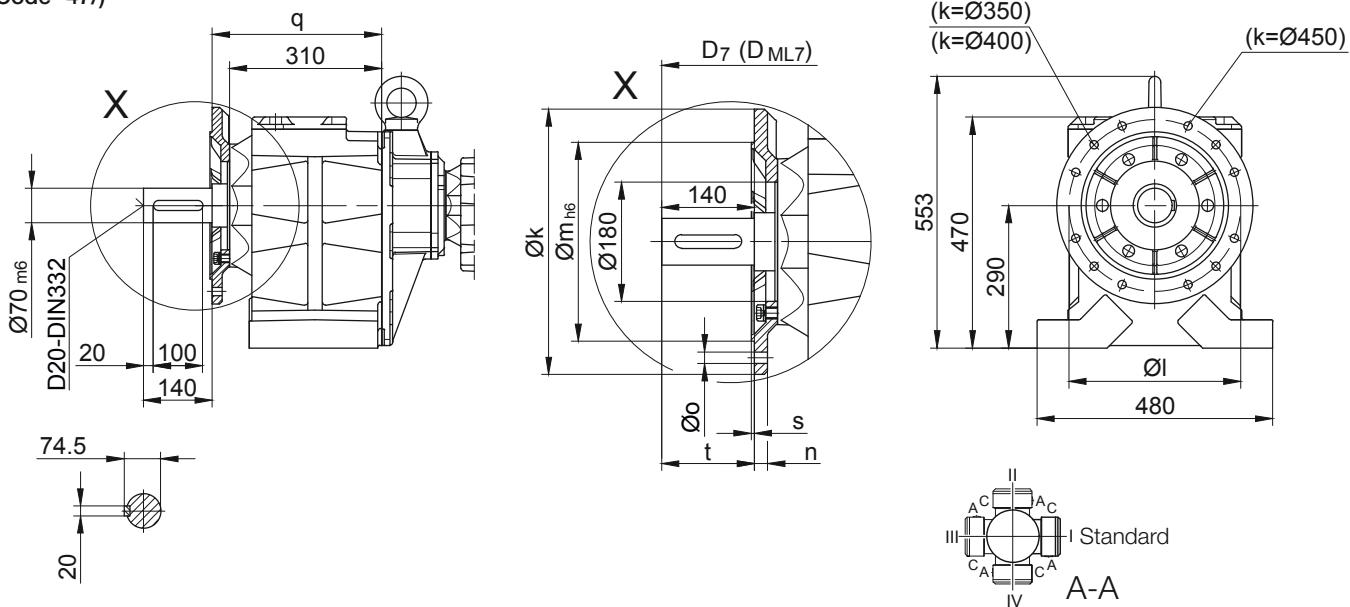

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG80..	Code -37/	400	350	300	20	4 x 17.5	345	5	141	d+24	d _{ML} +24
BG80..	Code -27/	350	300	250	20	4 x 17.5	345	5	141	d+24	d _{ML} +24
BG80..	Code -47/	450	400	350	22	8 x 17.5	355	5	131	d+24	d _{ML} +24

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG80G40-..S..08 (M, L)	199.5	373	156	1033.5	114.5	136.5	1099.5	1145.5	1207	-
BG80G40-..S..09 (S, X)	250.5	387.5	176	1099	124	157	1192	1206.5	1296	-
BG80G40-..S..11 (S, M, L)	319	394	218	1174	165	176	1272	1281.5	1374	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG80G40

Flange with tapped holes
Code -71/

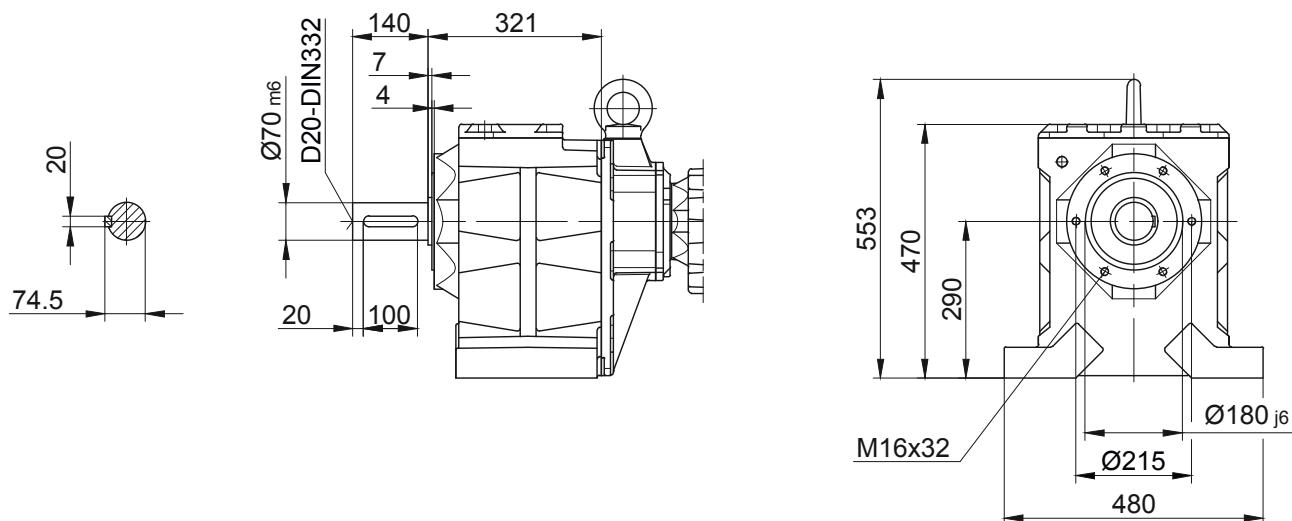


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG90G50

Foot mounting with clearance holes


Code -11/

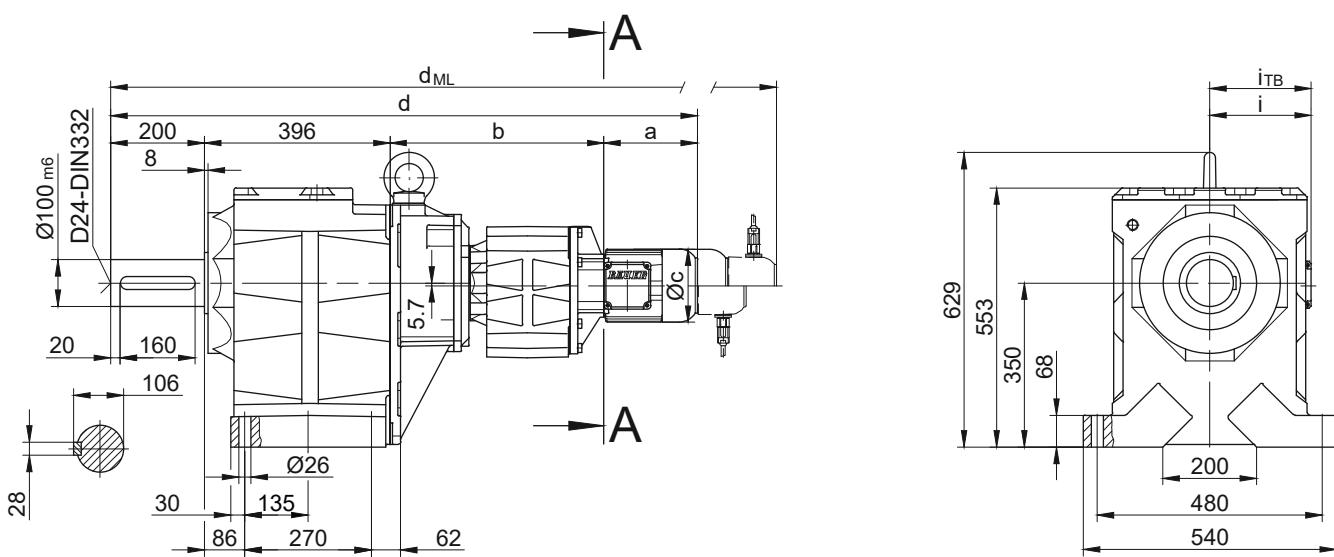

Flange with clearance holes

Code -37/

(Code -47/)

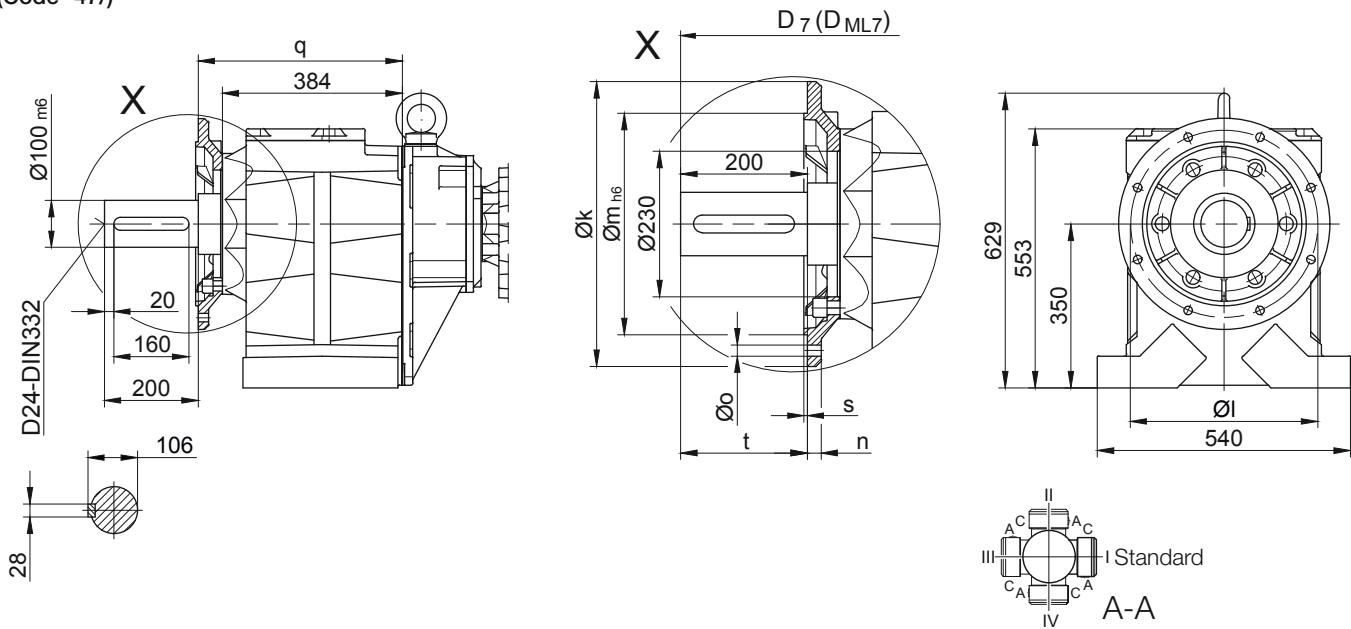

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{ML7}
BG90..	Code -37/	450	400	350	22	17.5	439	5	201	d+43	d _{ML} +43
BG90..	Code -47/	550	500	450	22	17.5	444	5	196	d+43	d _{ML} +43

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BG90G50.../S..08 (M, L)	199.5	456	156	1251.5	114.5	136.5	1317.5	1363.5	1425	-
BG90G50.../S..09 (S, X)	250.5	470.5	176	1317	124	157	1410	1424.5	1514	-
BG90G50.../S..11 (S, M, L)	319	477	218	1392	165	176	1490	1499.5	1592	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG90G50

Flange with tapped holes
Code -71/

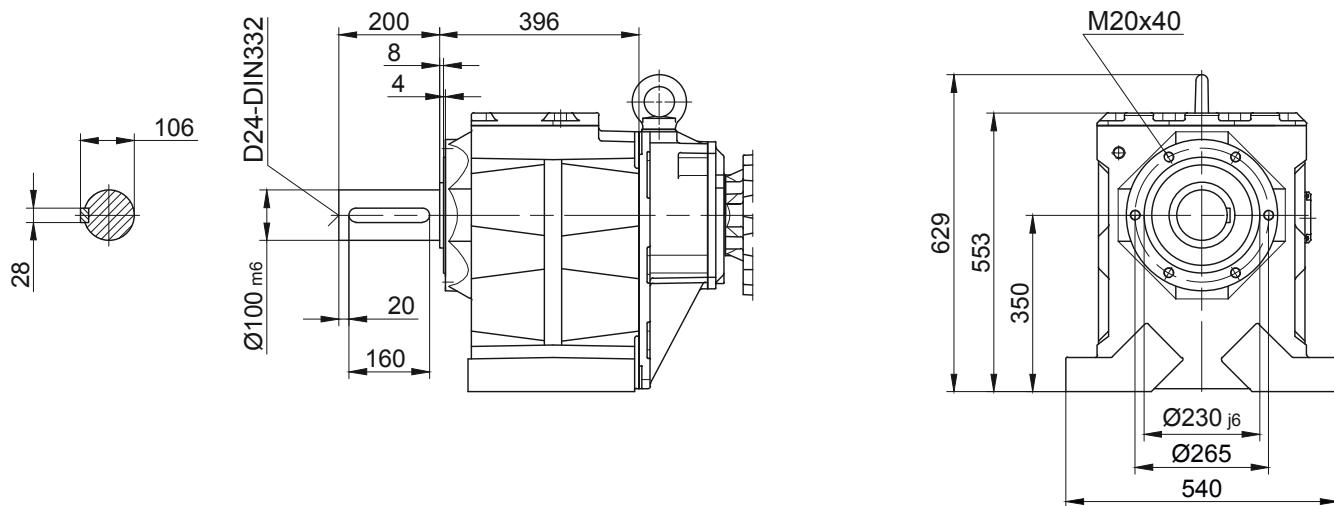


BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG100G50

Foot mounting with clearance holes

Code -11/

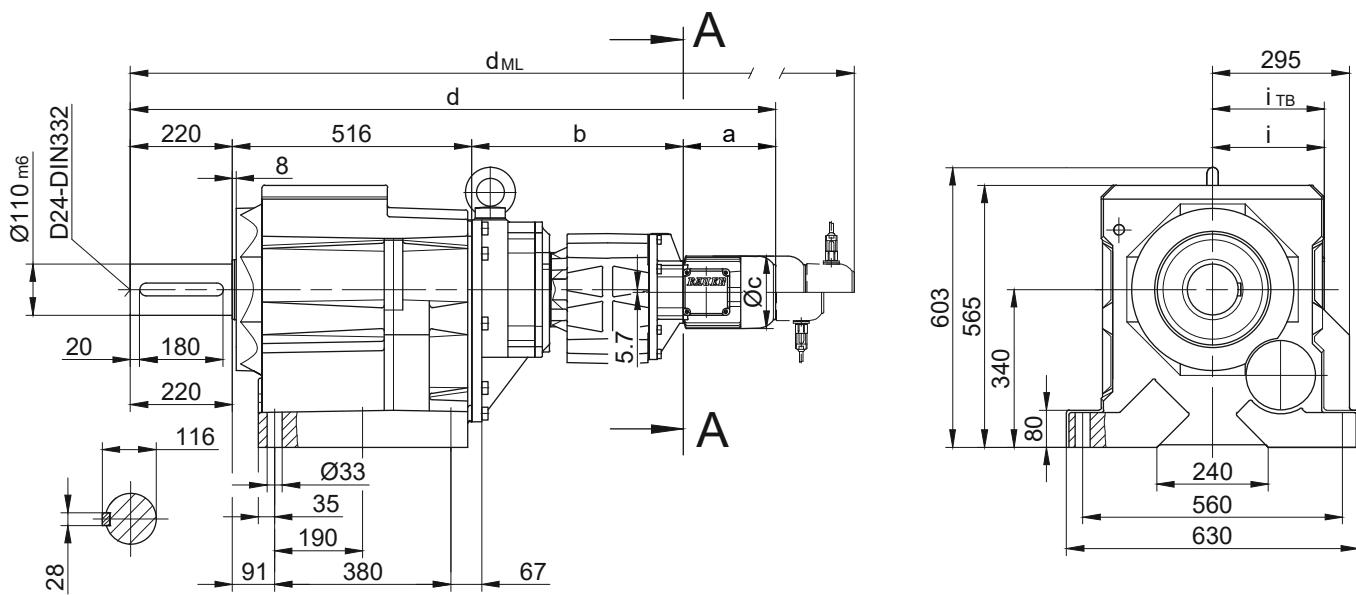


Flange with clearance holes

Code -37/

(Code -47/)

10

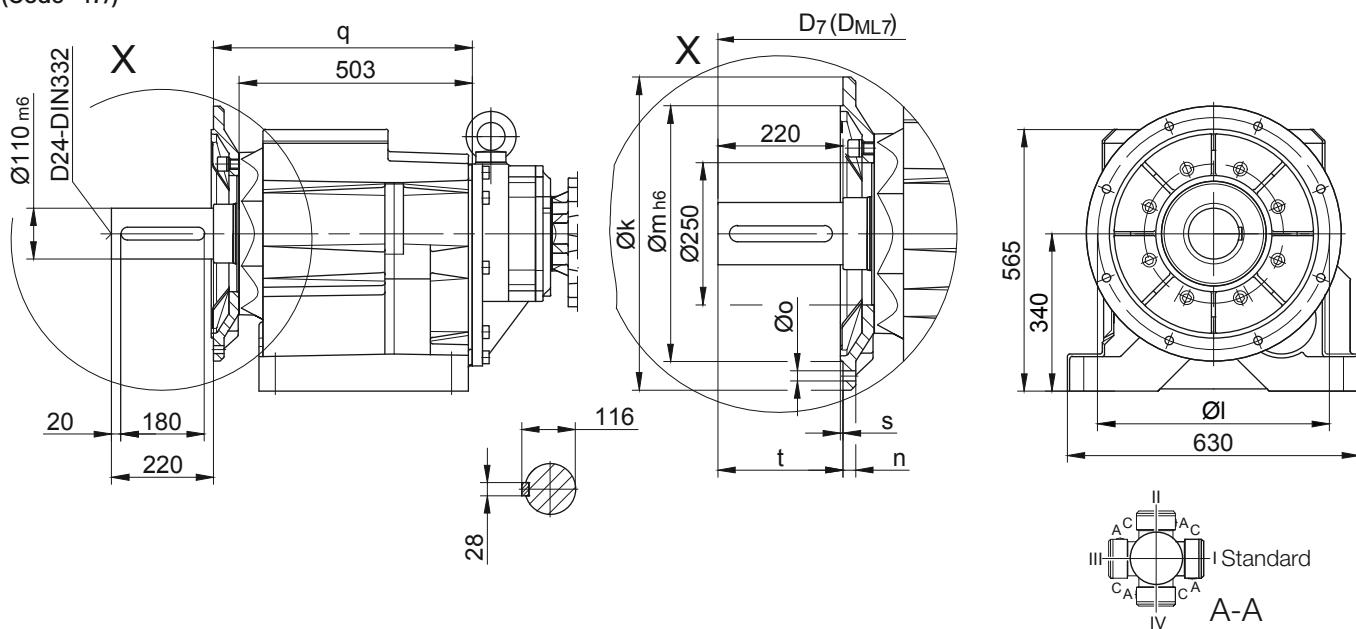

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t	D ₇	D _{M_L7}
BG100..	Code -37/	550	500	450	22	17.5	558	5	220	d+42	d _{M_L} +42
BG100..	Code -47/	660	600	550	25	22	552	6	227	d+42	d _{M_L} +42

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BG100G50-../S..08 (M, L)	199.5	456	156	1391.5	114.5	136.5	1457.5	1503.5	1565	-
BG100G50-../S..09 (S, X)	250.5	470.5	176	1457	124	157	1550	1564.5	1654	-
BG100G50-../S..11 (S, M, L)	319	477	218	1532	165	176	1630	1639.5	1732	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BG-series helical-gearred motors

Dimension - Tandem Gearbox

BG100G50


Flange with tapped holes

Code -71/

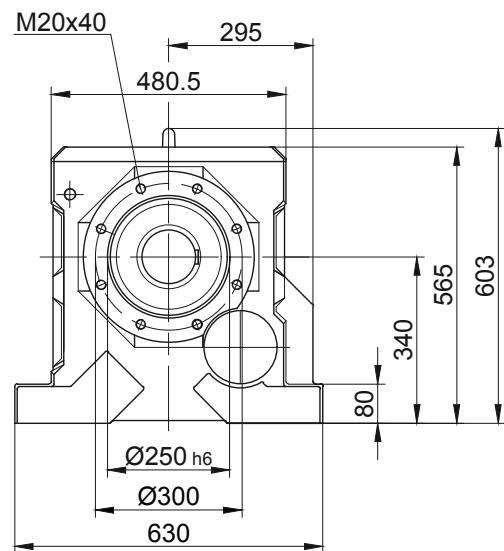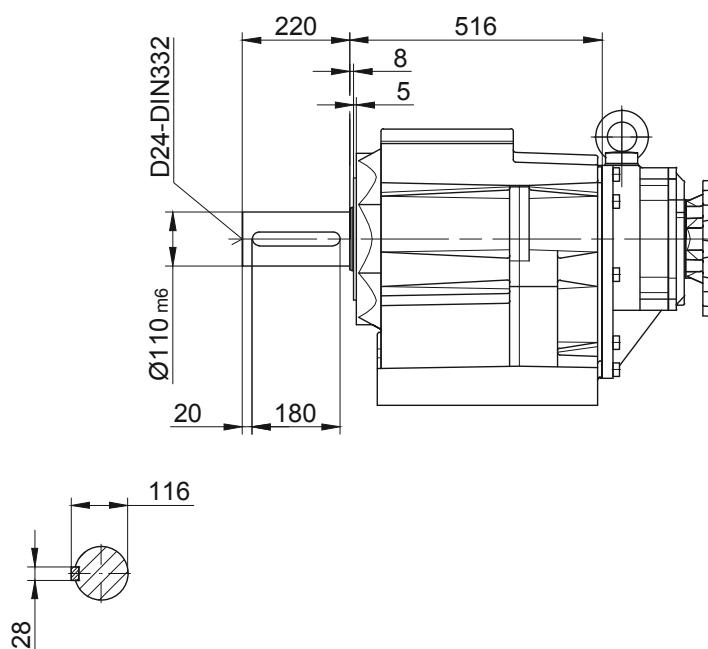

Energy Efficient Geared Motors

AC Variable Speed



BF-series shaft-mounted geared motors - Dimensions

Dimension - Standard	346
BF06	346
BF10-BF10Z	348
BF20-BF20Z	350
BF30-BF30Z	352
BF40-BF40Z	354
BF50-BF50Z	356
BF60-BF60Z	358
BF70-BF70Z	360
BF80-BF80Z	362
BF90-BF90Z	364
Dimension - Tandem Gearbox	366
BF10G06	366
BF20G06	368
BF30G06	370
BF40G10	372
BF50G10	374
BF60G20	376
BF70G20	378
BF80G40	380
BF90G50	382
Additional Dimension Sheet	385
Splined shaft	385
Shrink disc coupling (SSV)	386
Shrink disc coupling with (SSV) cover	387
Tapped Holes Side (H) → shaft cover	388
Rubber buffer for torque restraint	389
Assembly tools for hollow shaft and keyway	390
Assembly tools for shaft mounted gears with splined shaft	392
Shaft cap (VK)	394
Shaft cover (VD)	395



BF-series shaft-mounted geared motors

Dimension - Standard


BF06

with torque arm



Code -0./

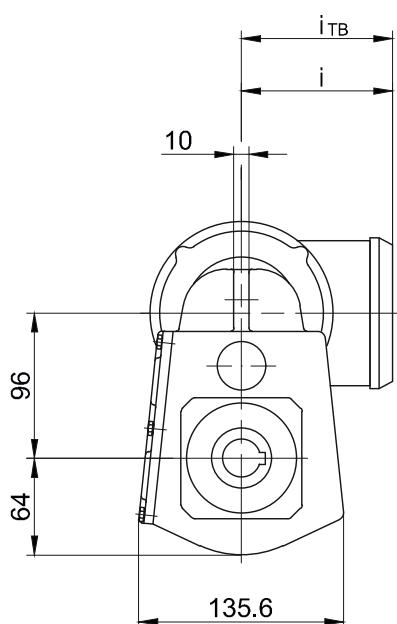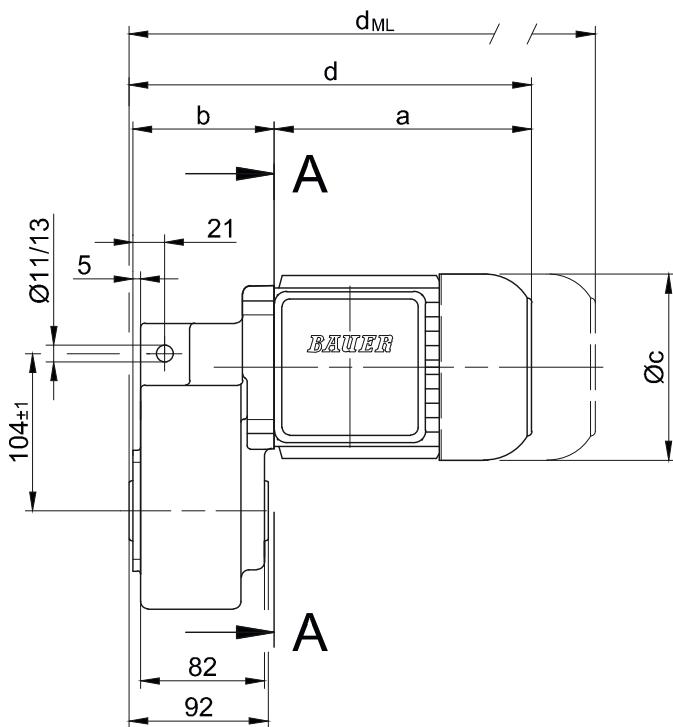

Code -.4/

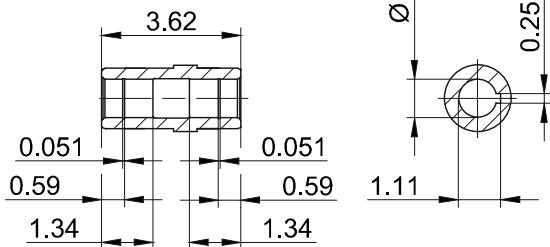

Code -.1/

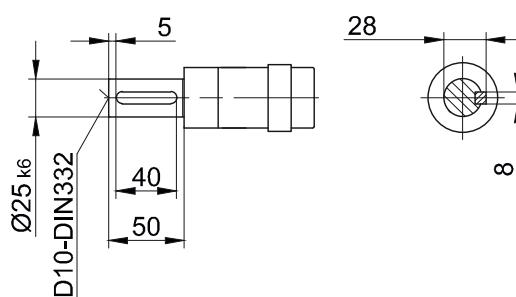

Type	a	b	c	d	i	Design with motor extensions				
						i_TB	Brake	Encoder	Brake with Encoder	Back Stop
	d_ML	d_ML	d_ML	d_ML	d_ML					
BF06-..S.06 (M, L)	170.5	93.5	123	266.5	99	119	306	366.5	404	-
BF06-..S.08 (M, L)	199.5	141.5	156	343.5	114.5	136.5	407	453	514.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BF-series shaft-mounted geared motors

Dimension -Standard

BF06

Flange with tapped holes



Code -7./

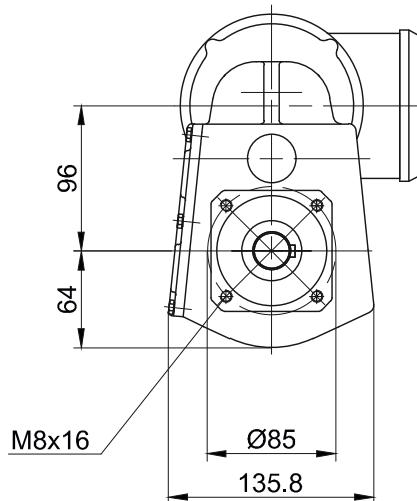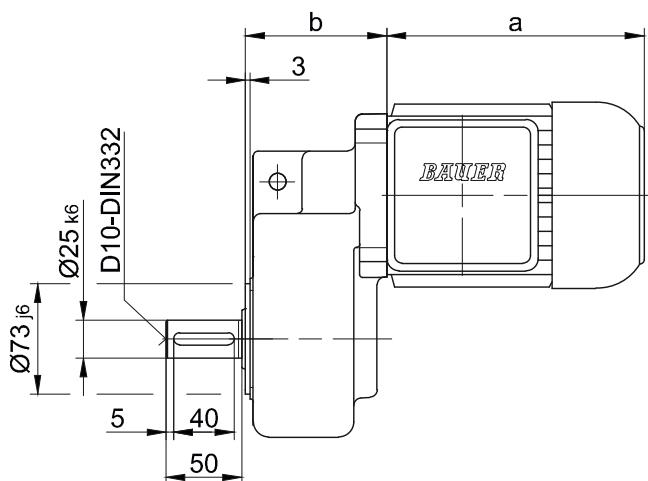

Flange with clearance holes

Code -3.V/

(Code -4.V/)

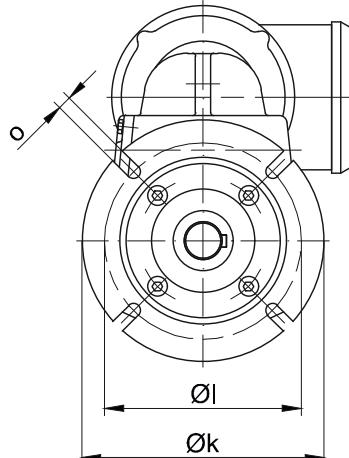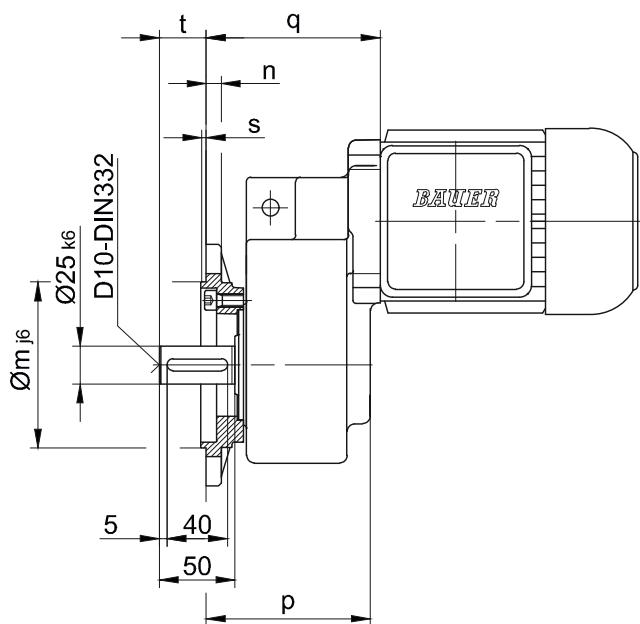

11

Flange Dimensions

Type	Design	k	l	m	n	o	p	q ¹⁾	q ²⁾	s	t
BF06	Code -3./	140	115	95	10	9	108.5	115	163	3	31
BF06	Code -4./	160	130	110	10	9	108.5	115	163	3.5	31

Dimensions in millimetres (mm)

q¹⁾ only for D05; D06; D07

q²⁾ only for D08..

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Standard


BF10-BF10Z

with torque arm


Code -0./

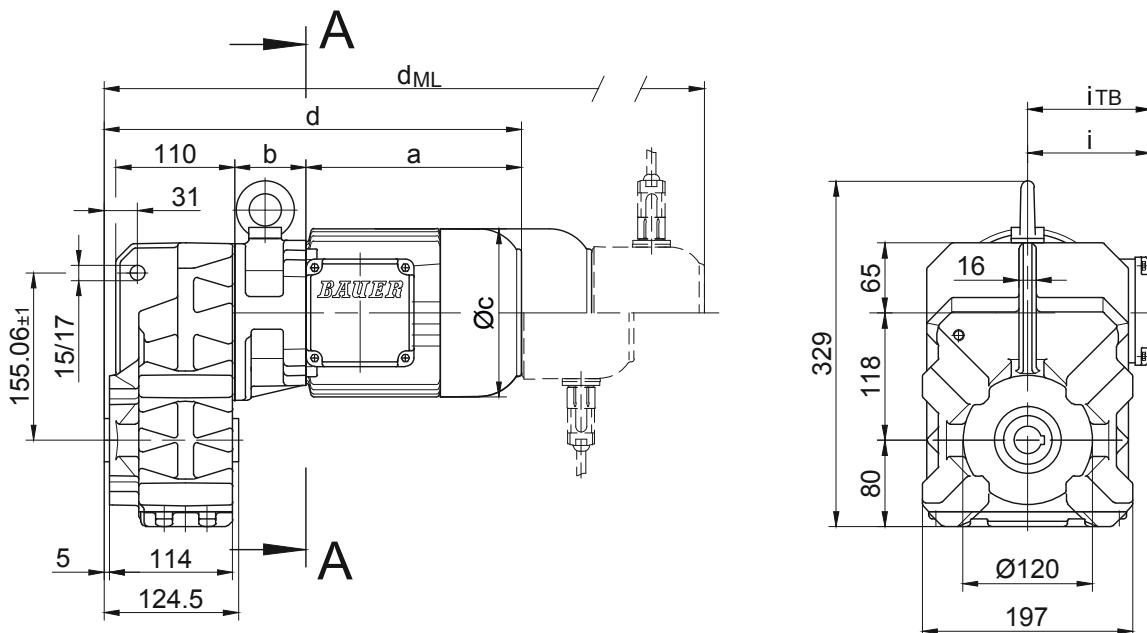



Code -.4/

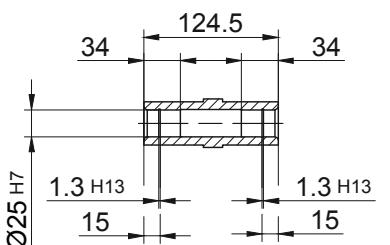

Code -.1/

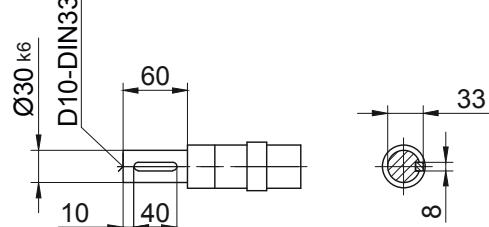

Code -.5/

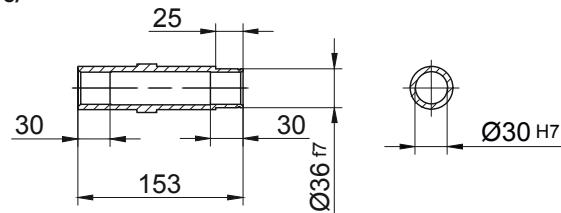

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							Brake	Encoder	Brake with Encoder	Back Stop
						d_{ML}	d_{ML}	d_{ML}	d_{ML}	d_{ML}
BF10Z-../S04S	142.5	86	110.5	349.5	90	112	393	437	480.5	-
BF10-../S..06 (M, L)	170.5	62	123	353.5	99	119	395.5	456	493.5	-
BF10Z-../S..06 (M, L)	170.5	88	123	379.5	99	119	421.5	482	519.5	-
BF10-../S..08 (M, L)	199.5	66	156	386.5	114.5	136.5	452.5	498.5	560	-
BF10Z-../S..08 (M, L)	199.5	132	156	452.5	114.5	136.5	518.5	564.5	626	-
BF10-../S..09 (S, X)	250.5	80.5	176	452	124	157	545	559.5	649	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BF-series shaft-mounted geared motors

Dimension -Standard

BF10-BF10Z

Flange with tapped holes




Code -7./

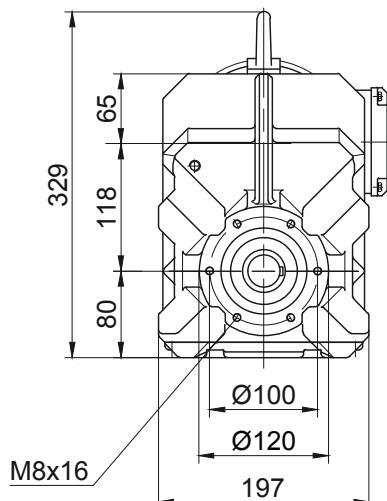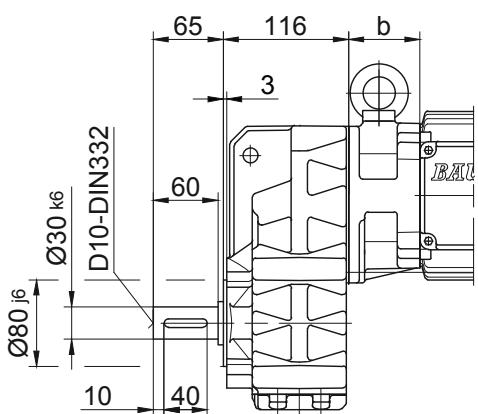

Flange with clearance holes

Code -3./

(Code -2./)

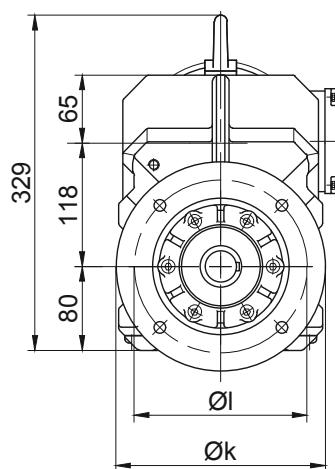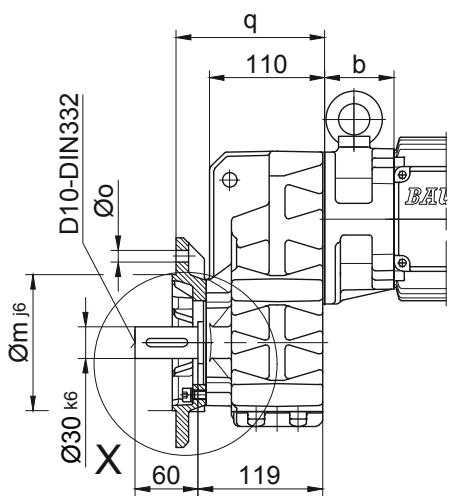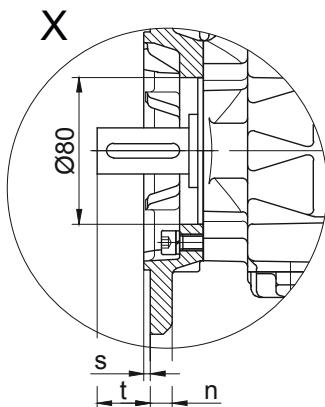



Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF10..	Code -3./	200	165	130	12	11	142	3.5	39
BF10..	Code -2./	160	130	110	10	9	135	3.5	46

Dimensions in millimetres (mm)

Foot with tapped holes left and right

Code -6.LR/

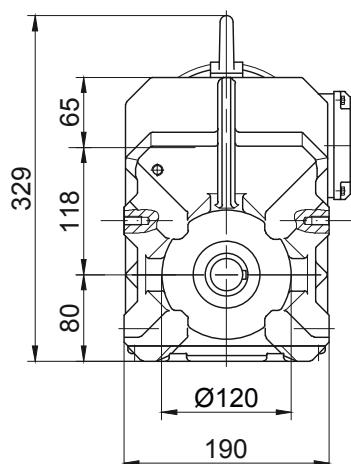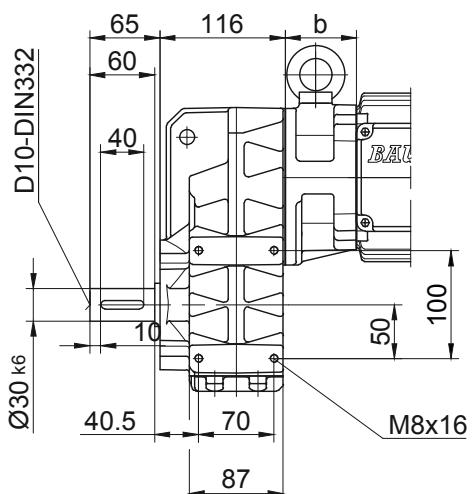


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Standard


BF20-BF20Z
with torque arm
Code -0./

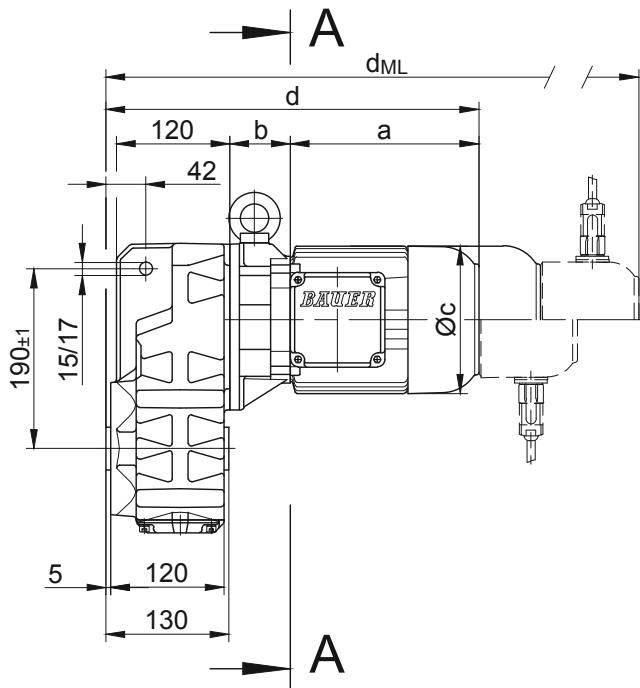




Code -.4/

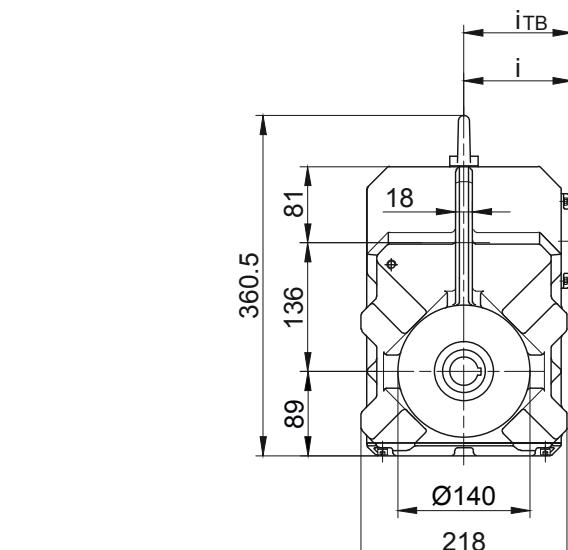

Code -.1/

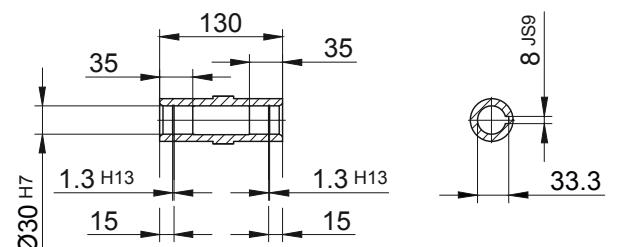

Code -.5/

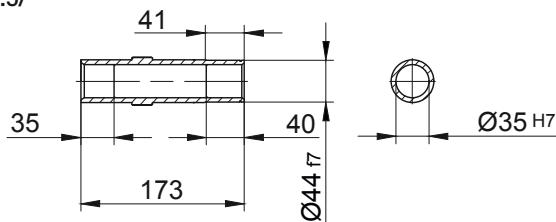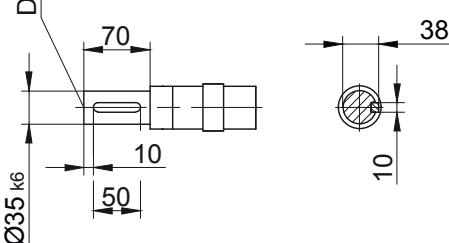

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							Brake	Encoder	Brake with Encoder	Back Stop
						d_{ML}	d_{ML}	d_{ML}	d_{ML}	d_{ML}
BF20Z-../S04S	142.5	100	110.5	373.5	90	112	417	461	504.5	-
BF20-../S..06 (M, L)	170.5	60	123	361.5	99	119	403.5	464	501.5	-
BF20Z-../S..06 (M, L)	170.5	102	123	403.5	99	119	445.5	506	543.5	-
BF20-../S..08 (M, L)	199.5	64	156	394.5	114.5	136.5	460.5	506.5	568	-
BF20Z-../S..08 (M, L)	199.5	146	156	476.5	114.5	136.5	542.5	588.5	650	-
BF20-../S..09 (S, X)	250.5	78.5	176	460	124	157	553	567.5	657	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension -Standard

BF20-BF20Z

Flange with tapped holes





Code -7./

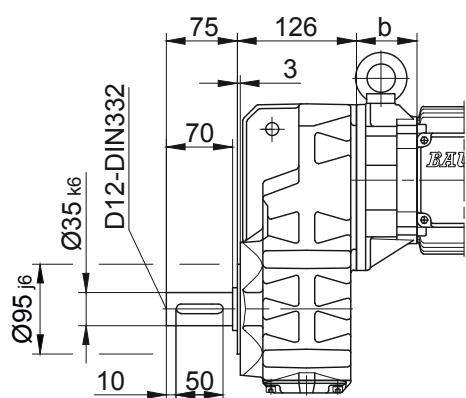

Flange with clearance holes

Code -3./

(Code -2./)

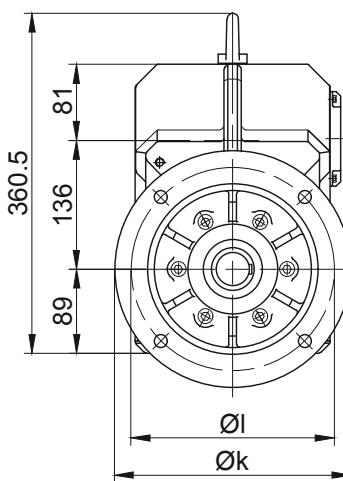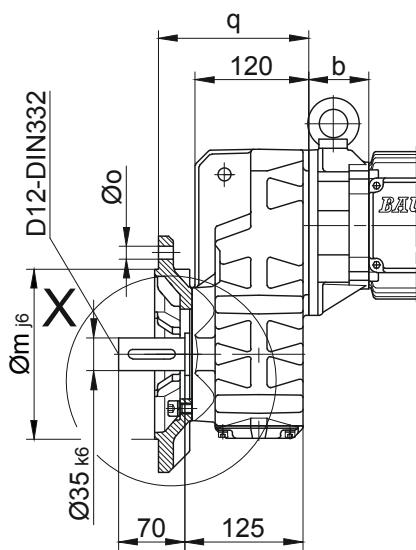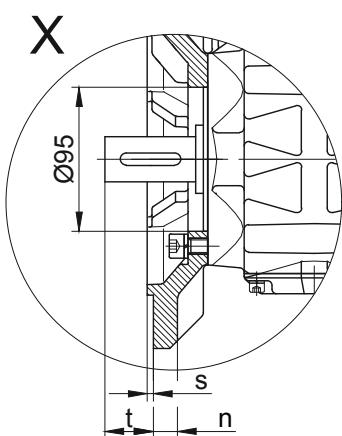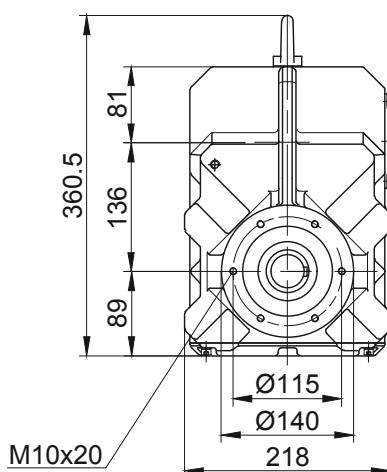



Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF20..	Code -3./	250	215	180	16	13.5	159	4	42
BF20..	Code -2./	200	165	130	12	11	150	3.5	51

Dimensions in millimetres (mm)

Foot with tapped holes left and right

Code -6.LR/

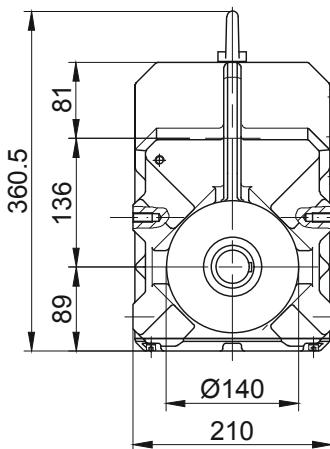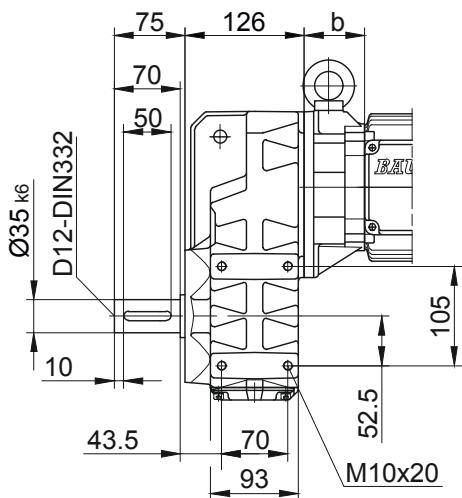

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BF-series shaft-mounted geared motors

Dimension - Standard



BF30-BF30Z

with torque arm



Code -0./

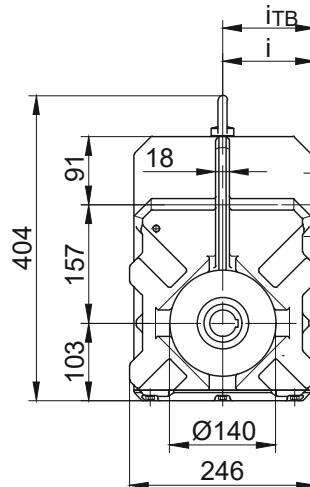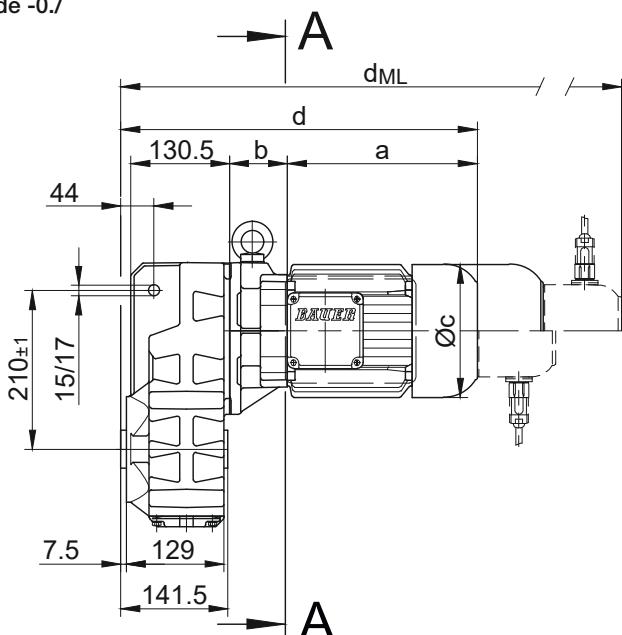

Code -1/

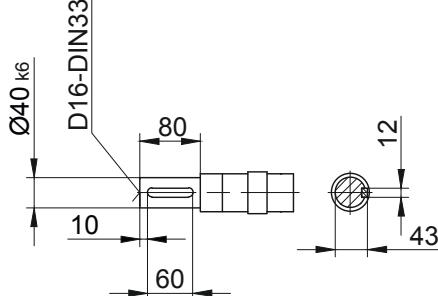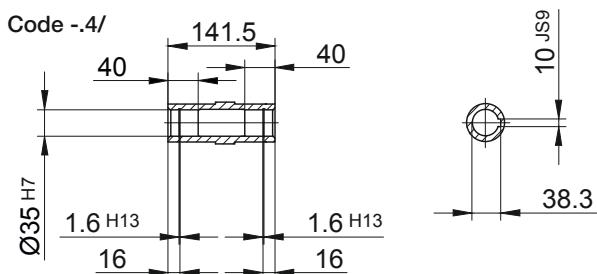

Code -5/

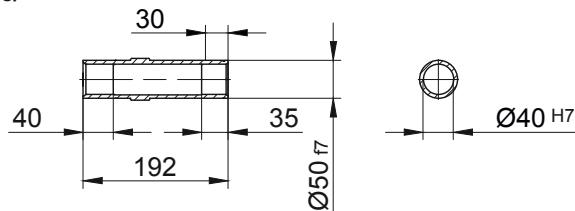

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BF30-../S..06 (M, L)	170.5	58	123	372.5	99	119	414.5	475	512.5	-
BF30Z-../S..06 (M, L)	170.5	133.5	123	448	99	119	490	550.5	588	-
BF30-../S..08 (M, L)	199.5	62	156	405.5	114.5	136.5	471.5	517.5	579	-
BF30Z-../S..08 (M, L)	199.5	137.5	156	481	114.5	136.5	547	593	654.5	-
BF30-../S..09 (S, X)	250.5	76.5	176	471	124	157	564	578.5	668	-
BF30Z-../S..09 (S, X)	250.5	152	176	546.5	124	157	639.5	654	743.5	-
BF30-../S..11 (S, M, L)	319	83	218	546	165	176	644	653.5	746	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension -Standard

BF30-BF30Z

Flange with tapped holes




Code -7./

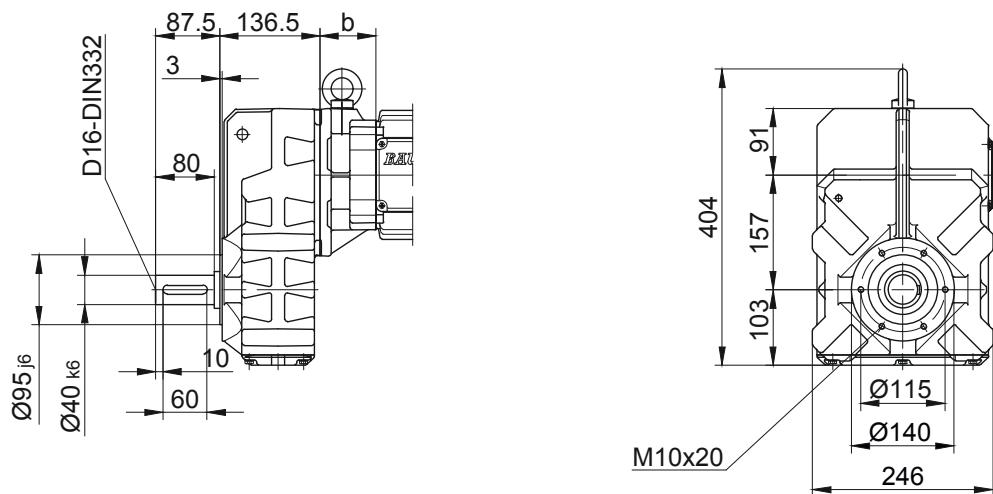

Flange with clearance holes

Code -3./

(Code -2./)

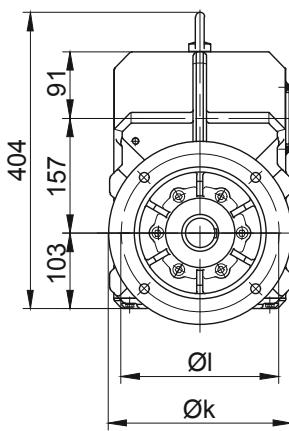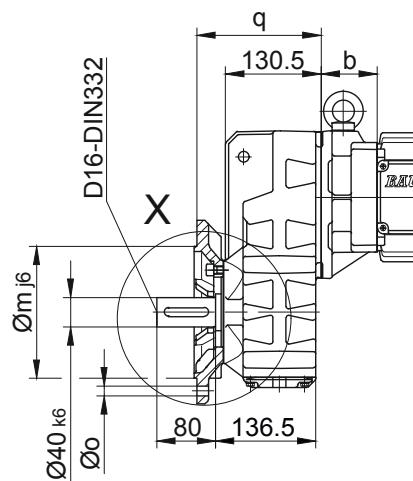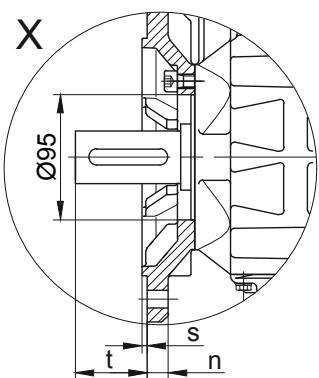



Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF30..	Code -3./	250	215	180	16	13.5	169.5	4	54.5
BF30..	Code -2./	200	165	130	12	11	160.5	3.5	63.5

Dimensions in millimetres (mm)

Foot with tapped holes left and right

Code -6.LR/

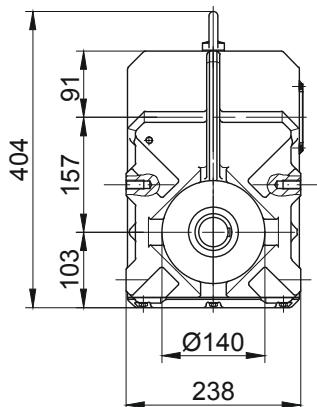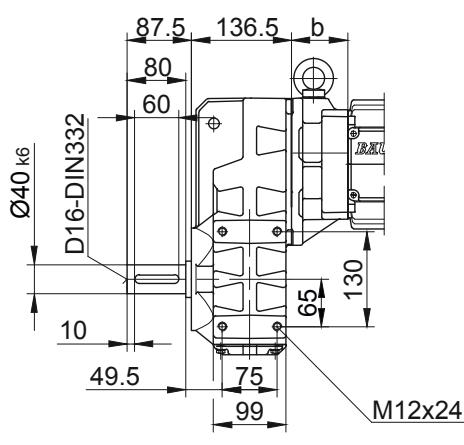

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Standard

BF40-BF40Z


with torque arm

Code -0./

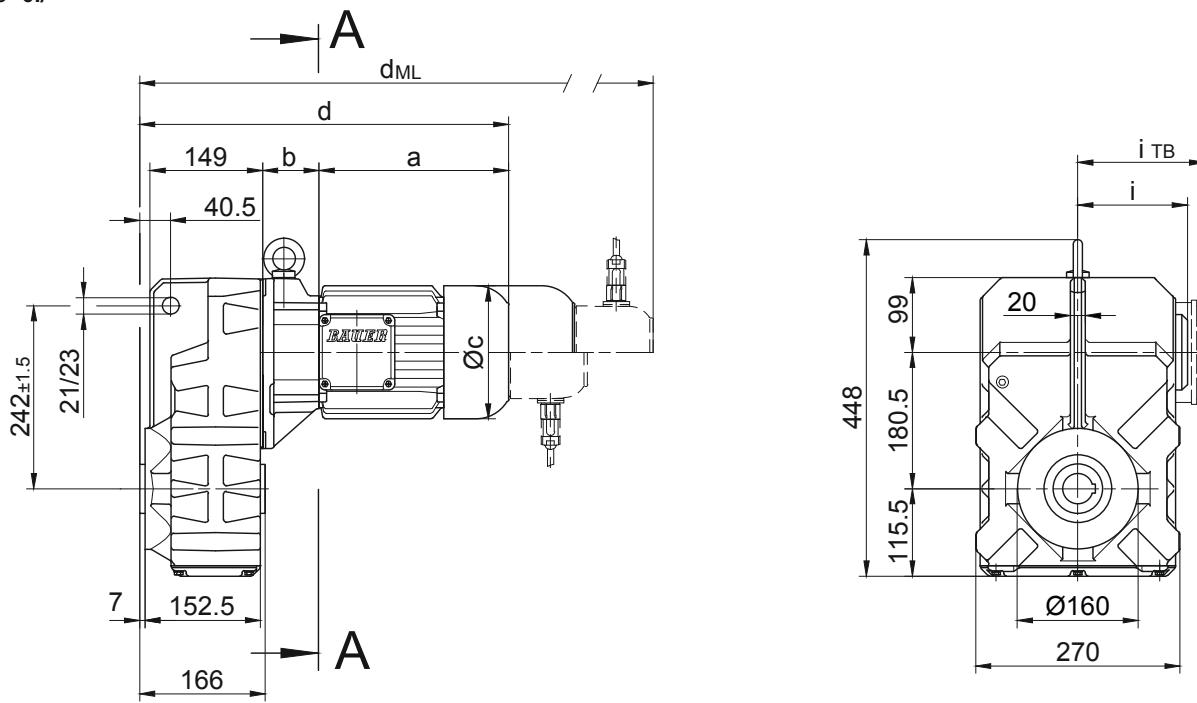


Code -1/



Code -.4/

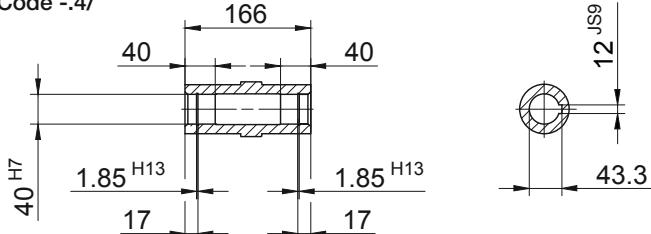

D16-DIN332

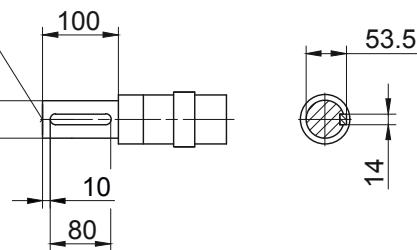

Code -.5/

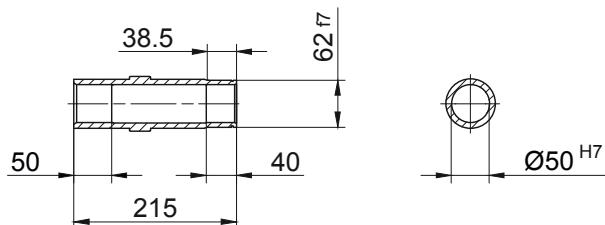

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF40Z-..S..06 (M, L)	170.5	138.5	123	471.5	99	119	513.5	574	611.5	-
BF40-..S..08 (M, L)	199.5	60	156	422	114.5	136.5	488	534	595.5	-
BF40Z-..S..08 (M, L)	199.5	142.5	156	504.5	114.5	136.5	570.5	616.5	678	-
BF40-..S..09 (S, X)	250.5	74.5	176	487.5	124	157	580.5	595	684.5	-
BF40Z-..S..09 (S, X)	250.5	157	176	570	124	157	663	677.5	767	-
BF40-..S..11 (S, M, L)	319	81	218	562.5	165	176	660.5	670	762.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BF-series shaft-mounted geared motors

Dimension -Standard

BF40-BF40Z

Flange with tapped holes




Change with
Code -7./

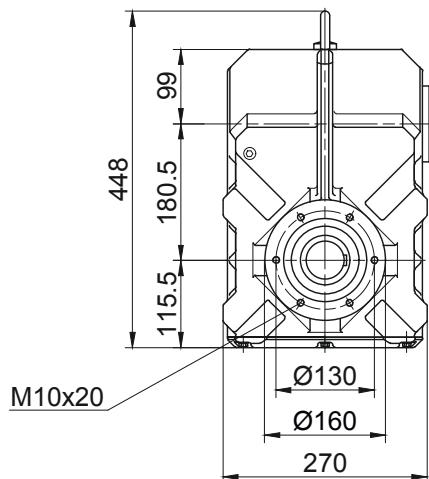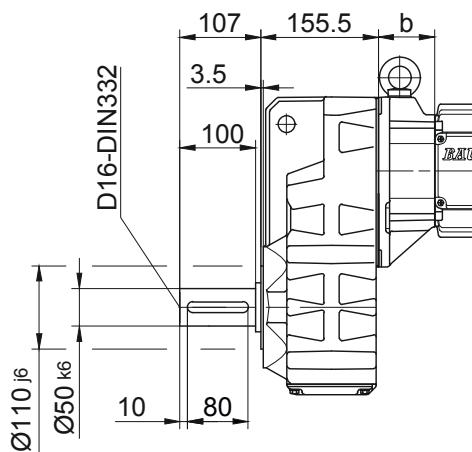

Flange with clearance holes

Code -3./

(Code -4.)

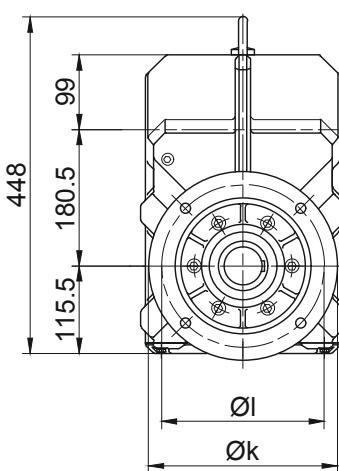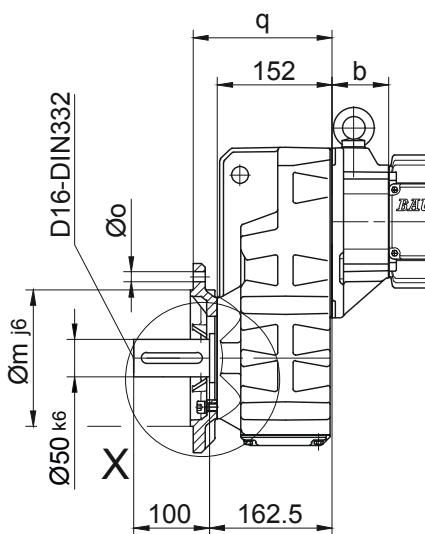
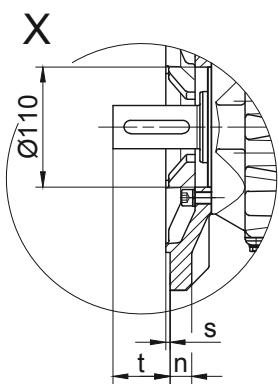


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF40..	Code -3./	250	215	180	16	13.5	184	4	78.5
BF40..	Code -4./	300	265	230	20	13.5	190	4	72.5

Dimensions in millimetres (mm)

Foot with tapp

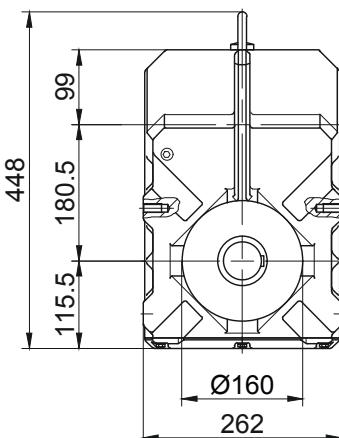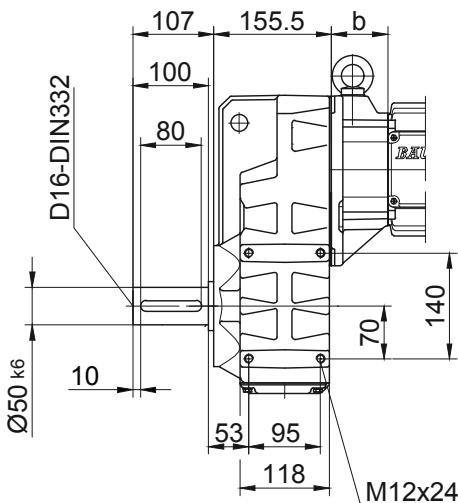

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Standard



BF50-BF50Z

with torque arm


Code -0./

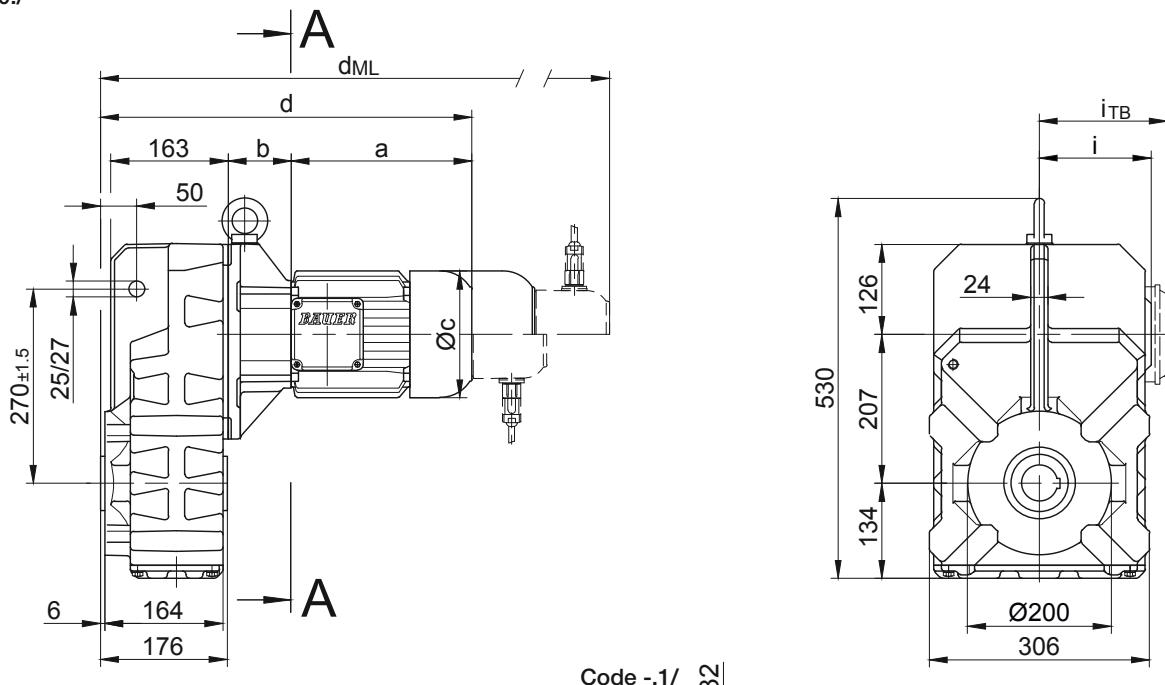



Code -.4/

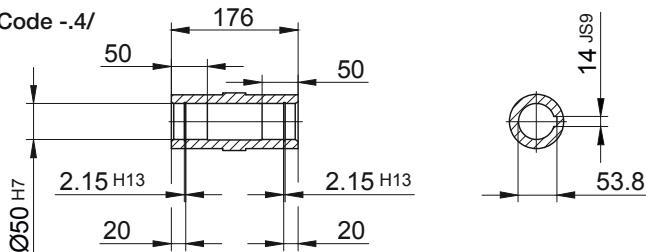

Code -.1/

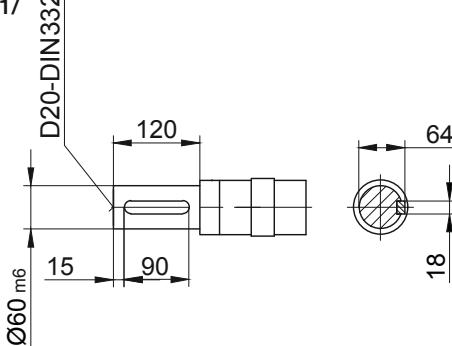

Code -.5/

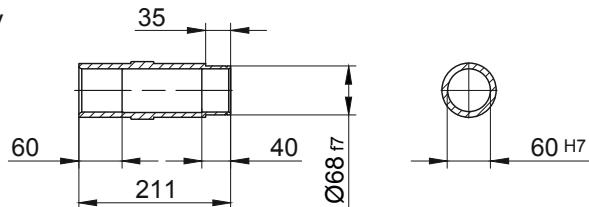

Type	a	b	c	d	i	Design with motor extensions				
						i_TB	Brake	Encoder	Brake with Encoder	Back Stop
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF50Z-..S..06 (M, L)	170.5	155	123	503	99	119	545	605.5	643	-
BF50-..S..08 (M, L)	199.5	73	156	450	114.5	136.5	516	562	623.5	-
BF50Z-..S..08 (M, L)	199.5	159	156	536	114.5	136.5	602	648	709.5	-
BF50-..S..09 (S, X)	250.5	87.5	176	515.5	124	157	608.5	623	712.5	-
BF50Z-..S..09 (S, X)	250.5	173.5	176	601.5	124	157	694.5	709	798.5	-
BF50-..S..11 (S, M, L)	319	94	218	590.5	165	176	688.5	698	790.5	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Dimension -Standard




BF50-BF50Z

Flange with tapped holes
Code -7./

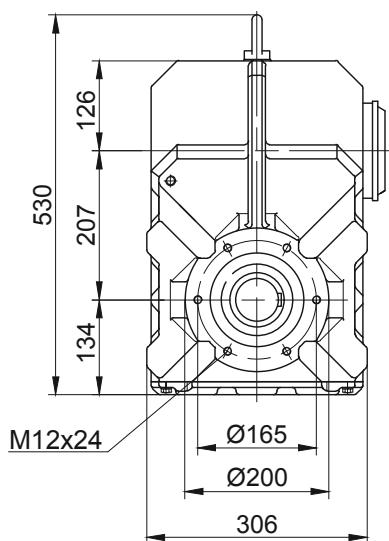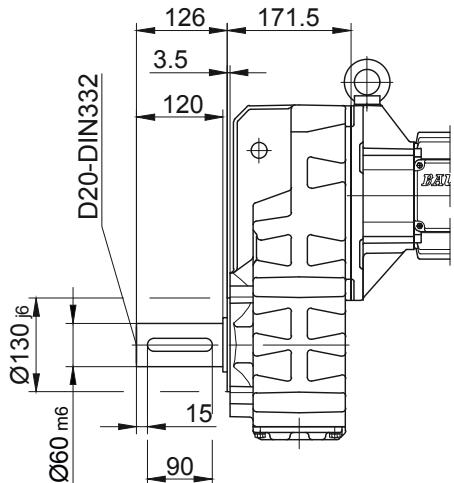

Flange with clearance holes

Code -3./
(Code -2./)

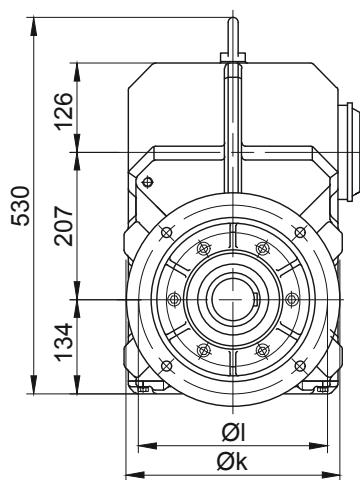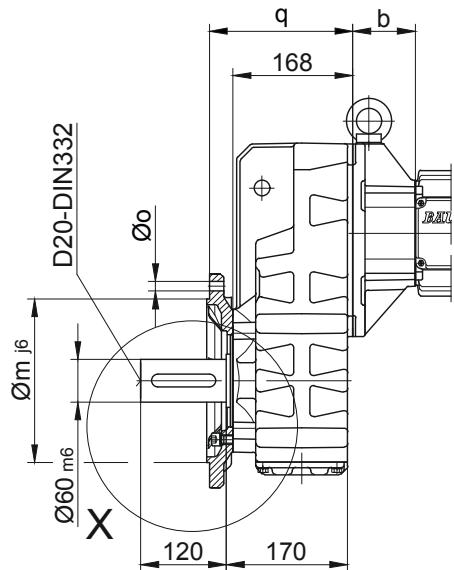
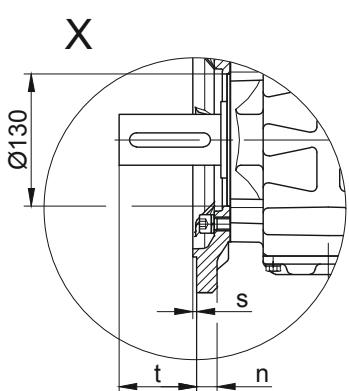


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF50..	Code -3./	300	265	230	20	13.5	201	4	96.5
BF50..	Code -2./	250	215	180	16	13.5	198	4	99.5

Dimensions in millimetres (mm)

Foot with tapped holes left and right
Code -6.LR/

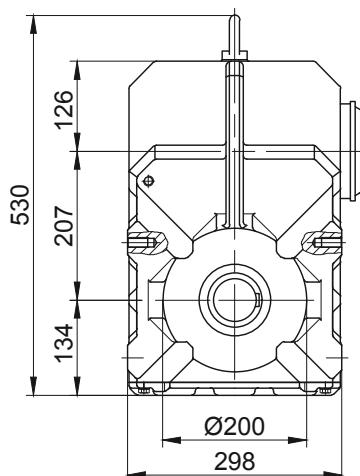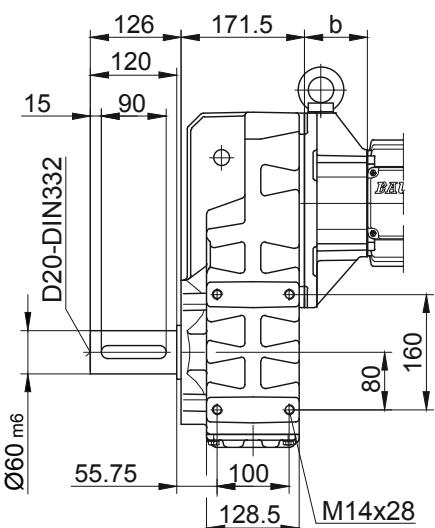

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.




BF-series shaft-mounted geared motors

Dimension - Standard

BF60-BF60Z

with torque arm

Code -0./

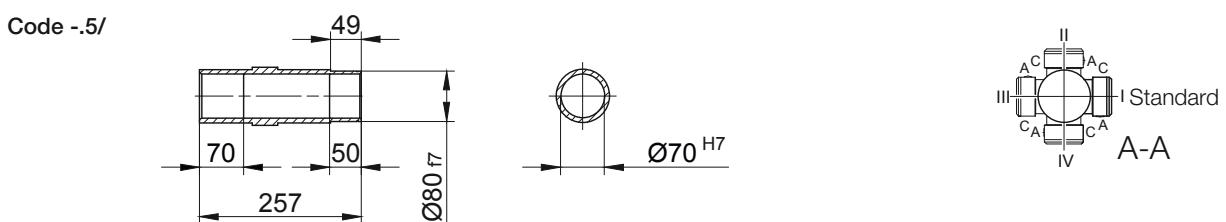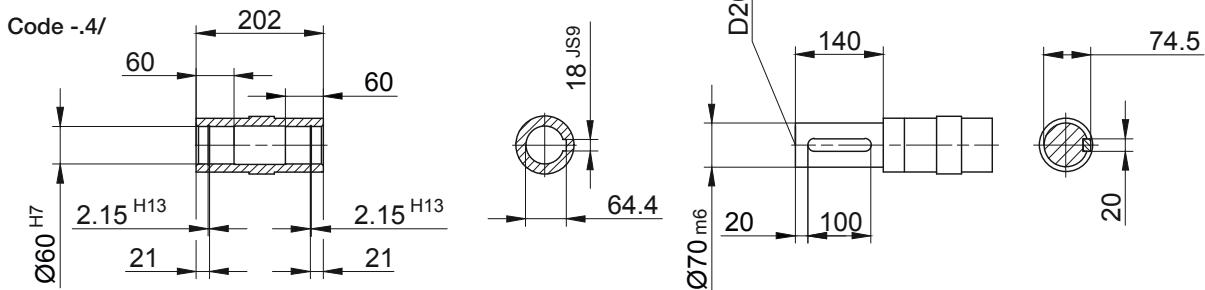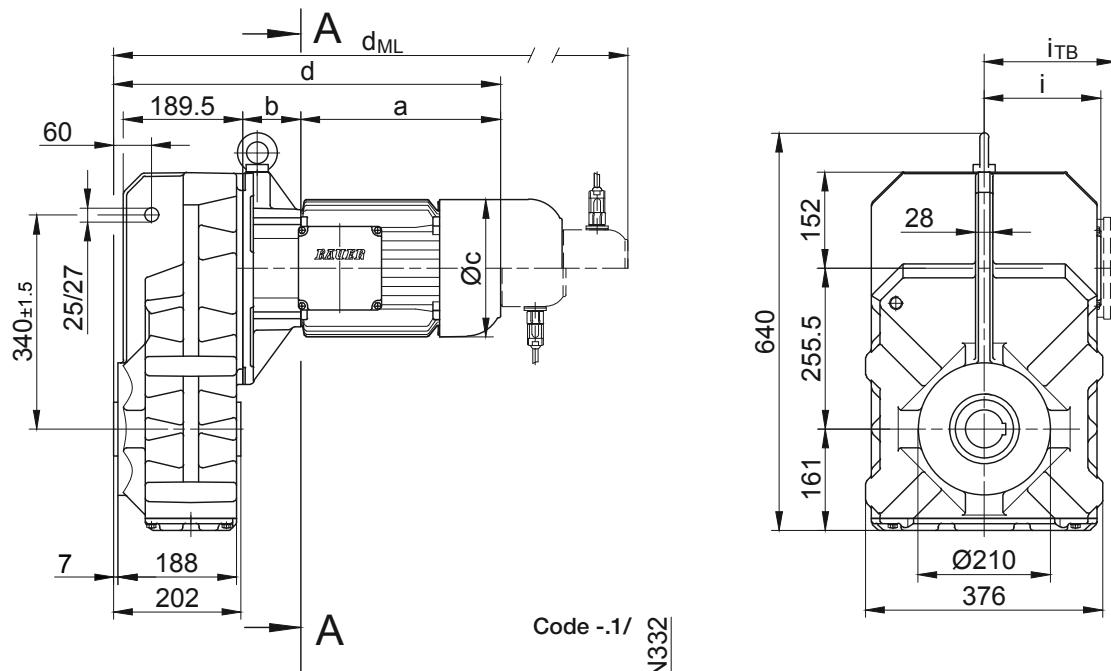

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF60Z-..S..08 (M, L)	199.5	181	156	585.5	114.5	136.5	651.5	697.5	759	-
BF60-..S..09 (S, X)	250.5	85.5	176	541	124	157	634	648.5	738	-
BF60Z-..S..09 (S, X)	250.5	195.5	176	651	124	157	744	758.5	848	-
BF60-..S..11 (S, M, L)	319	92	218	616	165	176	714	723.5	816	-
BF60Z-..S..11 (S, M, L)	319	202	218	726	165	176	824	833.5	926	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BF-series shaft-mounted geared motors

Dimension -Standard

BF60-BF60Z

Flange with tapped holes




Code -7./

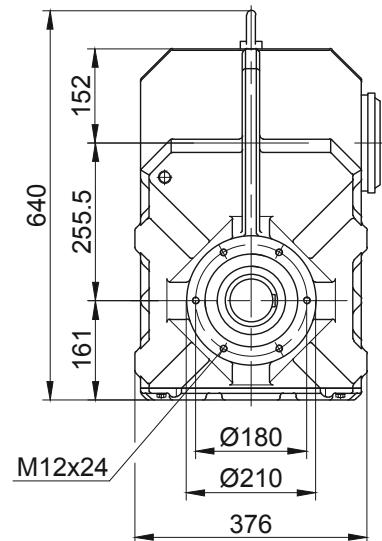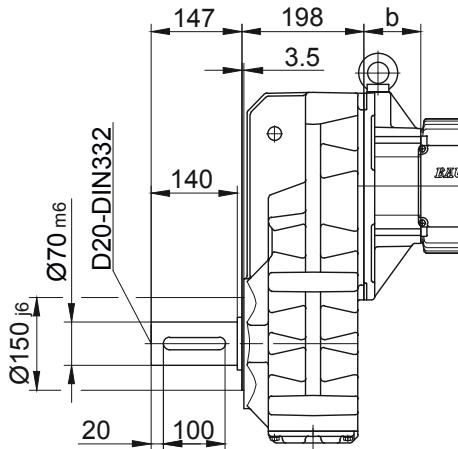

Flange with clearance holes

Code -3./

(Code -2./)

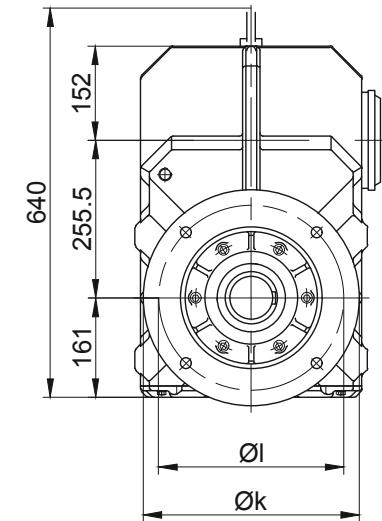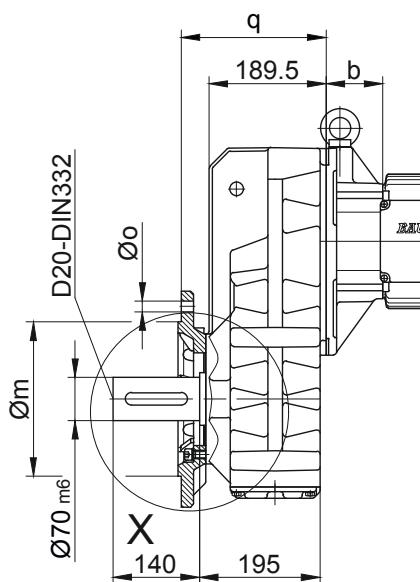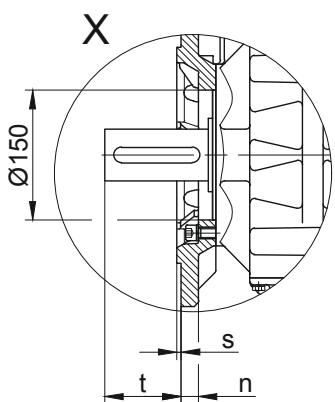



Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF60..	Code -3./	350	300	250	20	17.5	234.5	5	110.5
BF60..	Code -2./	300	265	230	20	13.5	242.5	4	102.5

Dimensions in millimetres (mm)

Foot with tapped holes left and right

Code -6.LR/

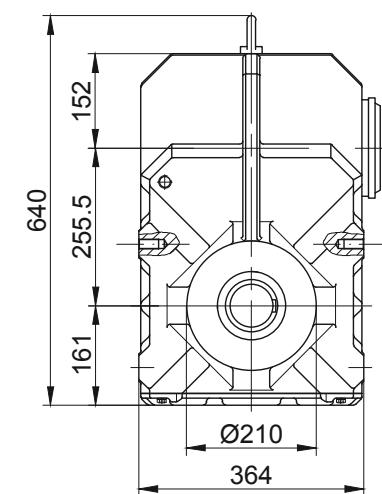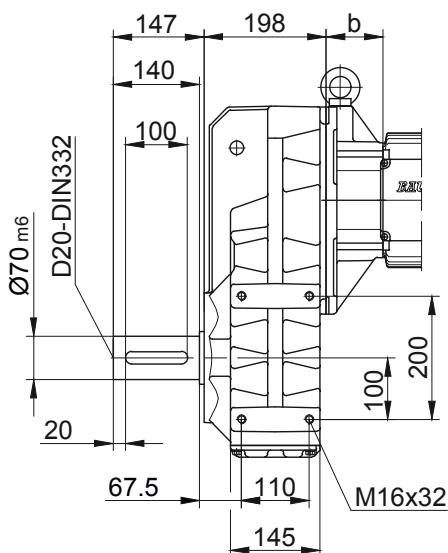

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Standard


BF70-BF70Z

with torque arm


Code -0./

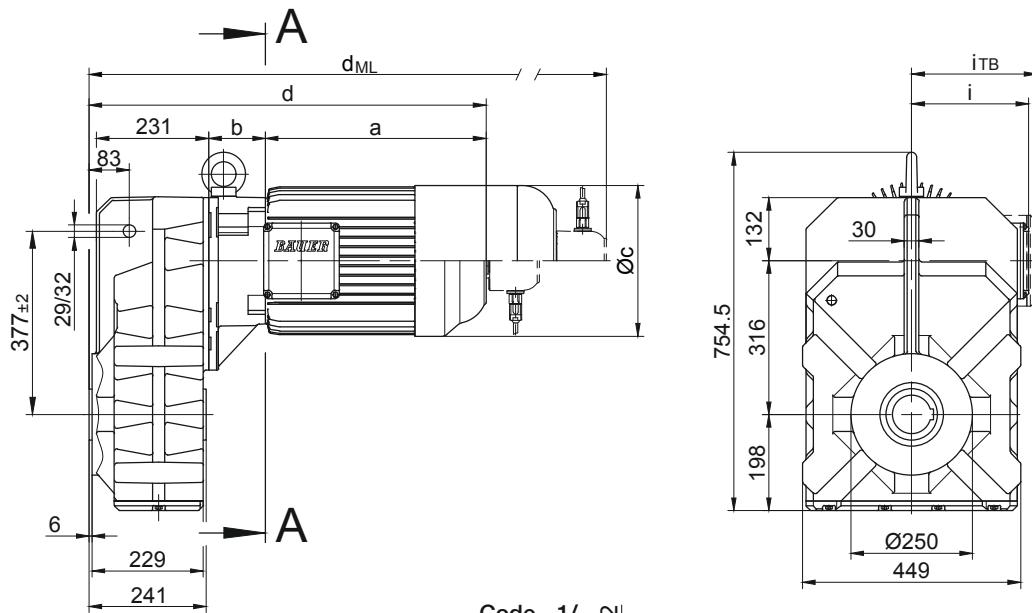


Code -.4/

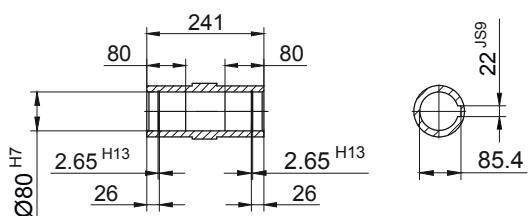



Code -.1/

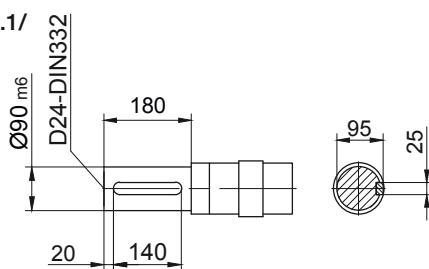

Code -.5/

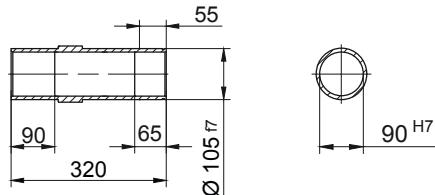

Code -.4/K70

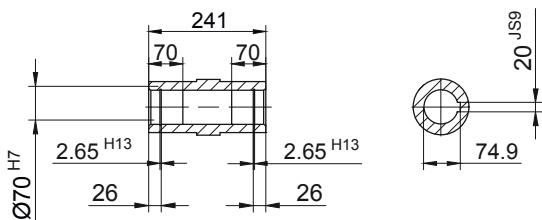

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF70Z-..S..08 (M, L)	199.5	202	156	647.5	114.5	136.5	713.5	759.5	821	-
BF70-..S..09 (S, X)	250.5	83.5	176	580	124	157	673	687.5	777	-
BF70Z-..S..09 (S, X)	250.5	216.5	176	713	124	157	806	820.5	910	-
BF70-..S..11 (S, M, L)	319	90	218	655	165	176	753	762.5	855	-
BF70Z-..S..11 (S, M, L)	319	223	218	788	165	176	886	895.5	988	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension -Standard

BF70-BF70Z

Flange with tapped holes

Code -7./


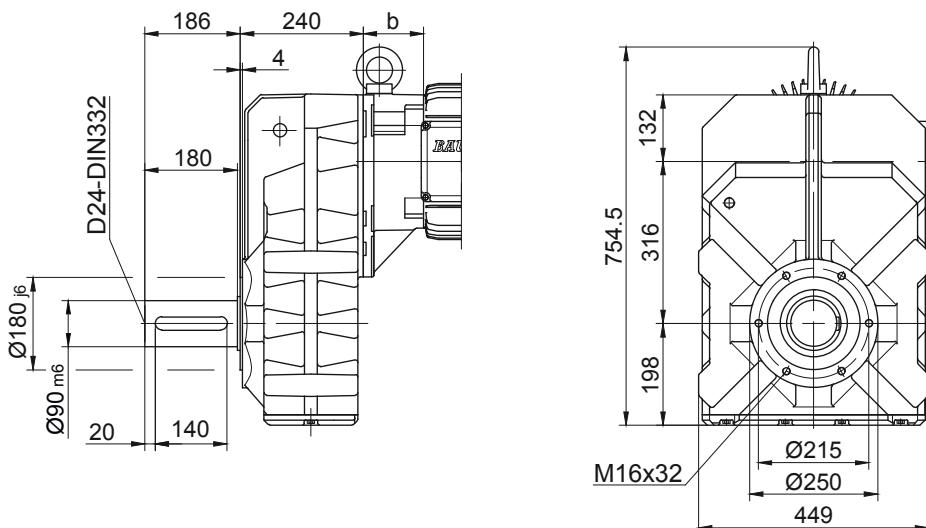


Flange with clearance holes

Code -3./

(Code -2./)

(Code -4./)

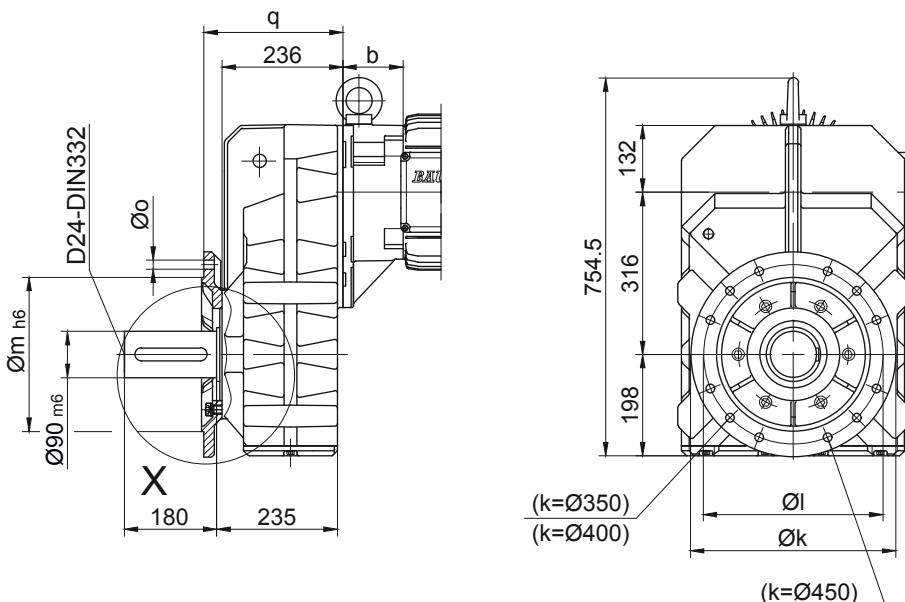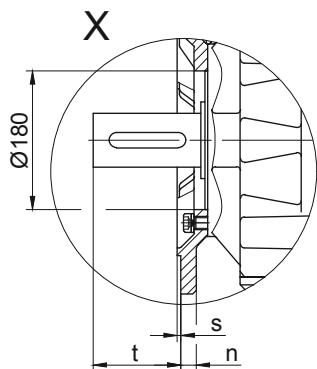


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF70..	Code -3./	400	350	300	20	4 x 17.5	271	5	155
BF70..	Code -2./	350	300	250	20	4 x 17.5	271	5	155
BF70..	Code -4./	450	400	350	22	8 x 17.5	281	5	145

Dimensions in millimetres (mm)

Foot with tapped holes left and right

Code -6.LR/

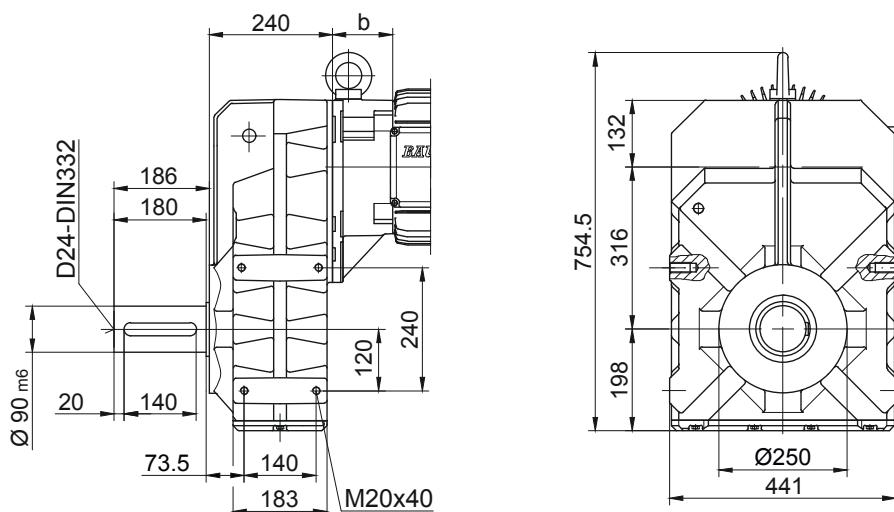


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors


Dimension - Standard

BF80-BF80Z


with torque arm
Code -0./

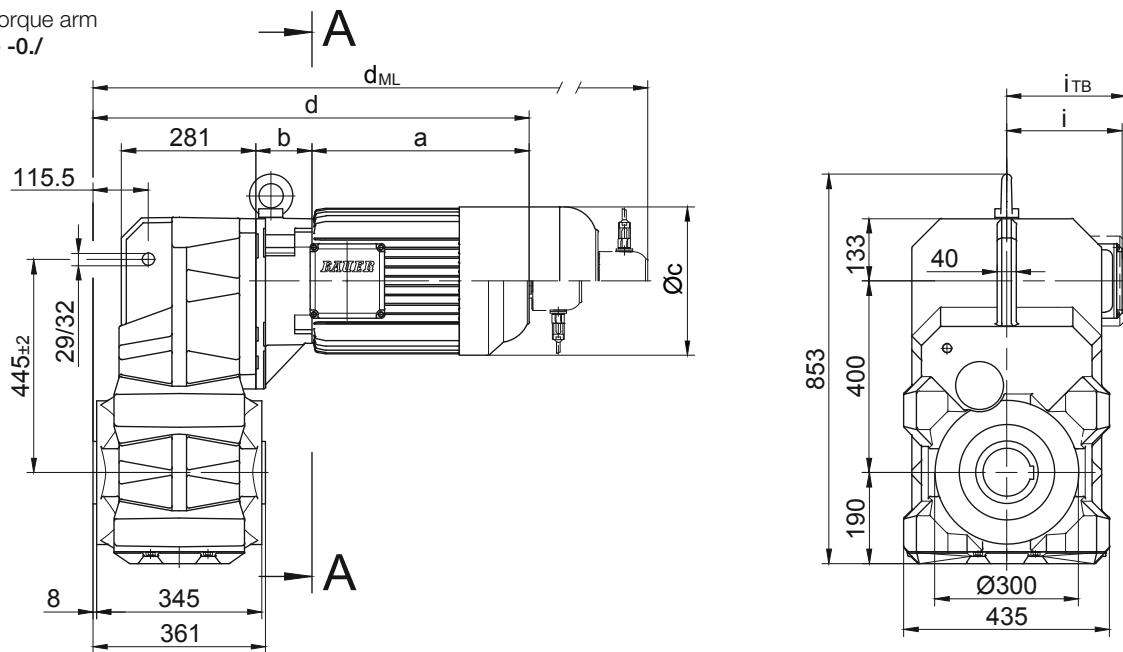



Code -.4/

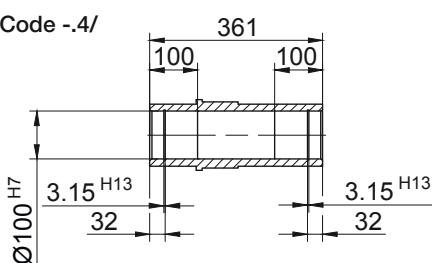

Code -.1/

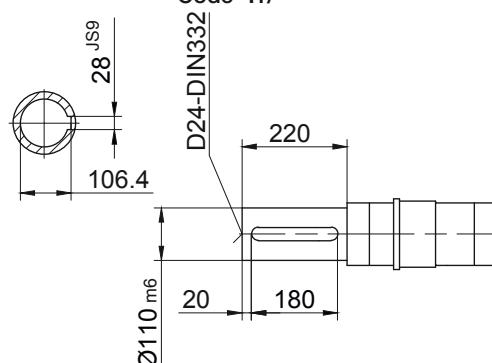

Code -.5/

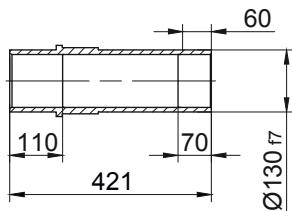

Type	a	b	c	d	i	Design with motor extensions				
						i_TB	Brake	Encoder	Brake with Encoder	Back Stop
						d_ML	d_ML	d_ML	d_ML	d_ML
BF80Z-..S..08 (M, L)	199.5	202	156	742	114.5	136.5	808	854	915.5	-
BF80-..S..09 (S, X)	250.5	83.5	176	674.5	124	157	767.5	782	871.5	-
BF80Z-..S..09 (S, X)	250.5	216.5	176	807.5	124	157	900.5	915	1004.5	-
BF80-..S..11 (S, M, L)	319	90	218	749.5	165	176	847.5	857	949.5	-
BF80Z-..S..11 (S, M, L)	319	223	218	882.5	165	176	980.5	990	1082.5	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors




Dimension -Standard

BF80-BF80Z

Flange with tapped holes
Code -7./

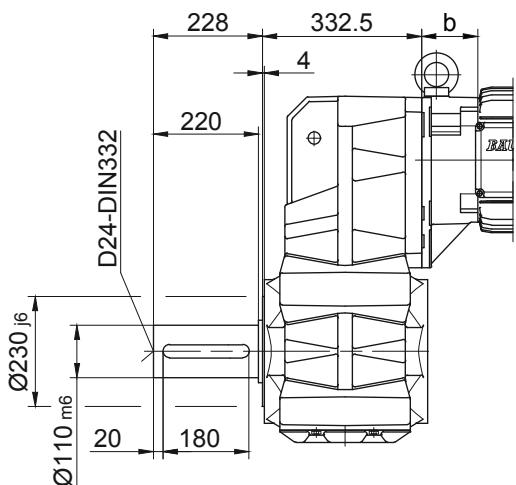

Flange with clearance holes
Code -3./
(Code -4./)

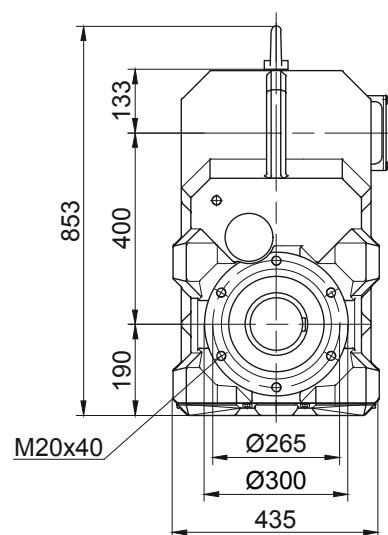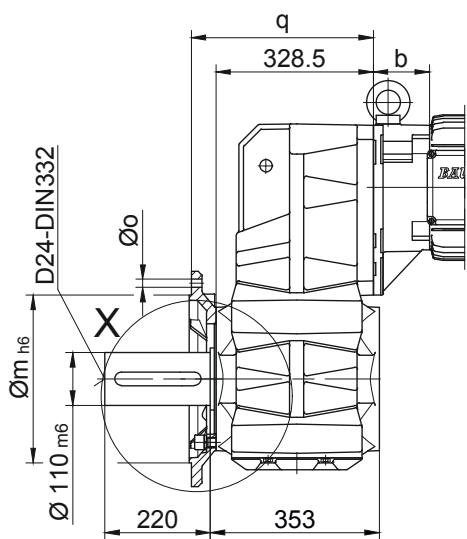
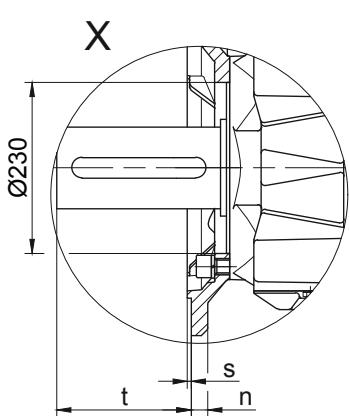


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF80..	Code -3./	450	400	350	22	17.5	383.5	5	177
BF80..	Code -4./	550	500	450	22	17.5	388.5	5	172

Dimensions in millimetres (mm)

Foot with clearance holes left and right
Code -1.LR/

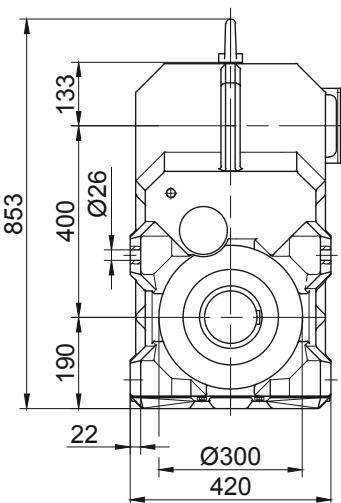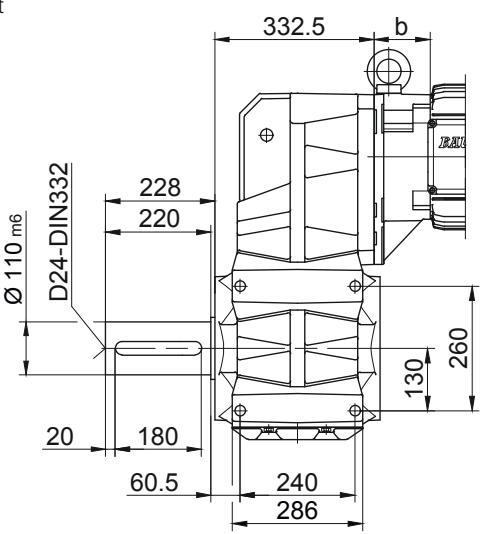

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Standard


BF90-BF90Z

with torque arm


Code -0./

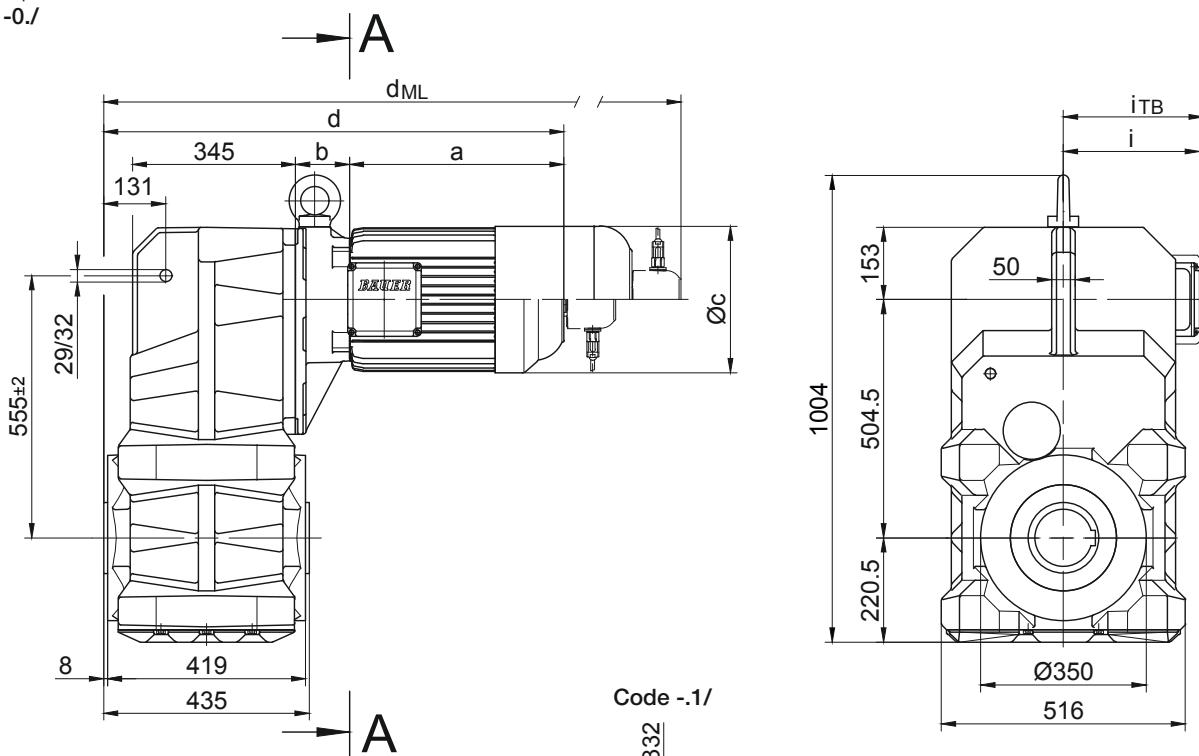



Code -.4/

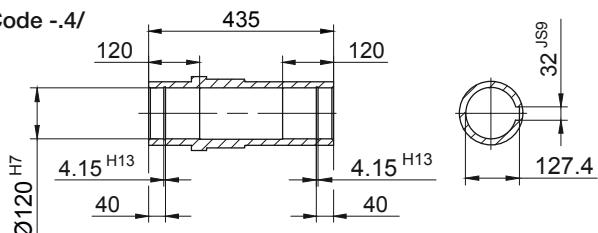

Code -.1/

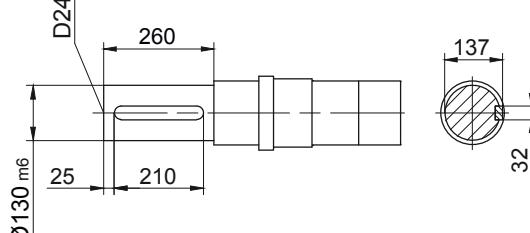

Code -.5/

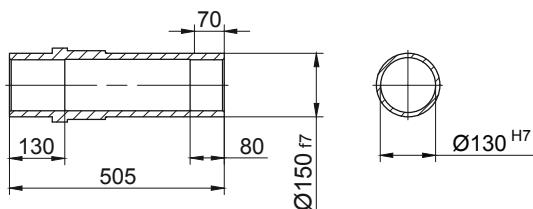

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF90Z-..S..09 (S, X)	250.5	252.5	176	909	124	157	1002	1016.5	1106	-
BF90-..S..11 (S, M, L)	319	87	218	812	165	176	910	919.5	1012	-
BF90Z-..S..11 (S, M, L)	319	259	218	984	165	176	1082	1091.5	1184	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors





Dimension -Standard

BF90-BF90Z

Flange with tapped holes
Code -7./

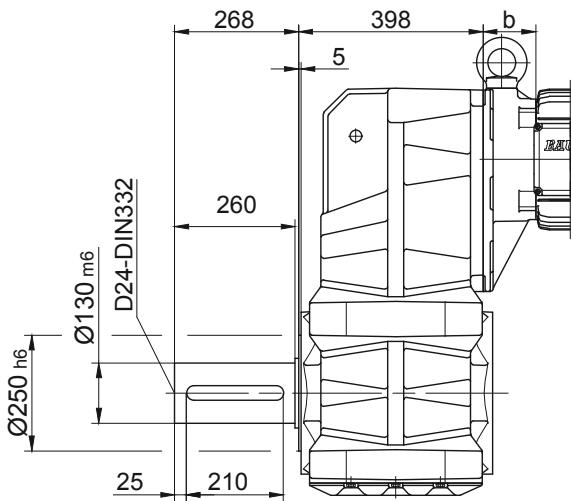

Flange with clearance holes
Code -3./
(Code -4./)

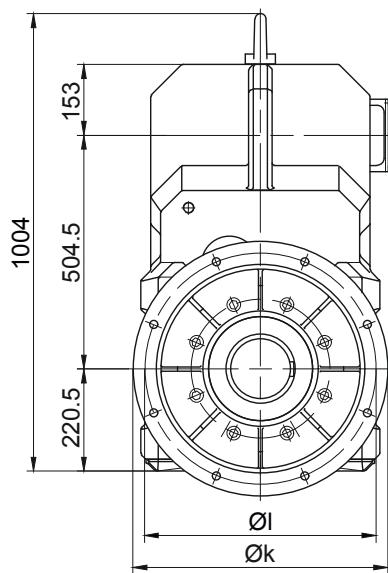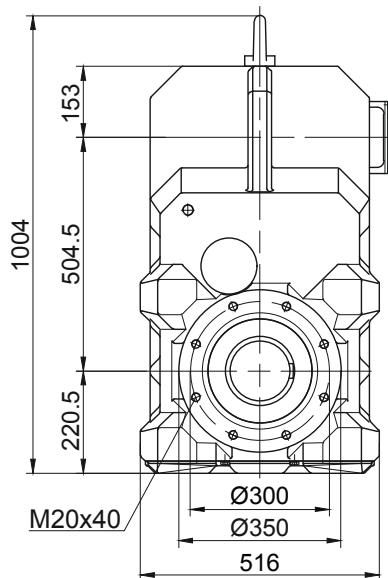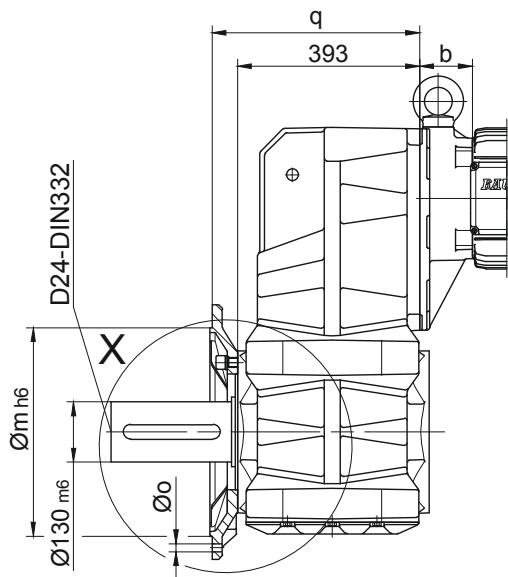
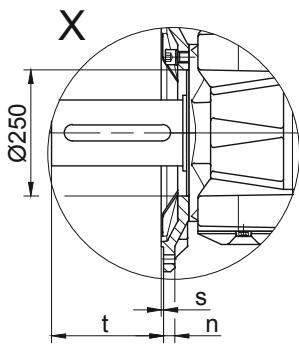


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF90..	Code -3./	550	500	450	22	17.5	448	5	218
BF90..	Code -4./	660	600	550	25	22	442	6	224

Dimensions in millimetres (mm)

Foot with clearance holes left and right
Code -1.LR/

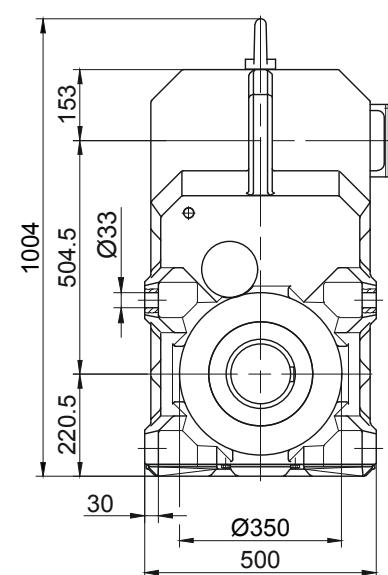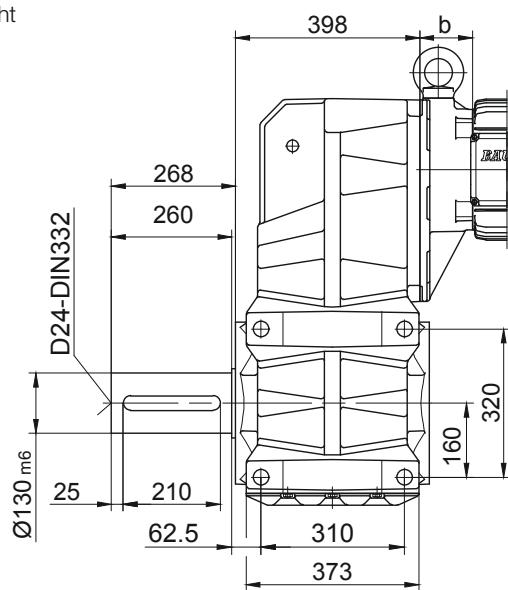

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox



BF10G06

with torque arm


Code -0./

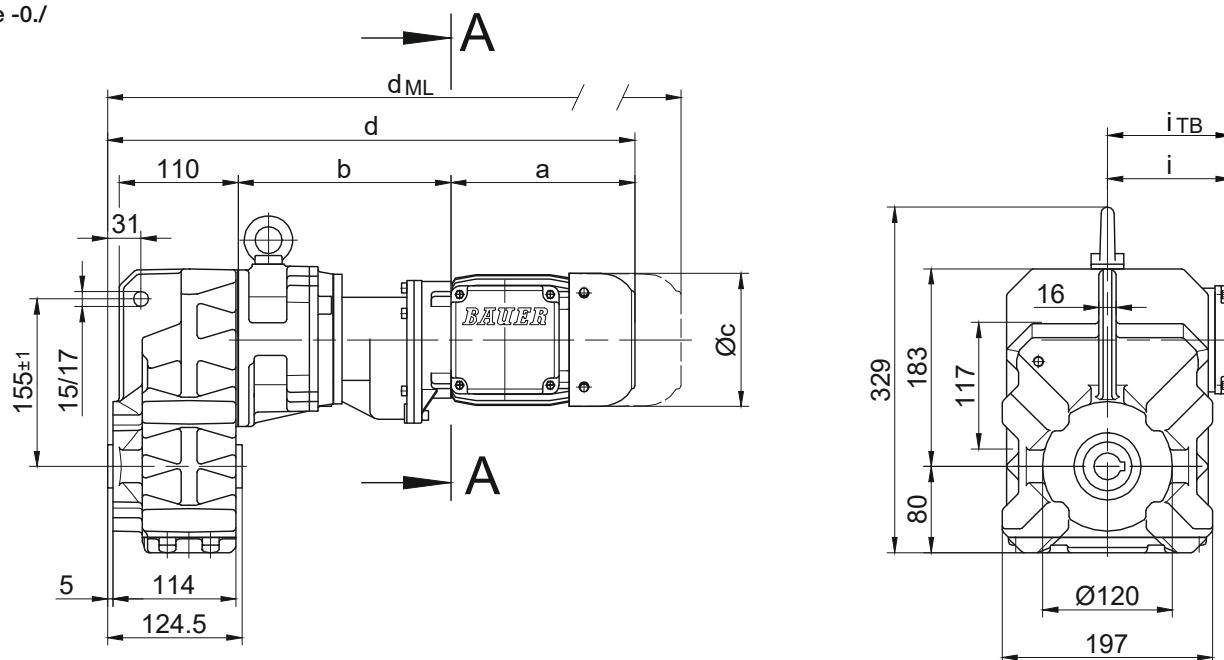



Code -.4/

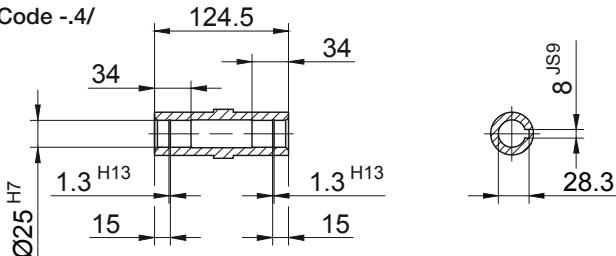

Code -.1/

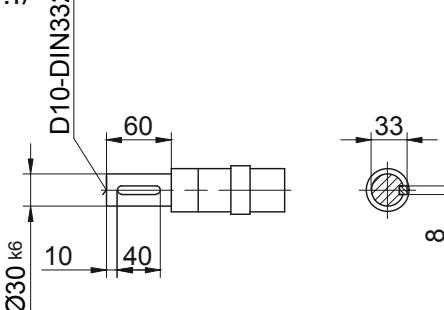

Code -.5/

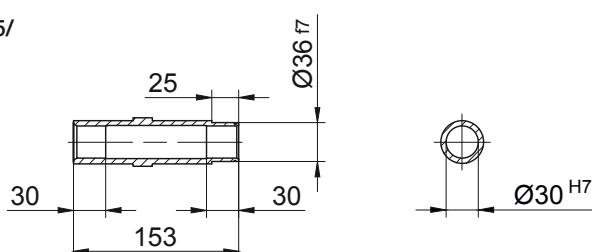

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF10G06.../S04S	142.5	195	110.5	458.5	90	112	502	546	589.5	-
BF10G06.../S..06 (M, L)	170.5	197	123	488.5	99	119	530.5	591	628.5	-
BF10G06.../S..08 (M, L)	199.5	241	156	561.5	114.5	136.5	627.5	673.5	735	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox

BF10G06

Flange with tapped holes




Code -7./

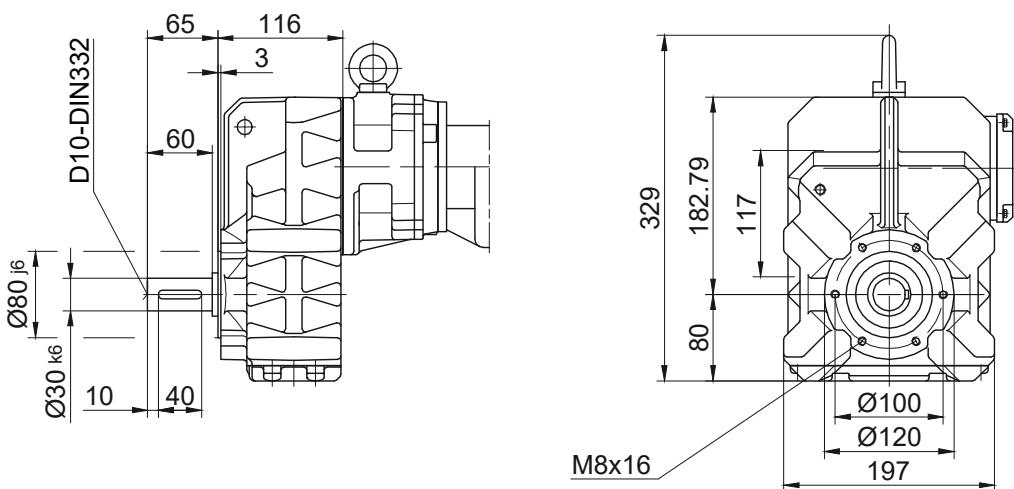

Flange with clearance holes

Code -3./

(Code -2./)

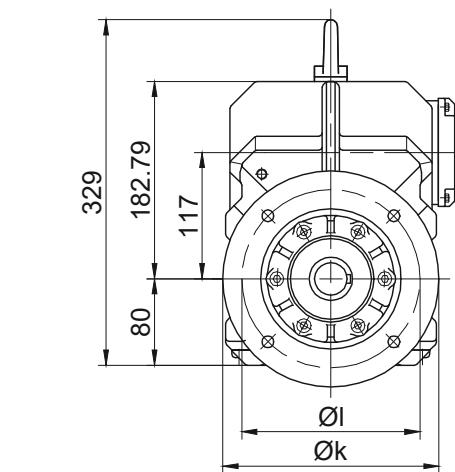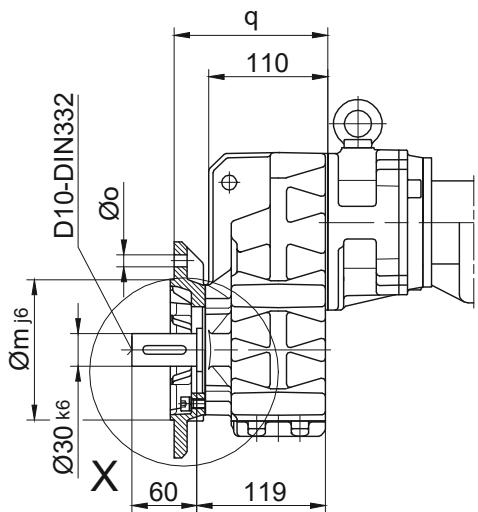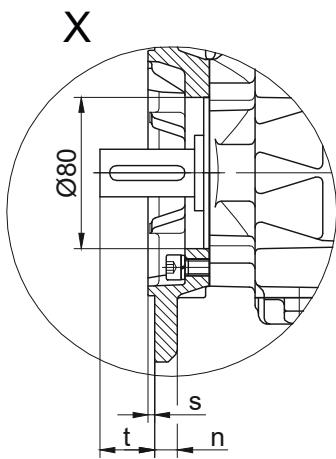



Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF10..	Code -3./	200	165	130	12	11	142	3.5	39
BF10..	Code -2./	160	130	110	10	9	135	3.5	46

Dimensions in millimetres (mm)

Foot with tapped holes left and right

Code -6.LR/

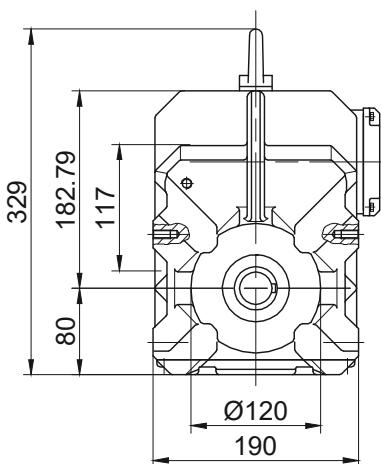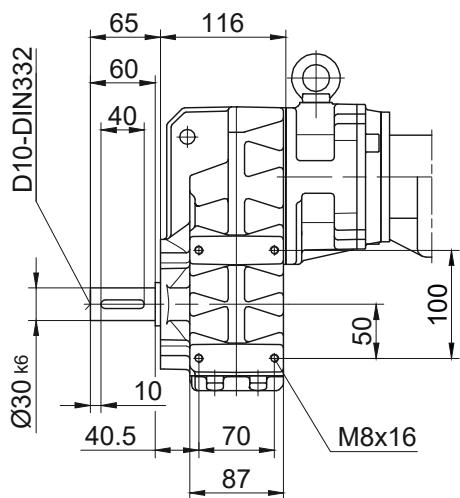

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox







BF20G06

with torque arm

Code -0./

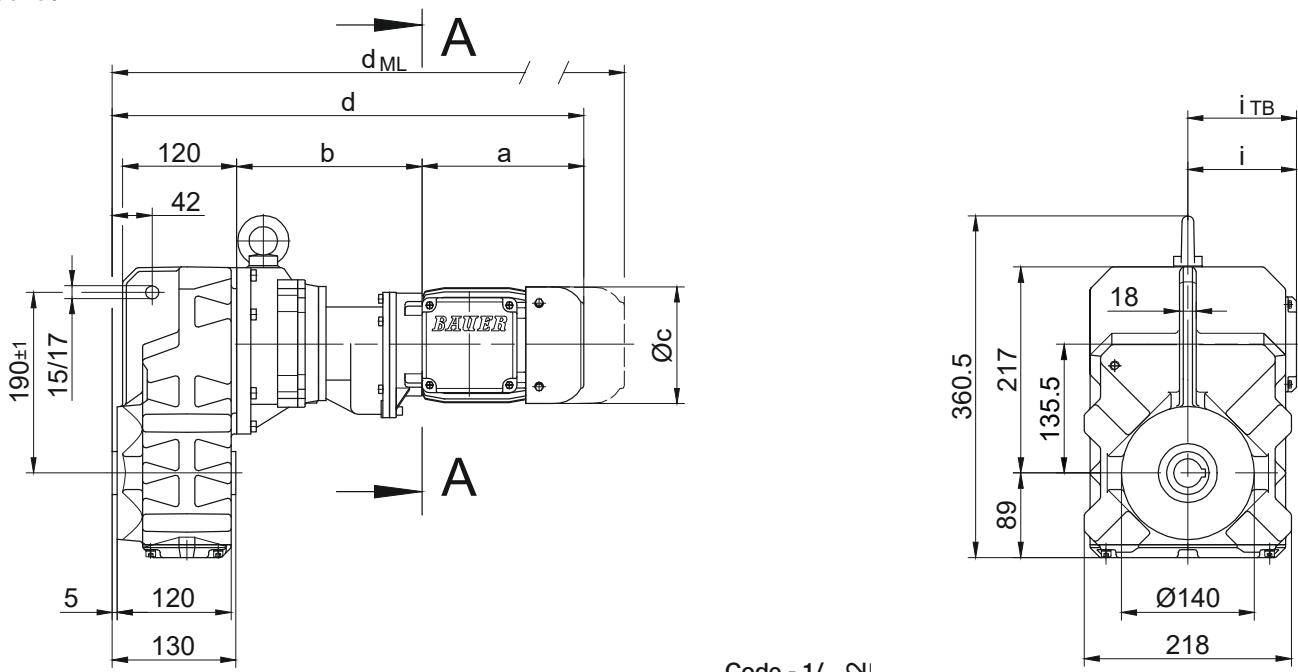

Code -1/

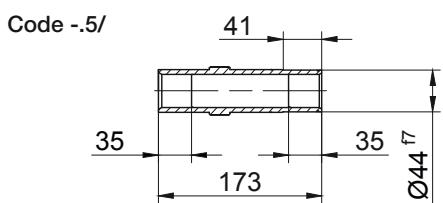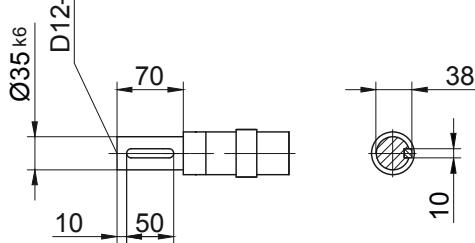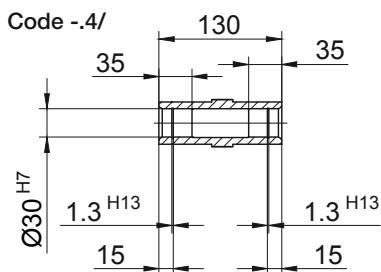

Type	a	b	c	d	i	Design with motor extensions				
						i_TB	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF20G06.../S04S	142.5	193	110.5	466.5	90	112	510	554	597.5	-
BF20G06.../S..06 (M, L)	170.5	195	123	496.5	99	119	538.5	599	636.5	-
BF20G06.../S..08 (M, L)	199.5	239	156	569.5	114.5	136.5	635.5	681.5	743	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors




Dimension - Tandem Gearbox

BF20G06

Flange with tapped holes
Code -7./

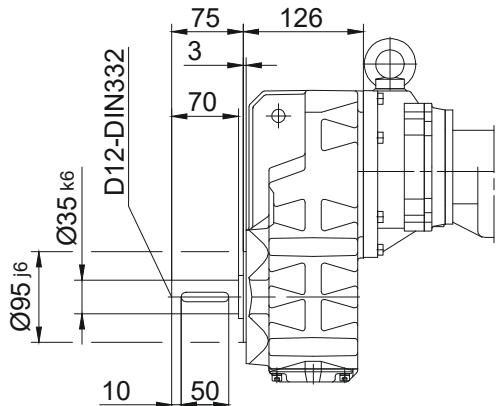

Flange with clearance holes
Code -3./
(Code -2./)

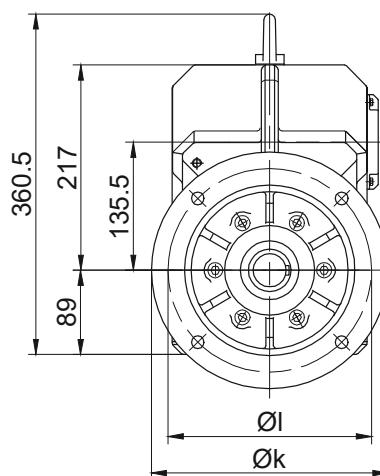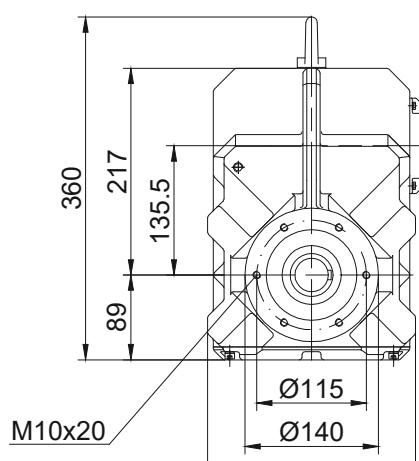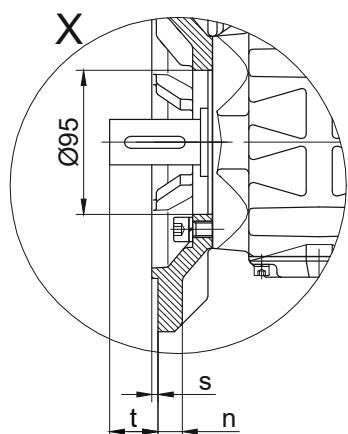



11

Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF20..	Code -3./	250	215	180	16	13.5	159	4	42
BF20..	Code -2./	200	165	130	12	11	150	3.5	51

Dimensions in millimetres (mm)

Foot with tapped holes left and right
Code -6.LR/

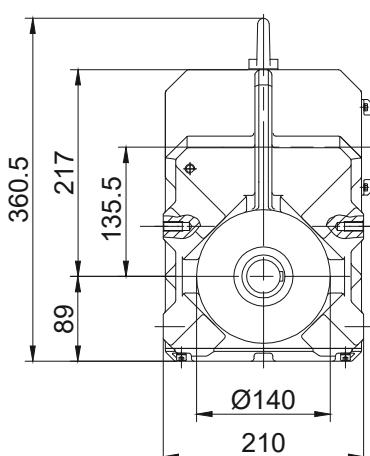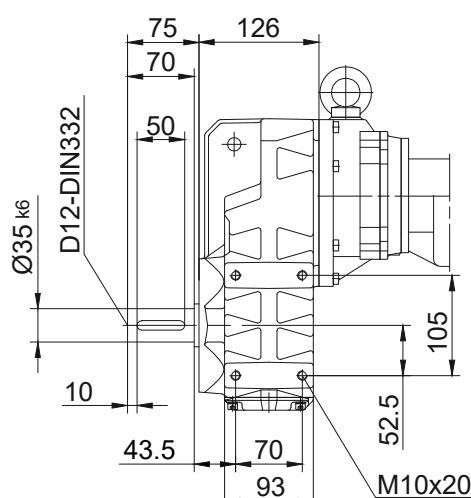

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox


BF30G06

with torque arm


Code -0./

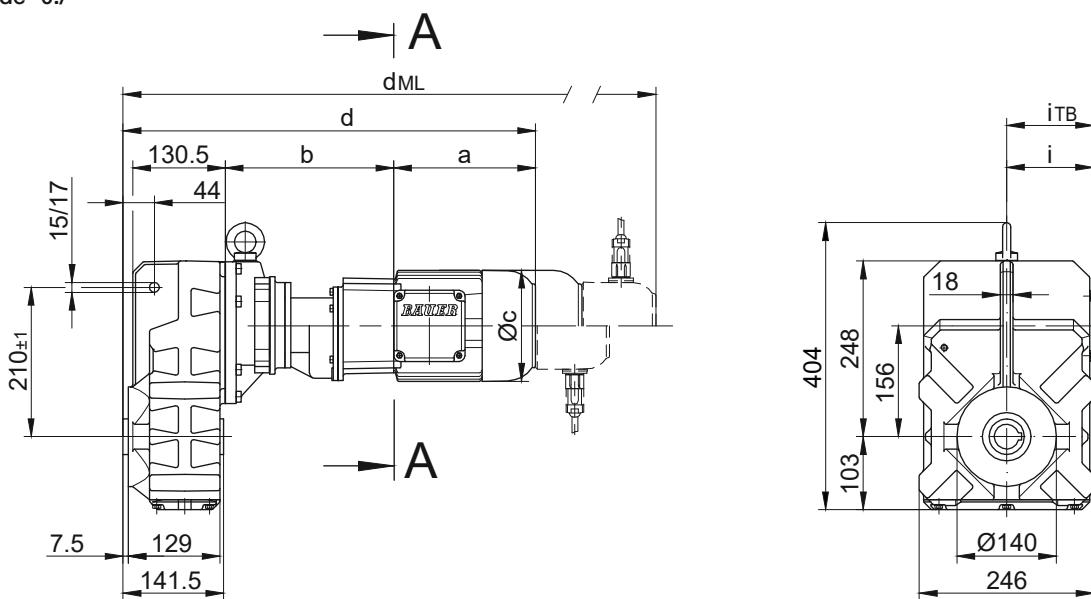



Code -.4/

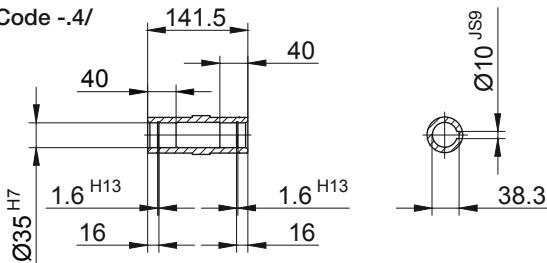

Code -.1/

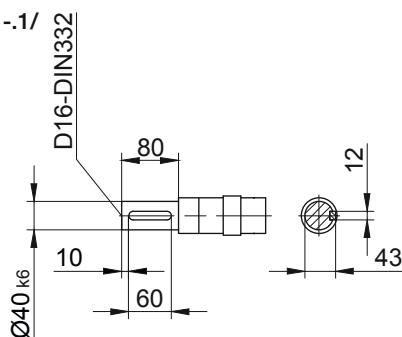

Code -.5/

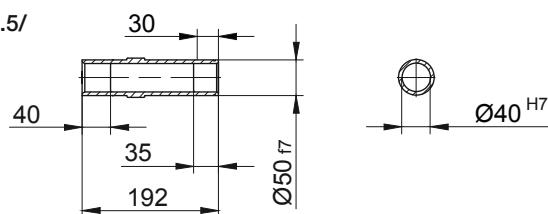

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF30G06.../S04S	142.5	191	110.5	477.5	90	112	521	565	608.5	-
BF30G06.../S..06 (M, L)	170.5	193	123	507.5	99	119	549.5	610	647.5	-
BF30G06.../S..08 (M, L)	199.5	237	156	580.5	114.5	136.5	646.5	692.5	754	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox

BF30G06

Flange with tapped holes




Code -7./

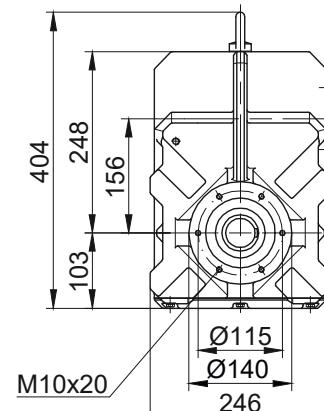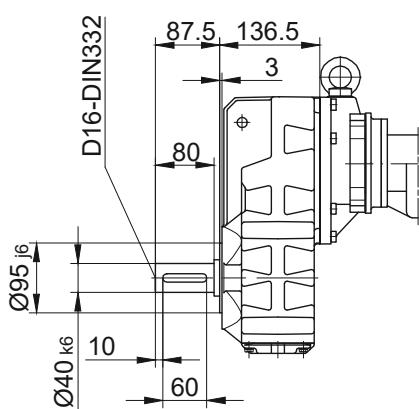

Flange with clearance holes

Code -3./

(Code -2./)

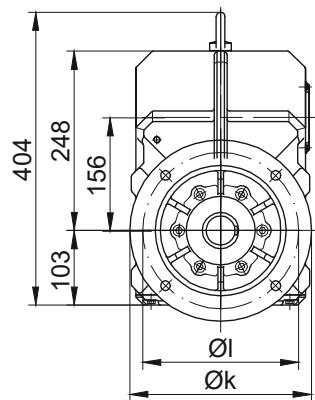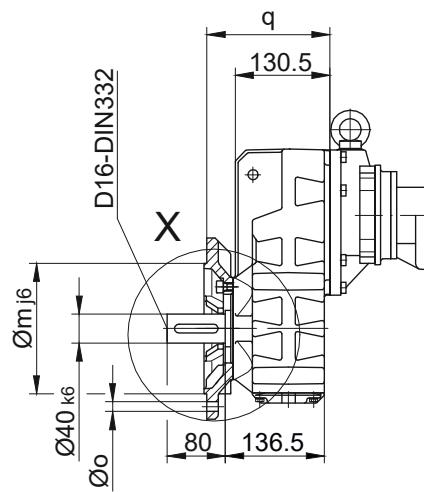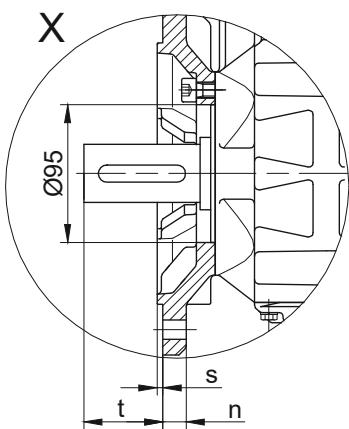



Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF30..	Code -3./	250	215	180	16	13.5	169.5	4	54.5
BF30..	Code -2./	200	165	130	12	11	160.5	3.5	63.5

Dimensions in millimetres (mm)

Foot with tapped holes left and right

Code -6.LR/

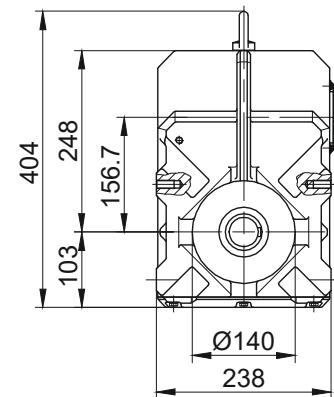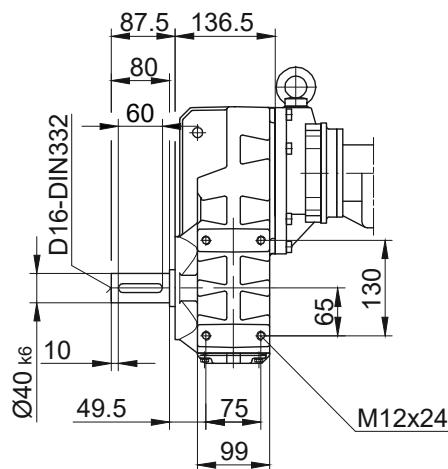

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox


BF40G10

with torque arm


Code -0./

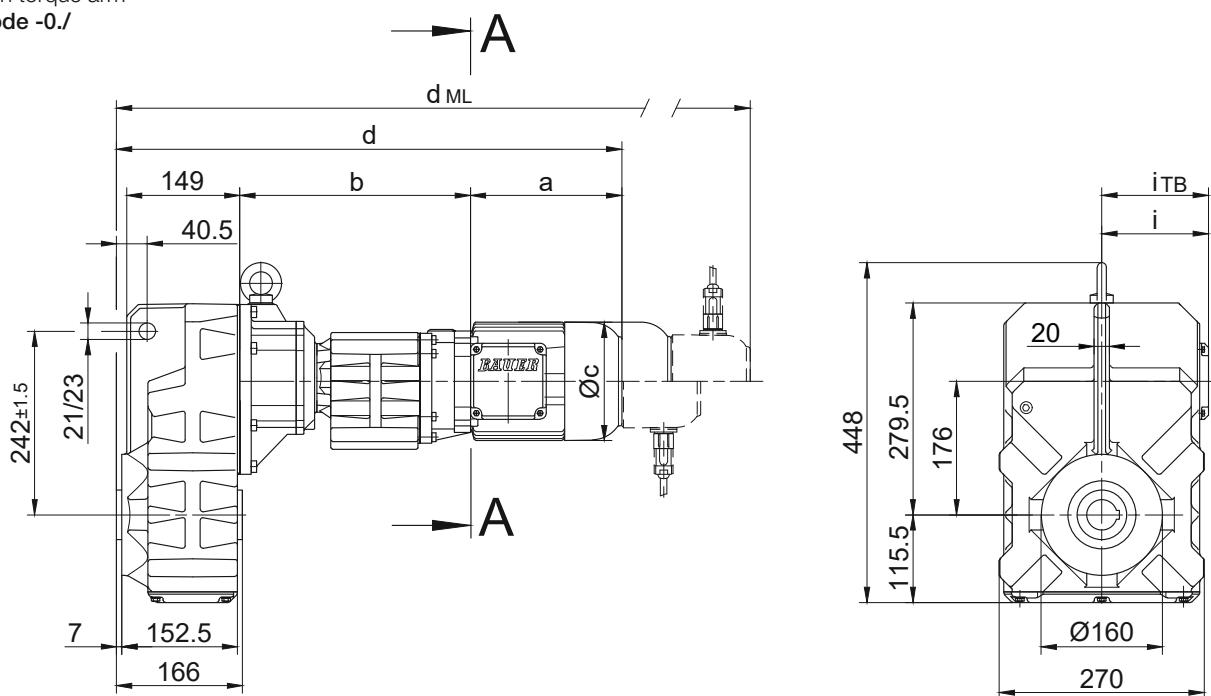



Code -.4/

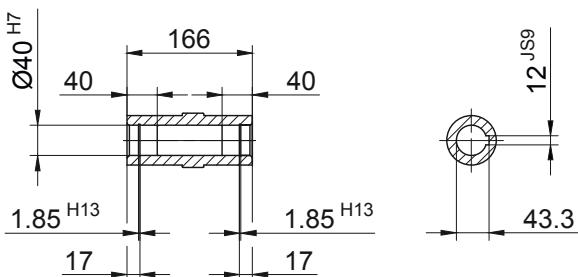

Code -.1/

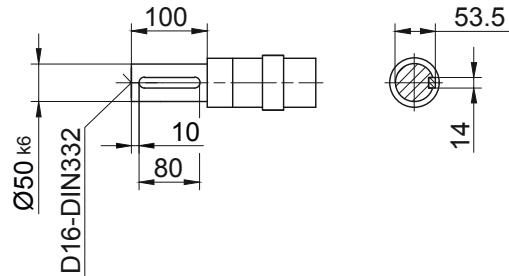

Code -.5/

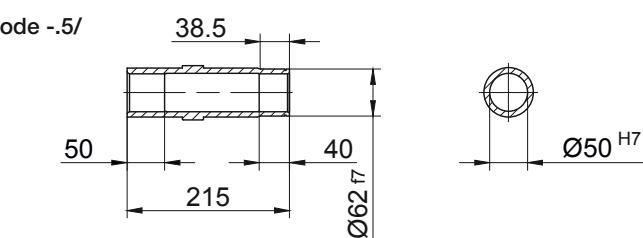

Type	a	b	c	d	i	Design with motor extensions				
						i_TB	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF40G10.../S..06 (M, L)	170.5	300	123	633	99	119	675	735.5	773	-
BF40G10.../S..08 (M, L)	199.5	304	156	666	114.5	136.5	732	778	839.5	-
BF40G10.../S..09 (S, X)	250.5	318.5	176	731.5	124	157	824.5	839	928.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox

BF40G10

Flange with tapped holes




Change with
Code -7.

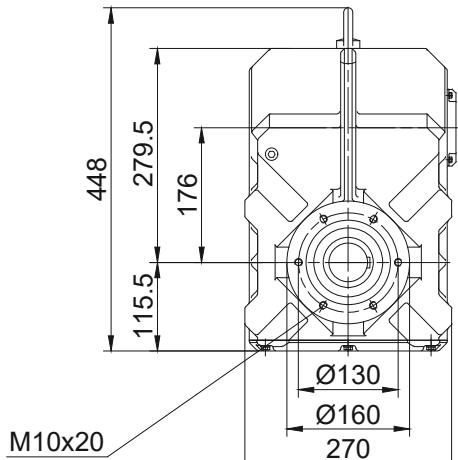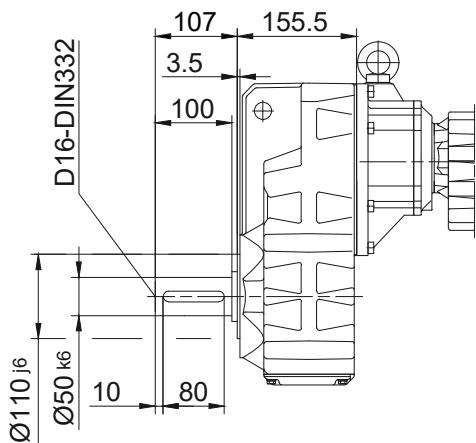

Flange with clearance holes

**Hang with
Code -3./**



(Code -4.)

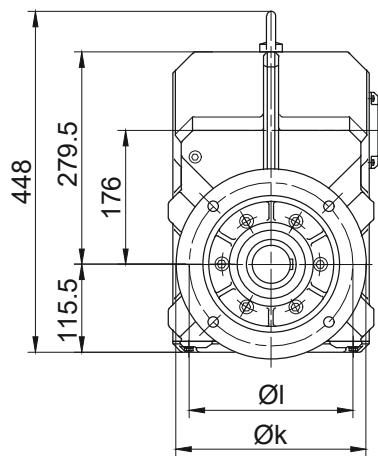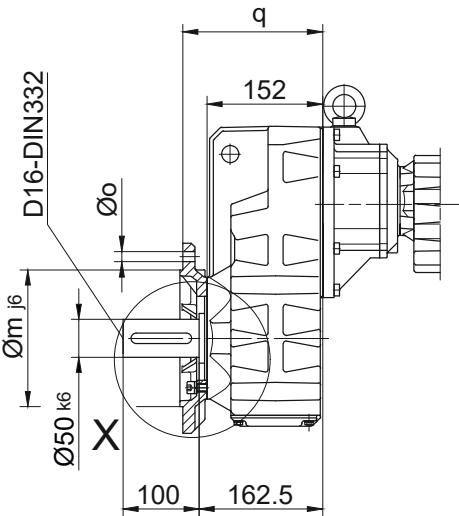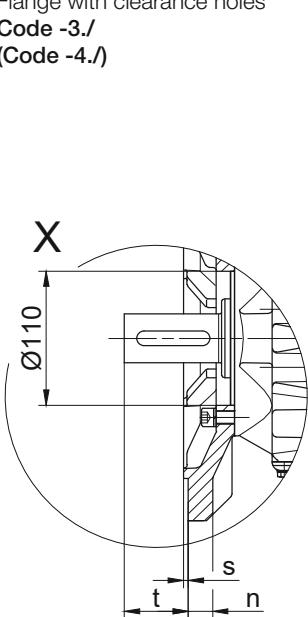

Flange Dimensions

Range Dimensions									
Type	Design	k	l	m	n	o	q	s	t
BF40..	Code -3./	250	215	180	16	13.5	184	4	78.5
BF40..	Code -4./	300	265	230	20	13.5	190	4	72.5

Dimensions in millimetres (mm)

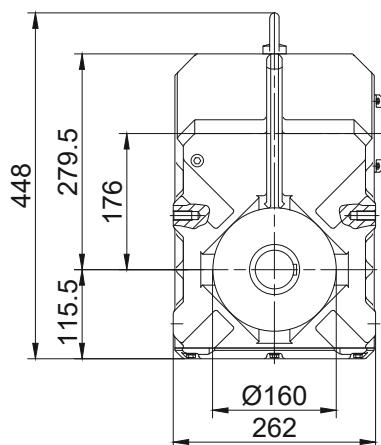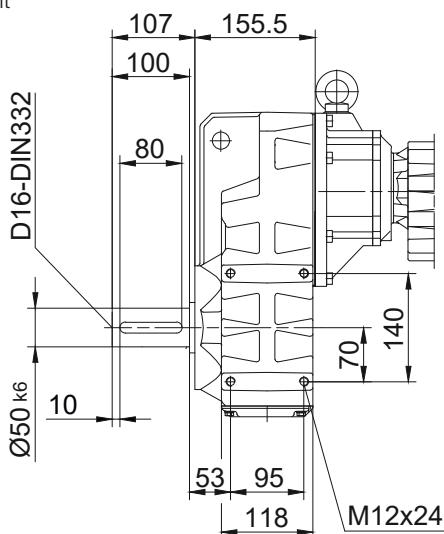

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox


BF50G10

with torque arm


Code -0./

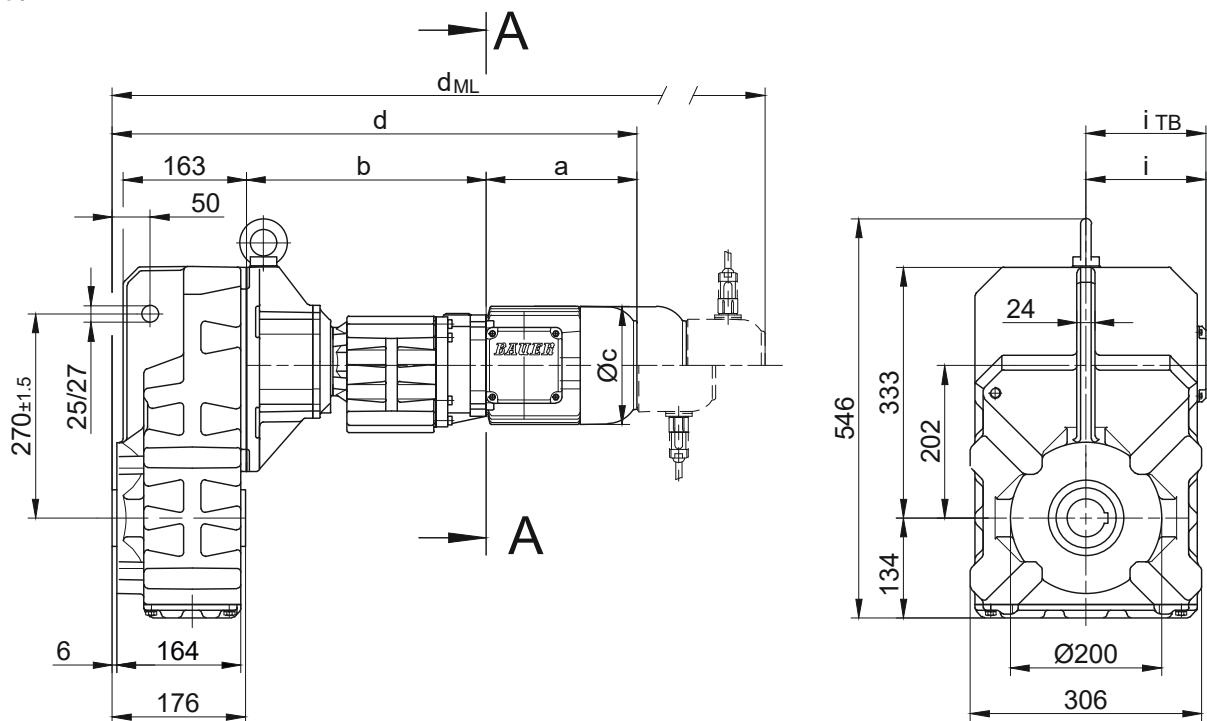



Code -.4/

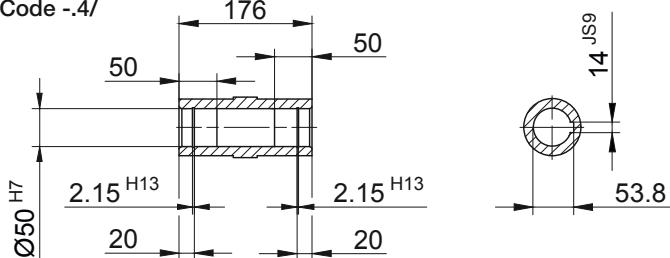

Code -.1/

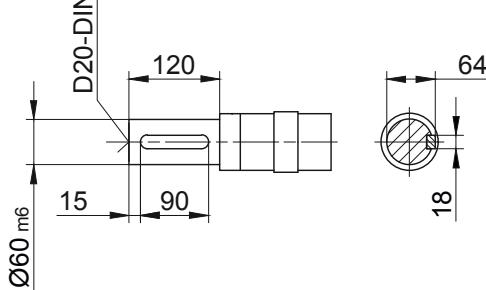

Code -.5/

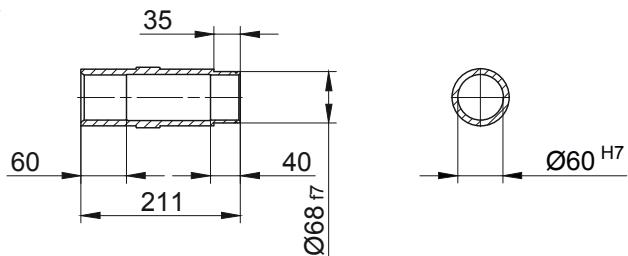

Type	a	b	c	d	i	Design with motor extensions				
						i_TB	Brake	Encoder	Brake with Encoder	Back Stop
						d_ML	d_ML	d_ML	d_ML	d_ML
BF50G10.../S..06 (M, L)	170.5	313	123	661	99	119	703	763.5	801	-
BF50G10.../S..08 (M, L)	199.5	317	156	694	114.5	136.5	760	806	867.5	-
BF50G10.../S..09 (S, X)	250.5	331.5	176	759.5	124	157	852.5	867	956.5	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox




BF50G10

Flange with tapped holes
Code -7./

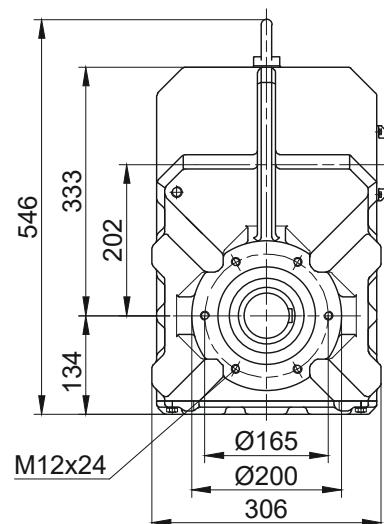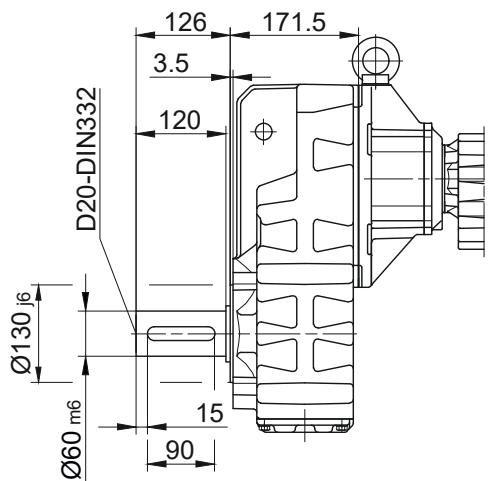

Flange with clearance holes

Code -3./
(Code -2./)

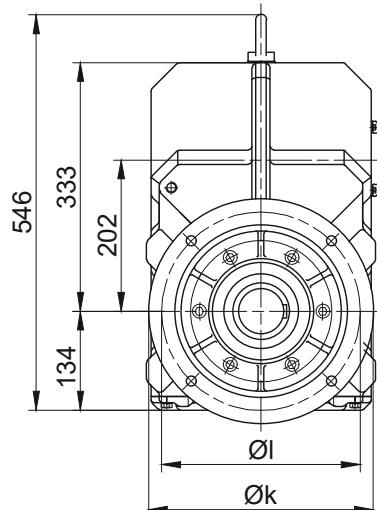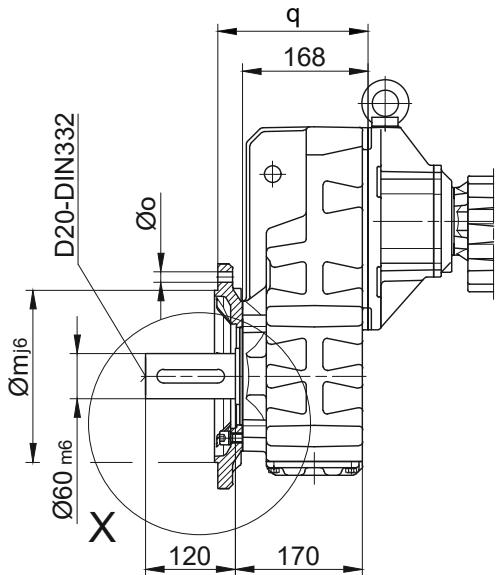
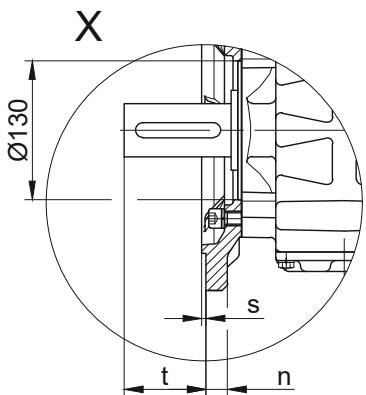


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF50..	Code -3./	300	265	230	20	13.5	201	4	96.5
BF50..	Code -2./	250	215	180	16	13.5	198	4	99.5

Dimensions in millimetres (mm)

Foot with tapped holes left and right
Code -6.LR/

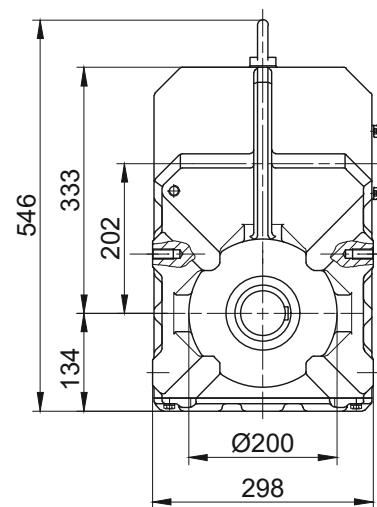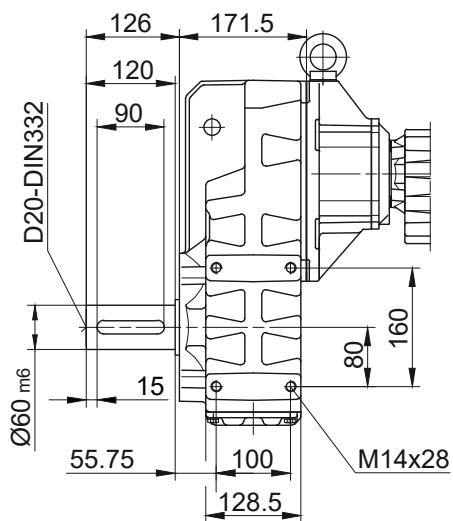

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox


BF60G20

with torque arm


Code -0./

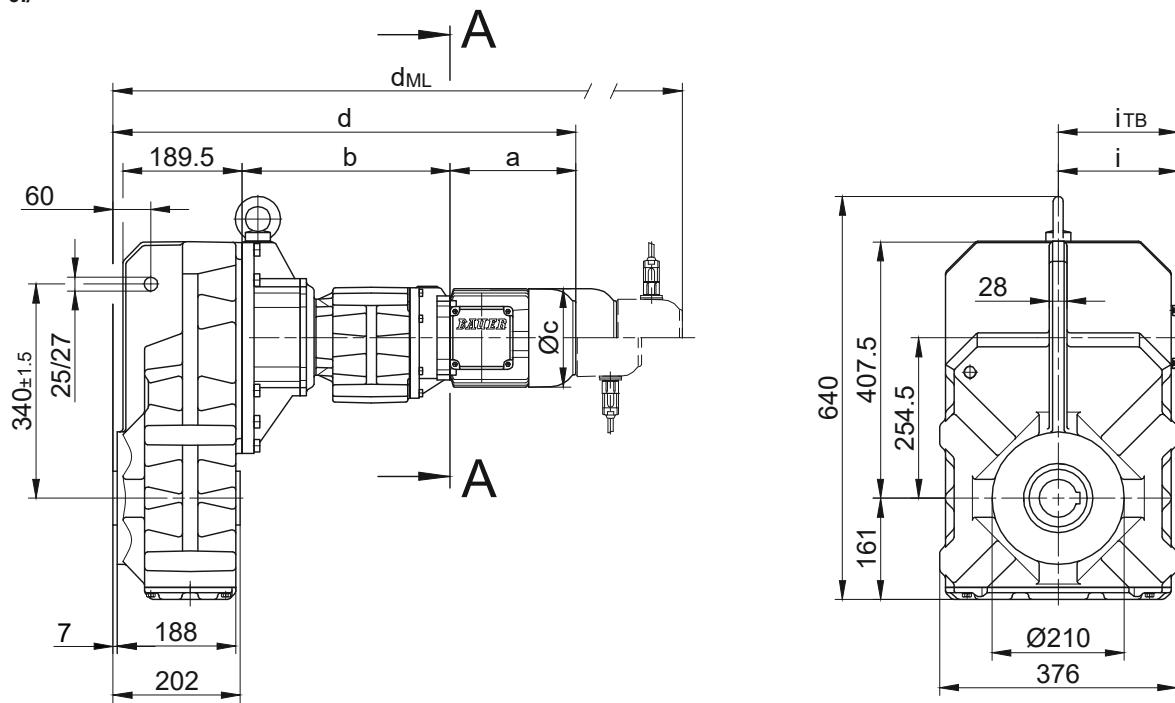



Code -.4/

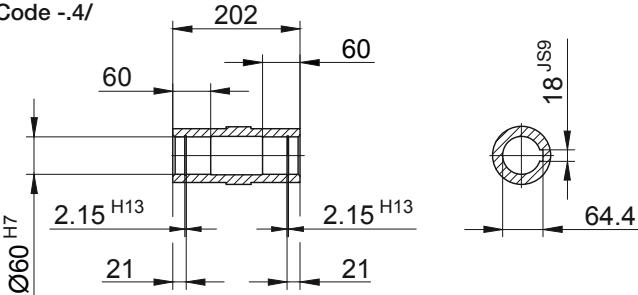

Code -.1/

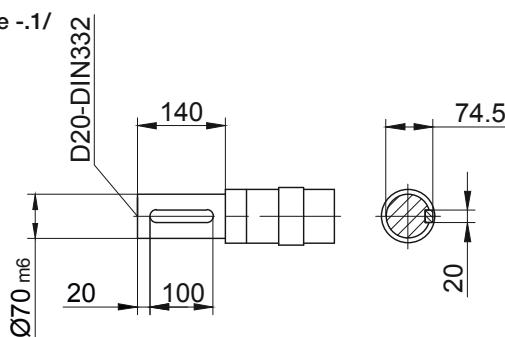

Code -.5/

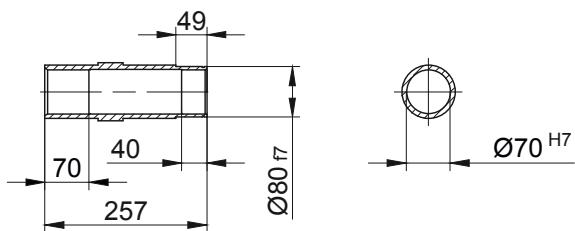

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF60G20.../S..06 (M, L)	170.5	326	123	701.5	99	119	743.5	804	841.5	-
BF60G20.../S..08 (M, L)	199.5	330	156	734.5	114.5	136.5	800.5	846.5	908	-
BF60G20.../S..09 (S, X)	250.5	344.5	176	800	124	157	893	907.5	997	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox

BF60G20

Flange with tapped holes



Code -7./

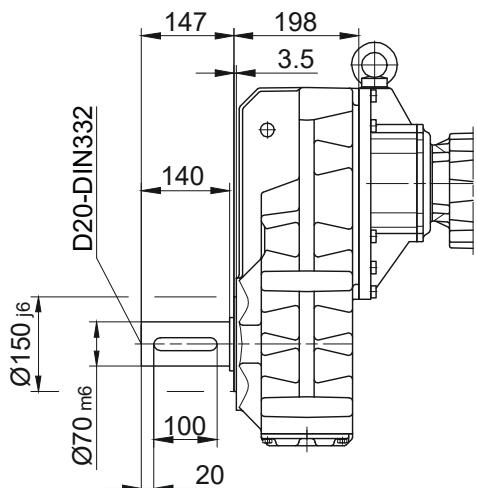

Flange with clearance holes

Code -3./

(Code -2./)

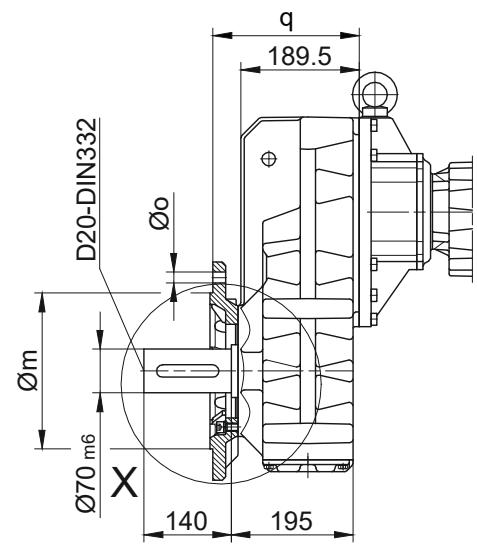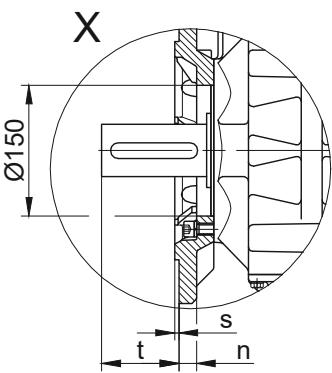




Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF60..	Code -3./	350	300	250	20	17.5	234.5	5	110.5
BF60..	Code -2./	300	265	230	20	13.5	242.5	4	102.5

Dimensions in millimetres (mm)

Foot with tapped holes left and right

Code -6.LR/

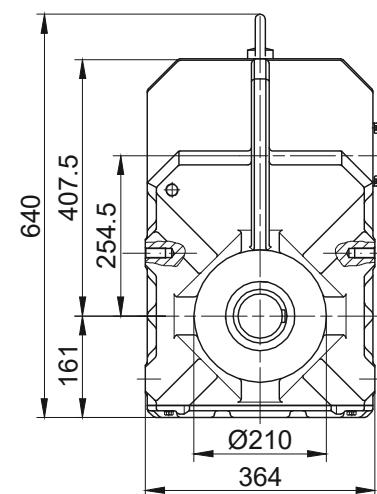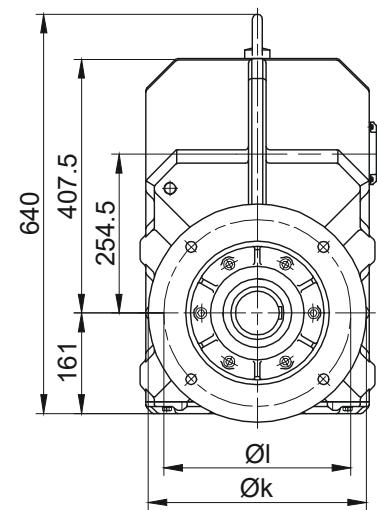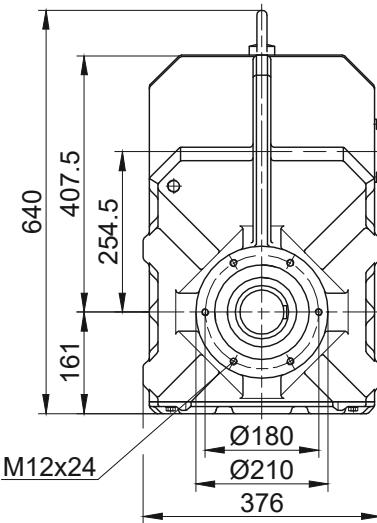

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox


BF70G20

with torque arm


Code -0./

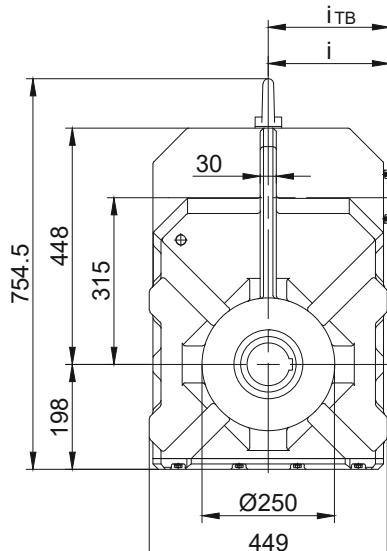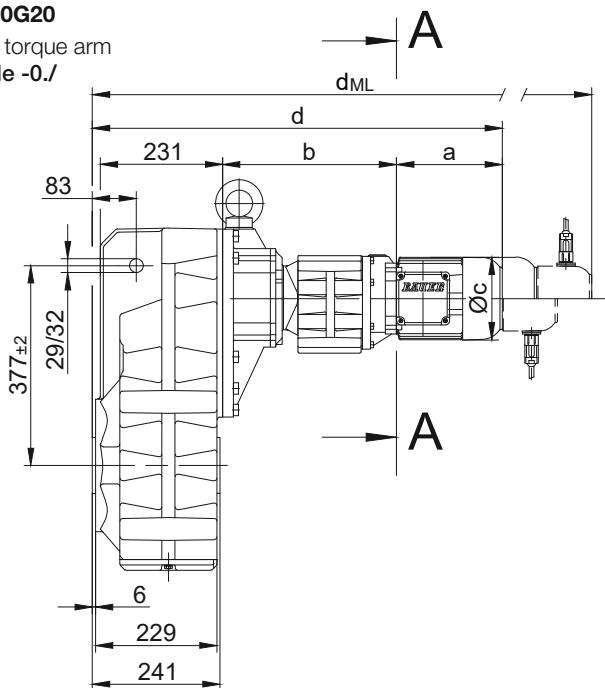


Code -.4/

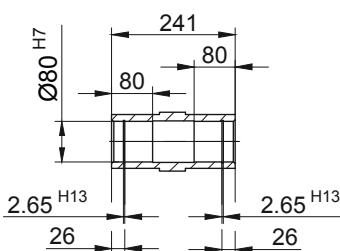


Code -.1/

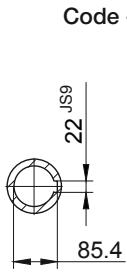



D24-DIN332



Code -.5/

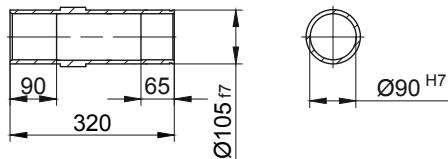

Code -.4/K70

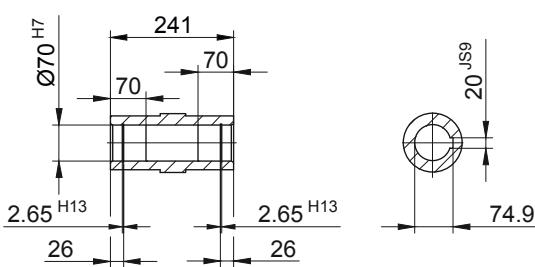

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF70G20.../S..06 (M, L)	170.5	324	123	740.5	99	119	782.5	843	880.5	-
BF70G20.../S..08 (M, L)	199.5	328	156	773.5	114.5	136.5	839.5	885.5	947	-
BF70G20.../S..09 (S, X)	250.5	342.5	176	839	124	157	932	946.5	1036	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox


BF70G20

Flange with tapped holes
Code -7./

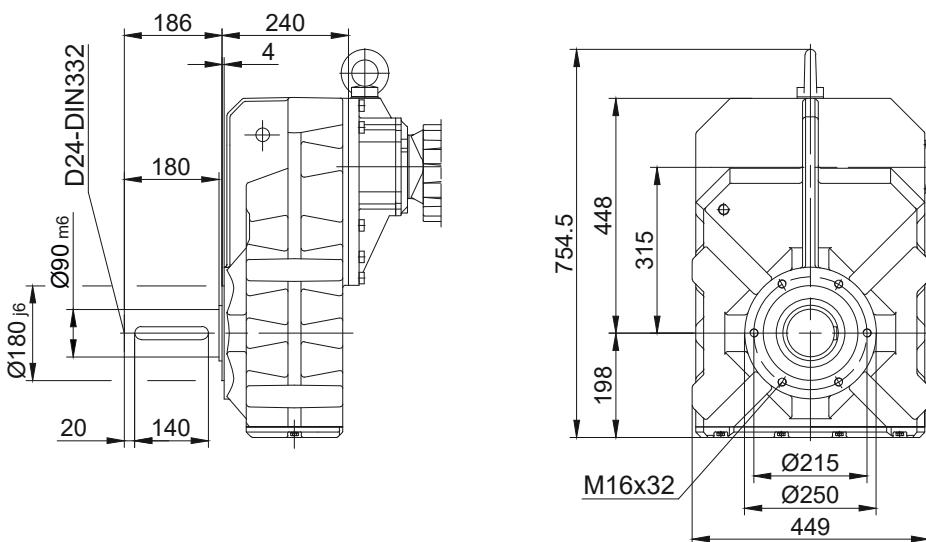

Flange with clearance holes

Code -3./
(Code -2./)
(Code -4./)

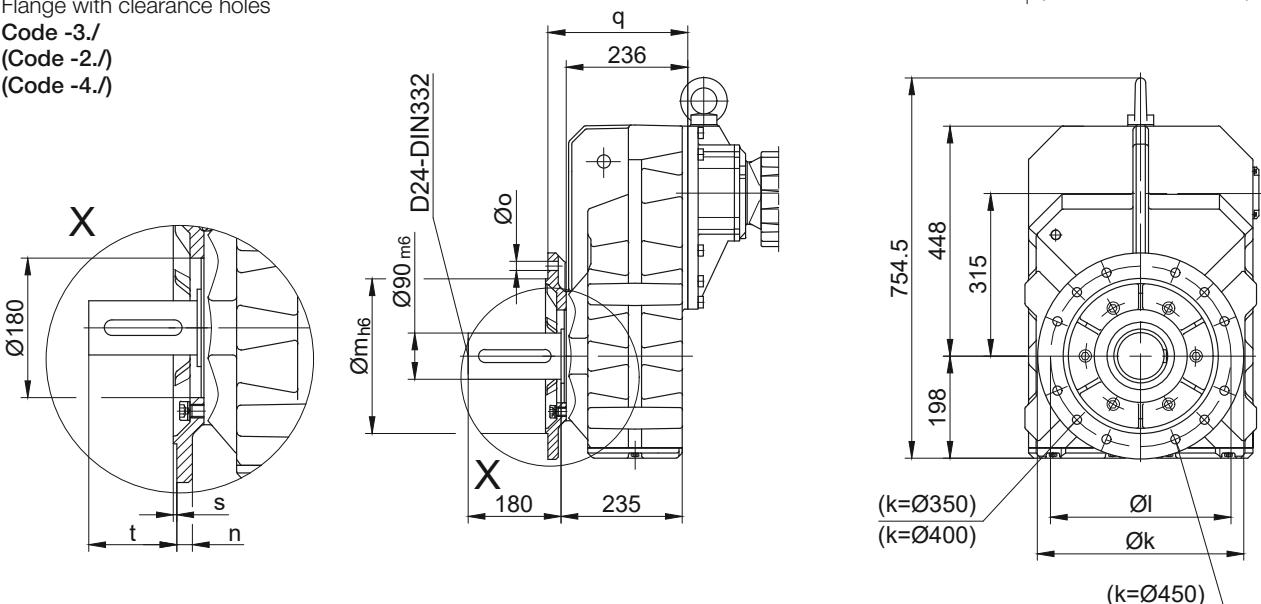


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF70..	Code -3./	400	350	300	20	4 x 17.5	271	5	155
BF70..	Code -2./	350	300	250	20	4 x 17.5	271	5	155
BF70..	Code -4./	450	400	350	22	8 x 17.5	281	5	145

Dimensions in millimetres (mm)

Foot with tapped holes left and right
Code -6.LR/

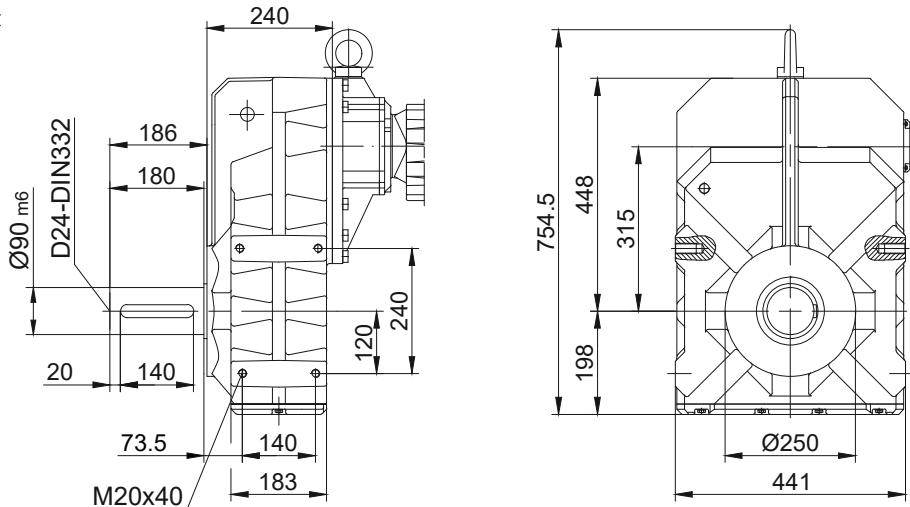

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox


BF80G40

with torque arm



Code -0./

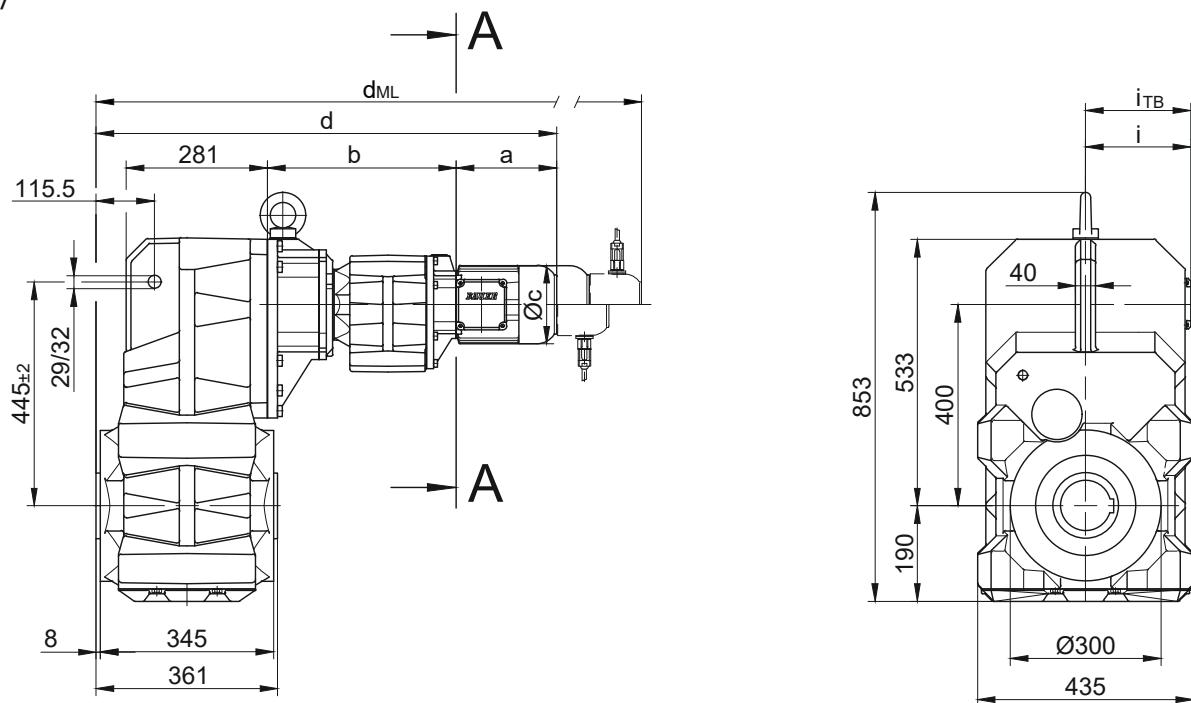



Code -.4/

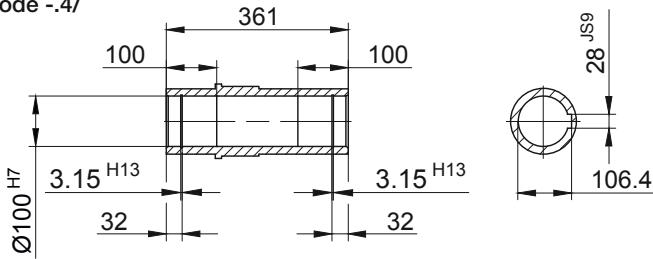

Code -.1/

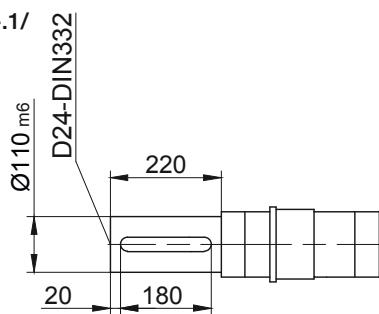

Code -.5/

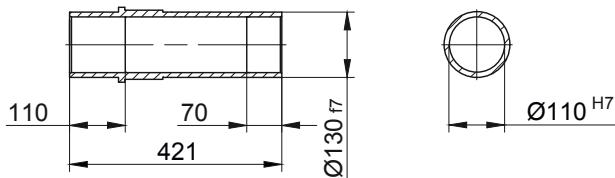

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BF80G40-..S..08 (M, L)	199.5	376	156	916	114.5	136.5	982	1028	1089.5	-
BF80G40-..S..09 (S, X)	250.5	390.5	176	981.5	124	157	1074.5	1089	1178.5	-
BF80G40-..S..11 (S, M, L)	319	397	218	1056.5	165	176	1154.5	1164	1256.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox

BF80G40

Flange with tapped holes


Code -7./

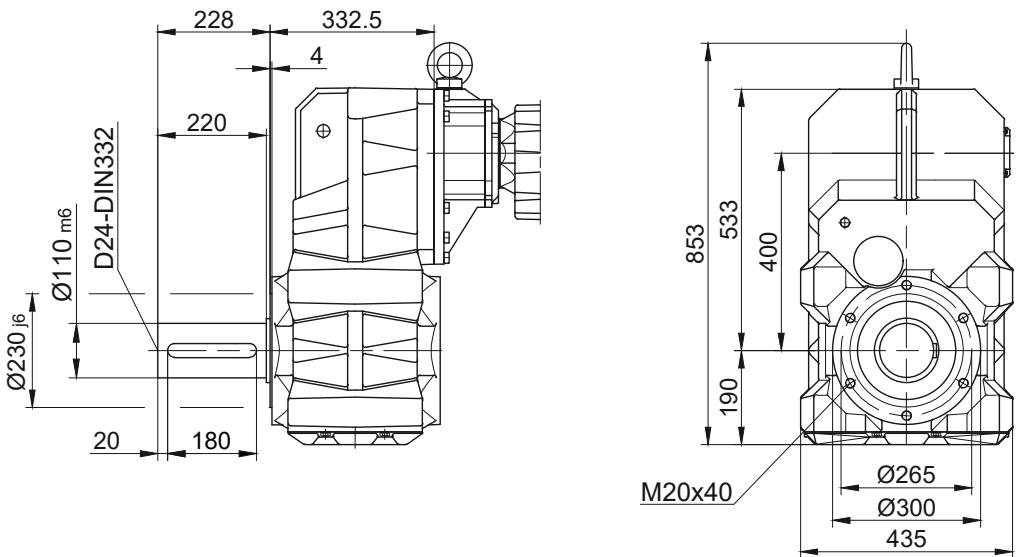

Flange with clearance holes

Code -3./

(Code -4./)

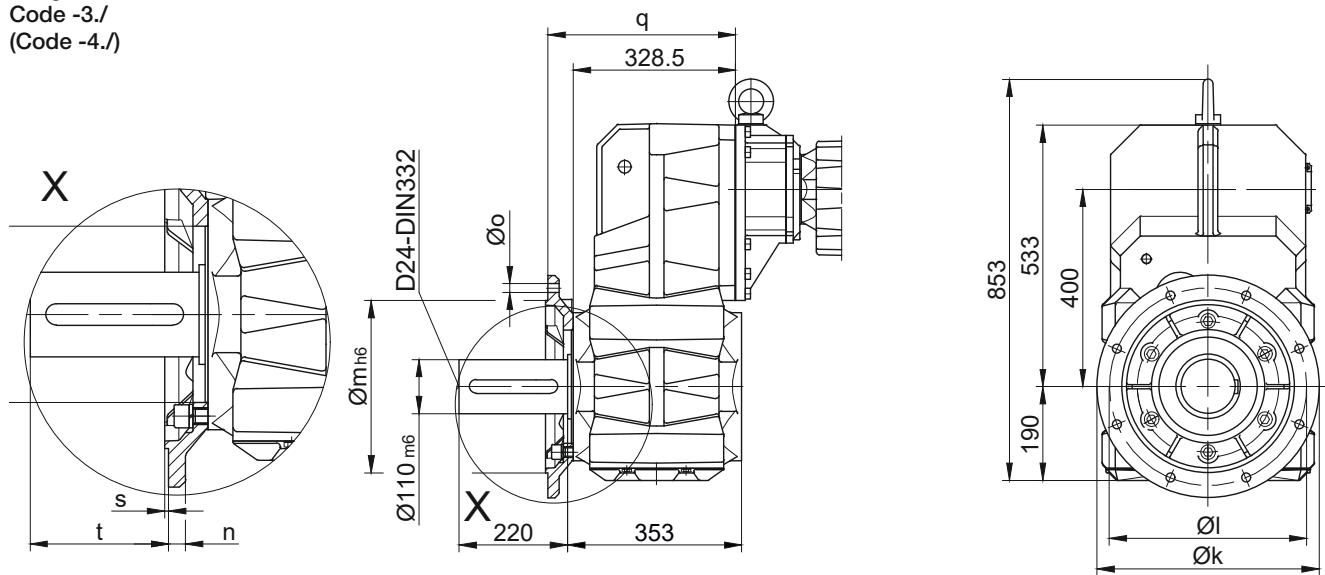


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF80..	Code -3./	450	400	350	22	17.5	383.5	5	177
BF80..	Code -4./	550	500	450	22	17.5	388.5	5	172

Dimensions in millimetres (mm)

Foot with clearance holes left and right

Code -1.LR/

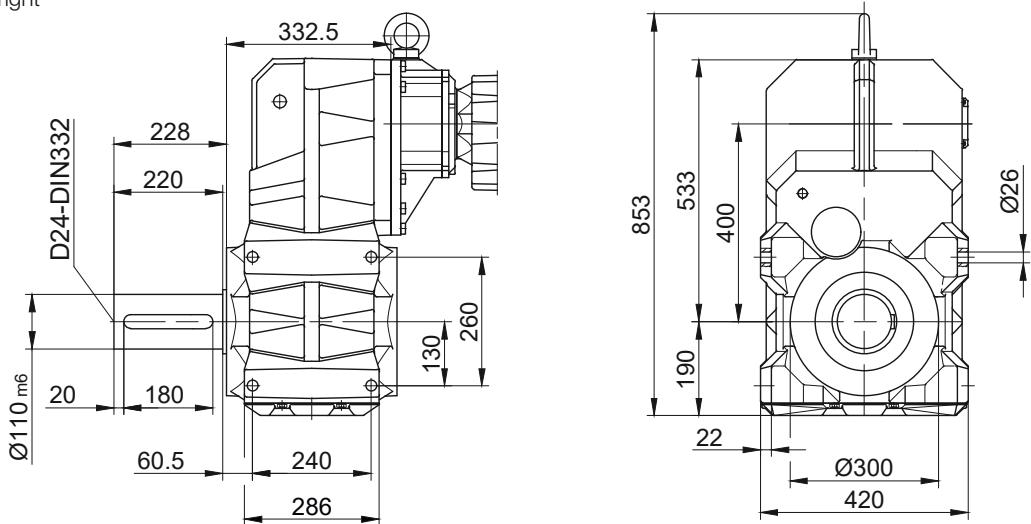

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Dimension - Tandem Gearbox


BF90G50

with torque arm



Code -0./

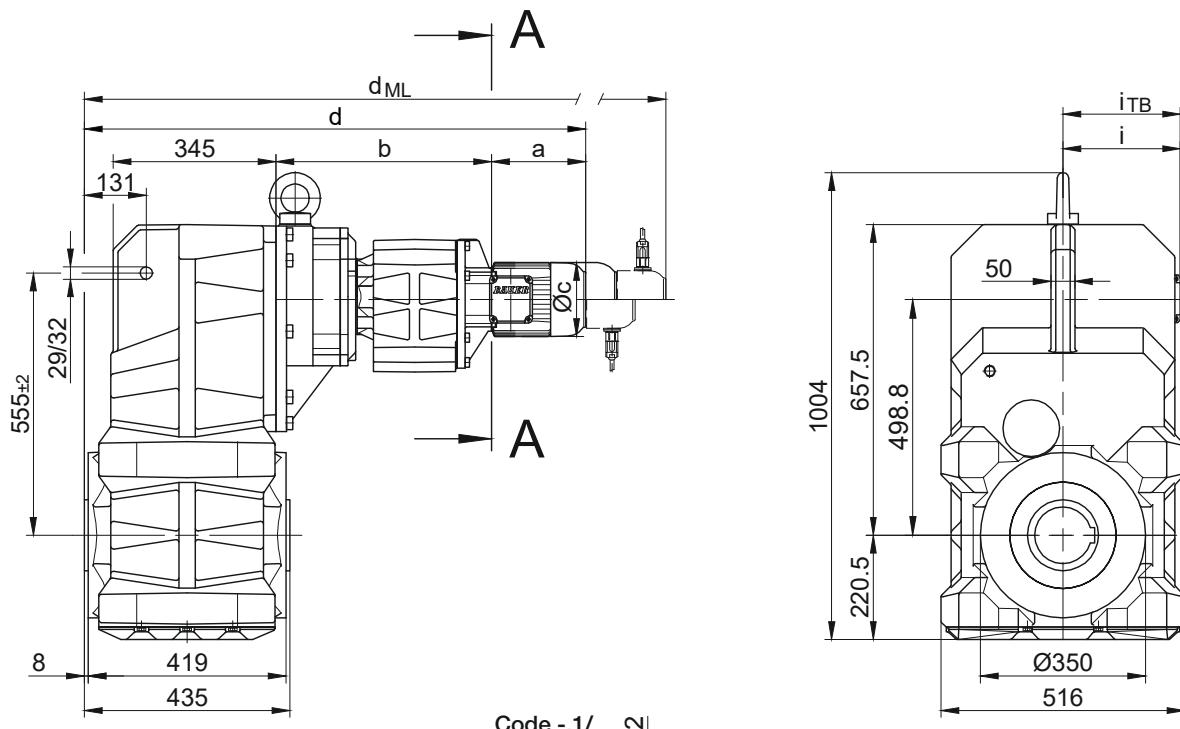

Code -.4/

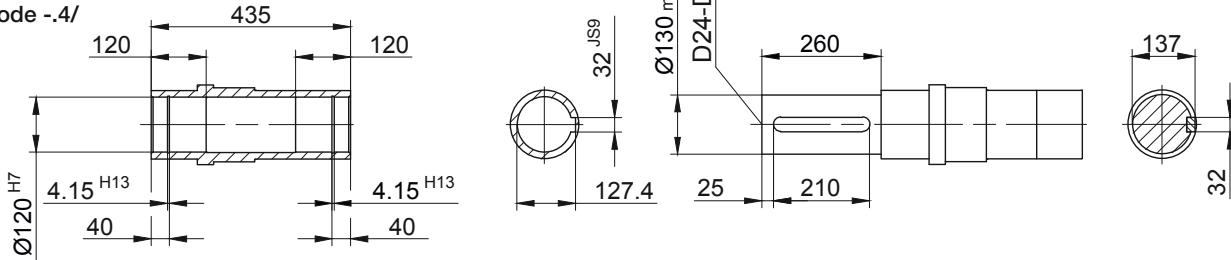

Code -.5/

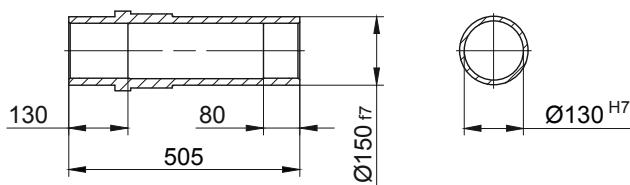

Type	a	b	c	d	i	Design with motor extensions				
						i_{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d_{ML}	d_{ML}	d_{ML}	d_{ML}	d_{ML}
BF90G50.../S..08 (M, L)	199.5	456	156	1061.5	114.5	136.5	1127.5	1173.5	1235	-
BF90G50.../S..09 (S, X)	250.5	470.5	176	1127	124	157	1220	1234.5	1324	-
BF90G50.../S..11 (S, M, L)	319	477	218	1202	165	176	1300	1309.5	1402	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors





Dimension - Tandem Gearbox

BF90G50

Flange with tapped holes
Code -7./

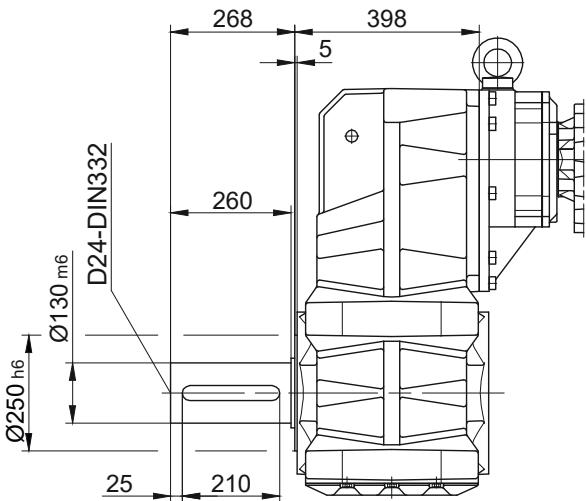

Flange with clearance holes
Code -3./
(Code -4./)

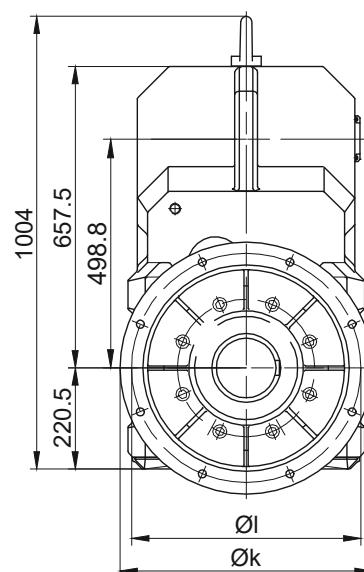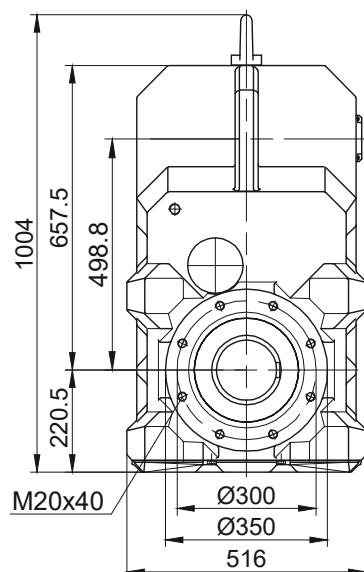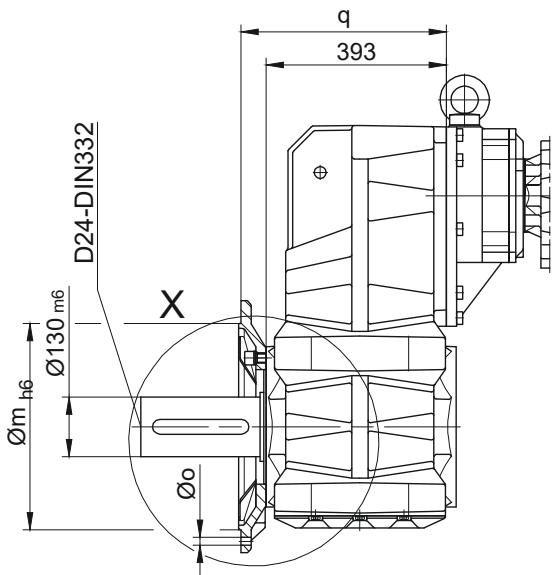
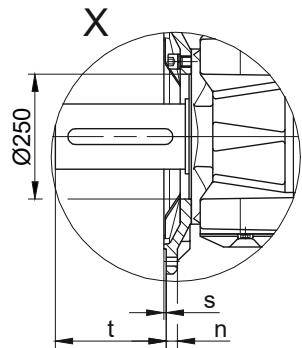


Flange Dimensions

Type	Design	k	l	m	n	o	q	s	t
BF90..	Code -3./	550	500	450	22	17.5	448	5	218
BF90..	Code -4./	660	600	550	25	22	442	6	224

Dimensions in millimetres (mm)

Foot with clearance holes left and right
Code -1.LR/

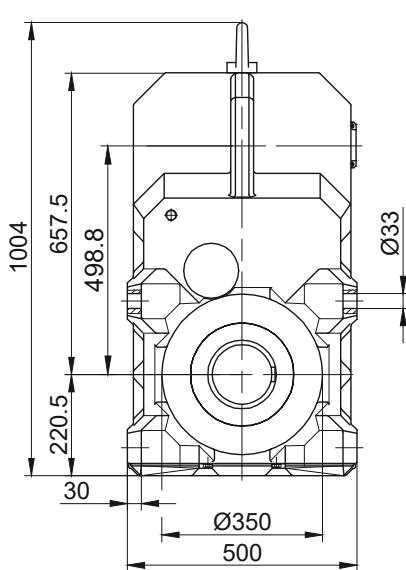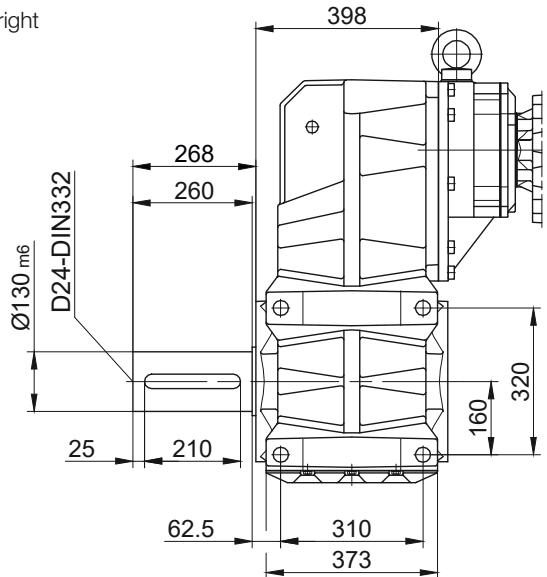

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Energy Efficient Geared Motors


AC Variable Speed

11

BF-series shaft-mounted geared motors

Additional Dimension Sheet

Splined shaft

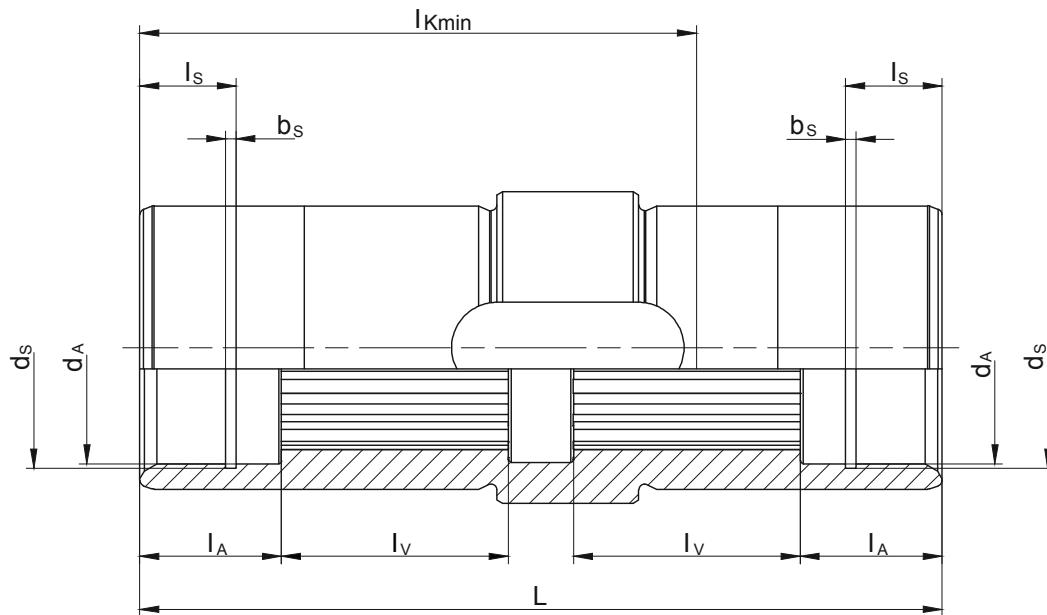

Type	Splined shaft acc. to DIN 5480	d _A	l _A	l _V	l _{Kmin}	L	d _s	l _s	b _s
BF06	N25x1.25x18x9H	30 ^{G7}	22	20	68	92	31.4 ^{H12}	15	1.3 ^{H13}
BF10	N30x1.25x22x9H	30.5 ^{G7}	22	33.5	87	124.5	31.4 ^{H12}	15	1.3 ^{H13}
BF20	N35x2x16x9H	36 ^{G7}	22	35	92	130	37 ^{H12}	9.5	1.6 ^{H13}
BF30	N40x2x18x9H	41 ^{G7}	25	40	103	141.5	42.5 ^{H12}	15	1.85 ^{H13}
BF40	N50x2x24x9H	51 ^{G7}	25	48	120	166	53 ^{H12}	9.5	2.15 ^{H13}
BF50	N60x2x28x9H	61 ^{G7}	25	55	123	176	63 ^{H12}	17	2.15 ^{H13}
BF60	N70x2x34x9H	72 ^{G7}	25	70	147	202	75 ^{H12}	17	2.65 ^{H13}
BF70	N85x3x27x9H	86 ^{G7}	26	85	185	241	88.5 ^{H12}	17	3.15 ^{H13}
BF80	N110x3x35x9H	112 ^{G7}	50	90	292	361	116 ^{H12}	30	4.15 ^{H13}
BF90	N130x5x24x9H	131.5 ^{G7}	60	110	365	435	134 ^{H12}	30	4.15 ^{H13}
Dimensions in millimetres (mm)									

11


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Additional Dimension Sheet

Shrink disc coupling (SSV)

(Code BF10-.5/...)
(Code BF10Z-.5/...)

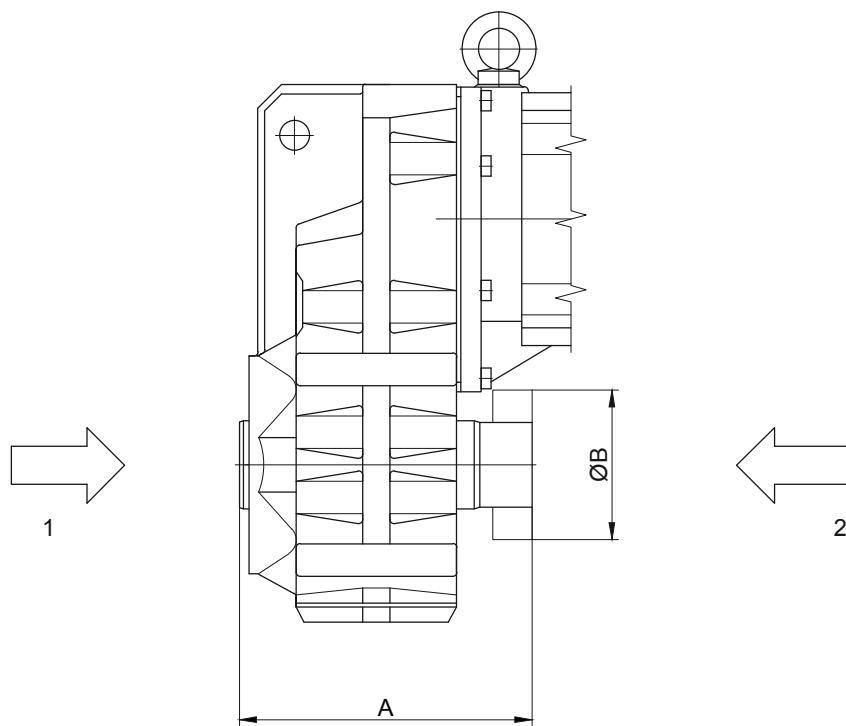

- 1 Gear side FRONT (M)
2 Gear side REAR (H)

Type	SSV Ringfeder	SSV STÜWE	A	B
BF10	RfN 4161 036x072	HDS 36-22x36	153	72
BF20	RfN 4161 044x080	HDS 44-22x44	173	80
BF30	RfN 4161 050x090	HDS 50-22x50	192	90
BF40	RfN 4161 062x110	HDS 62-22x62	215	110
BF50	RfN 4161 068x115	HDS 68-22x68	211	115
BF60	RfN 4161 080x141	HDS 80-22x80	257	140
BF70	RfN 4161 105x185	HDS 110-22x105	320	185
BF80	RfN 4161 130x215	HDS 125-22x130	421	215
BF90	RfN 4161 150x263	HDS 155-22x150	505	263
Dimensions in millimetres (mm)				


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Additional Dimension Sheet

Shrink disc coupling with (SSV) cover

(Code BF10-.5A/...)
 (Code BF10Z-.5A/...)

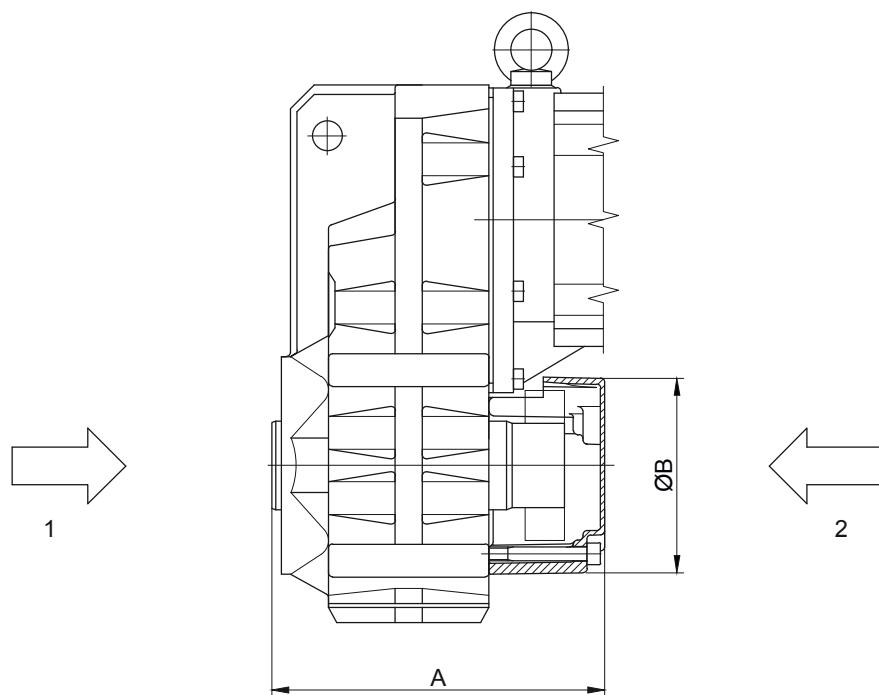

11

1 Gear side FRONT (M)

2 Gear side REAR (H)

Type	SSV Ringfeder	SSV STÜWE	A	B
BF10	RfN 4161 036x072	HDS 36-22x36	174	120
BF20	RfN 4161 044x080	HDS 44-22x44	211	140
BF30	RfN 4161 050x090	HDS 50-22x50	223	140
BF40	RfN 4161 062x110	HDS 62-22x62	245	160
BF50	RfN 4161 068x115	HDS 68-22x68	227	200
BF60	RfN 4161 080x141	HDS 80-22x80	290	210
BF70	RfN 4161 105x185	HDS 110-22x105	359	250
BF80	RfN 4161 130x215	HDS 125-22x130	463	300
BF90	RfN 4161 150x263	HDS 155-22x150	557	350
Dimensions in millimetres (mm)				


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors


Additional Dimension Sheet

Tapped Holes Side (H) → shaft cover

BF10 to BF70

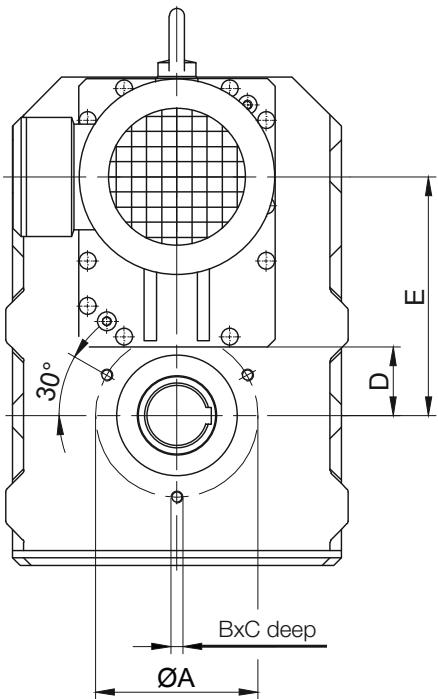

BF80

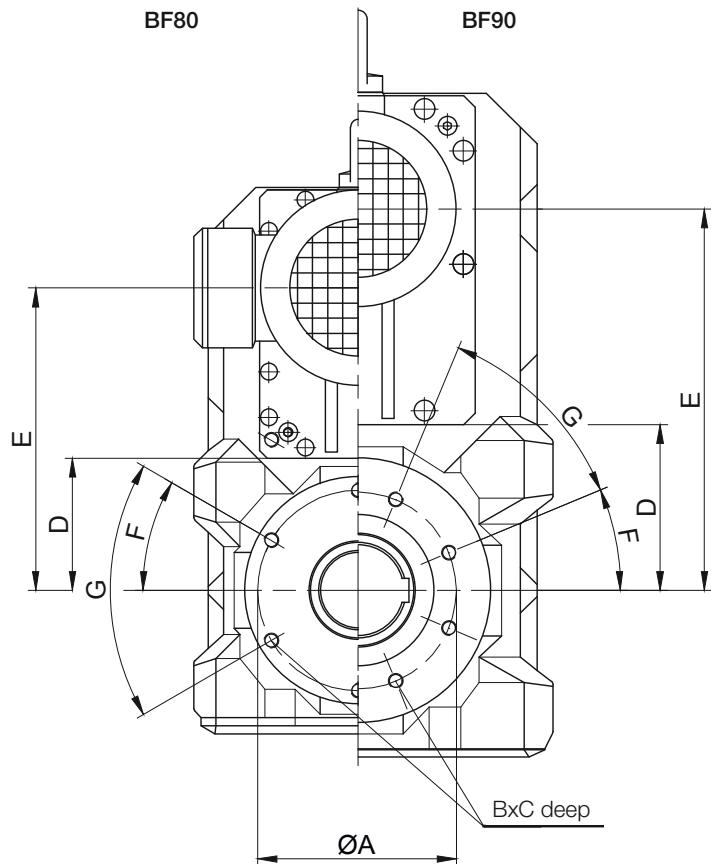

BF90


Gear	A	B	C	D	E	F	G
BF10	100	M8	16	35	118	-	-
BF20	115	M10	20	39	136	-	-
BF30	115	M10	20	44	157	-	-
BF40	130	M10	20	52	180.5	-	-
BF50	165	M12	24	60	207	-	-
BF60	180	M12	24	69	255.5	-	-
BF70	215	M16	32	89	316	-	-
BF80	265	M20	40	173	400	30°	6x60°
BF90	300	M20	40	219	504.5	22.5°	8x45°

Dimensions in millimetres (mm)

BF-series shaft-mounted geared motors

Additional Dimension Sheet

Rubber buffer for torque restraint

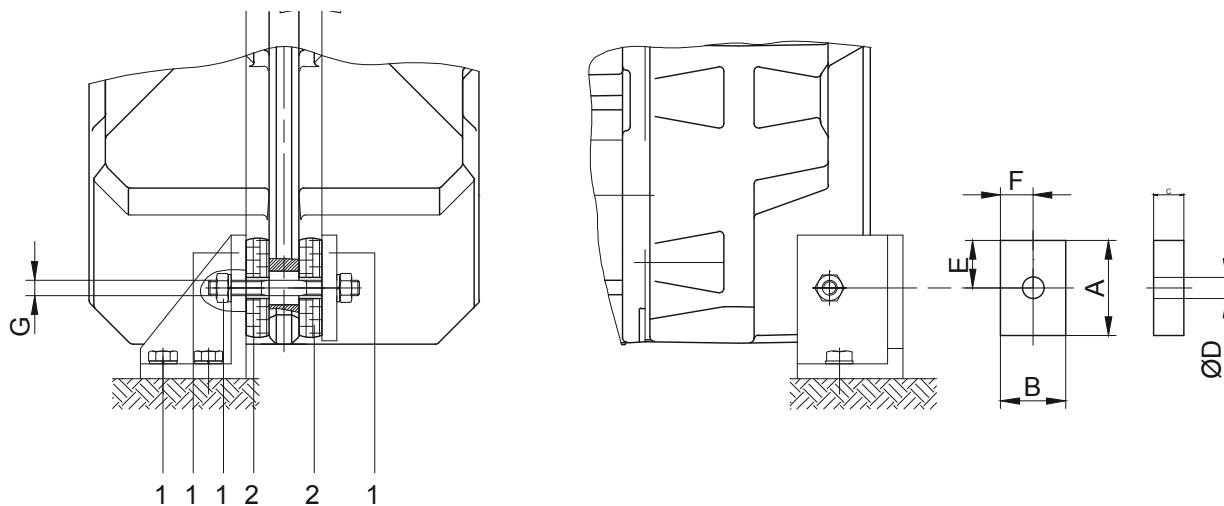

- 1 not included in delivery
2 Rubber buffers pretensioned

G Maximum screw diameter

Material: Natural rubber Hardness 50 +/-5 Shore A
Dimensions of the transverse hole: See dimensioned sketch of the respective shaft mounted gearbox


Gear	Position	A	B	C	D	E	F	G	H	L
BF06	Position 0	30	30	12	12	15	15	M10	10	10
BF10	Position 1	48	32	15	14	24	16	M10	16	13.5
BF20	Position 1	48	32	15	14	24	16	M10	18	13
BF30	Position 2	63	43	20	14	31.5	21.5	M10	18	17
BF40	Position 2	63	43	20	14	31.5	21.5	M10	20	16.5
BF50	Position 3	88	60	25	22	44	30	M18	24	21.5
BF60	Position 3	88	60	25	22	44	30	M18	28	21
BF70	Position 4	123	88	30	26	61.5	44	M20	30	25.5
BF80	Position 5	133	103	35	26	66.5	51.5	M20	40	30
BF90	Position 5	133	103	35	26	66.5	51.5	M20	50	29.5
Dimensions in millimetres (mm)										

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors


Additional Dimension Sheet

Assembly tools for hollow shaft and keyway

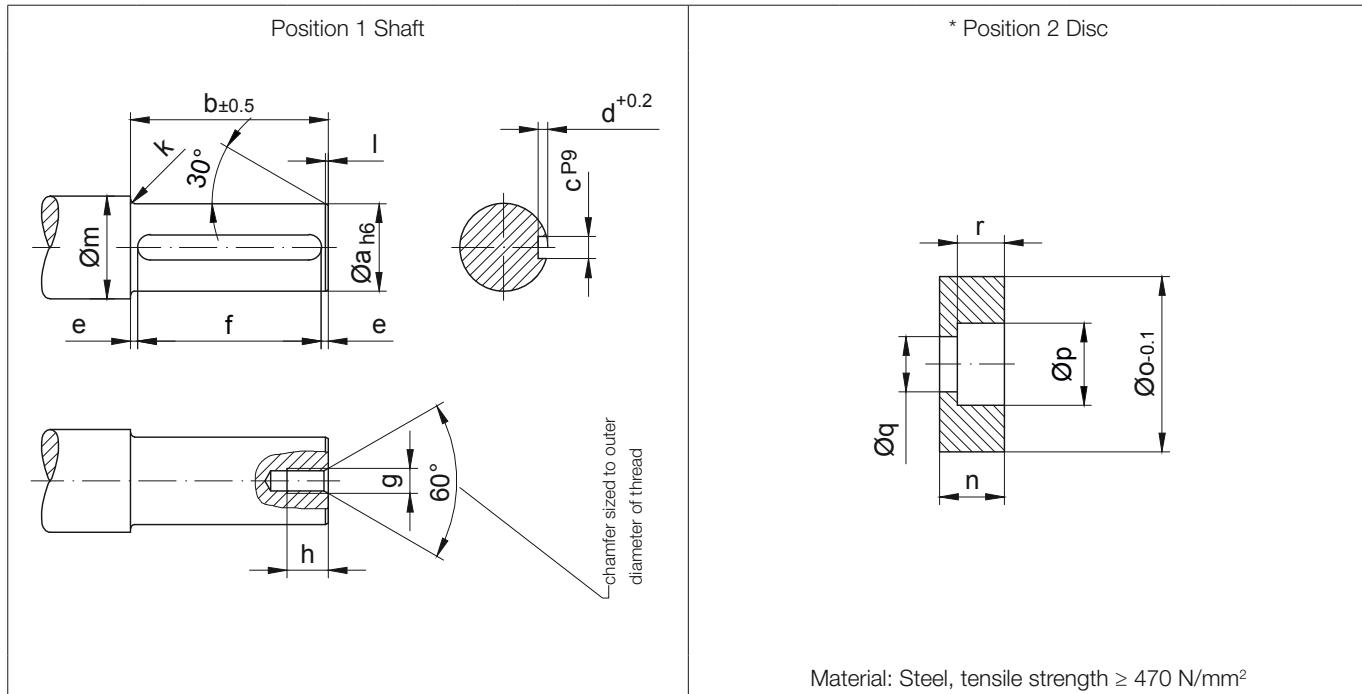

Material: Steel, tensile strength $\geq 470 \text{ N/mm}^2$

Type	Dimensions (mm)															
	Position 1 Shaft												Position 2 Disc			
	a	b	c	d	e	f	g	h	k	l	m	n	o	p	q	r
BF06	25	70	8	4	3.5	63 ^{+0.5}	M8	18	2	1.5	33	13.5	24.8	15	9	8.5
BF10	25	102	8	4	6	90 ^{+0.5}	M8	18	2.5	1.5	33	13.5	24.8	15	9	8.5
BF20	30	108	8	4	9	90 ^{+0.5}	M10	20	3	1.5	38	15	29.8	18	11	10
BF30	35	118	10	5	9	100 ^{+0.5}	M10	20	3	1.5	43	16	34.8	18	11	10
BF40	40	141	12	5	8	125 ^{+0.5}	M12	22	3	2	48	18	39.8	20	13.5	12
BF50	50	148	14	5.5	11.5	125 ^{+0.5}	M16	30	3.5	2	58	21	49.8	26	17.5	15
BF60	60	173	18	7	6.5	160 ^{+0.5}	M20	38	3.5	2	68	24	59.8	33	22	18
BF70	80	205	22	9	12.5	180 ^{+0.5}	M20	38	4	2	90	27	79.8	33	22	20
BF70-K70	70	205	20	7.5	12.5	180 ^{+0.5}	M20	38	4	2	90	27	69.8	33	22	20
BF80	100	317	28	10	18.5	280 ^{+0.5}	M24	45	4	3	110	32	99.8	40	26	25
BF90	120	383	32	11	11.5	360 ^{+0.5}	M24	45	4.5	3	130	35	119.8	40	26	28

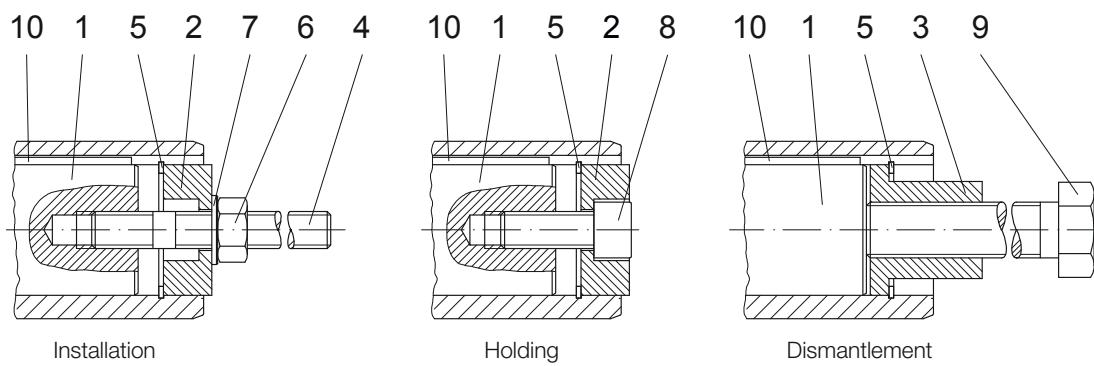

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Additional Dimension Sheet

Assembly tools for hollow shaft and keyway

Type	Dimensions (mm)												* Retaining ring DIN 472	Hexagon nut DIN 394-8	Disc DIN 125-St	* Filister head screw DIN 912-8.8	Tightening torques (Nm)	Hexagon bolt DIN EN 24017-8.8	Key DIN 6885 Width/Height/Length
	Position 3 Sleeve						Position 4 Stud bolt												
	s	t	u	v	w	R	x	y	z	z1	Pos.5	Pos.6	Pos.7	Pos.8		Pos.9	Pos.10		
BF06	24.8	24	5	15.4	M12	0.8	160	130	20	M8	25x1.2	M8	8.4	M8x30	5	M12x110	A 8x7x63		
BF10	24.8	24	5	15.4	M12	0.8	160	130	20	M8	25x1.2	M8	8.4	M8x30		M12x140	A 8x7x90		
BF20	29.8	28	5	19.8	M14	0.8	170	135	23	M10	30x1.2	M10	10.5	M10x30		M14x150	A 8x7x90		
BF30	34.8	28	5	23	M14	-	180	145	23	M10	35x1.5	M10	10.5	M10x35		M14x160	A 10x8x100		
BF40	39.8	40	6	27.7	M20	0.8	210	170	28	M12	40x1.75	M12	13	M12x35		M20x200	A 12x8x125		
BF50	49.8	48	6	36	M24	-	230	175	37	M16	50x2.0	M16	17	M16x40	30	M24x210	A 14x9x125		
BF60	59.8	60	6	44	M30	-	270	205	45	M20	60x2.0	M20	21	M20x50	42	M30x250	A 18x11x160		
BF70	79.8	60	8	55	M30	-	310	240	45	M20	80x2.5	M20	21	M20x50		M30x280	A 22x14x180		
BF70-K70	69.8	60	8	53	M30	-	310	240	45	M20	70x2.5	M20	21	M20x50		M30x280	A 20x12x180		
BF80	99.8	72	10	75	M36	-	440	360	55	M24	100x3.0	M24	25	M24x60		M36x410	A 28x16x280		
BF90	119.8	72	10	80	M36	-	510	430	55	M24	120x4.0	M24	25	M24x60	100	M36x480	A 32x18x360		

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!


Optional	Type	Assembly tool „Holding“
	BF06	Id.Nr. 4103921
	BF10	Id.Nr. 4103921
	BF20	Id.Nr. 4103939
	BF30	Id.Nr. 4103947
	BF40	Id.Nr. 4103955
	BF50	Id.Nr. 4103963
	BF60	Id.Nr. 4103971
	BF70	Id.Nr. 4103980
	BF70-K70	Id.Nr. 4104765
	BF80	Id.Nr. 4103998
	BF90	Id.Nr. 4104005

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BF-series shaft-mounted geared motors

Additional Dimension Sheet

Assembly tools for shaft mounted gears with splined shaft

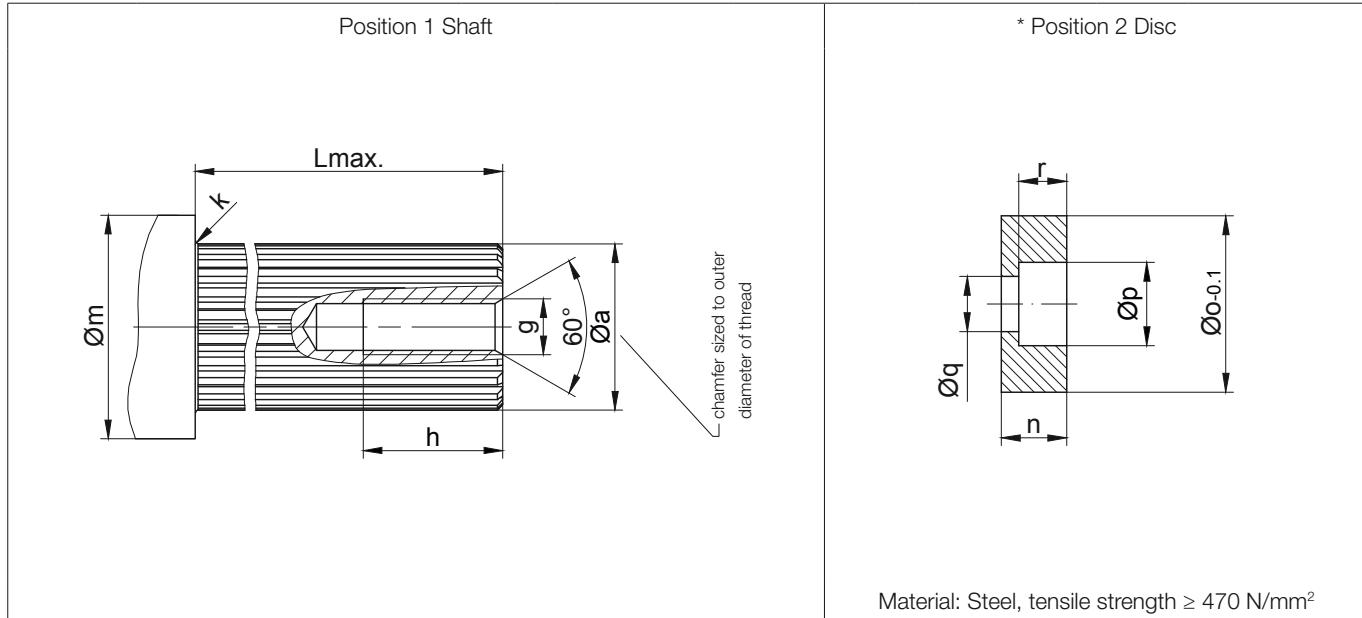

Type	Dimensions (mm)										
	Position 1 Shaft					Position 2 Disc					
	a	g	h	g	Lmax.	m	n	o	p	q	r
BF06	DIN 5480-W25x1.25x18x8f	M8	20	2	70	37	13	29.9	15	9	8
BF10	DIN 5480-W30x1.25x22x8f	M10	25	2.5	100	38	15	30.4	18	11	10
BF20	DIN 5480-W35x2x16x8f	M10	25	3	110	43	14	35.9	18	11	10
BF30	DIN 5480-W40x2x18x8f	M12	30	3	117	48	18	40.9	20	13.5	12
BF40	DIN 5480-W50x2x24x8f	M16	35	3	145	60	17.5	50.9	26	17.5	12.5
BF50	DIN 5480-W60x2x28x8f	M20	40	3.5	150	69	24	60.9	33	22	18
BF60	DIN 5480-W70x2x34x8f	M20	40	3.5	175	80	24	71.9	33	22	18
BF70	DIN 5480-W85x3x27x8f	M20	40	4	215	96	22	85.9	33	22	16
BF80	DIN 5480-W110x3x35x8f	M24	50	4	315	122	32	111.9	40	26	25
BF90	DIN 5480-W130x5x24x8f	M24	50	4.5	390	141	25	131.4	40	26	18

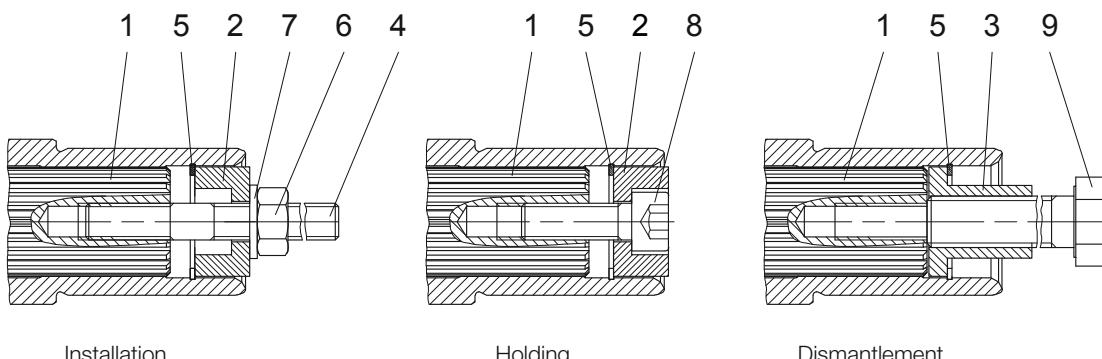

Installation

Holding

Dismantlement

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Additional Dimension Sheet

Assembly tools for shaft mounted gears with splined shaft

Position 3 Sleeve												* Position 4 Stud bolt					
Type	Dimensions (mm)											* Retaining ring DIN 472	Hexagon nut DIN 394-8	Disc DIN 125-St	* Filister head screw DIN 912-8.8	Starting torque (Nm)	Hexagon bolt DIN EN 24017-8.8
	Position 3 Sleeve						Position 4 Stud bolt										
	s	t	u	v	w	R	x	y	z	z1	Pos.5	Pos.6	Pos.7	Pos.8		Pos.9	
BF06	29.9	24	5	15.4	M12	0.8	160	130	20	M8	30x1.2	M8	8.4	M8x30	5	M12x110	
BF10	30.4	28	5	19.8	M14	-	170	135	23	M10	30x1.2	M10	10.5	M10x30	8	M14x150	
BF20	35.9	28	5	23	M14	-	180	145	23	M10	35x1.5	M10	10.5	M10x35		M14x160	
BF30	40.9	40	6	27.7	M20	-	210	170	28	M12	40x1.75	M12	13	M12x35	16	M20x200	
BF40	50.9	48	6	36	M24	0.8	230	175	37	M16	50x2.0	M16	17	M16x40	30	M24x210	
BF50	60.9	60	6	44	M30	-	270	205	45	M20	60x2.0	M20	21	M20x50	42	M30x250	
BF60	71.9	60	6	53	M30	0.8	310	240	45	M20	72x2.5	M20	21	M20x50		M20x280	
BF70	85.9	60	8	65	M30	0.8	310	240	45	M20	85x3	M20	21	M20x50		M30x280	
BF80	111.9	72	10	85	M36	0.8	440	360	55	M24	112x4	M24	25	M24x60	100	M36x410	
BF90	131.4	72	10	95	M36	0.8	510	430	55	M24	130x4	M24	25	M24x60		M36x480	

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!


Optional	Type	Assembly tool „Holding“
	BF06	Id.Nr. 4105125
	BF10	Id.Nr. 4105133
	BF20	Id.Nr. 4105141
	BF30	Id.Nr. 4105150
	BF40	Id.Nr. 4105168
	BF50	Id.Nr. 4105176
	BF60	Id.Nr. 4105184
	BF70	Id.Nr. 4105192
	BF80	Id.Nr. 4105206
	BF90	Id.Nr. 4105214

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Additional Dimension Sheet

Shaft cap (VK)

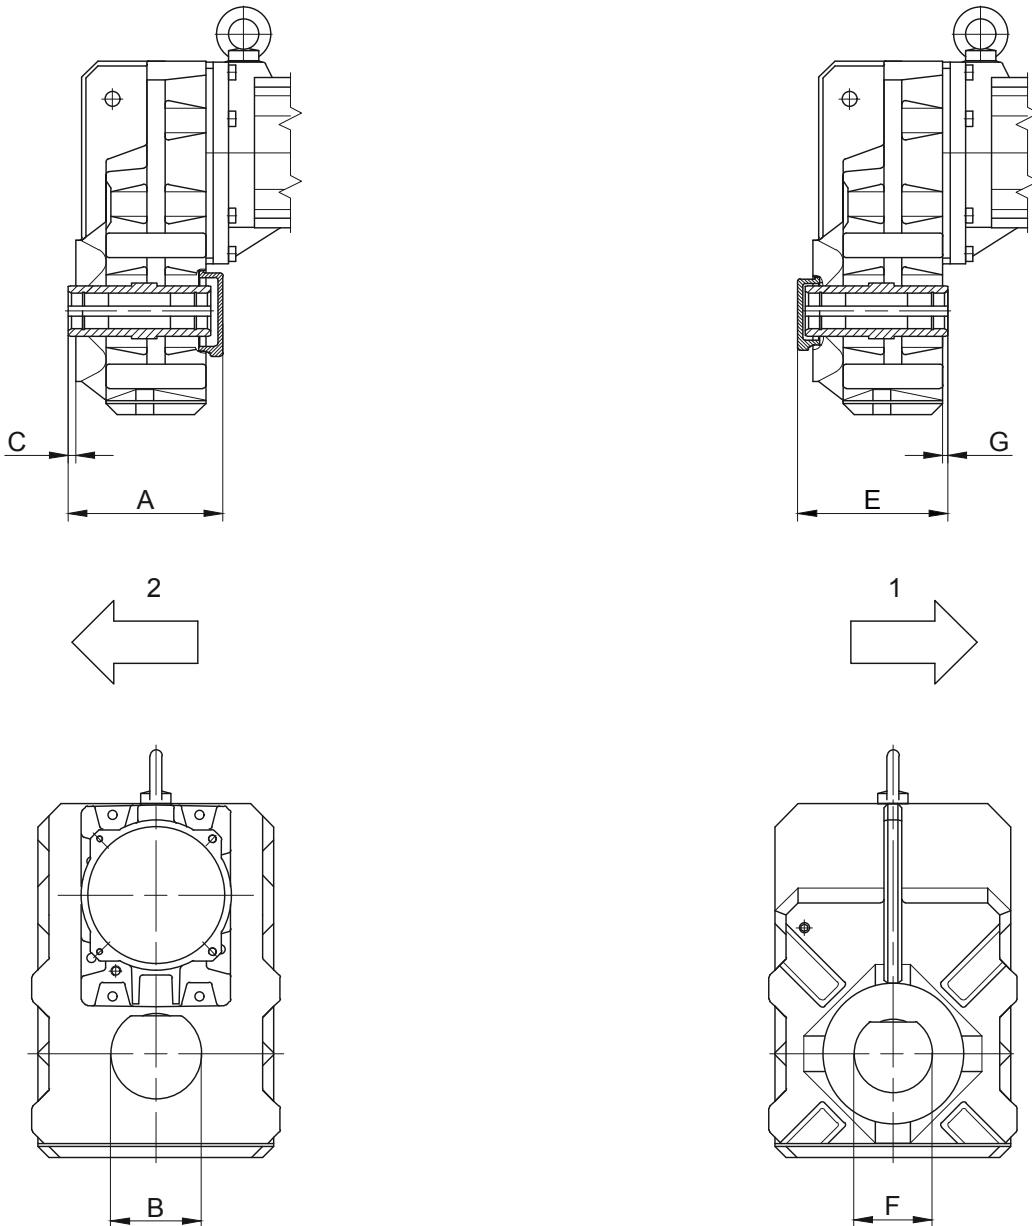

1 Gear side FRONT (V)

2 Gear side REAR (H)

Shaft cap REAR (H)			
Type	A	B	C
BF10	134	78	5
BF20	142	85	5
BF30	153.5	90	7.5
BF40	179.5	110	7
BF50	192	125	6
BF60	222	140	7
BF70	258	170	6

Dimensions in millimetres (mm)

Shaft cap FRONT (V)			
Type	E	F	G
BF30	149	78	7.5
BF50	189.5	110	6
BF70	262	130	6


Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BF-series shaft-mounted geared motors

Additional Dimension Sheet

Shaft cover (VD)

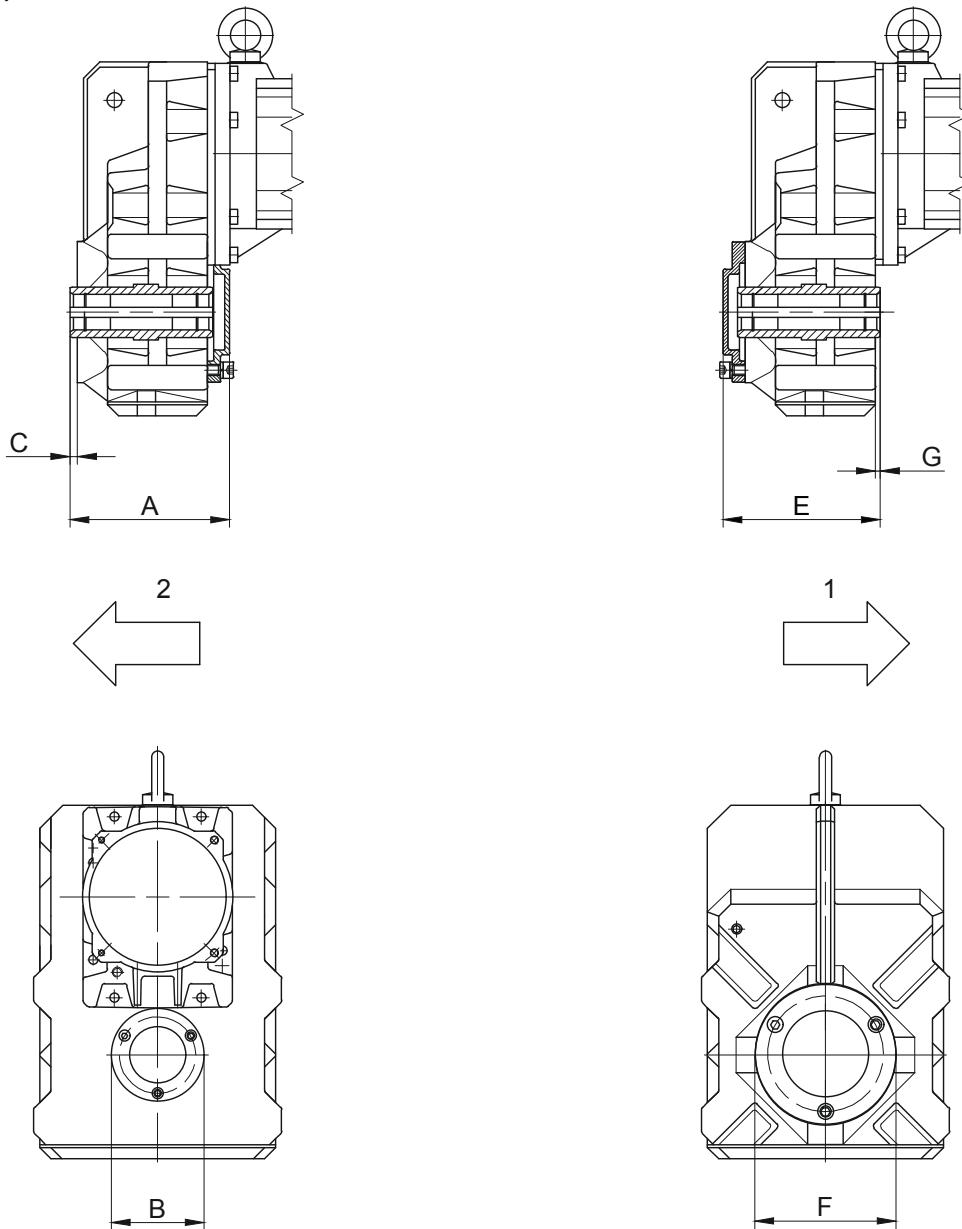

- 1 Gear side FRONT (V)
2 Gear side REAR (H)


Shaft cover REAR (H)			
Type	A	B	C
BF70	376	300	8
BF90	442	350	8
Dimensions in millimetres (mm)			

Shaft cover FRONT (V)			
Type	E	F	G
BF10	135.5	120	5
BF20	144	139.5	5
BF30	153	139.5	7.5
BF40	179.5	160	7
BF50	191.5	199	6
BF60	221.5	210	7
BF70	258	250	6
BF80	376	300	8
BF90	442	350	8
Dimensions in millimetres (mm)			

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Energy Efficient Geared Motors

AC Variable Speed

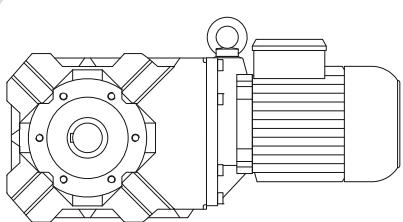

12

BK-series bevel-gearred motors - Dimensions

Dimension - Standard	398
BK06	398
BK08	400
BK10-BK10Z	402
BK17	404
BK20-BK20Z	406
BK30-BK30Z	408
BK40-BK40Z	410
BK50-BK50Z	412
BK60-BK60Z	414
BK70-BK70Z	416
BK80-BK80Z	418
BK90-BK90Z	420
Dimension - Tandem Gearbox	422
BK10G06	422
BK20G06	424
BK30G06	426
BK40G10	428
BK50G10	430
BK60G20	432
BK70G20	434
BK80G40	436
BK90G50	438
Additional Dimension Sheet	441
Splined shaft	441
Shrink disc couplings (SSV)	442
Shrink disc connection with cover (SSV)	443
Rubber buffer for torque arm	444
Position of the torque arm	445
Foot with tapped holes	446
Foot plate with clearance holes	447
Assembly tools for hollow shaft and keyway	448
Assembly tools for splined shaft	450
Shaft cap (VK)	452
Shaft cover (VD)	453


BK-series bevel-gear motors

Dimension - Standard

BK06

Flange with clearance holes at front

Code -3.V/

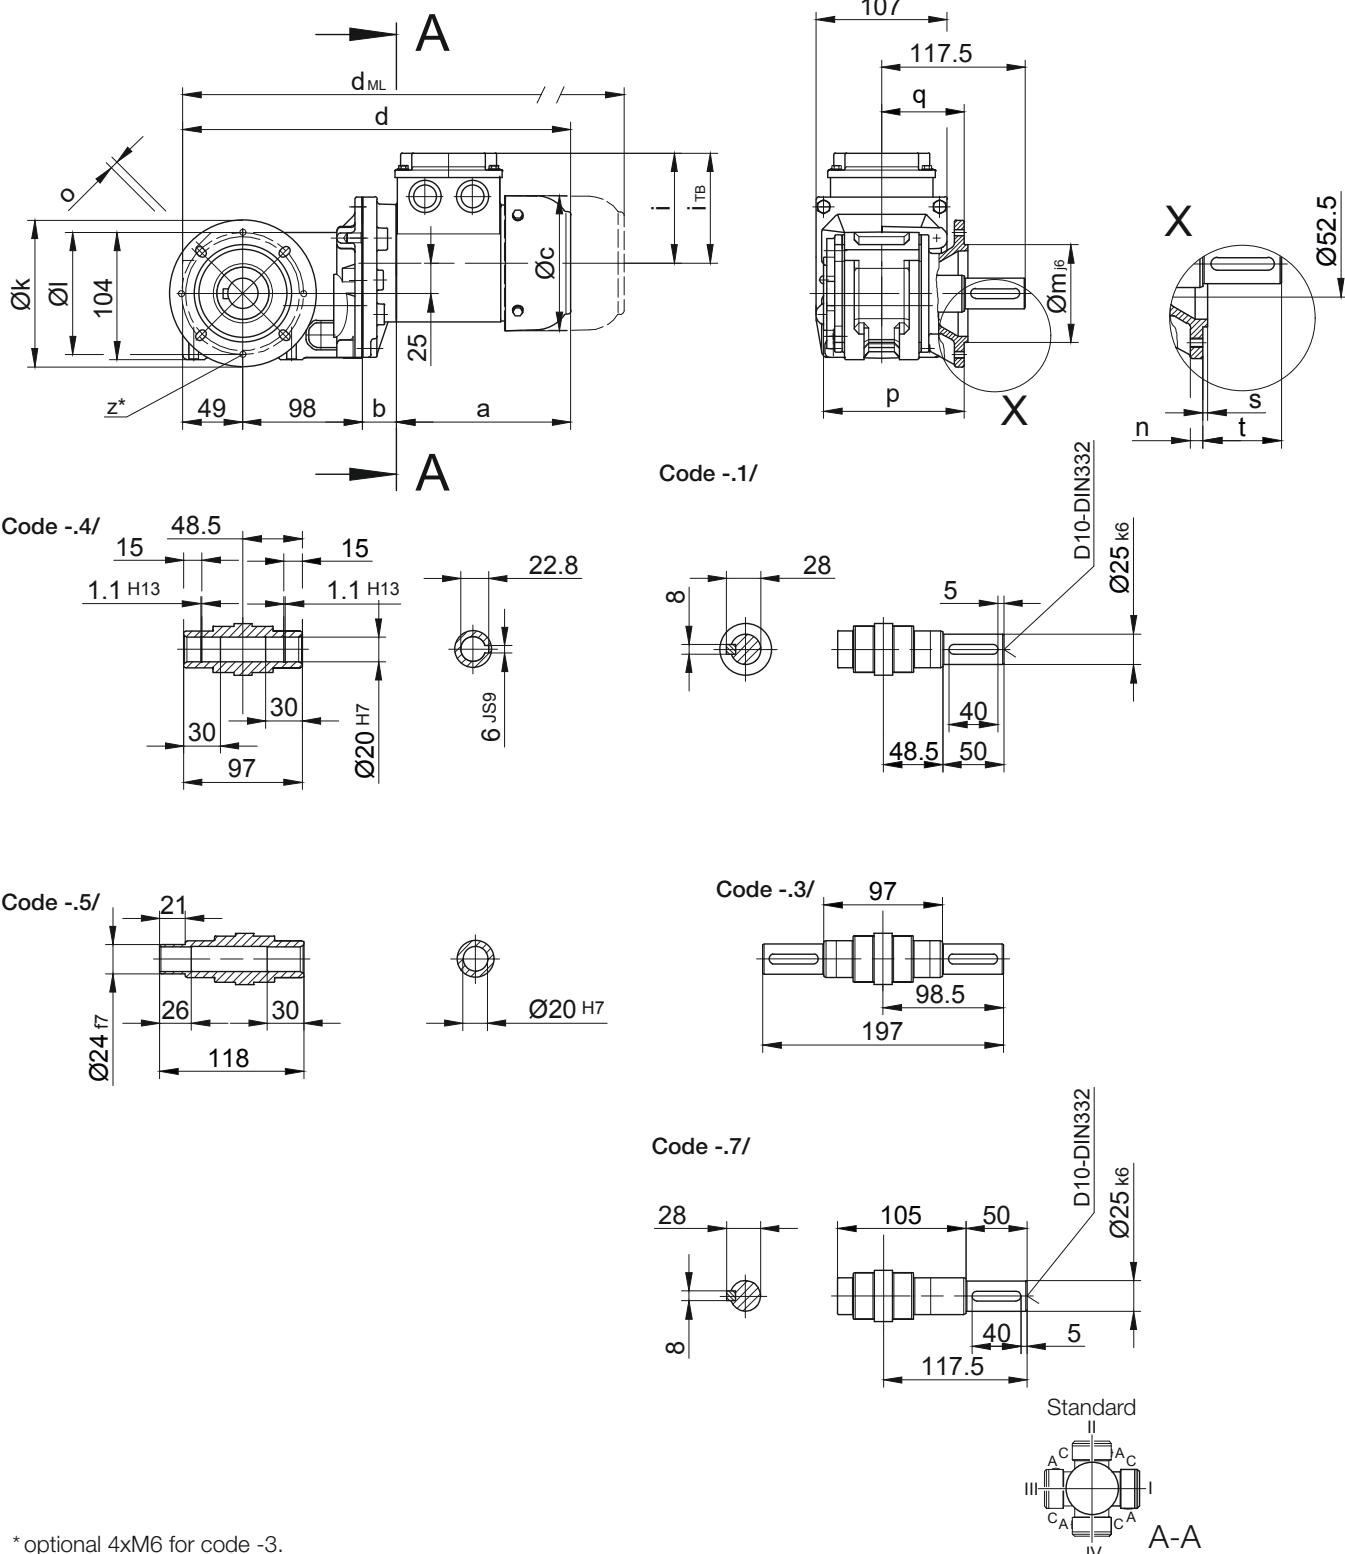

* optional 4xM6 for code -3.

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK06	Code -3.V/	120	100	80	8	6.6	115	67.5	3	50

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i_TB	Brake	Encoder	Brake with Encoder	Back Stop
BK06-../S04S	142.5	28	110.5	317.5	90	112	361	405	448.5	-
BK06-../S..06 (M, L)	170.5	30	123	347.5	99	119	389.5	450	487.5	-
BK06-../S..08 (M, L)	199.5	74	156	420.5	114.5	136.5	486.5	532.5	594	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors



Dimension - Standard

BK06



Torque arm at front
Code -5.V/

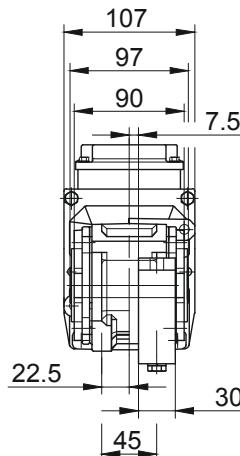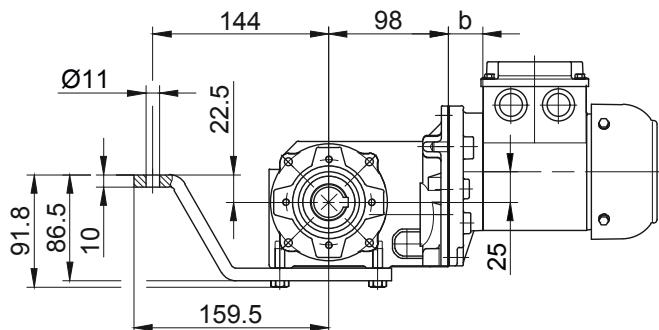



Flange with tapped holes at front
Code -7.V/

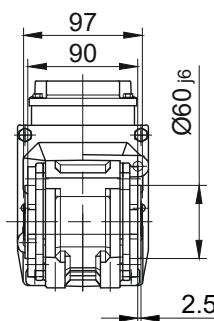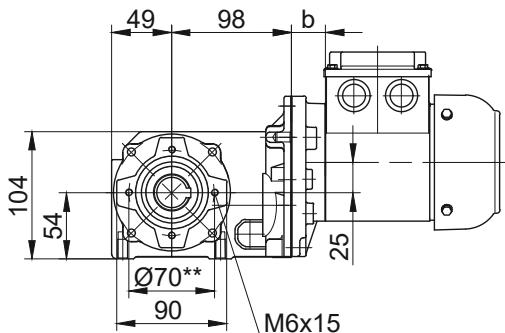

Foot with tapped holes at bottom
Code -6.U/

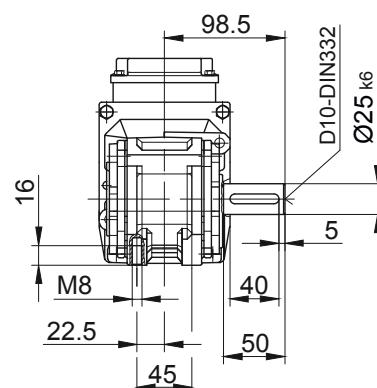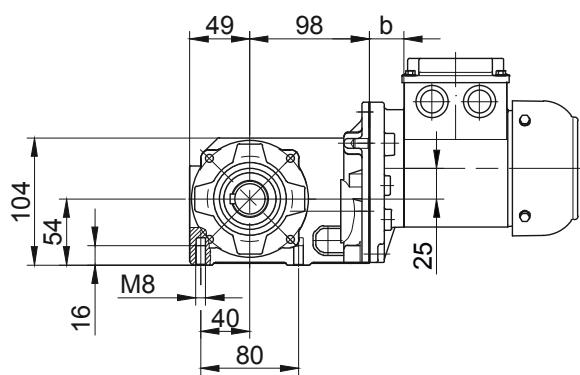

Foot with clearance holes at bottom
Code -1.U/

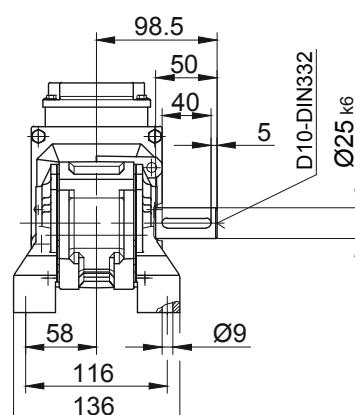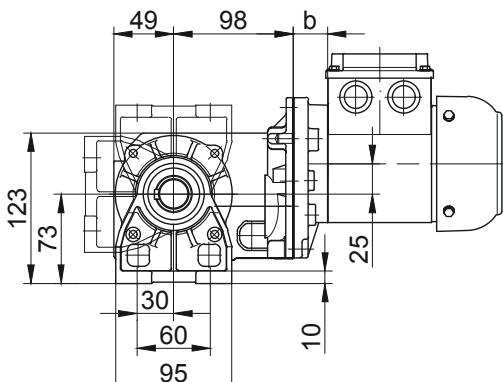

** not for D..08.. with PTO shaft (code -.1, -.2, -.3, -.7, -.8, -.9)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Dimension - Standard


BK08

Flange with clearance holes at front


Code -3.V/
(Code -2.V)

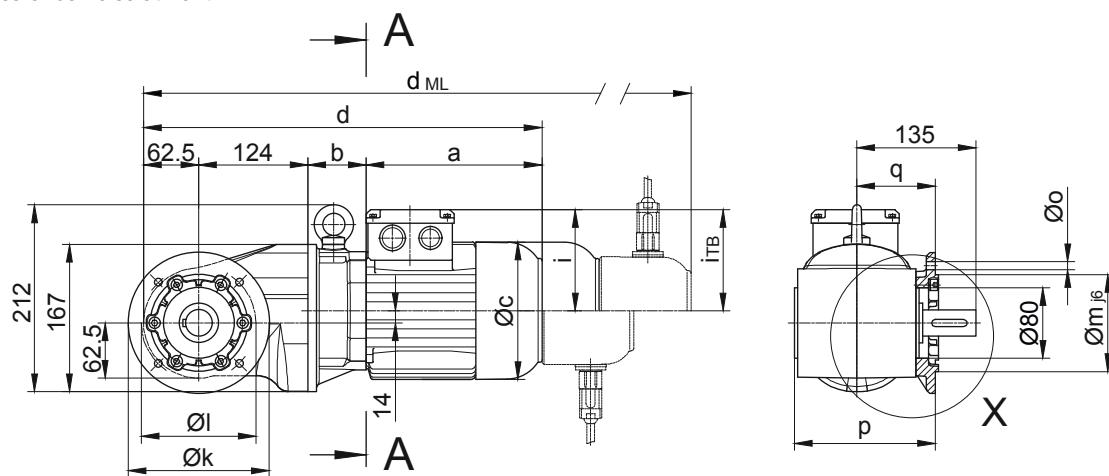


Code -4/

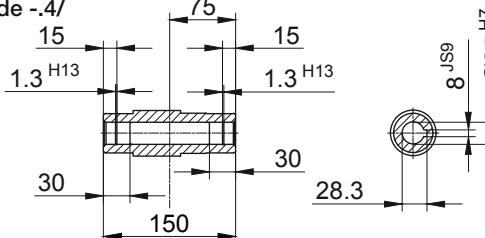


Code -1/

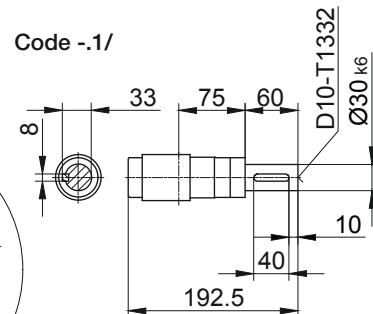


Code -5/

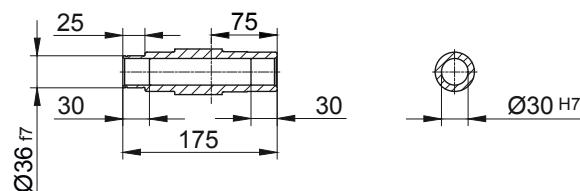


Code -3/

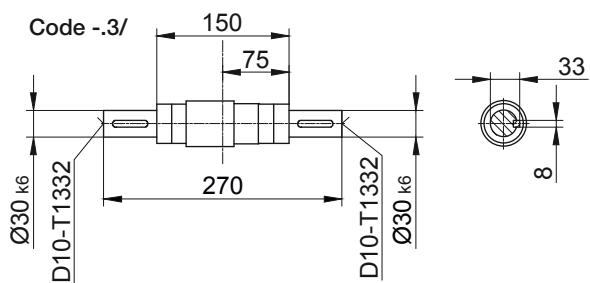


Code -4/K30

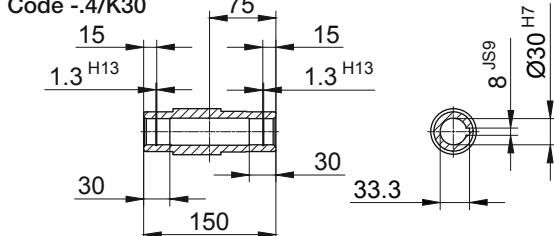

Code -4/K35

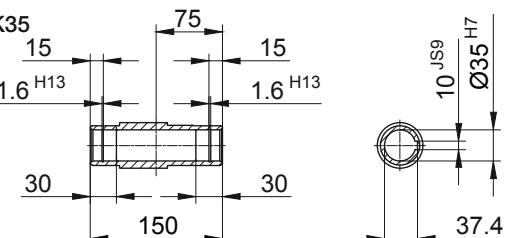

Standard



Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK08	Code -3.V/	200	165	130	12	11	166.5	96	3.5	39
BK08	Code -2.V/	160	130	110	10	9	159.5	89	3.5	46

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i _{TB}	Design with motor extensions			
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BK08-.../S..08 (M, L)	199.5	66	156	452	114.5	136.5	518	564	625.5	-
Dimensions in millimetres (mm)										

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gearred motors

Dimension - Standard

BK08



Torque arm at front

Code -5.V/

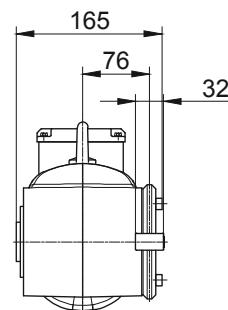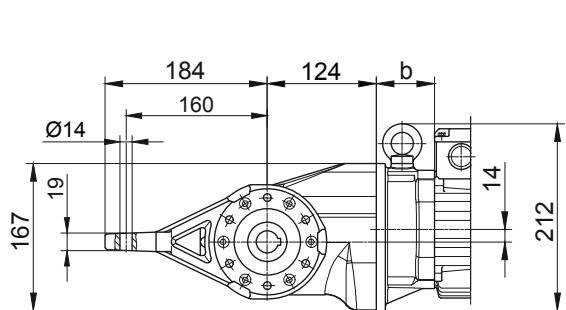

Flange with tapped holes at front

Code -7.V/

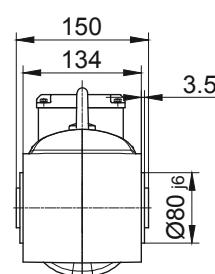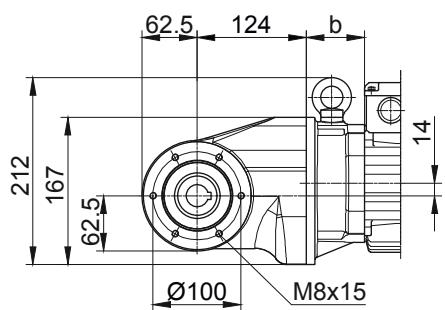


BK-series bevel-gear motors

Dimension - Standard


BK10-BK10Z

Flange with clearance holes at front


Code -3.V/
(Code -2.V/)

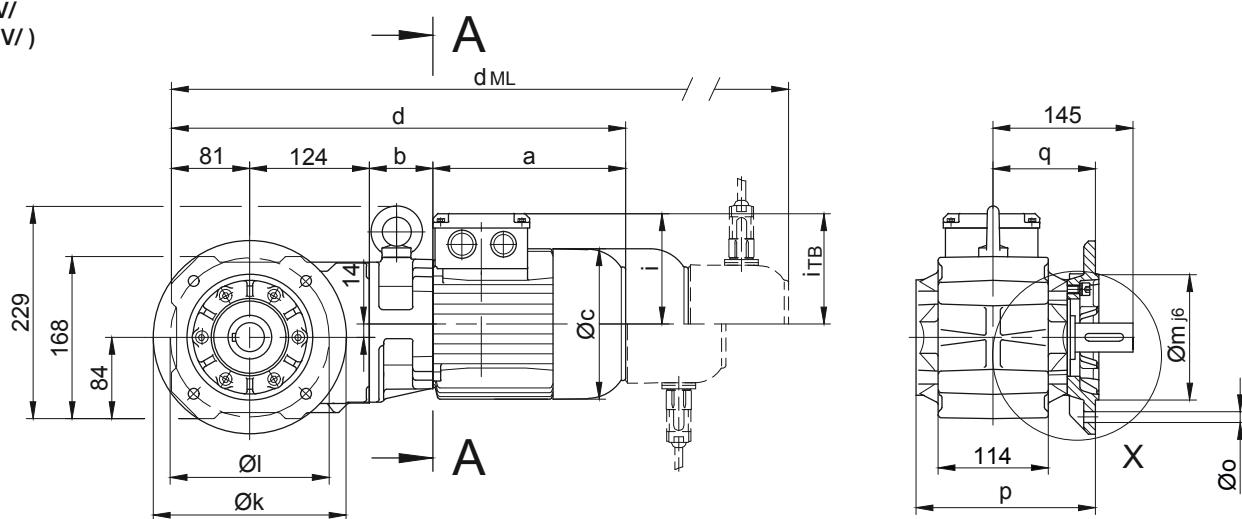


Code -.4/

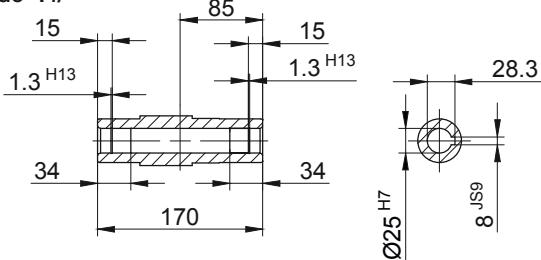



Code -.1/

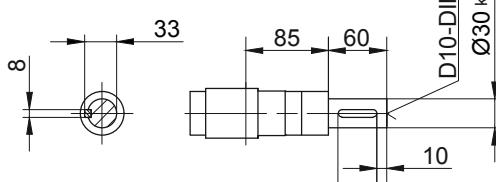

Code -.5/

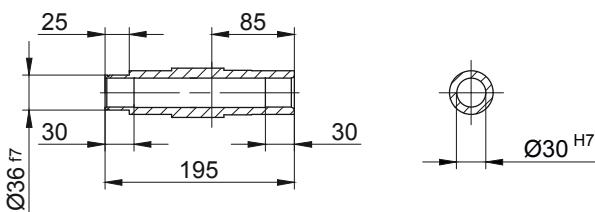

Code -.3/

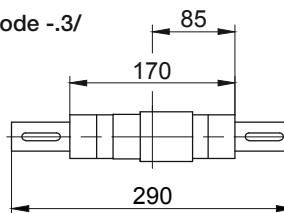

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK10..	Code -3.V/	200	165	130	12	11	186.5	106	3.5	39
BK10..	Code -2.V/	160	130	110	10	9	179.5	99	3.5	46

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i _{TB}	Design with motor extensions				
							d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BK10Z-..S04S	142.5	86	110.5	433.5	90	112	477	521	564.5	-	
BK10-..S..06 (M, L)	170.5	62	123	437.5	99	119	479.5	540	577.5	-	
BK10Z-..S..06 (M, L)	170.5	88	123	463.5	99	119	505.5	566	603.5	-	
BK10-..S..08 (M, L)	199.5	66	156	470.5	114.5	136.5	536.5	582.5	644	-	
BK10Z-..S..08 (M, L)	199.5	132	156	536.5	114.5	136.5	602.5	648.5	710	-	
BK10-..S..09 (S, X)	250.5	80.5	176	536	124	157	629	643.5	733	-	

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Dimension - Standard



BK10-BK10Z

Torque arm at front
Code -5.V/

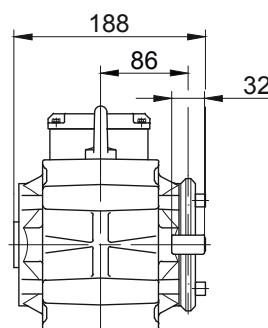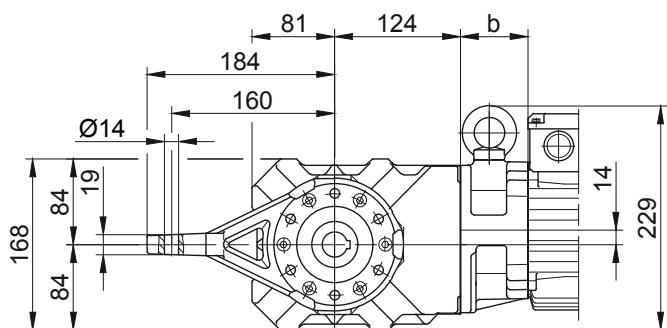



Flange with tapped holes at front

Code -7.V/

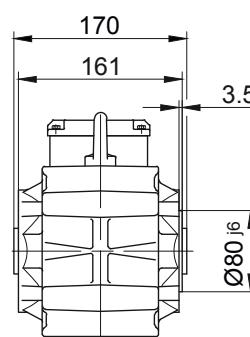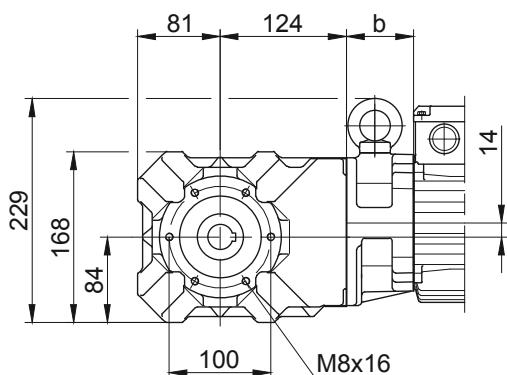



Foot with tapped holes at bottom

Code -6.U/

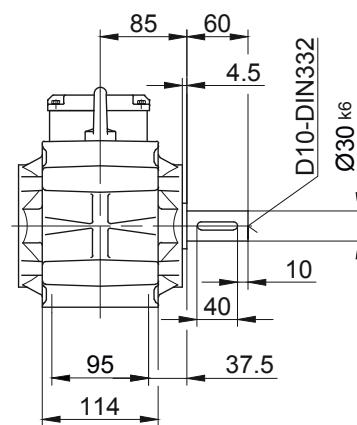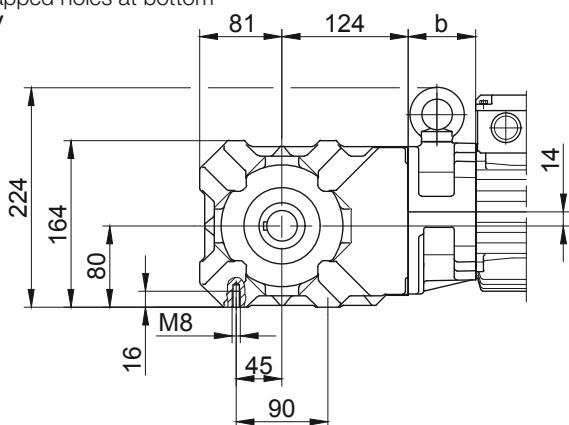

Foot with clearance holes at bottom

Code -1.U/

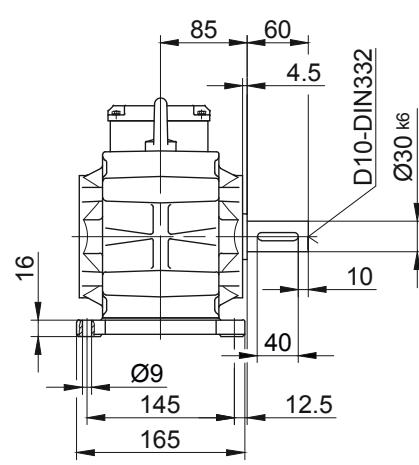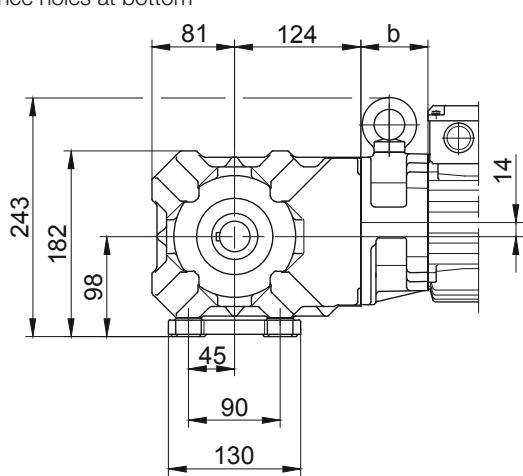

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Dimension - Standard

BK17




Flange with clearance holes at front

Code -3.V/
(Code -2.V)

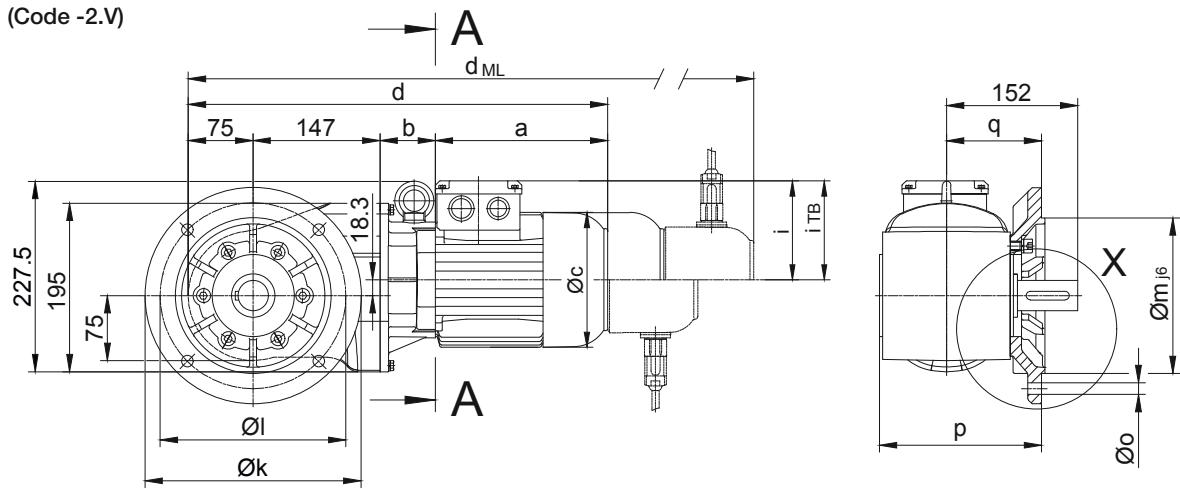


Code -.1/



Code -.4/

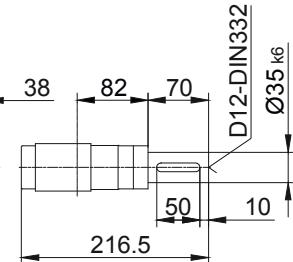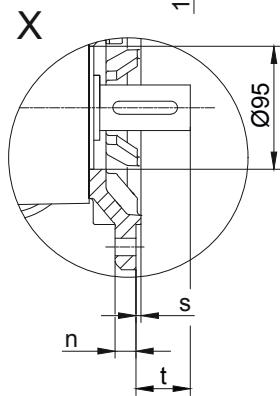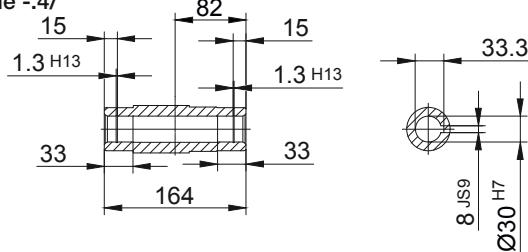

Code -.5/

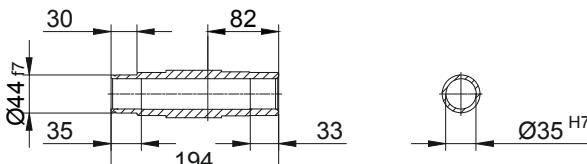

Code -.3/

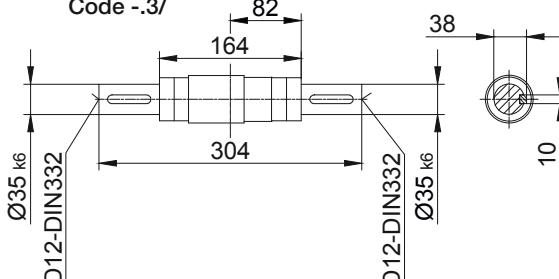

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK17	Code -3.V/	250	215	180	16	13.5	187.5	110	4	42.5
BK17	Code -2.V/	200	165	130	12	11	178.5	101	3.5	51

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i_{TB}	Brake	Encoder	Brake with Encoder	Back Stop
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BK17-..S..08 (M, L)	199.5	64	156	485.5	114.5	136.5	551.5	597.5	659	-
BK17-..S..09 (S, X)	250.5	78.5	176	551	124	157	644	658.5	748	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Dimension - Standard



BK17

Torque arm at front
Code -5.V/

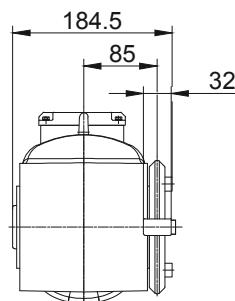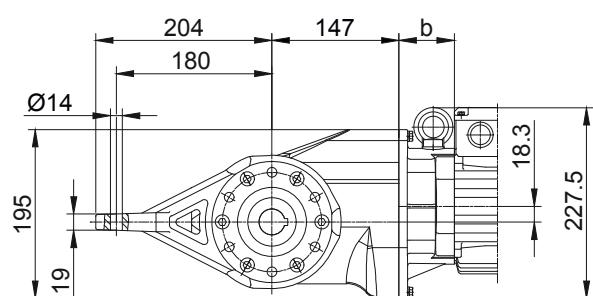


Flange with tapped holes at front


Code -7.V/

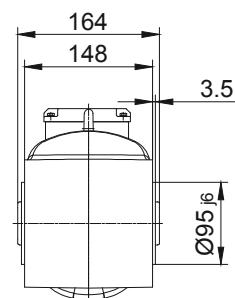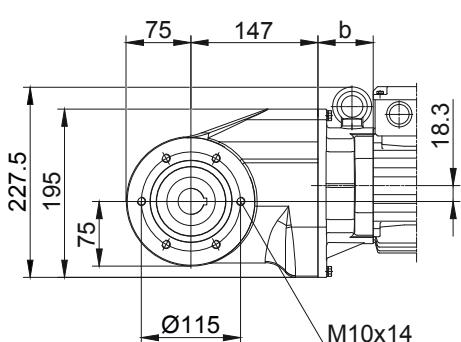

Code -.4/K35

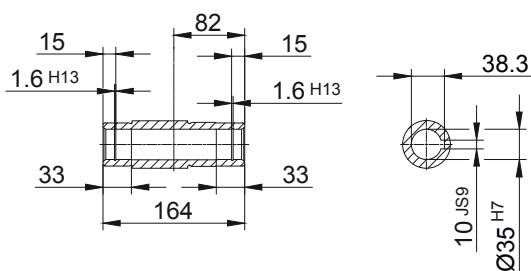

Code -.4/K40

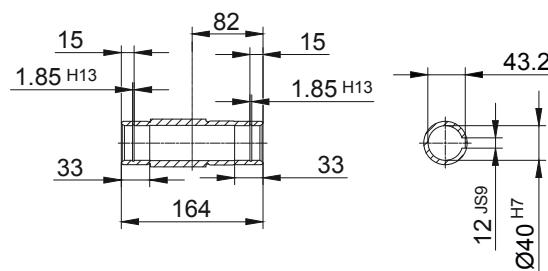

12


BK-series bevel-gear motors

Dimension - Standard


BK20-BK20Z

Flange with clearance holes at front


Code -3.V/
(Code -2.V/)

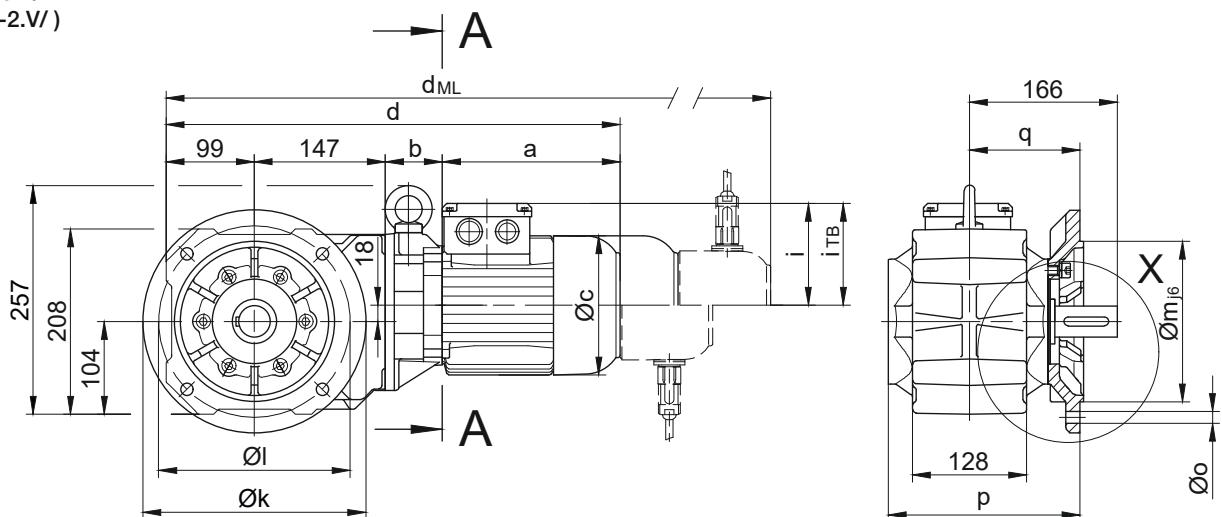


Code -.4/

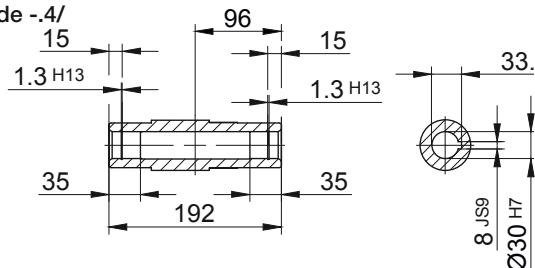



Code -.1/

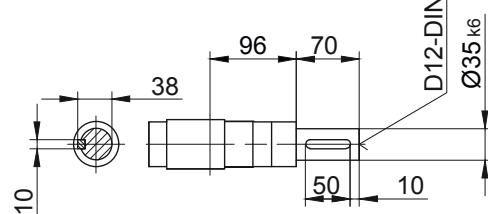

Code -.5/

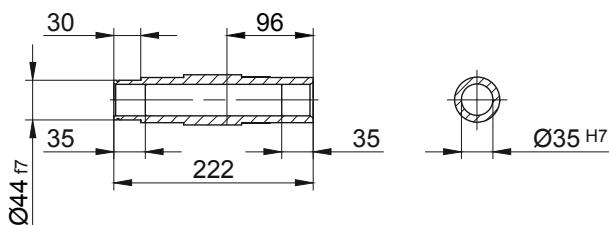

Code -.3/

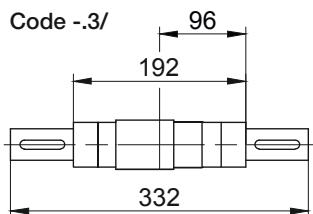

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK20..	Code -3.V/	250	215	180	16	13.5	215.5	124	4	42.5
BK20..	Code -2.V/	200	165	130	12	11	206.5	115	3.5	51

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_TB	Design with motor extensions			
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BK20Z-../S04S	142.5	100	110.5	488.5	90	112	532	576	619.5	-
BK20-../S..06 (M, L)	170.5	60	123	476.5	99	119	518.5	579	616.5	-
BK20Z-../S..06 (M, L)	170.5	102	123	518.5	99	119	560.5	621	658.5	-
BK20-../S..08 (M, L)	199.5	64	156	509.5	114.5	136.5	575.5	621.5	683	-
BK20Z-../S..08 (M, L)	199.5	146	156	591.5	114.5	136.5	657.5	703.5	765	-
BK20-../S..09 (S, X)	250.5	78.5	176	575	124	157	741.5	682.5	772	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gear motors

Dimension - Standard

BK20-BK20Z



Torque arm at front

Code -5.V/

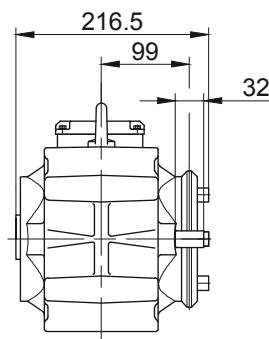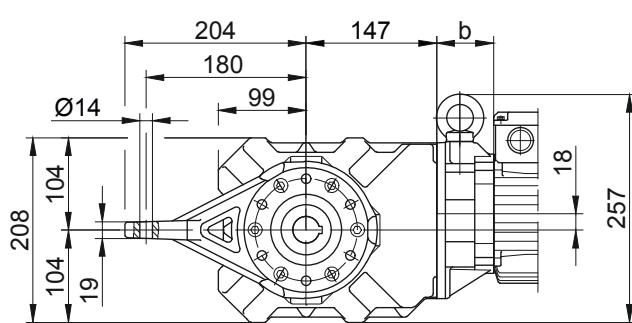



Flange with tapped holes at front

Code -7.V/

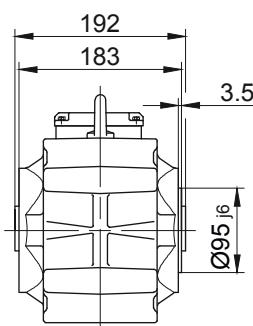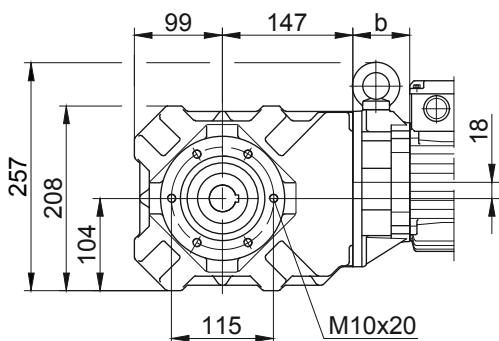



Foot with tapped holes at bottom

Code -6.U/

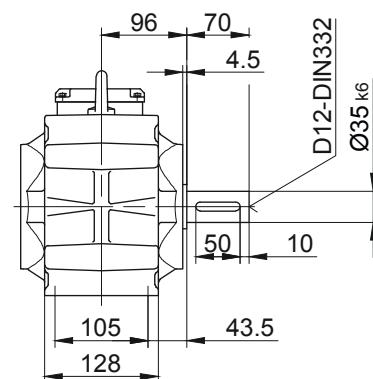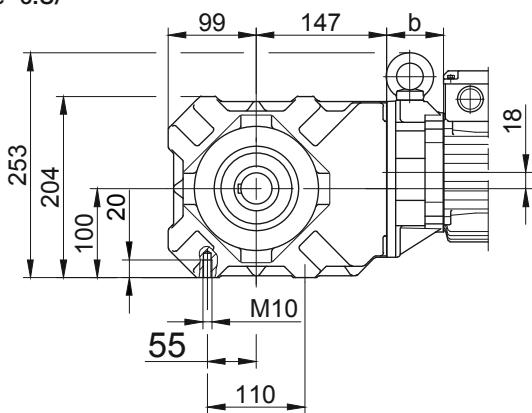

Foot with clearance holes at bottom

Code -1.U/

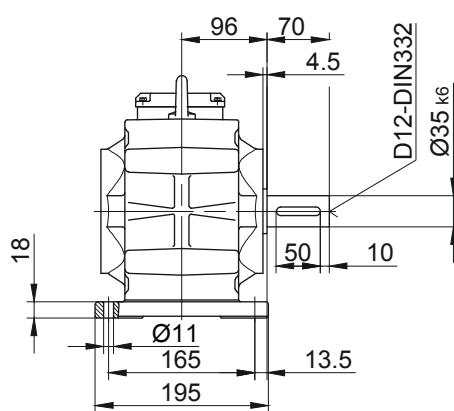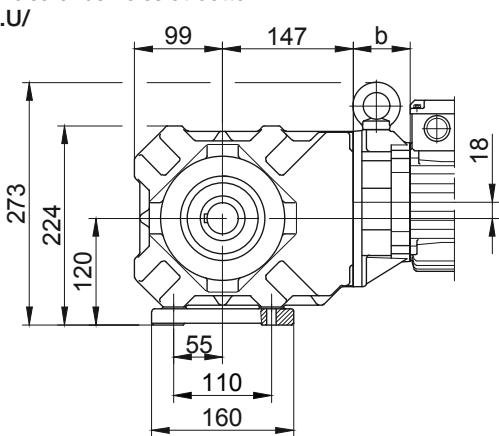

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Dimension - Standard


BK30-BK30Z

Flange with clearance holes at front


Code -3.V/
(Code -2.V/)

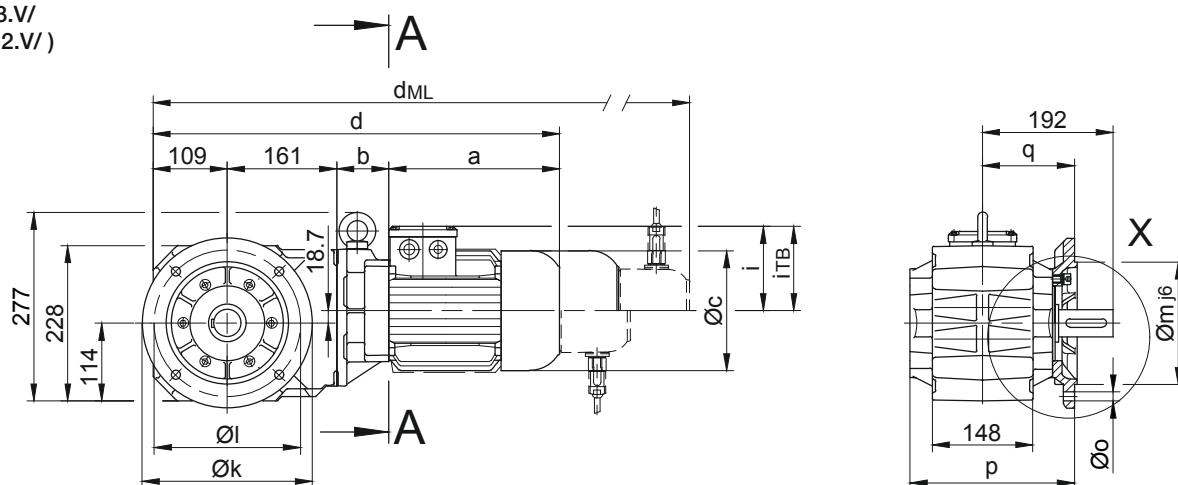


Code -.4/

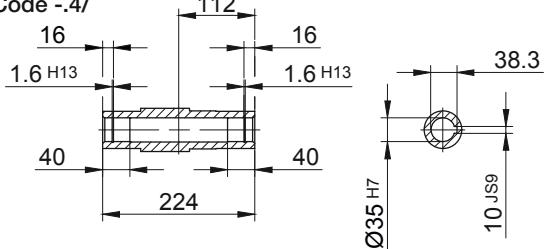


Code -.1/

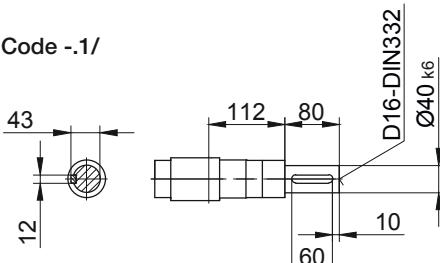


Code -.5/

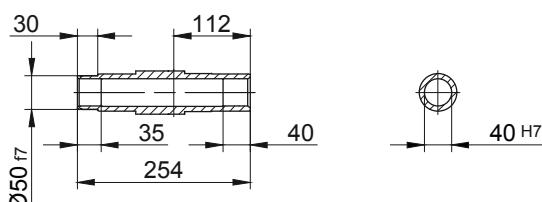

Code -.3/

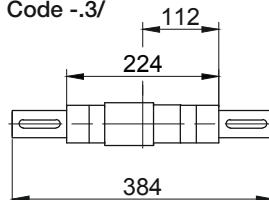

Standard



Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK30..	Code -3.V/	250	215	180	16	13.5	242	135	4	57
BK30..	Code -2.V/	200	165	130	12	11	239	132	3.5	59.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions				
							d_{ML}	Brake	Encoder	Brake with Encoder	Back Stop
BK30-..S..06 (M, L)	170.5	58	123	498.5	99	119	540.5	601	638.5	-	-
BK30Z-..S..06 (M, L)	170.5	133.5	123	574	99	119	616	676.5	714	-	-
BK30-..S..08 (M, L)	199.5	62	156	531.5	114.5	136.5	597.5	643.5	705	-	-
BK30Z-..S..08 (M, L)	199.5	137.5	156	607	114.5	136.5	673	719	780.5	-	-
BK30-..S..09 (S, X)	250.5	76.5	176	597	124	157	690	704.5	794	-	-
BK30Z-..S..09 (S, X)	250.5	152	176	672.5	124	157	765.5	780	869.5	-	-
BK30-..S..11 (S, M, L)	319	83	218	672	165	176	770	779.5	872	-	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Dimension - Standard



BK30-BK30Z

Torque arm at front
Code -5.V/

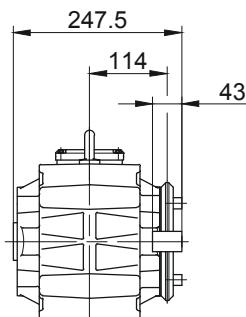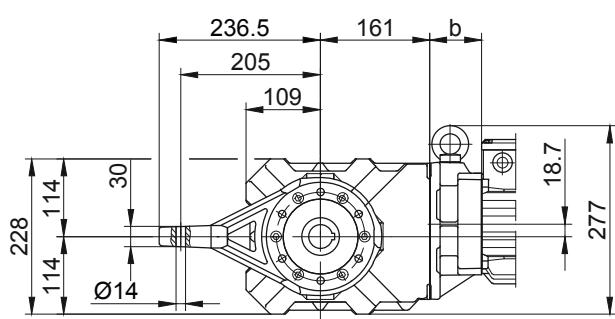



Flange with tapped holes at front

Code -7.V/

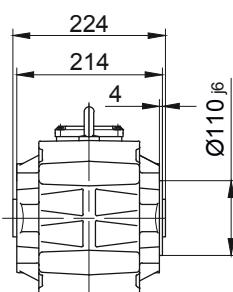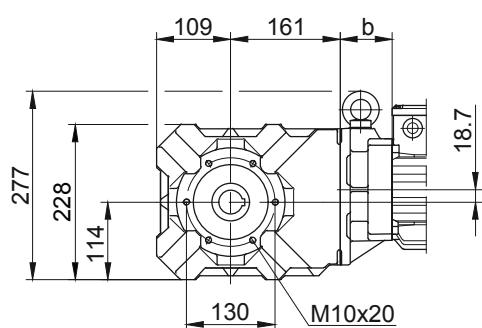



Foot with tapped holes at bottom

Code -6.U/

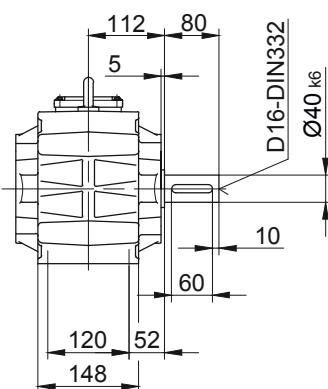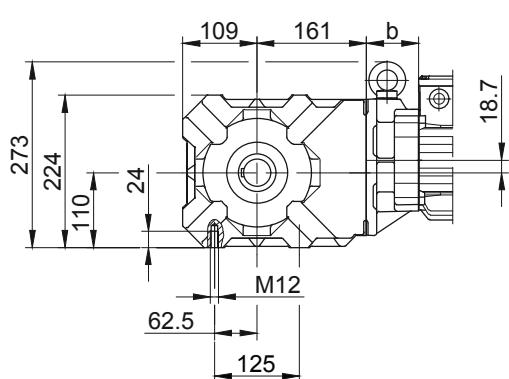

Foot with clearance holes at bottom

Code -1.U/

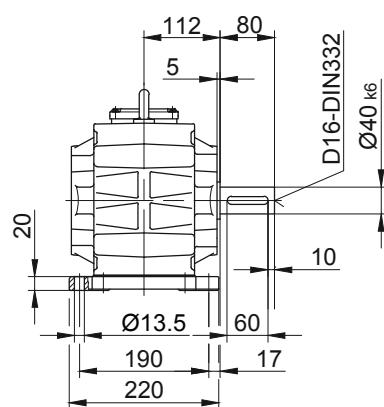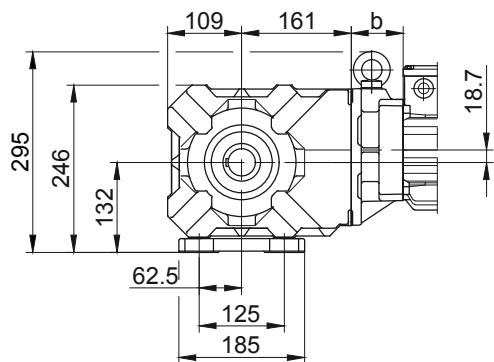

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.




BK-series bevel-gear motors

Dimension - Standard


BK40-BK40Z

Flange with clearance holes at front



Code -3.V/
(Code -4.V/)

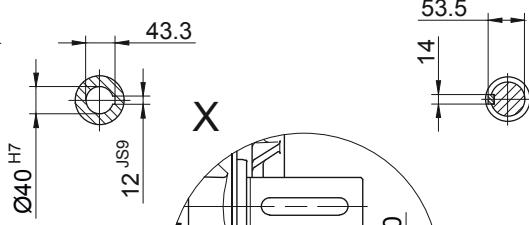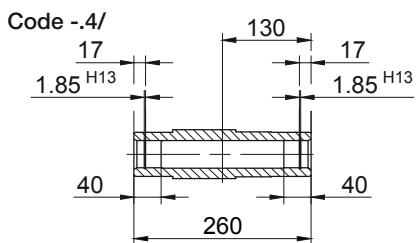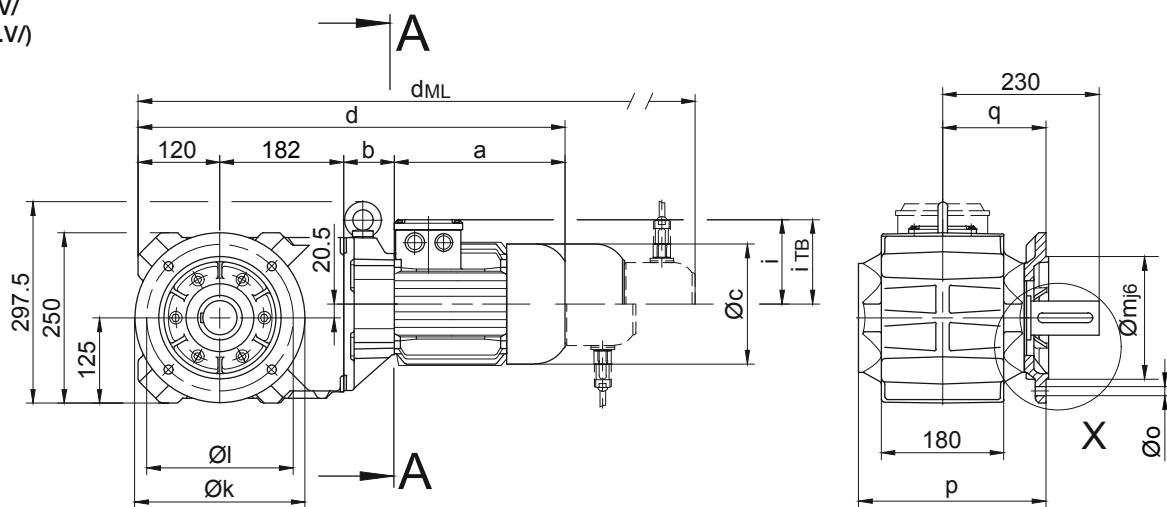



Code -1/

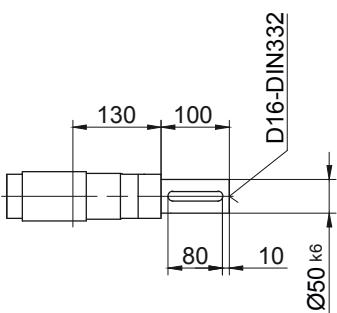

Code -5/

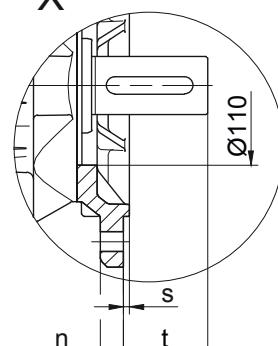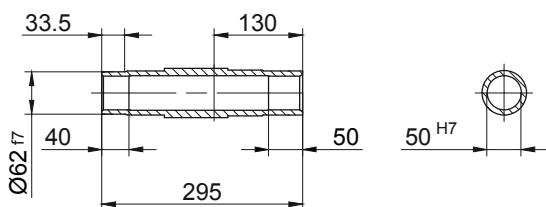

Code -3/

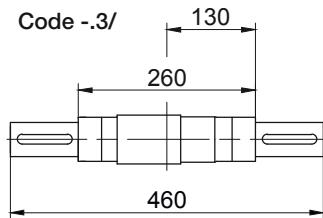

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK40..	Code -3.V/	250	215	180	16	13.5	276	152	4	78
BK40..	Code -4.V/	300	265	230	20	13.5	282	158	4	72

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BK40Z-..S..06 (M, L)	170.5	138.5	123	611	99	119	653	713.5	751	-
BK40-..S..08 (M, L)	199.5	60	156	561.5	114.5	136.5	627.5	673.5	735	-
BK40Z-..S..08 (M, L)	199.5	142.5	156	644	114.5	136.5	710	756	817.5	-
BK40-..S..09 (S, X)	250.5	74.5	176	627	124	157	720	734.5	824	-
BK40Z-..S..09 (S, X)	250.5	157	176	709.5	124	157	802.5	817	906.5	-
BK40-..S..11 (S, M, L)	319	81	218	702	165	176	800	809.5	902	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Dimension - Standard



BK40-BK40Z

Torque arm at front
Code -5.V/

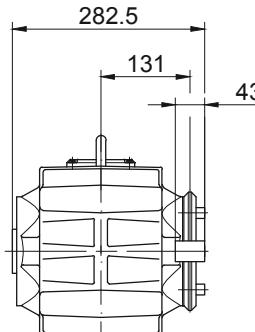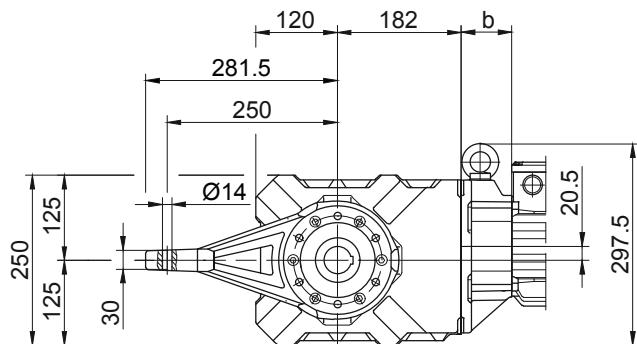



Flange with tapped holes at front

Code -7.V/

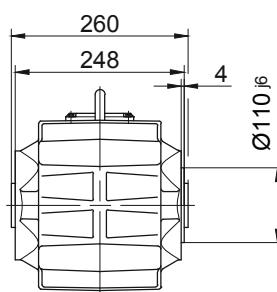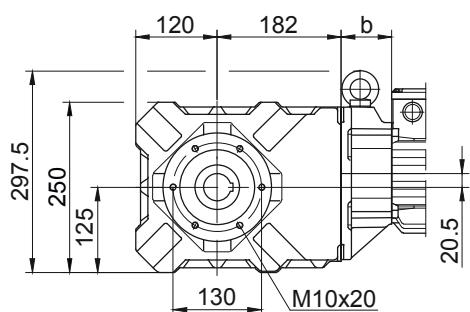



Foot with tapped holes at bottom

Code -6.U/

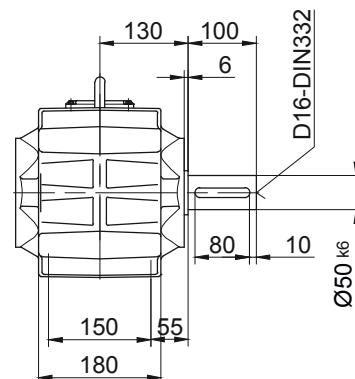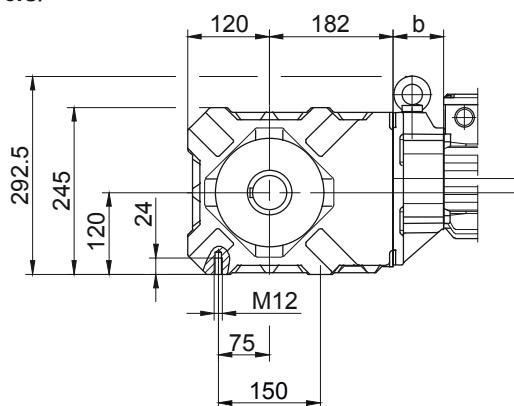

Foot with clearance holes at bottom

Code -1.U/

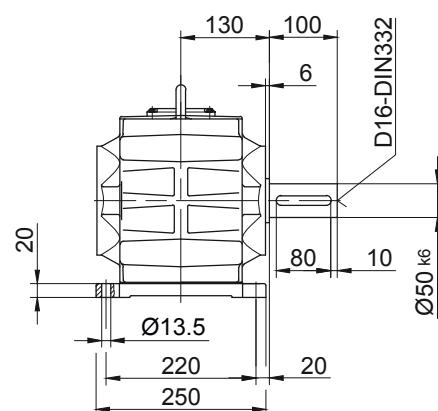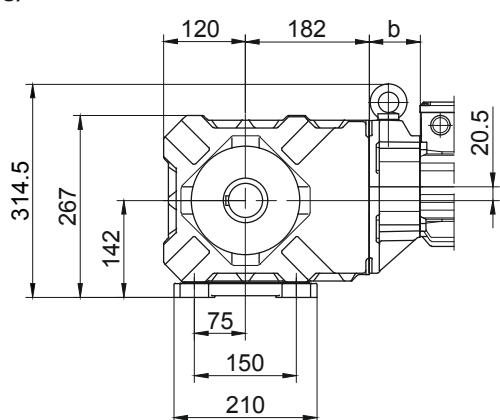

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors


Dimension - Standard

BK50-BK50Z


Flange with clearance holes at front

Hangs with Code -3.V/


Code -3.V
(Code -2.V/)

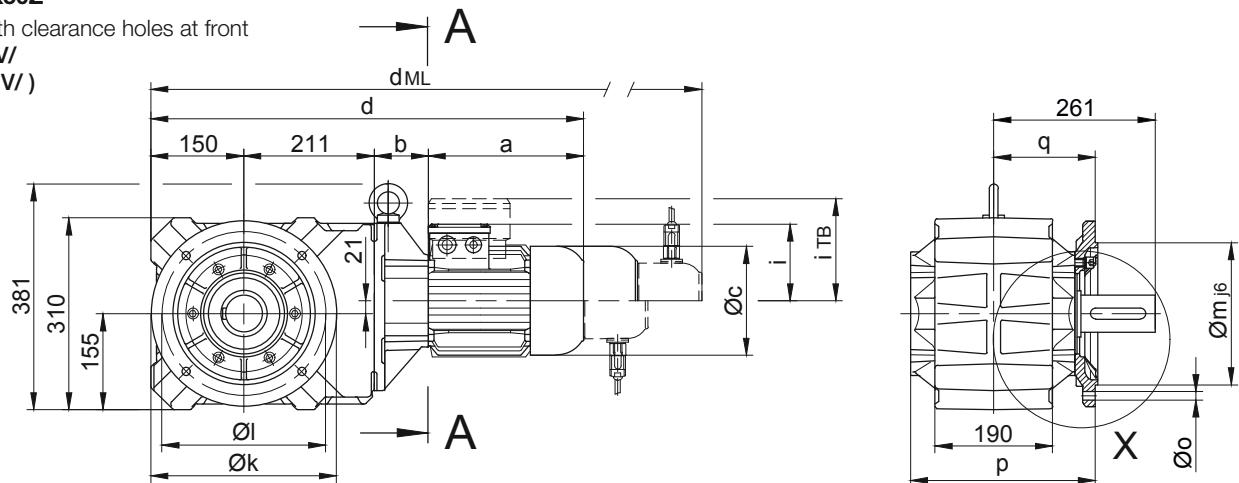


Code -.4/

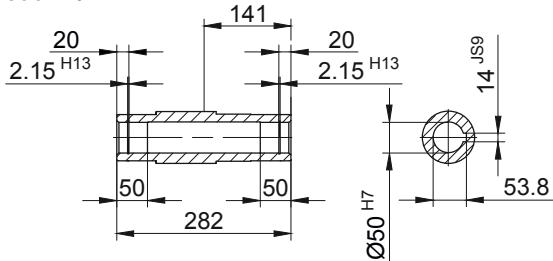


Code -1/

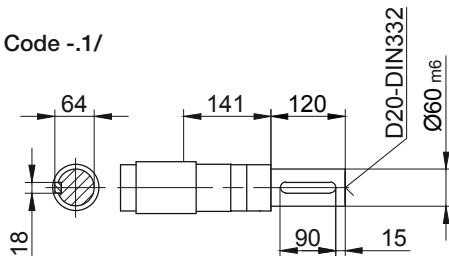

Code -.5/

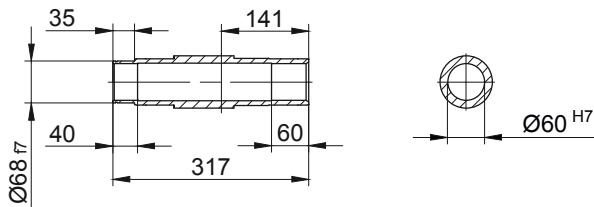


Code -3/

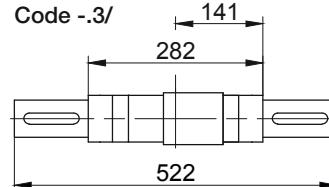

Flange Dimensions

Flange Dimensions										
Type	Design	k	l	m	n	o	p	q	s	t
BK50..	Code -3.V/	300	265	230	20	13.5	299	164	4	97
BK50..	Code -2.V/	250	215	180	16	13.5	296	161	4	100

Dimensions in millimetres (mm)



Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d _{ML}	d _{ML}	d _{ML}	d _{ML}	d _{ML}
BK50Z-..S..06 (M, L)	170.5	155	123	686.5	99	119	728.5	789	826.5	-
BK50-..S..08 (M, L)	199.5	73	156	633.5	114.5	136.5	699.5	745.5	807	-
BK50Z-..S..08 (M, L)	199.5	159	156	719.5	114.5	136.5	785.5	831.5	893	-
BK50-..S..09 (S, X)	250.5	87.5	176	699	124	157	792	806.5	896	-
BK50Z-..S..09 (S, X)	250.5	173.5	176	785	124	157	878	892.5	982	-
BK50-..S..11 (S, M, L)	319	94	218	774	165	176	872	881.5	974	-

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gear motors

Dimension - Standard

BK50-BK50Z



Torque arm at front

Code -5.V/

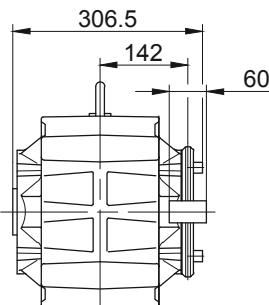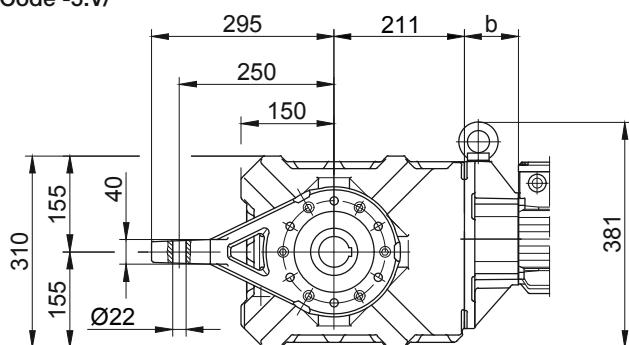



Flange with tapped holes at front

Code -7.V/

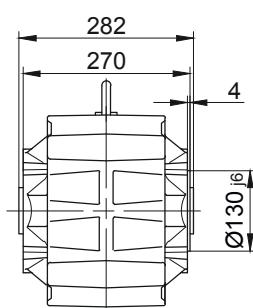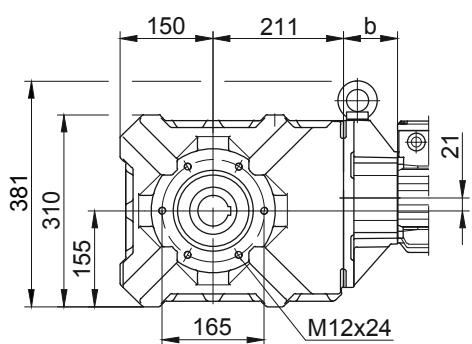



Foot with tapped holes at bottom

Code -6.U/

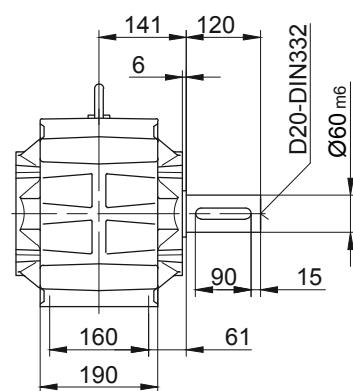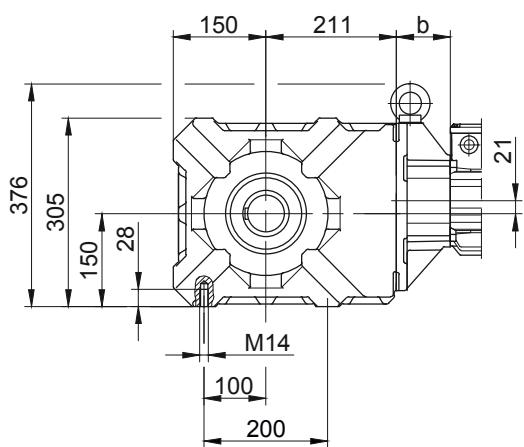

Foot with clearance holes at bottom

Code -1.U/

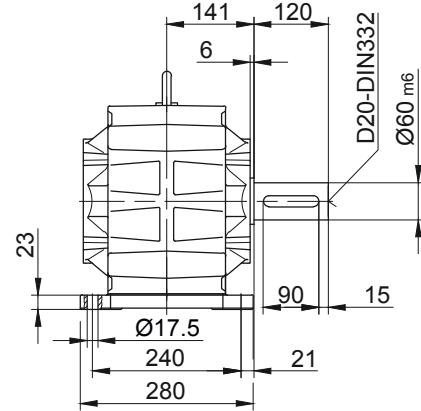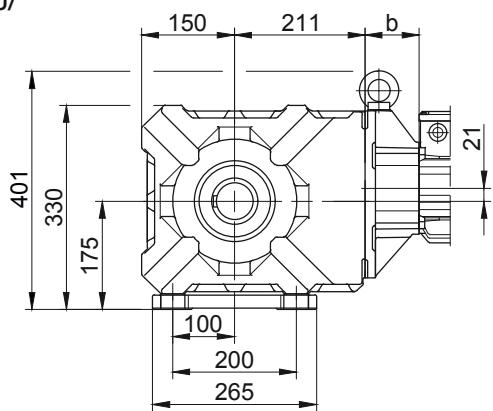

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Dimension - Standard

BK60-BK60Z

Flange with clearance holes at front

Code -3.V/
(Code -2.V/)

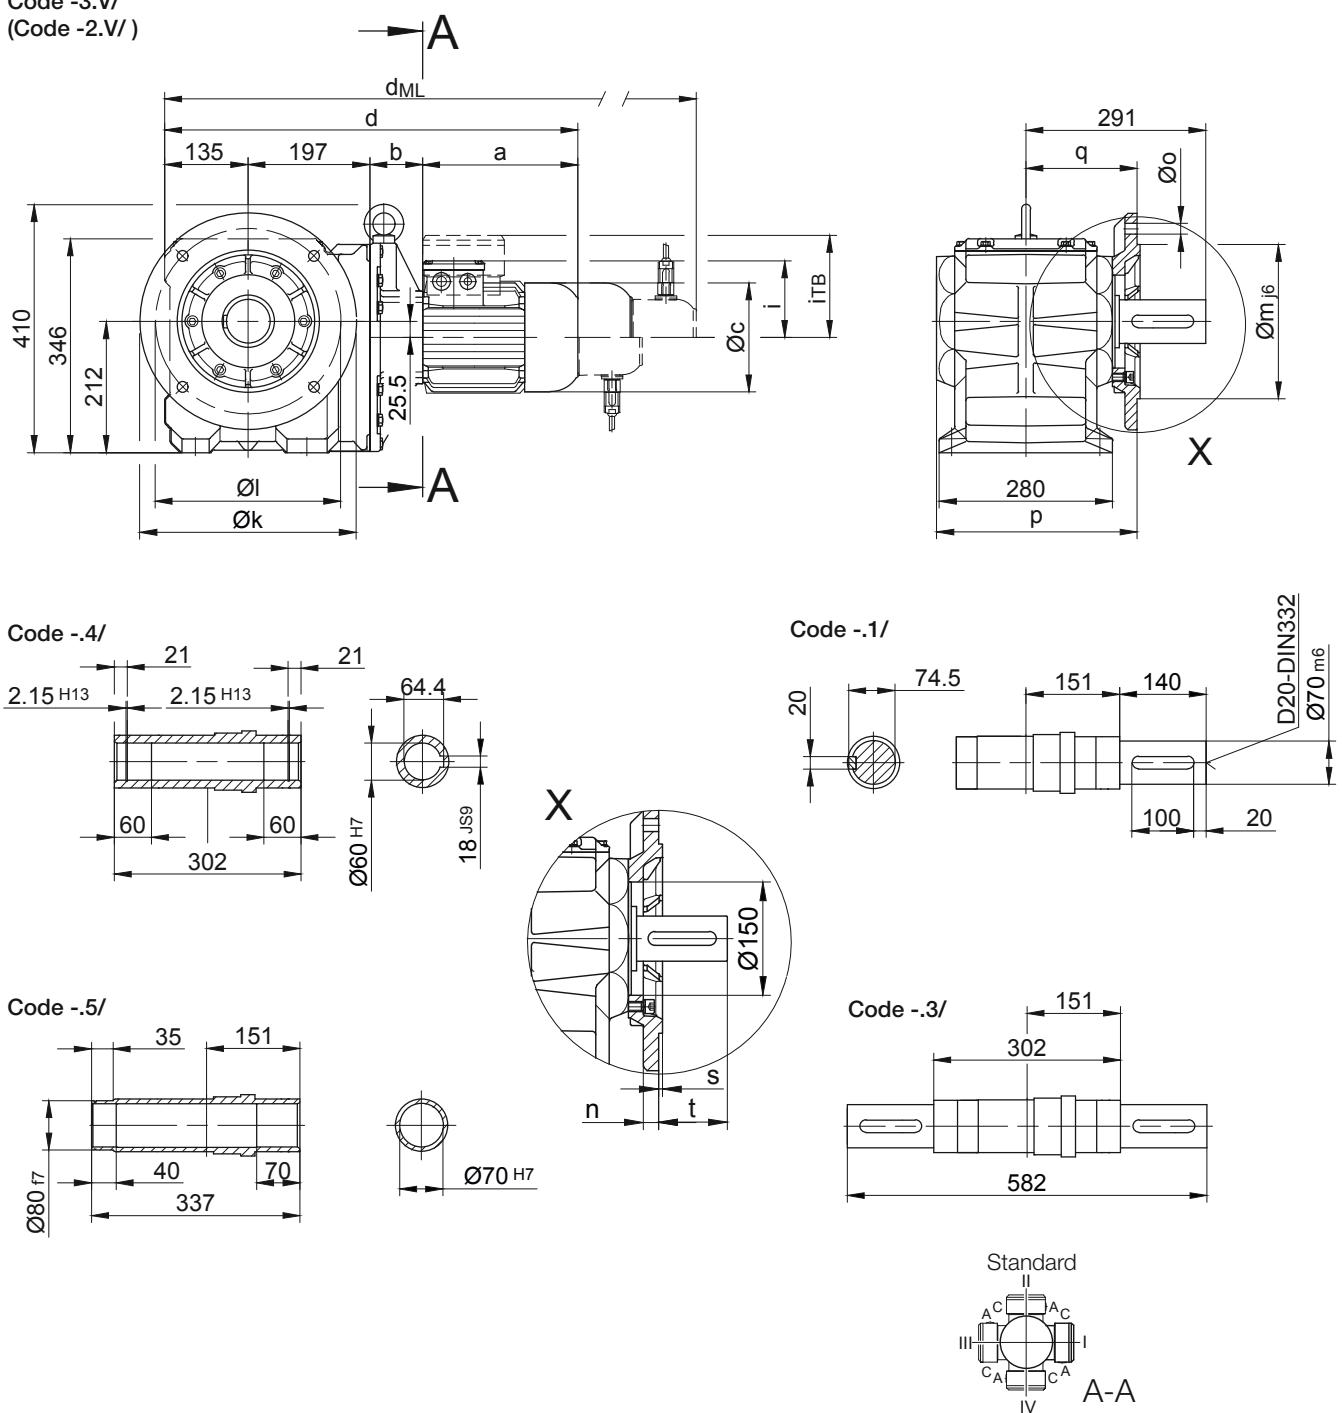

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK60..	Code -3.V/	350	300	250	20	17.5	324	180	5	112
BK60..	Code -2.V/	300	265	230	20	13.5	332	188	4	103

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							Brake	Encoder	Brake with Encoder	Back Stop
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BK60Z-..S..08 (M, L)	199.5	181	156	712.5	114.5	136.5	778.5	824.5	886	-
BK60-..S..09 (S, X)	250.5	85.5	176	668	124	157	761	775.5	865	-
BK60Z-..S..09 (S, X)	250.5	195.5	176	778	124	157	871	885.5	975	-
BK60-..S..11 (S, M, L)	319	92	218	743	165	176	841	850.5	943	-
BK60Z-..S..11 (S, M, L)	319	202	218	853	165	176	951	960.5	1053	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Dimension - Standard



BK60-BK60Z

Torque arm at front
Code -5.V/

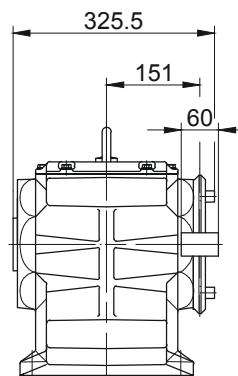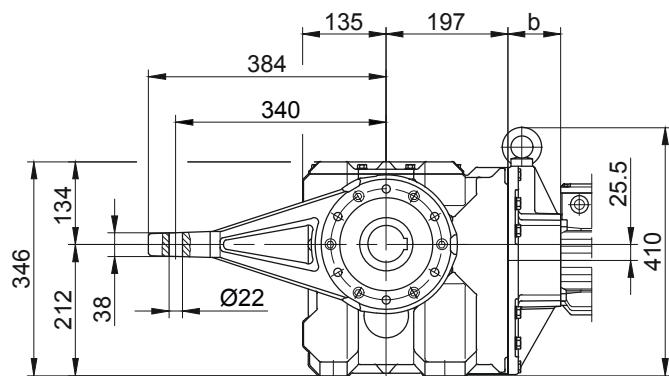



Flange with tapped holes at front

Code -7.V/

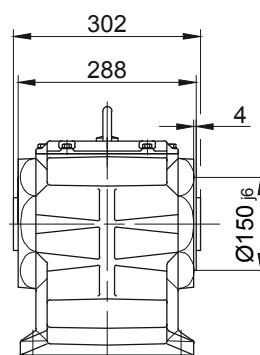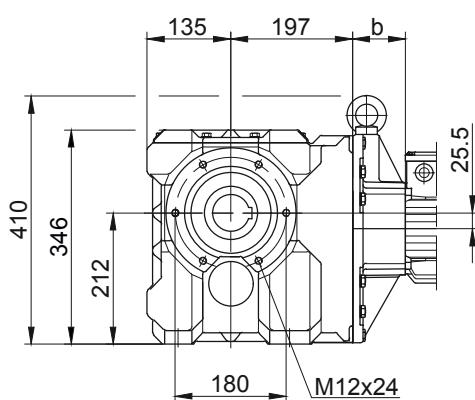

Foot with clearance holes at bottom

Code -1.U/

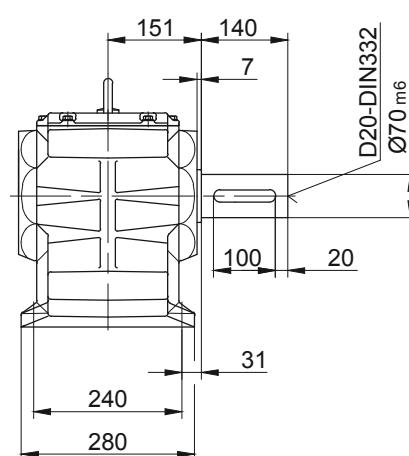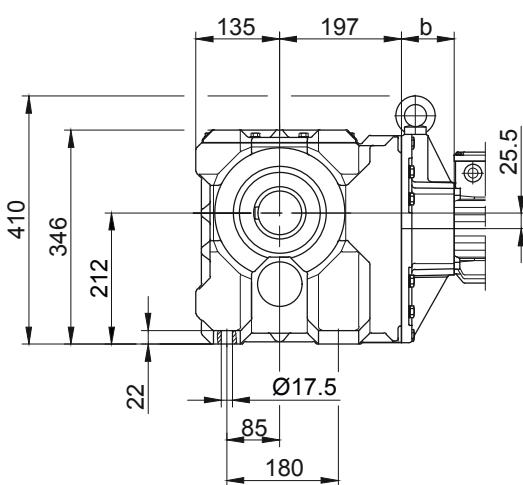

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gear motors

Dimension - Standard



BK70-BK70Z

Flange with clearance holes at front



Code -3.V/
(Code -2.V/)
(Code -4.V/)

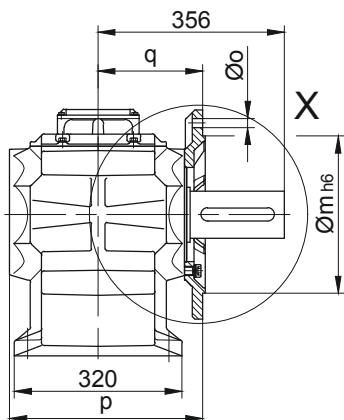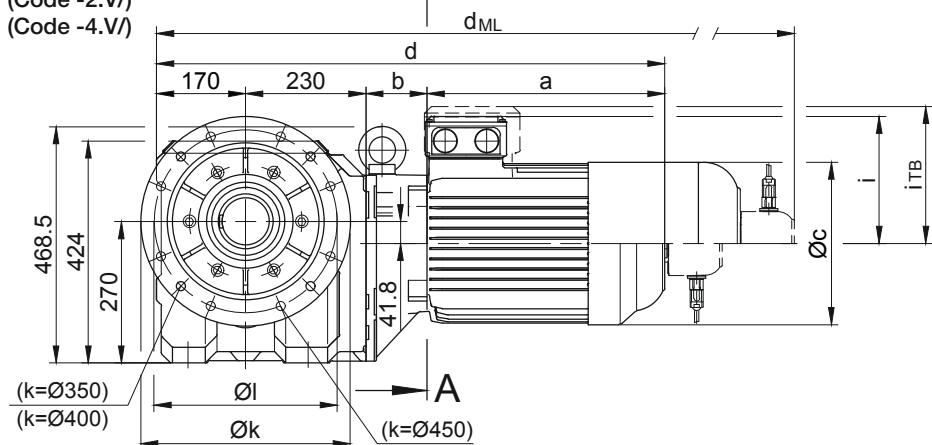



Code -4./

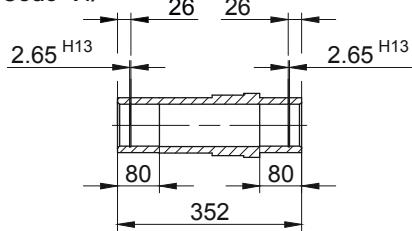



Code -1/

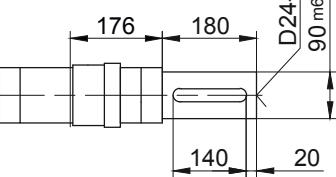

Code -.5/

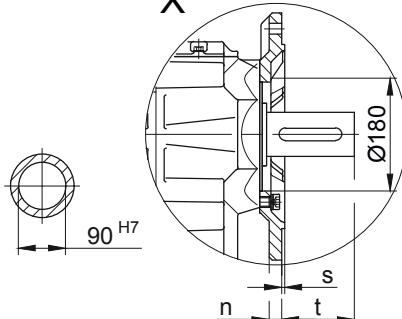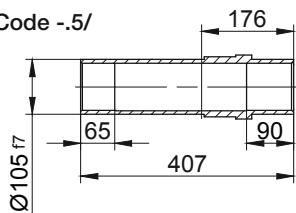

Code -.3/

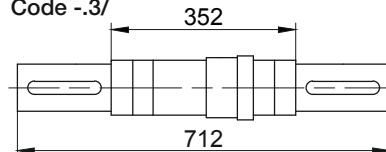

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK70..	Code -3.V/	400	350	300	20	4 x 17.5	369	200	5	157
BK70..	Code -2.V/	350	300	250	20	4 x 17.5	369	200	5	157
BK70..	Code -4.V/	450	400	350	22	4 x 17.5	379	210	5	147

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_TB	Design with motor extensions			
							d_ML	d_ML	d_ML	d_ML
BK70Z-..S..08 (M, L)	199.5	202	156	801.5	114.5	136.5	867.5	913.5	975	-
BK70-..S..09 (S, X)	250.5	83.5	176	734	124	157	827	841.5	931	-
BK70Z-..S..09 (S, X)	250.5	216.5	176	867	124	157	960	974.5	1064	-
BK70-..S..11 (S, M, L)	319	90	218	809	165	176	907	916.5	1009	-
BK70Z-..S..11 (S, M, L)	319	223	218	942	165	176	1040	1049.5	1142	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors


Dimension - Standard

BK70-BK70Z


Torque arm at front
Code -5.V/

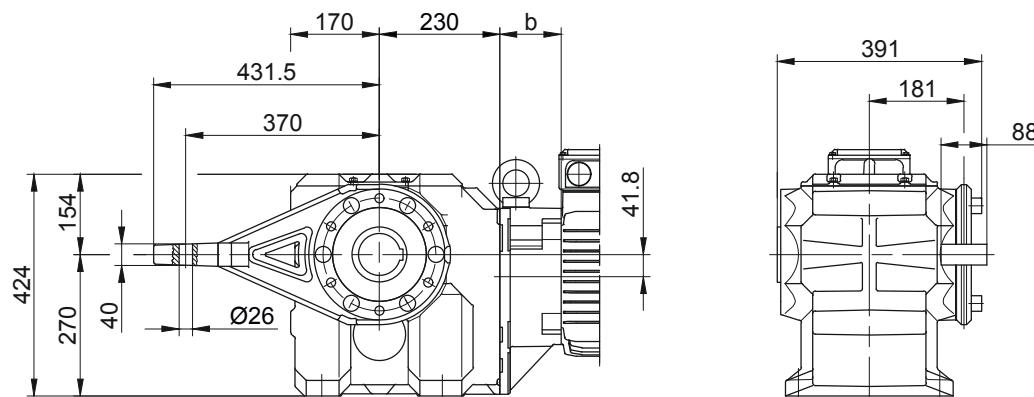


Flange with tapped holes at front
Code -7.V/

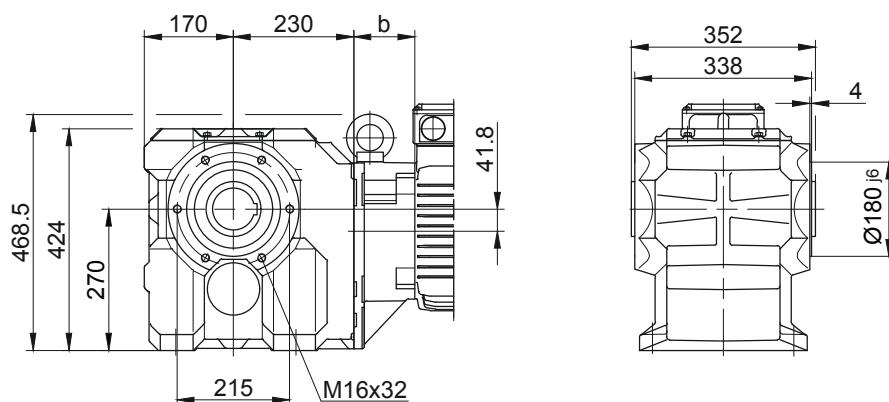

Foot with clearance holes at bottom
Code -1.U/

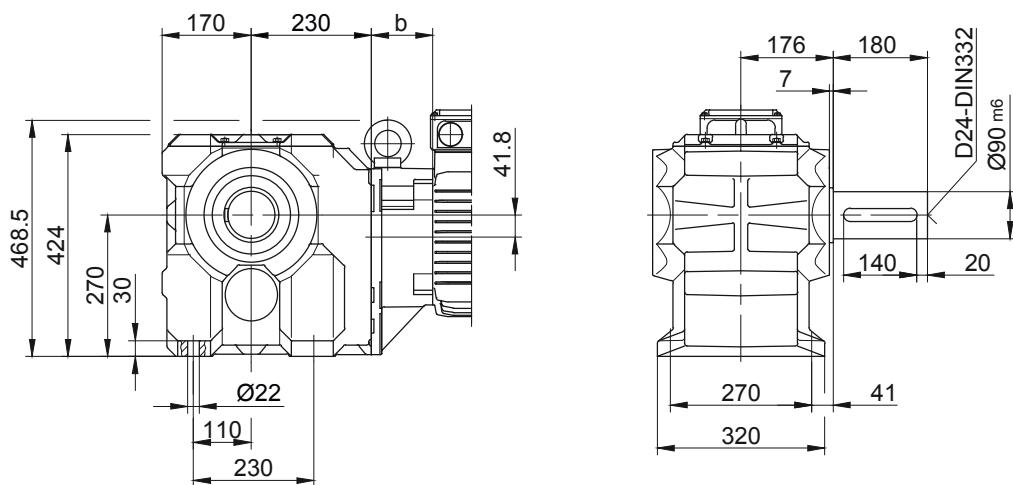

Code -.4/K70

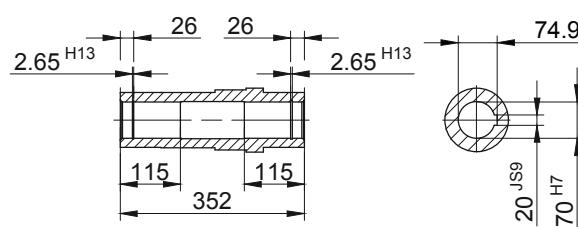

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gear motors

Dimension - Standard



BK80-BK80Z

Flange with clearance holes at front


Code -3.V/
(Code -4.V.)

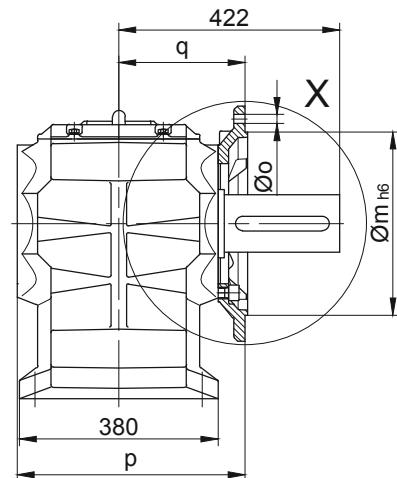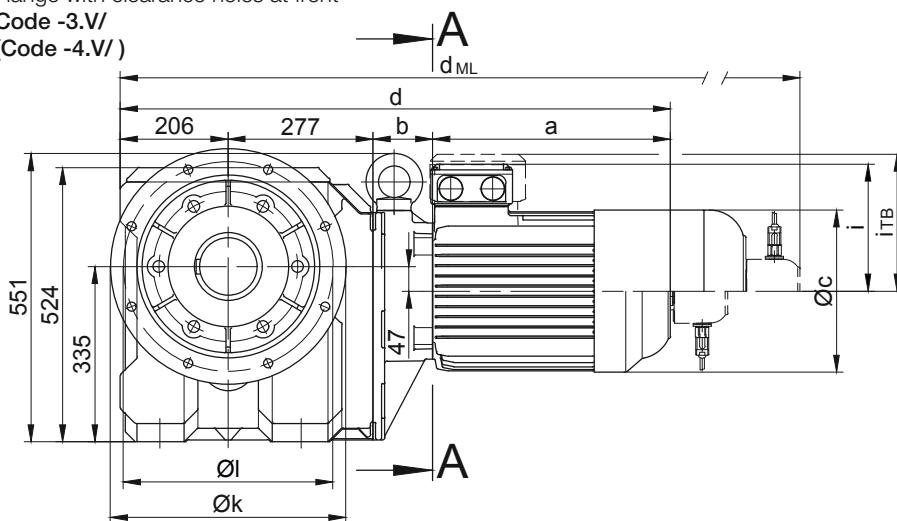


Code -4/

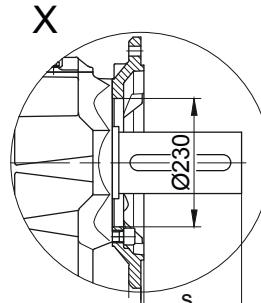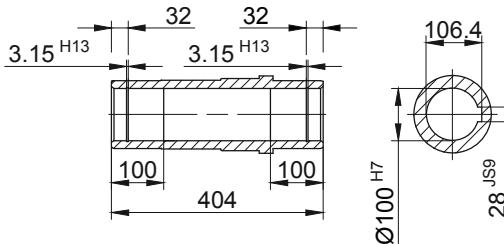


Code -1/

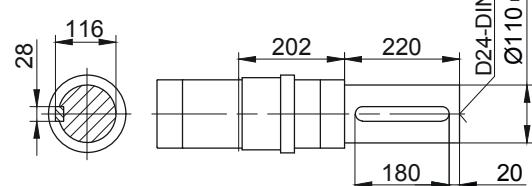


Code -5/

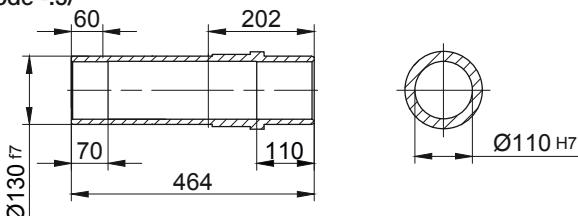


Code -3/

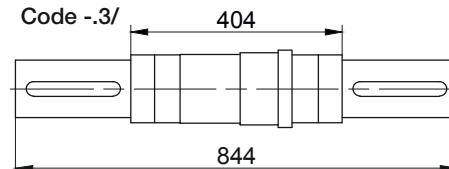

Code -4/K90

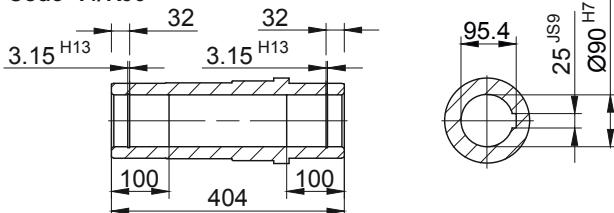

Standard



Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK80..	Code -3.V/	450	400	350	22	17.5	439	245	5	178
BK80..	Code -4.V/	550	500	450	22	17.5	444	250	5	173

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i_TB	Brake	Encoder	Brake with Encoder	Back Stop
BK80Z-..S..09 (S, X)	250.5	252.5	176	986	124	157	1079	1093.5	1183	-
BK80-..S..11 (S, M, L)	319	87	218	889	165	176	987	996.5	1089	-
BK80Z-..S..11 (S, M, L)	319	259	218	1061	165	176	987	1168.5	1261	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Dimension - Standard

BK80-BK80Z


Torque arm at front

Code -5.V/

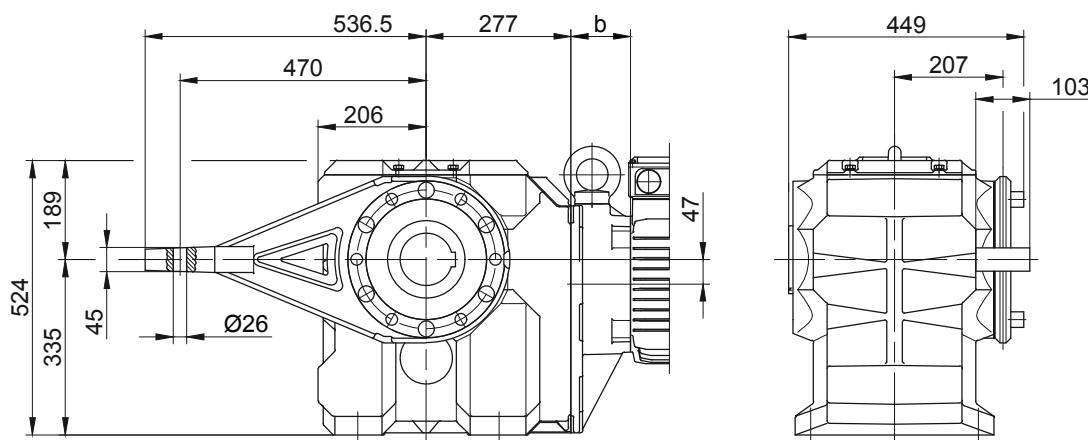


Flange with tapped holes at front

Code -7.V/

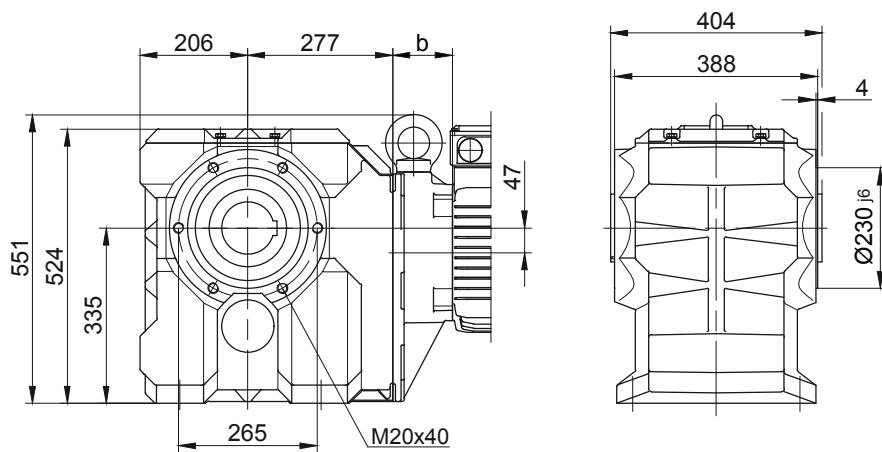

Foot with clearance holes at bottom

Code -1.U/

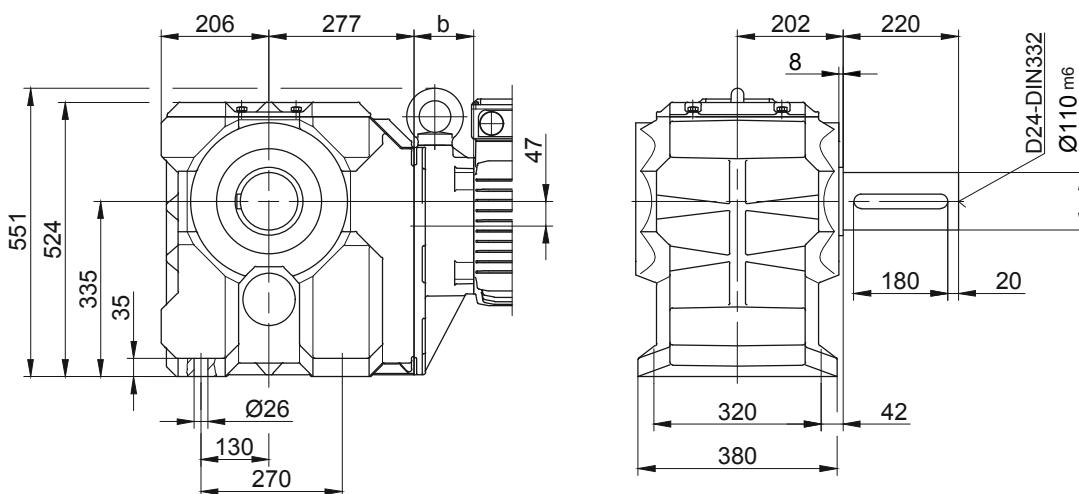


BK-series bevel-gear motors

Dimension - Standard


BK90-BK90Z

Flange with clearance holes at front


Code -3.V/
(Code -4.V/)

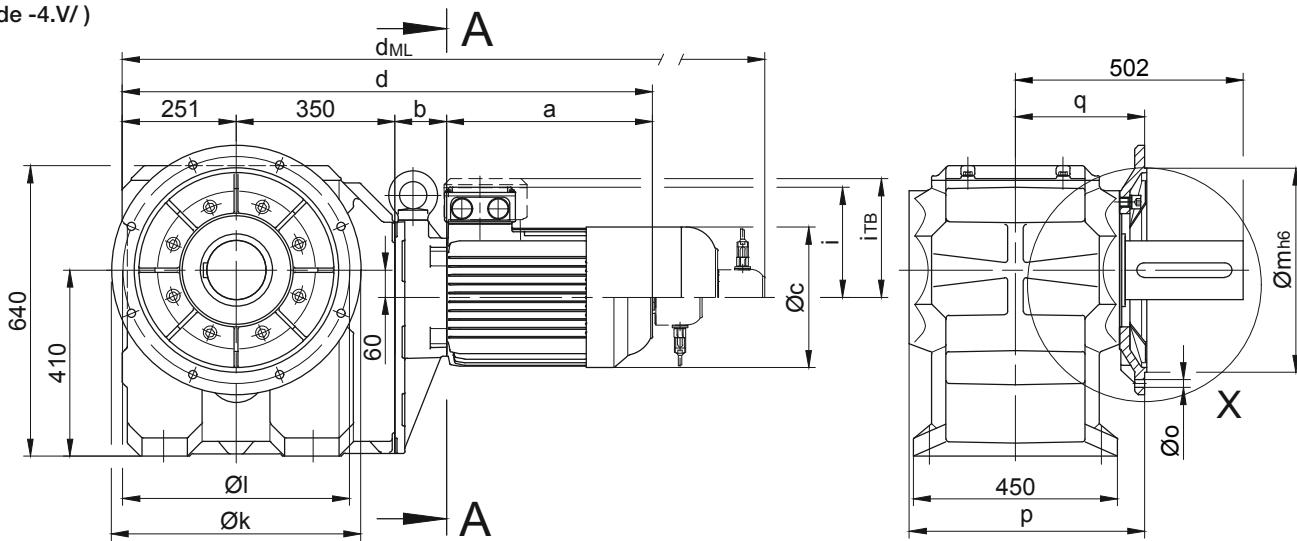


Code -.4/

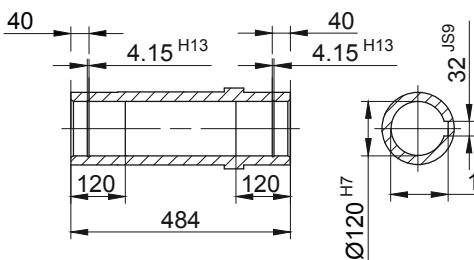


Code -.1/




Code -.5/

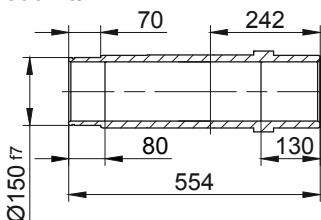

Code -.3/

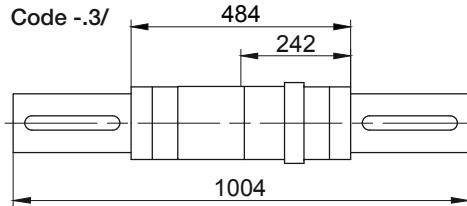

Standard



Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK90..	Code -3.V/	550	500	450	22	17.5	519	285	5	218
BK90..	Code -4.V/	660	600	550	25	22	513	279	6	225

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions								
						i _{TB}	Brake		Encoder		Brake with Encoder		Back Stop	
							d _{ML}	d _{ML}						
BK90Z-..S..09 (S, X)	250.5	267	176	1118.5	124	157	1211.5	1226	1315.5	-				
BK90Z-..S..11 (S, M, L)	319	273.5	218	1193.5	165	176	1291.5	1301	1393.5	-				

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Dimension - Standard

BK90-BK90Z


Torque arm at front

Code -5.V/

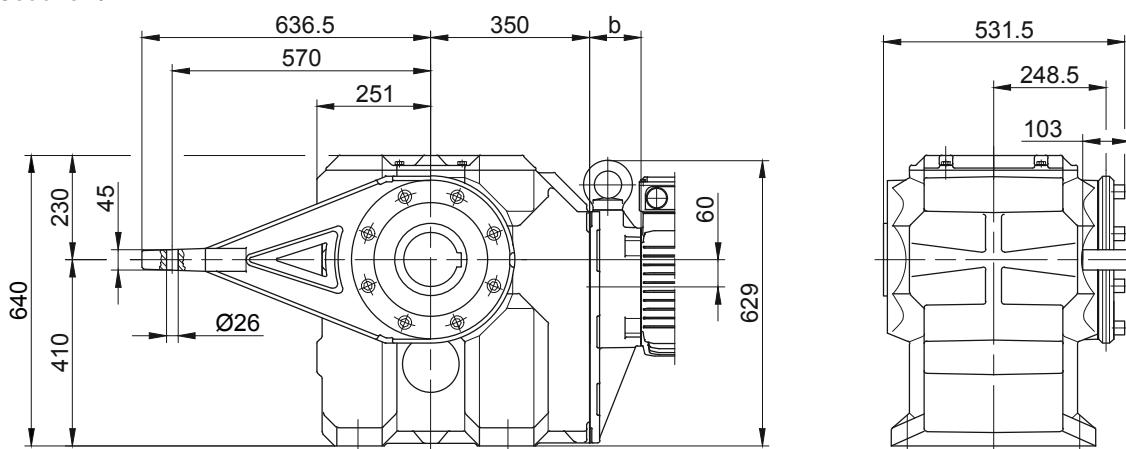


Flange with tapped holes at front

Code -7.V/

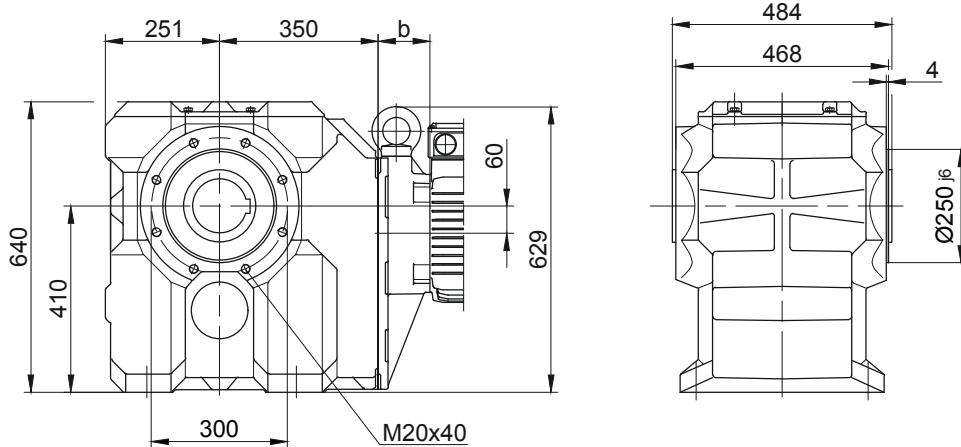

Foot with tapped holes at bottom

Code -1.U/

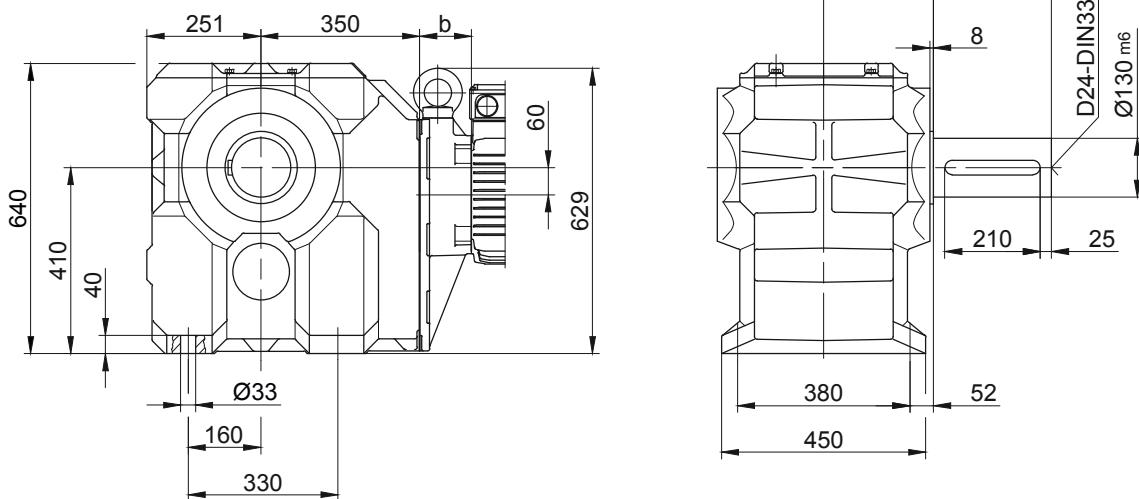

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gearred motors

Dimension - Tandem Gearbox

BK10G06

Flange with clearance holes at front

Code -3.V/
(Code -2.V/)

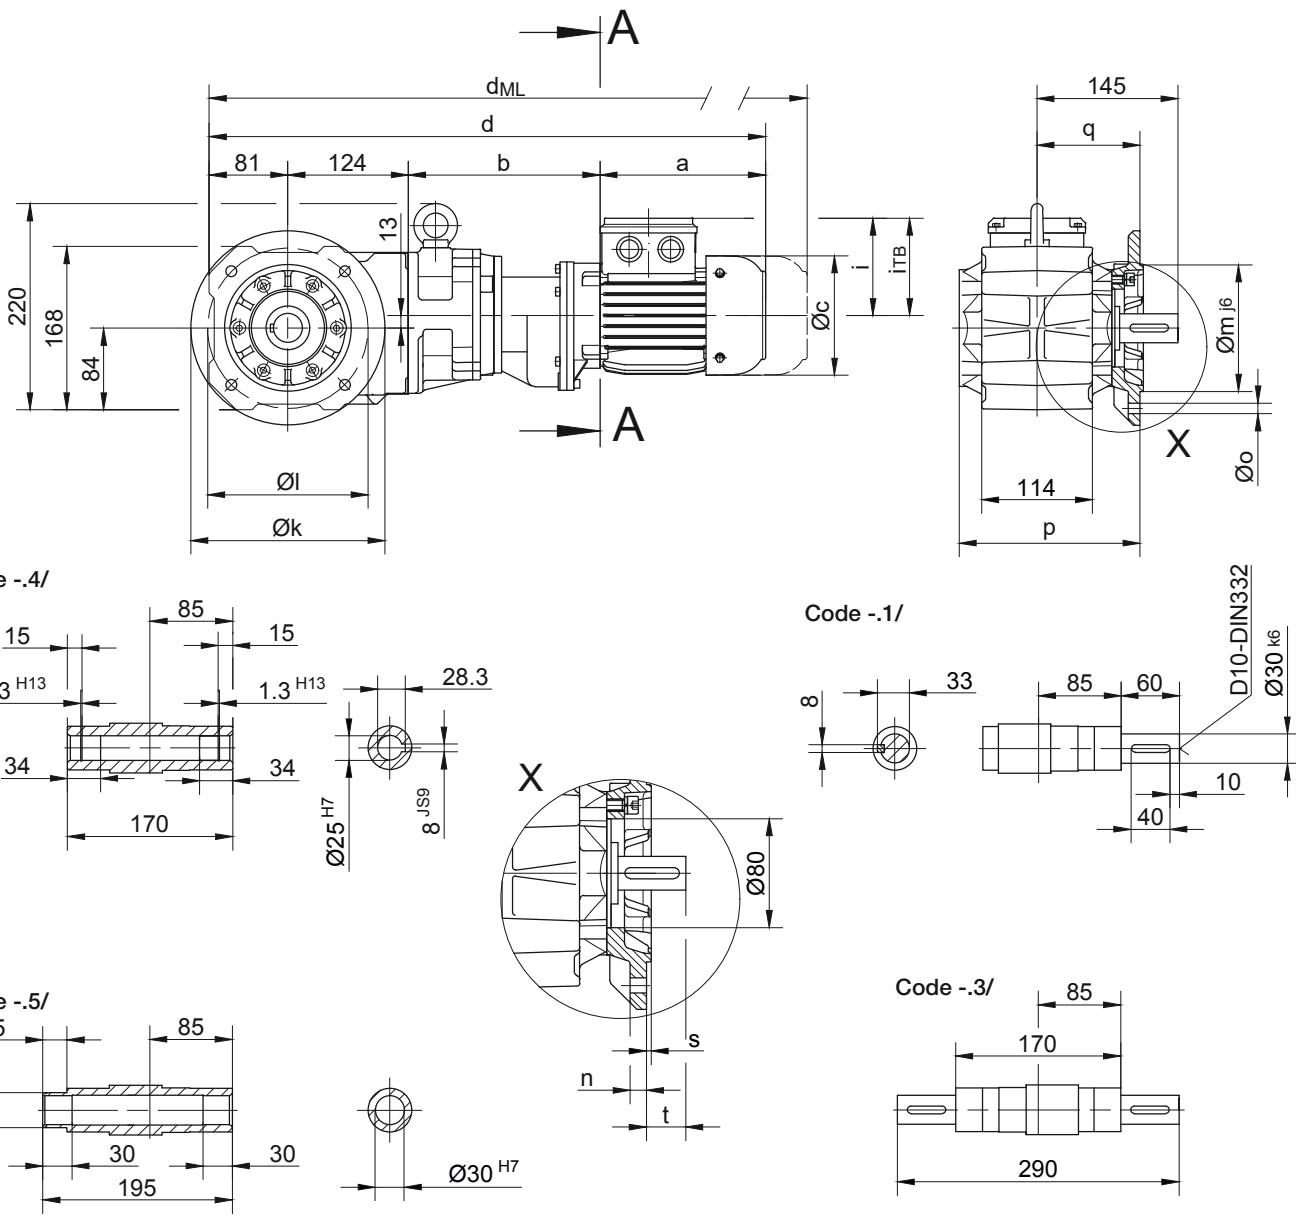

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK10..	Code -3.V/	200	165	130	12	11	186.5	106	3.5	39
BK10..	Code -2.V/	160	130	110	10	9	179.5	99	3.5	46

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BK10G06.../S04S	142.5	193	110.5	540.5	90	112	584	628	671.5	-
BK10G06.../S..06 (M, L)	170.5	195	123	570.5	99	119	612.5	673	710.5	-
BK10G06.../S..08 (M, L)	199.5	239	156	643.5	114.5	136.5	709.5	755.5	817	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gearred motors

Dimension - Tandem Gearbox

BK10G06



Torque arm at front

Code -5.V/

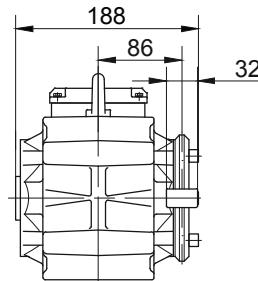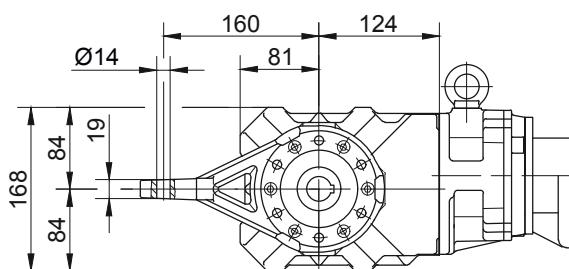



Flange with tapped holes at front

Code -7.V/

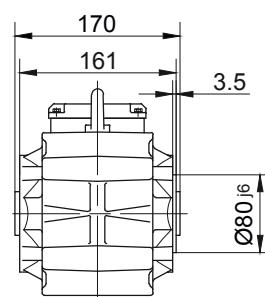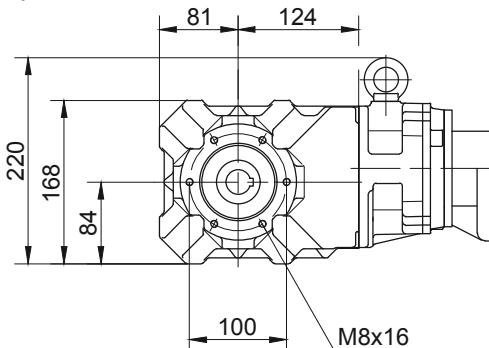



Foot with tapped holes at bottom

Code -6.U/

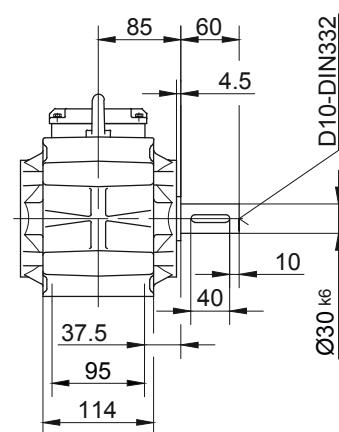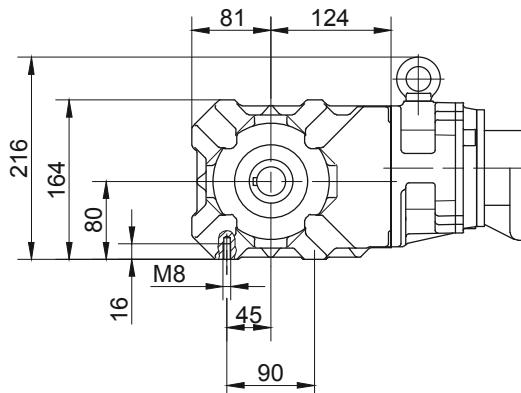

Foot with clearance holes at bottom

Code -1.U/

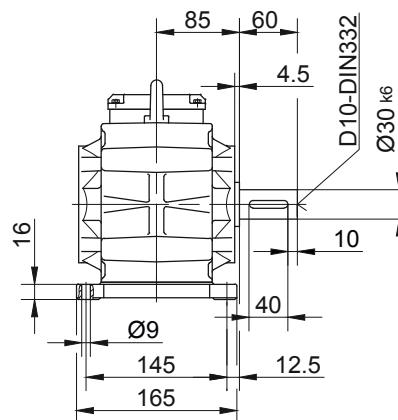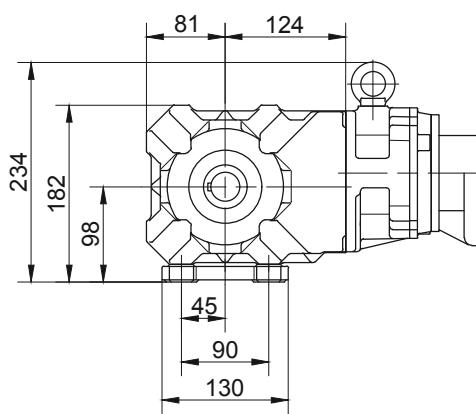

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gearred motors

Dimension - Tandem Gearbox

BK20G06

Flange with clearance holes at front

Code -3.V/
(Code -2.V/)

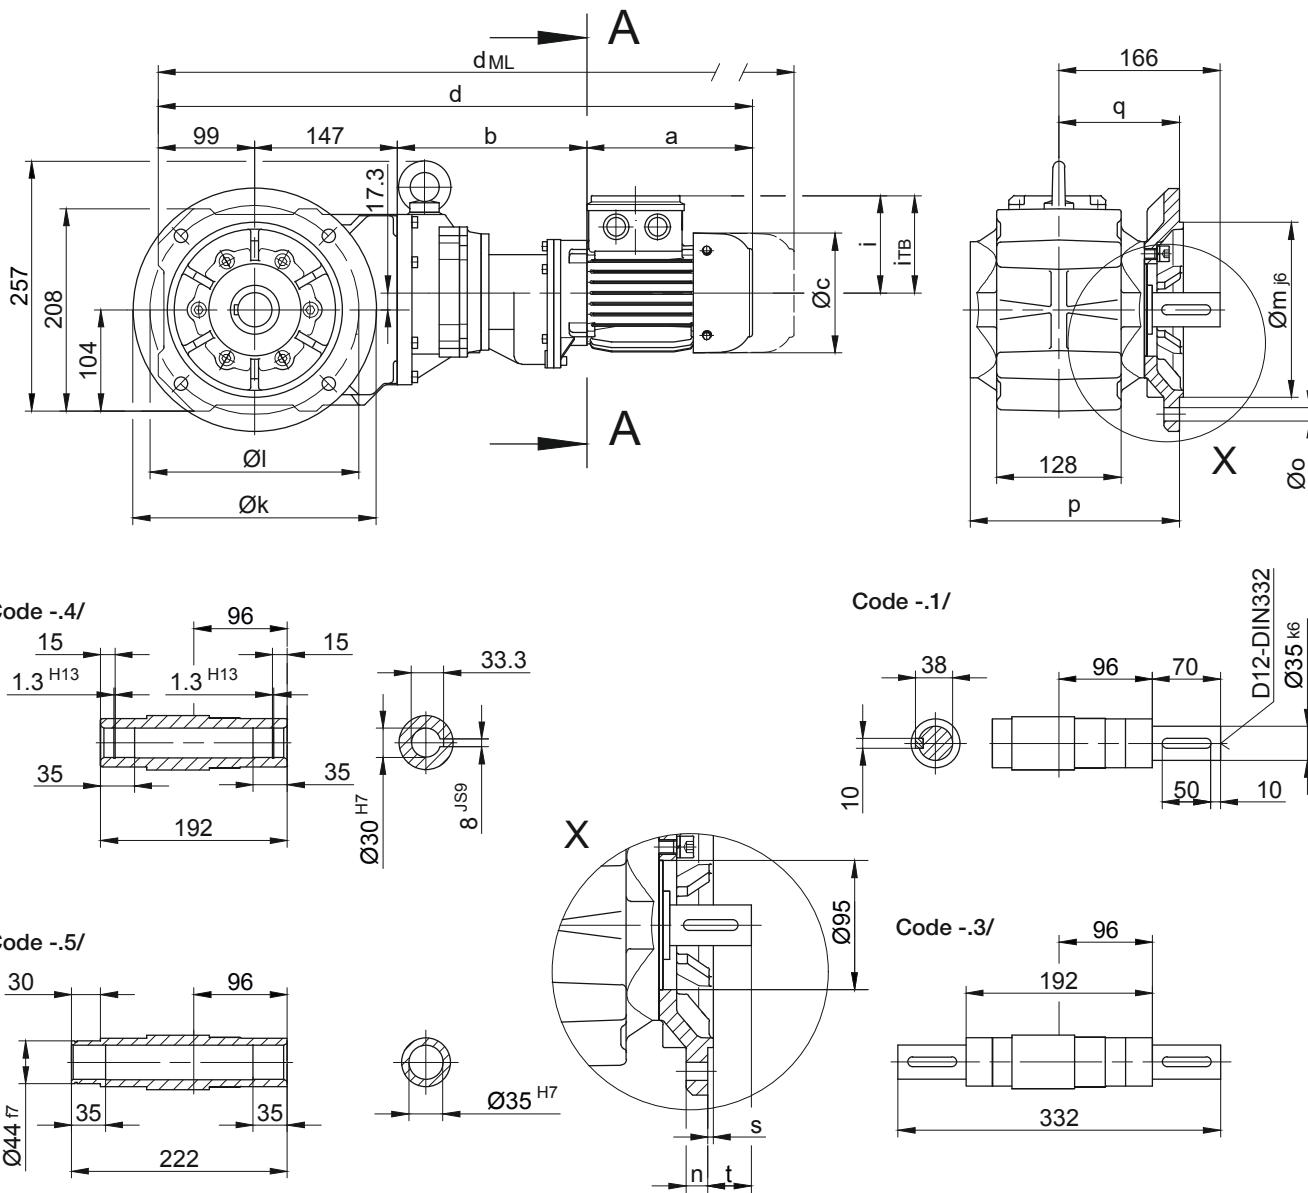

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK20..	Code -3.V/	250	215	180	16	13.5	215.5	124	4	42.5
BK20..	Code -2.V/	200	165	130	12	11	206.5	115	3.5	51

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BK20G06.../S04S	142.5	193	110.5	581.5	90	112	625	669	712.5	-
BK20G06.../S..06 (M, L)	170.5	195	123	611.5	99	119	653.5	714	751.5	-
BK20G06.../S..08 (M, L)	199.5	239	156	684.5	114.5	136.5	750.5	796.5	858	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gearred motors

Dimension - Tandem Gearbox

BK20G06



Torque arm at front

Code -5.V/

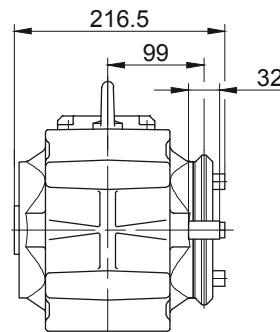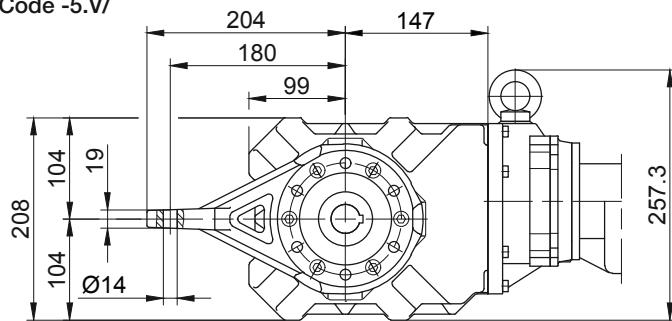



Flange with tapped holes at front

Code -7.V/

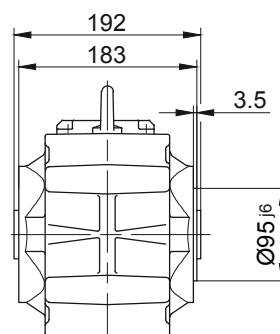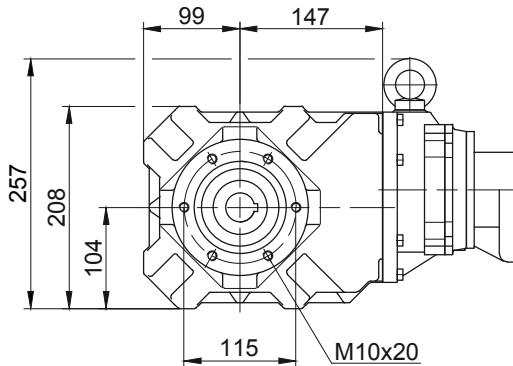



Foot with tapped holes at bottom

Code -6.U/

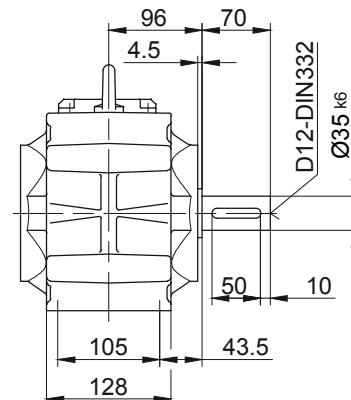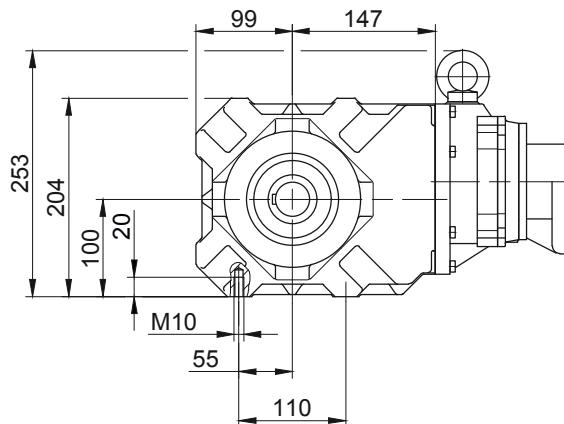

Foot with clearance holes at bottom

Code -1.U/

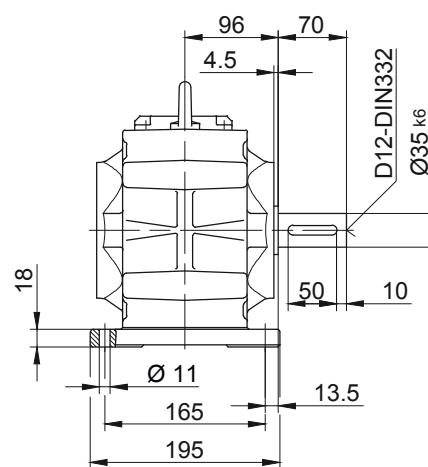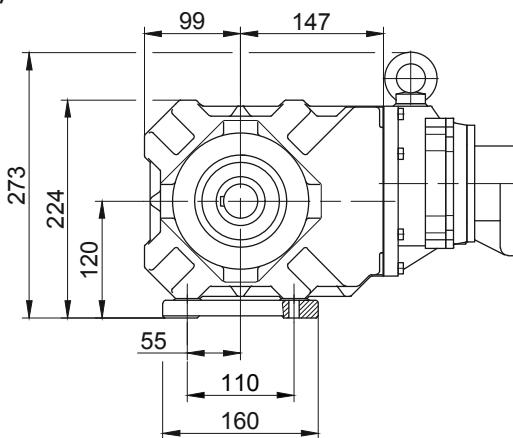

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gearred motors

Dimension - Tandem Gearbox


BK30G06

Flange with clearance holes at front


Code -3.V/
(Code -2.V/)

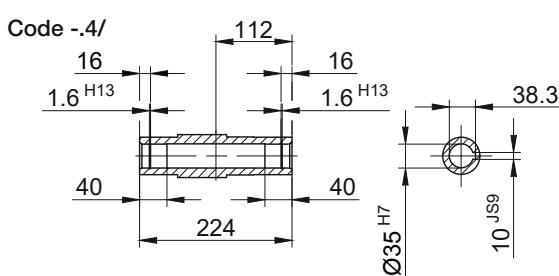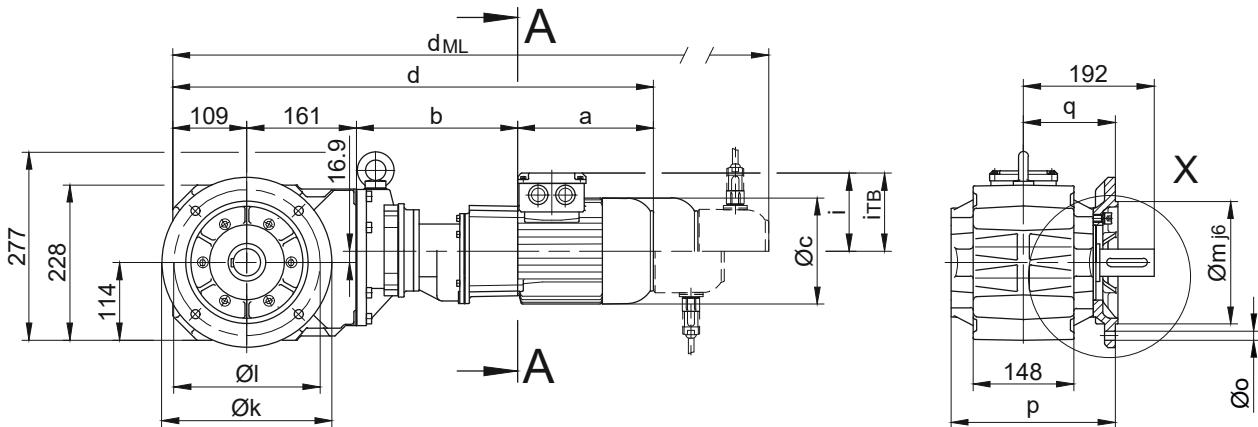



Code -.1/

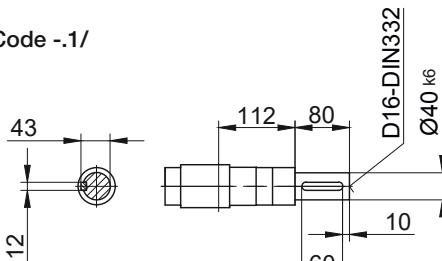

Code -.5/

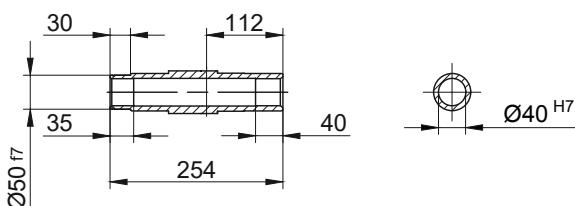

Code -.3/

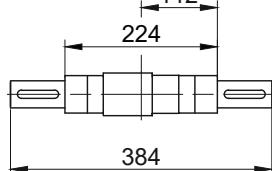

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK30..	Code -3.V/	250	215	180	16	13.5	242	135	4	57
BK30..	Code -2.V/	200	165	130	12	11	239	132	3.5	59.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BK30G06.../S04S	142.5	191	110.5	603.5	90	112	647	691	734.5	-
BK30G06.../S..06 (M, L)	170.5	193	123	633.5	99	119	675.5	736	773.5	-
BK30G06.../S..08 (M, L)	199.5	237	156	706.5	114.5	136.5	772.5	818.5	880	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gearred motors

Dimension - Tandem Gearbox



BK30G06

Torque arm at front
Code -5.V/

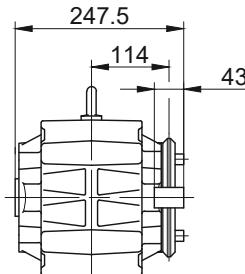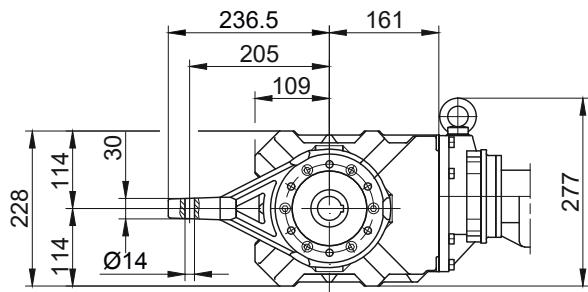



Flange with tapped holes at front

Code -7.V/

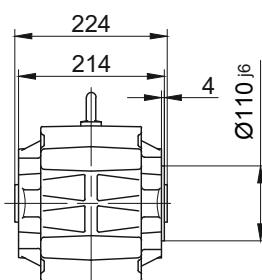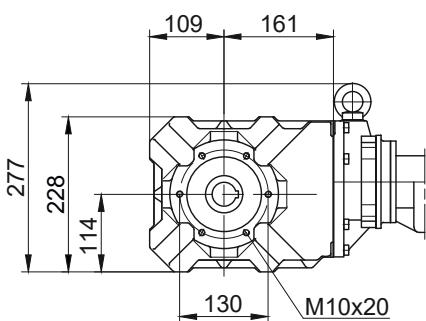



Foot with tapped holes at bottom

Code -6.U/

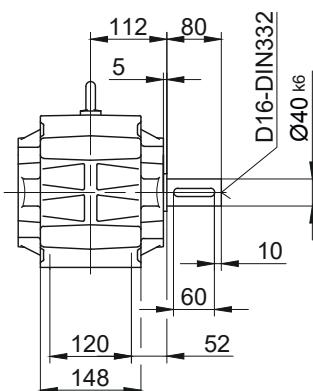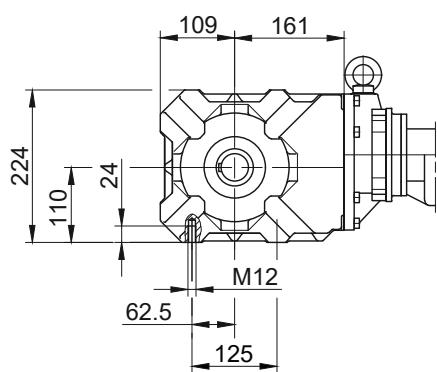

Foot with clearance holes at bottom

Code -1.U/

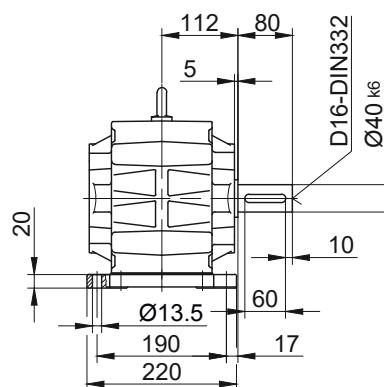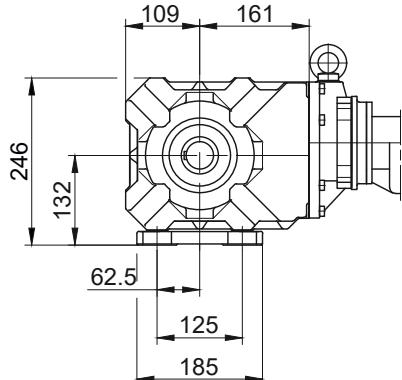

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.




BK-series bevel-gear motors

Dimension - Tandem Gearbox


BK40G10

Flange with clearance holes at front




Code -3.V/
(Code -4.V/)

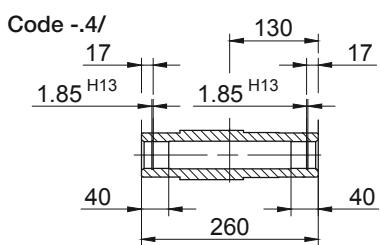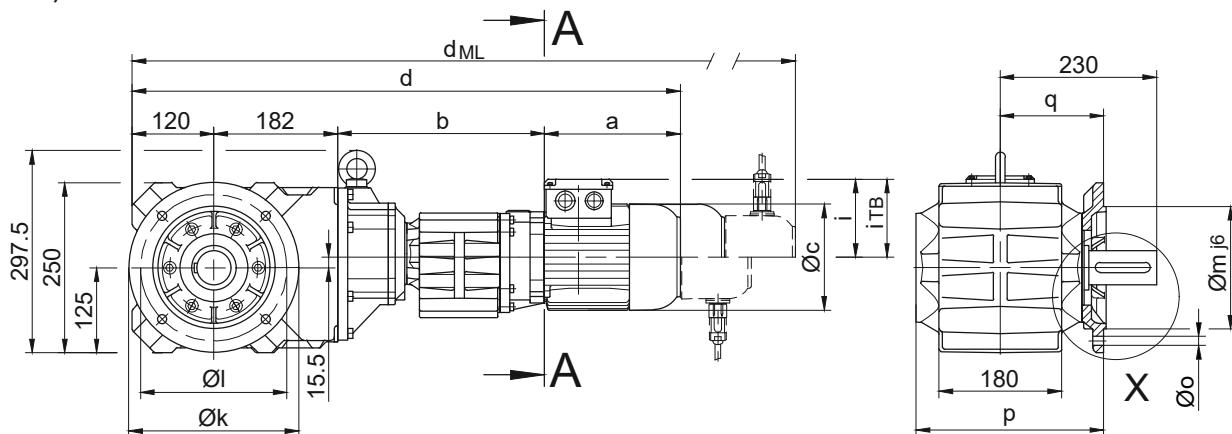



Code -.1/

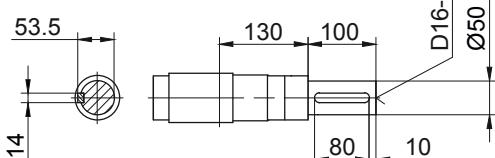

Code -.5/

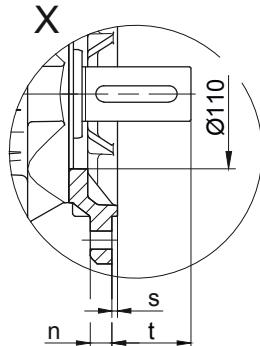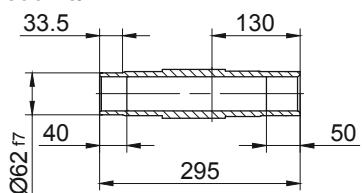

Code -.3/

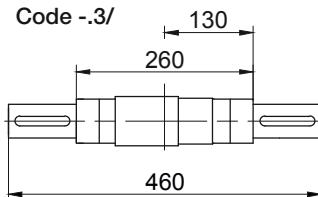

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK40..	Code -3.V/	250	215	180	16	13.5	276	152	4	78
BK40..	Code -4.V/	300	265	230	20	13.5	282	158	4	72

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BK40G10.../S..06 (M, L)	170.5	300	123	772.5	99	119	814.5	875	912.5	-
BK40G10.../S..08 (M, L)	199.5	304	156	805.5	114.5	136.5	871.5	917.5	979	-
BK40G10.../S..09 (S, X)	250.5	318.5	176	871	124	157	964	978.5	1068	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gearred motors

Dimension - Tandem Gearbox

BK40G10



Torque arm at front

Code -5.V/

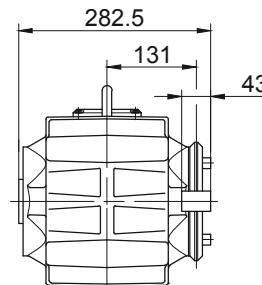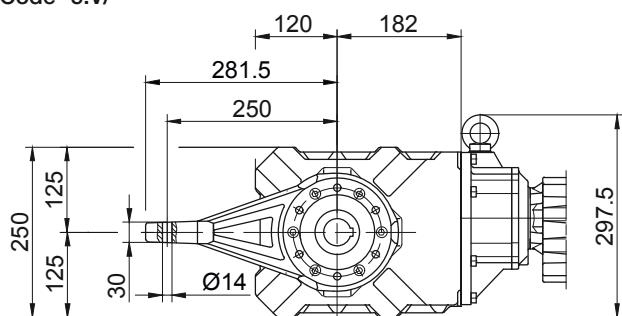



Flange with tapped holes at front

Code -7.V/

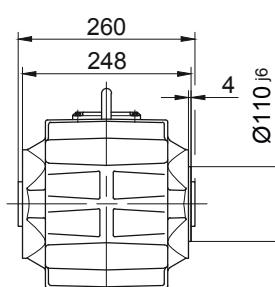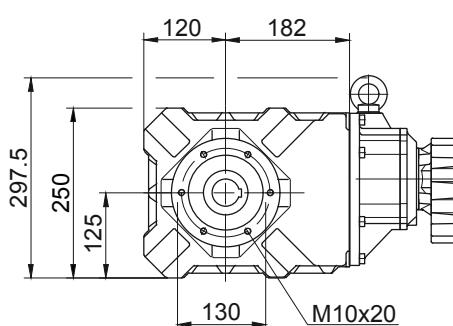



Foot with tapped holes at bottom

Code -6.U/

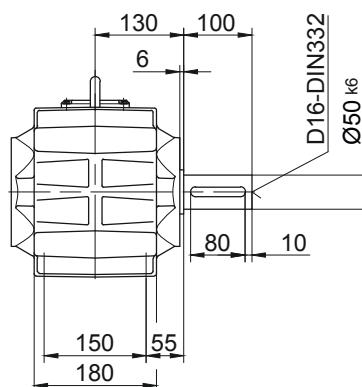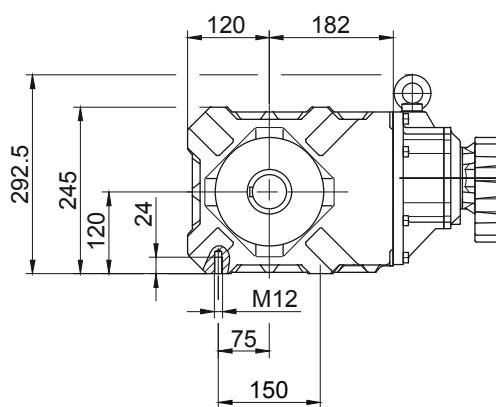

Foot with clearance holes at bottom

Code -1.U/

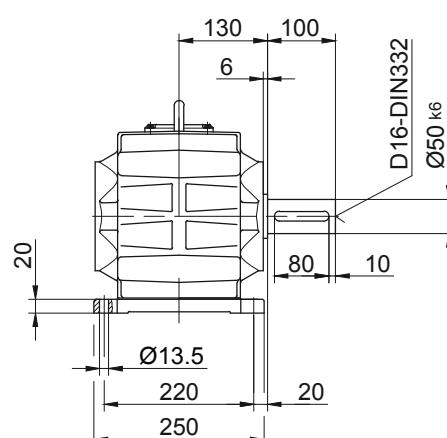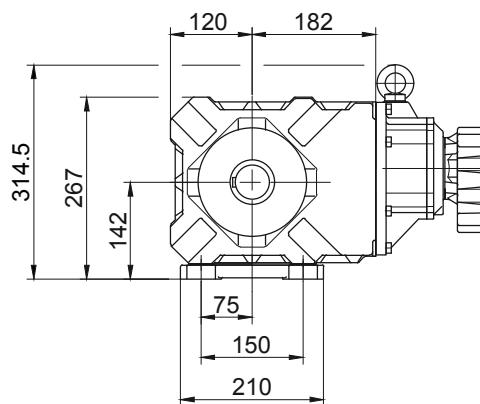

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gearred motors

Dimension - Tandem Gearbox


BK50G10

Flange with clearance holes at front


Code -3.V/
(Code -2.V/)

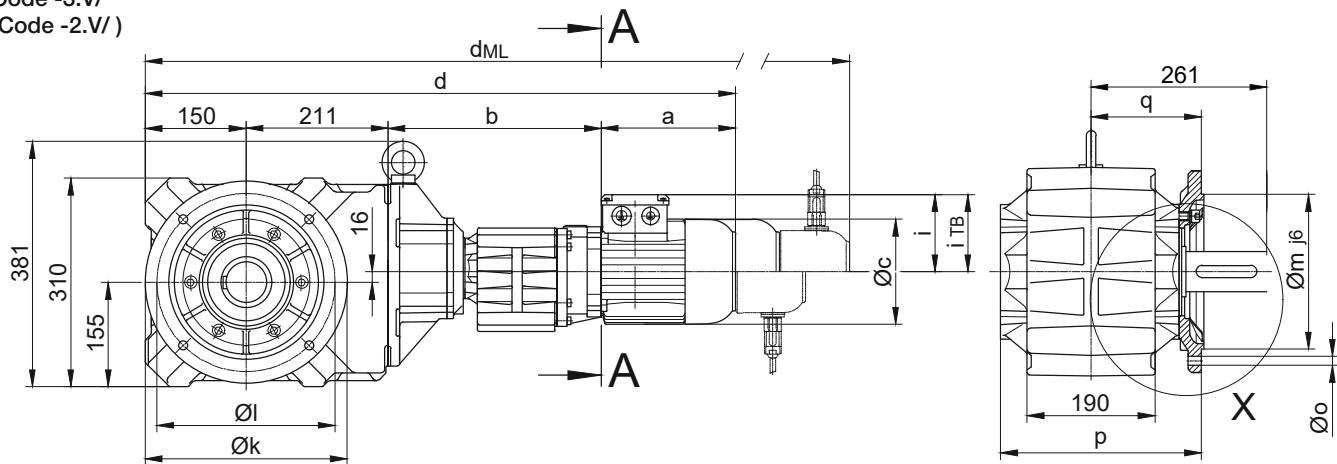


Code -.4/

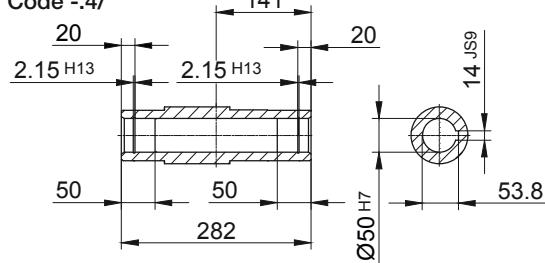



Code -.1/

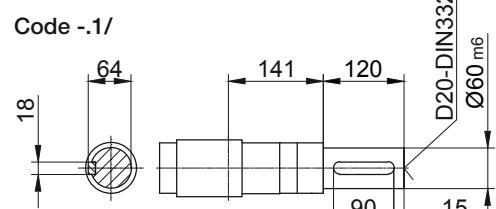

Code -.5/

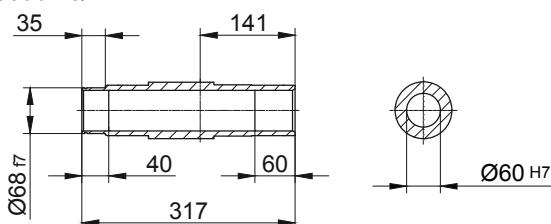

Code -.3/

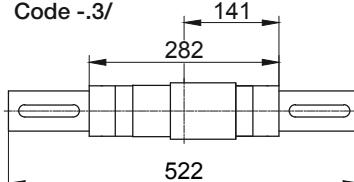

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK50..	Code -3.V/	300	265	230	20	13.5	299	164	4	97
BK50..	Code -2.V/	250	215	180	16	13.5	296	161	4	100

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BK50G10.../S..06 (M, L)	170.5	313	123	844.5	99	119	886.5	947	984.5	-
BK50G10.../S..08 (M, L)	199.5	317	156	877.5	114.5	136.5	943.5	989.5	1051	-
BK50G10.../S..09 (S, X)	250.5	331.5	176	943	124	157	1036	1050.5	1140	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gearred motors

Dimension - Tandem Gearbox

BK50G10



Torque arm at front

Code -5.V/

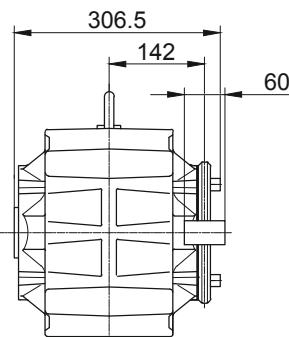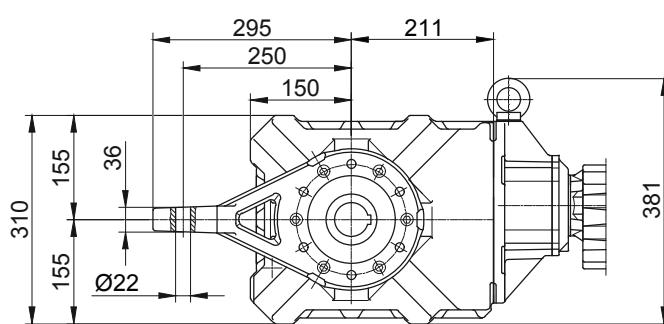



Flange with tapped holes at front

Code -7.V/

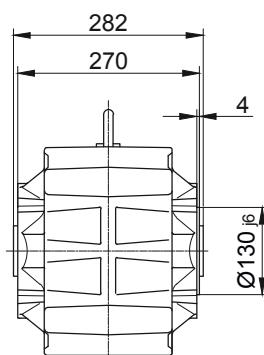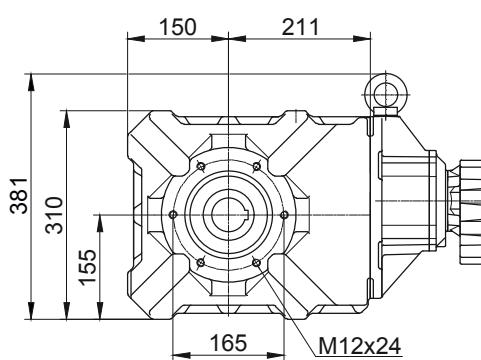



Foot with tapped holes at bottom

Code -6.U/

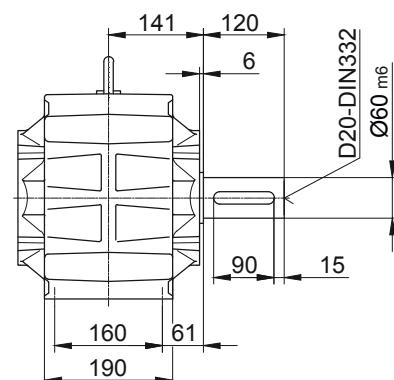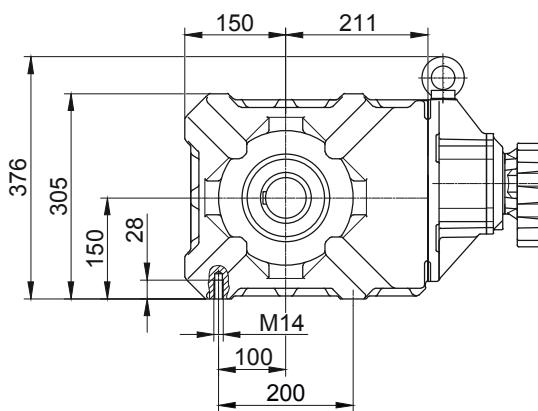

Foot with clearance holes at bottom

Code -1.U/

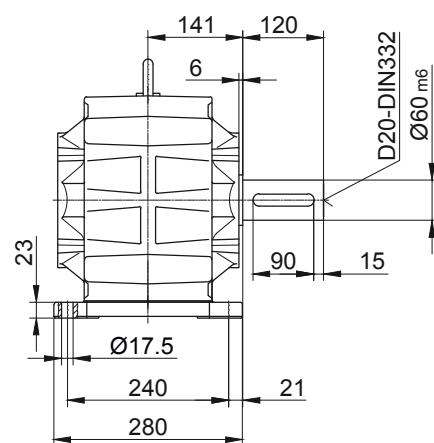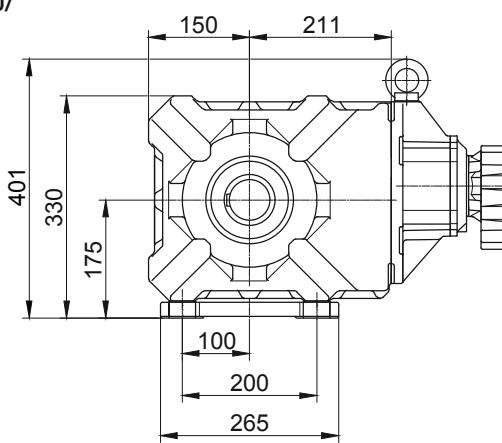

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Dimension - Tandem Gearbox


BK60G20

Flange with clearance holes at front


Code -3.V/
(Code -2.V/)

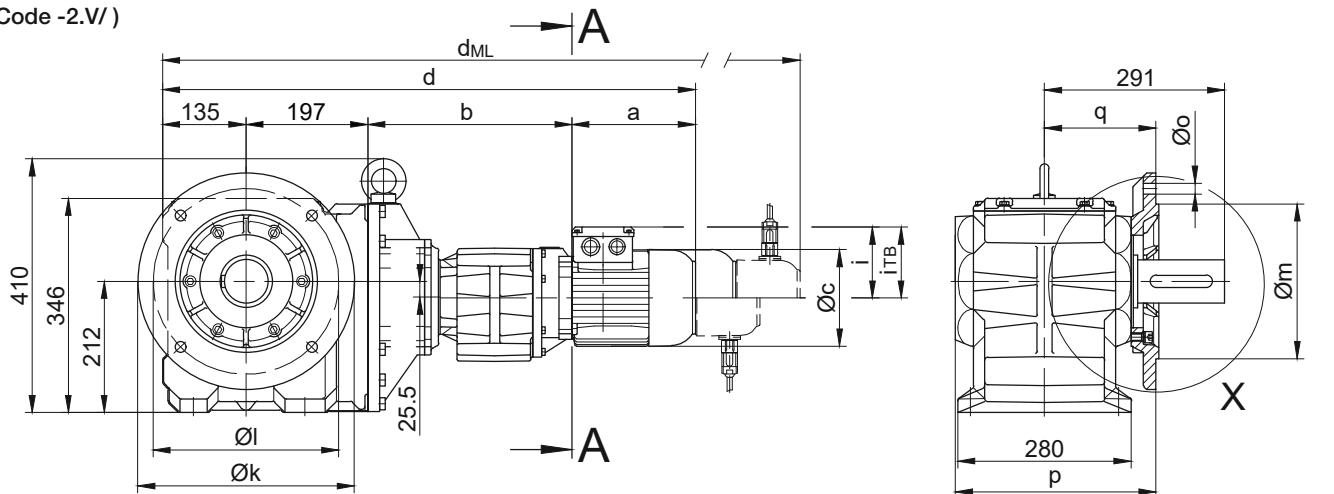


Code -.4/

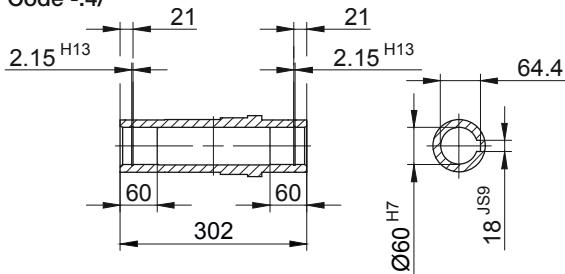


Code -.1/

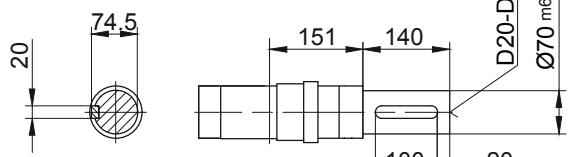


Code -.5/

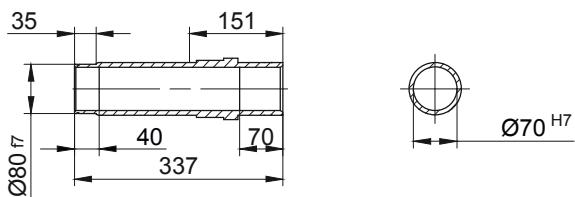

Code -.3/

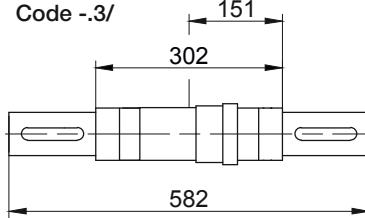

12



Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK60..	Code -3.V/	350	300	250	20	17.5	324	180	5	112
BK60..	Code -2.V/	300	265	230	20	13.5	332	188	4	103

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BK60G20.../S..06 (M, L)	170.5	326	123	828.5	99	119	870.5	931	968.5	-
BK60G20.../S..08 (M, L)	199.5	330	156	861.5	114.5	136.5	927.5	973.5	1035	-
BK60G20.../S..09 (S, X)	250.5	344.5	176	927	124	157	1020	1034.5	1124	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gearred motors



Dimension - Tandem Gearbox

BK60G20



Torque arm at front
Code -5.V/

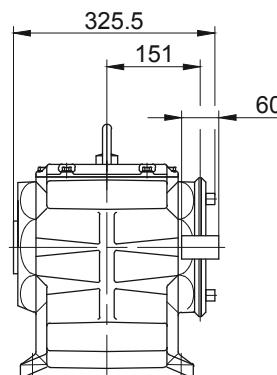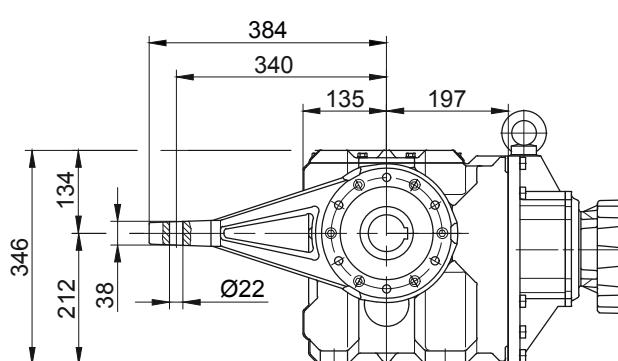

Flange with tapped holes at front
Code -7.V/

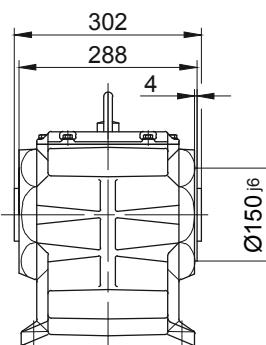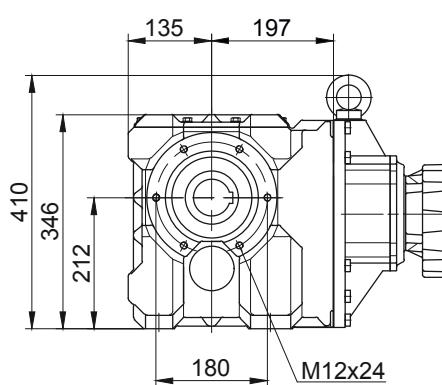

Foot with clearance holes at bottom
Code -1.U/

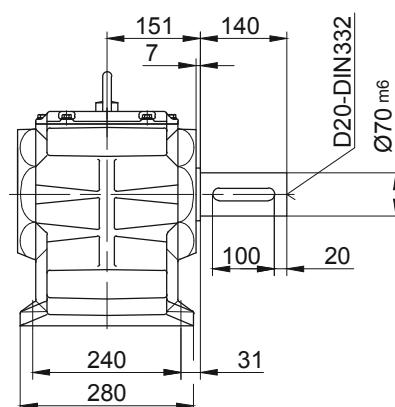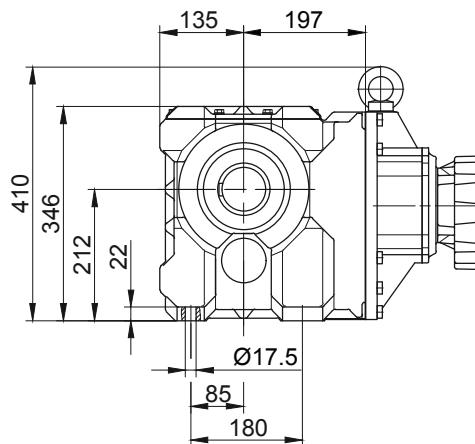






BK-series bevel-gear motors

Dimension - Tandem Gearbox




BK70G20

Flange with clearance holes at front



Code -3.V/
(Code -2.V/)
(Code -4.V/)

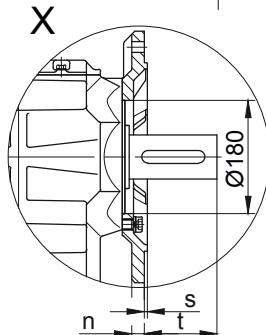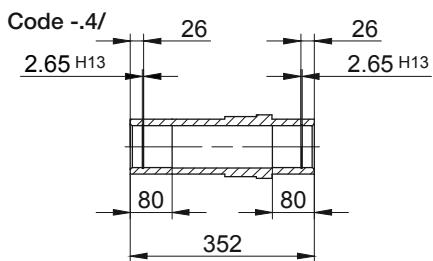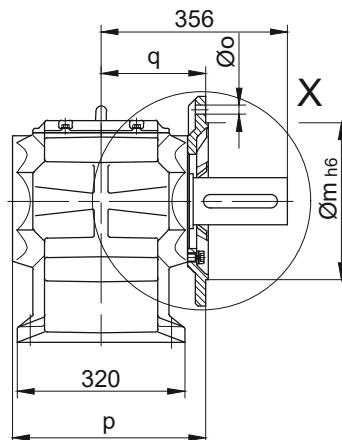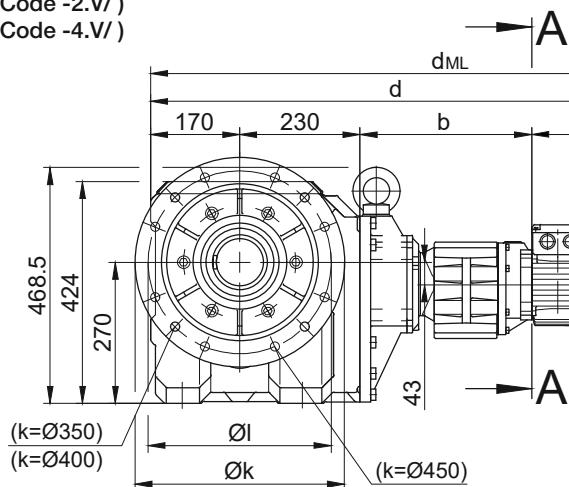

Code -1/

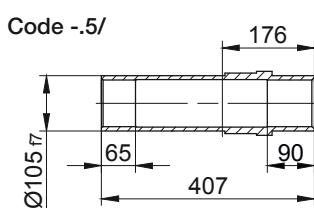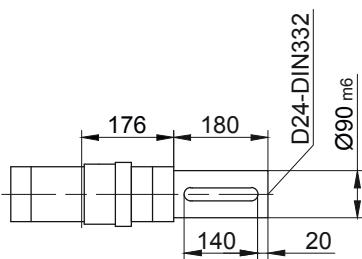

Code -3/

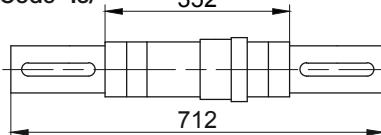

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK70..	Code -3.V/	400	350	300	20	4 x 17.5	369	200	5	157
BK70..	Code -2.V/	350	300	250	20	4 x 17.5	369	200	5	157
BK70..	Code -4.V/	450	400	350	22	4 x 17.5	379	210	5	147

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BK70G20.../S..06 (M, L)	170.5	326	123	896.5	99	119	938.5	999	1036.5	-
BK70G20.../S..08 (M, L)	199.5	330	156	929.5	114.5	136.5	995.5	1041.5	1103	-
BK70G20.../S..09 (S, X)	250.5	344.5	176	995	124	157	1088	1102.5	1192	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gearred motors

Dimension - Tandem Gearbox



BK70G20

Torque arm at front
Code -5.V/

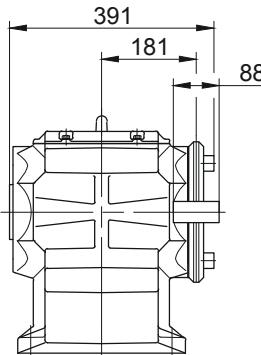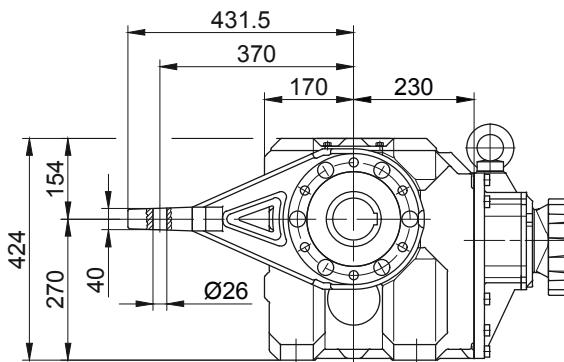



Flange with tapped holes at front

Code -7.V/

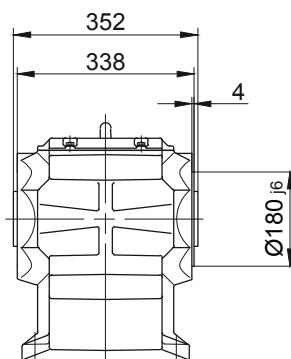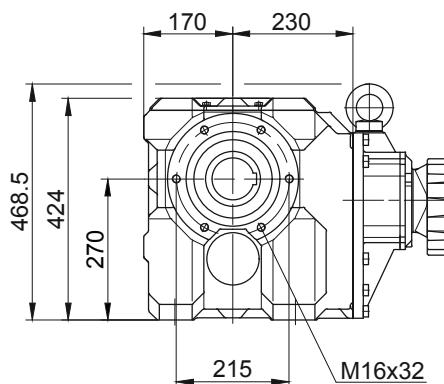


Foot with clearance holes at bottom

Code -1.U/

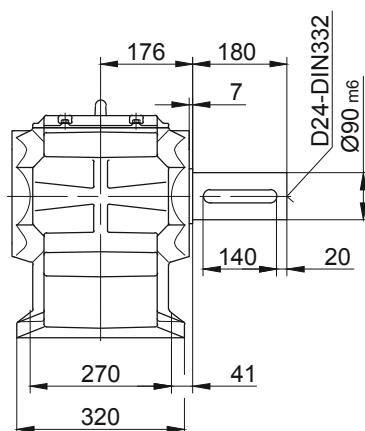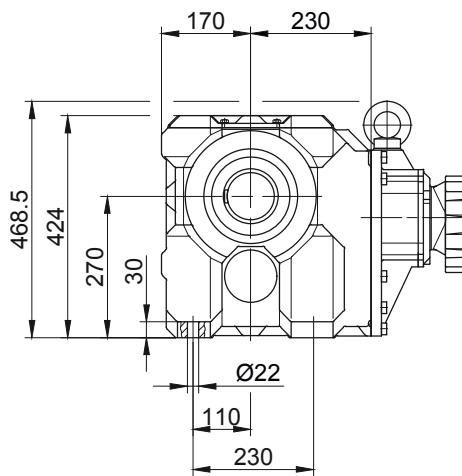

Code -.4/K70

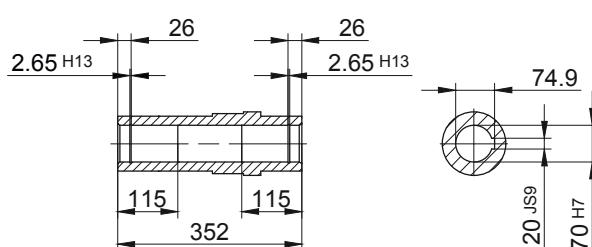

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gearred motors

Dimension - Tandem Gearbox


BK80G40

Flange with clearance holes at front


Code -3.V/
(Code -4.V/)

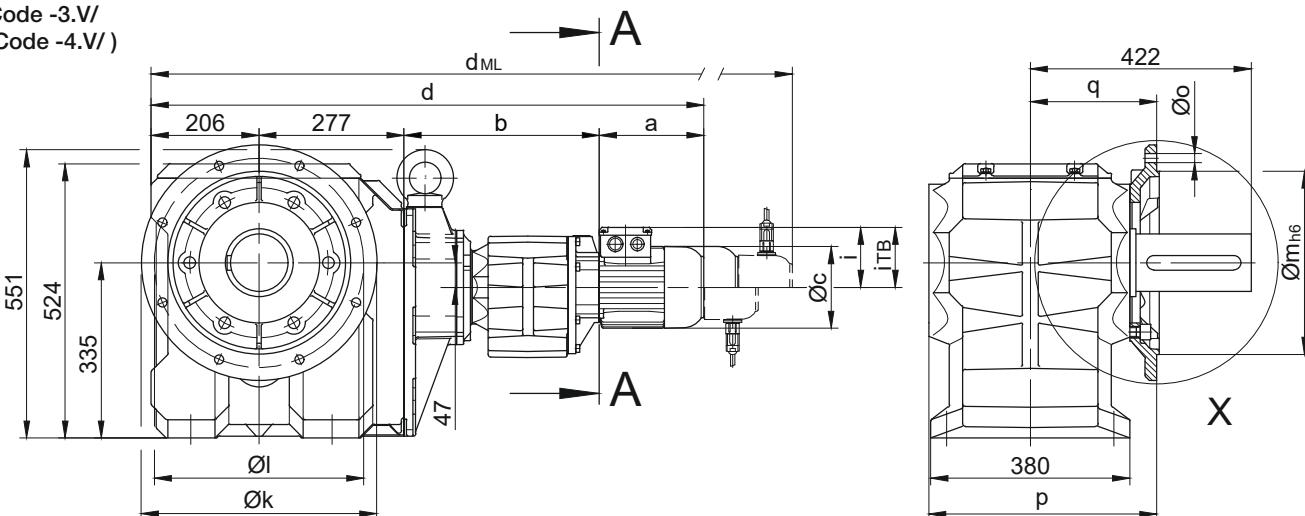


Code -.4/

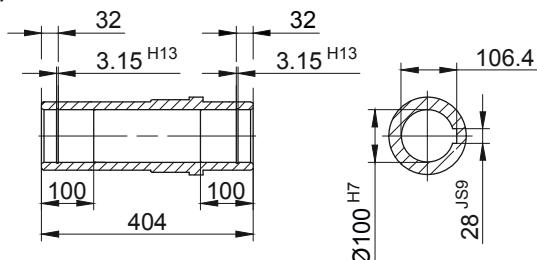


Code -.1/

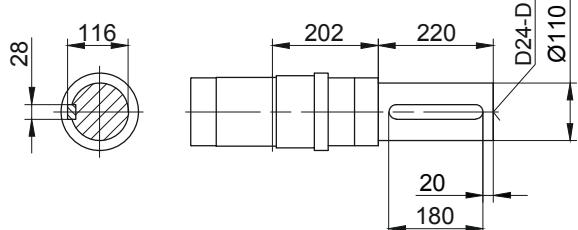




Code -.5/

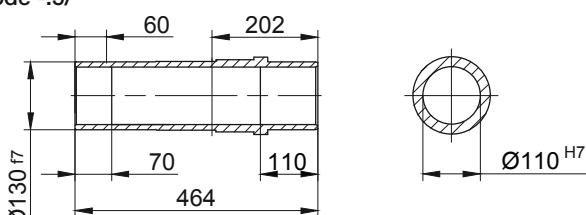

Code -.3/

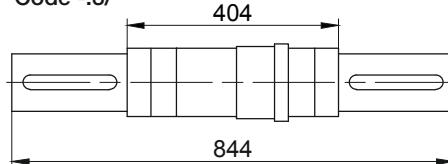

Code -.4/K90

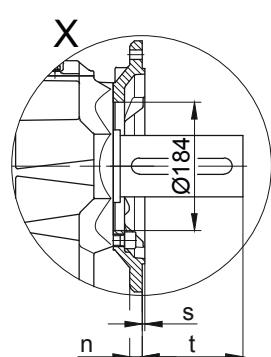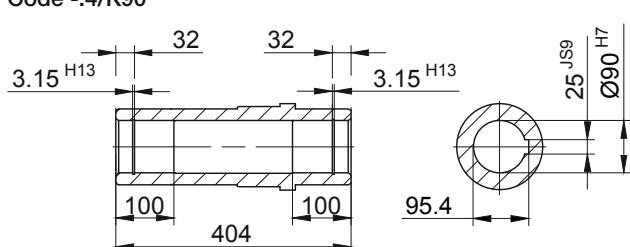

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BK80..	Code -3.V/	450	400	350	22	17.5	439	245	5	178
BK80..	Code -4.V/	550	500	450	22	17.5	444	250	5	173

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i _{TB}	Brake	Encoder	Brake with Encoder	Back Stop
BK80G40.../S..08 (M, L)	199.5	357	156	1039.5	114.5	136.5	1105.5	1151.5	1213	-
BK80G40.../S..09 (S, X)	250.5	371.5	176	1105	124	157	1198	1212.5	1302	-
BK80G40.../S..11 (S, M, L)	319	378	218	1180	165	176	1278	1287.5	1380	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gearred motors

Dimension - Tandem Gearbox



BK80G40

Torque arm at front
Code -5.V/

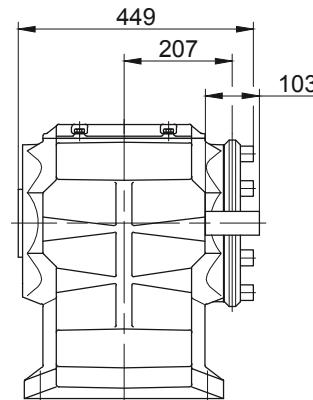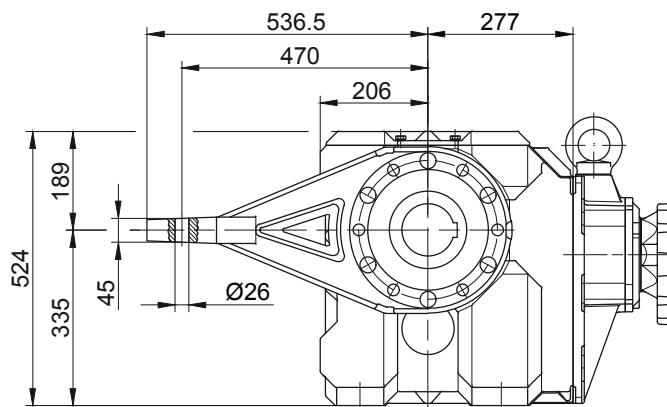



Flange with tapped holes at front

Code -7.V/

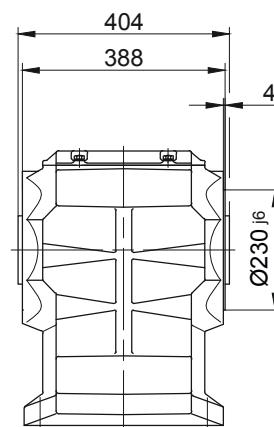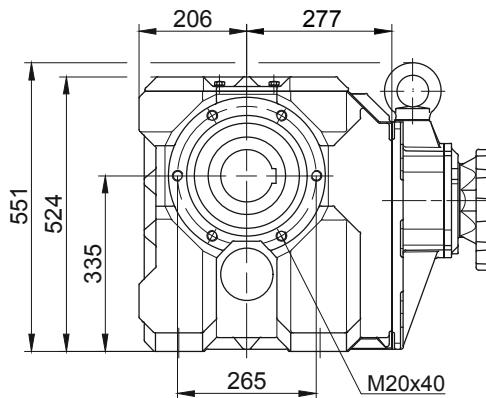

Foot with clearance holes at bottom

Code -1.U/

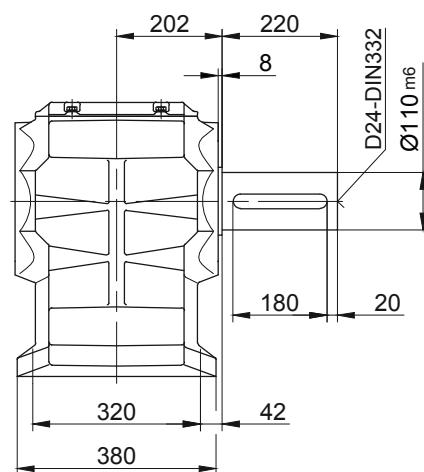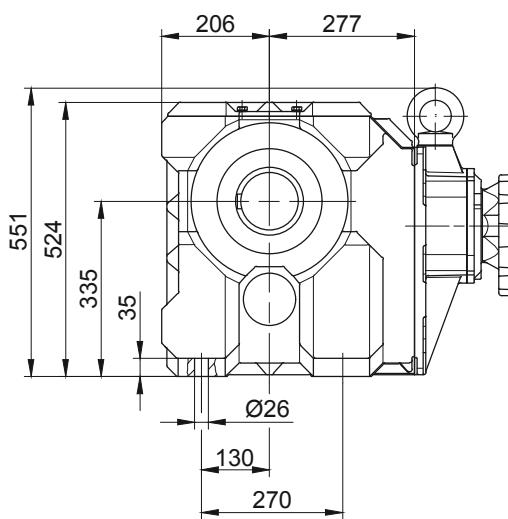

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Dimension - Tandem Gearbox


BK90G50

Flange with clearance holes at front


**Code -3.V/
(Code -4.V/)**

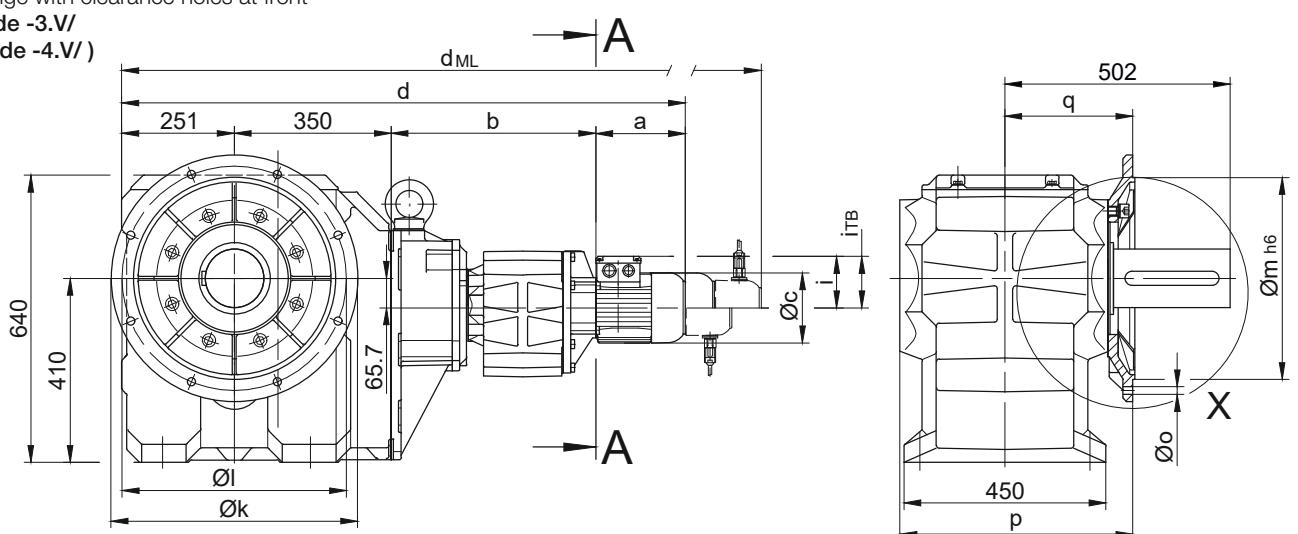


Code -4/

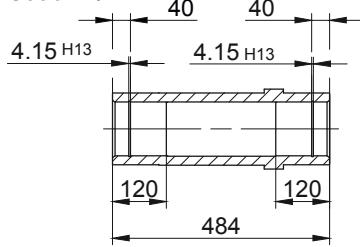


Code -1/

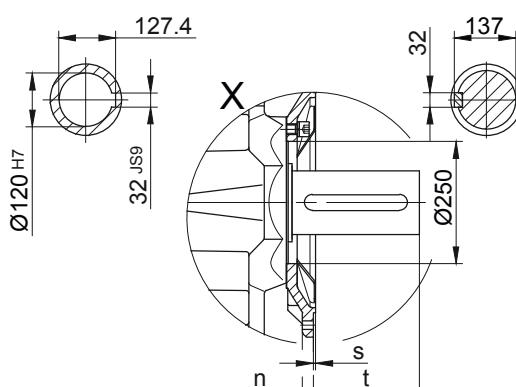

Code -.5/

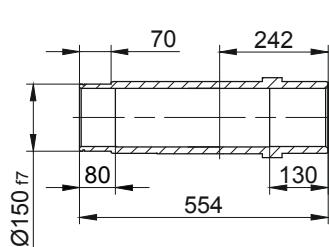

Code -3/

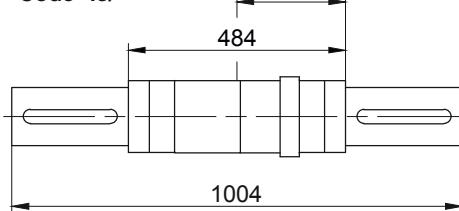

Flange Dimensions											
Type	Design	k	l	m	n	o	p	q	s	t	
BK90..	Code -3.V/	550	500	450	22	17.5	519	285	5	218	
BK90..	Code -4.V/	660	600	550	25	22	513	279	6	225	

Dimensions in millimetres (mm)

Type	a	b	c	d	i	Design with motor extensions				
						i_{TB}	Brake	Encoder	Brake with Encoder	Back Stop
						d_{ML}	d_{ML}	d_{ML}	d_{ML}	d_{ML}
BK90G50-../S..08 (M, L)	199.5	427	156	1227.5	114.5	136.5	1293.5	1339.5	1401	-
BK90G50-../S..09 (S, X)	250.5	441.5	176	1293	124	157	1386	1400.5	1490	-
BK90G50-../S..11 (S, M, L)	319	448	218	1368	165	176	1466	1475.5	1568	-


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com

BK-series bevel-gearred motors

Dimension - Tandem Gearbox


BK90G50

Torque arm at front
Code -5.V/

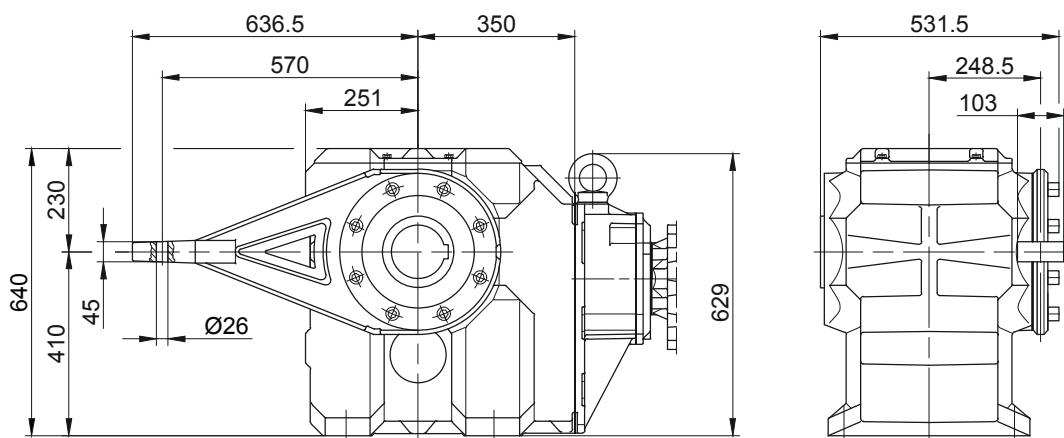


Flange with tapped holes at front

Code -7.V/

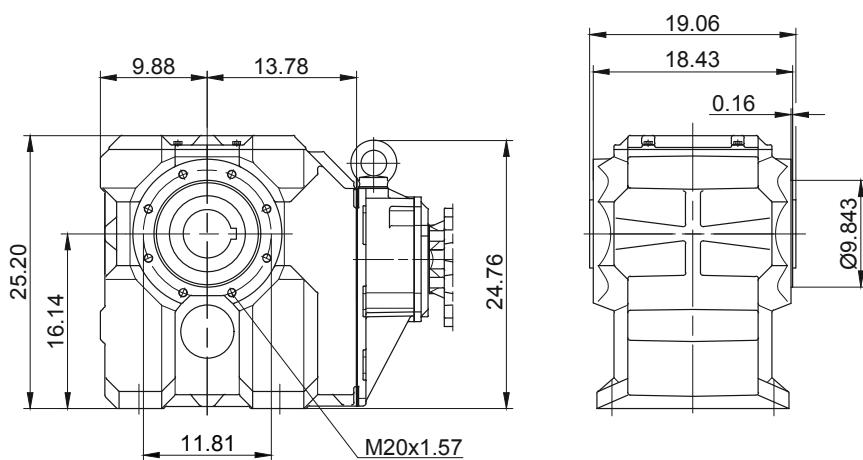

Foot with clearance holes at bottom

Code -1.U/

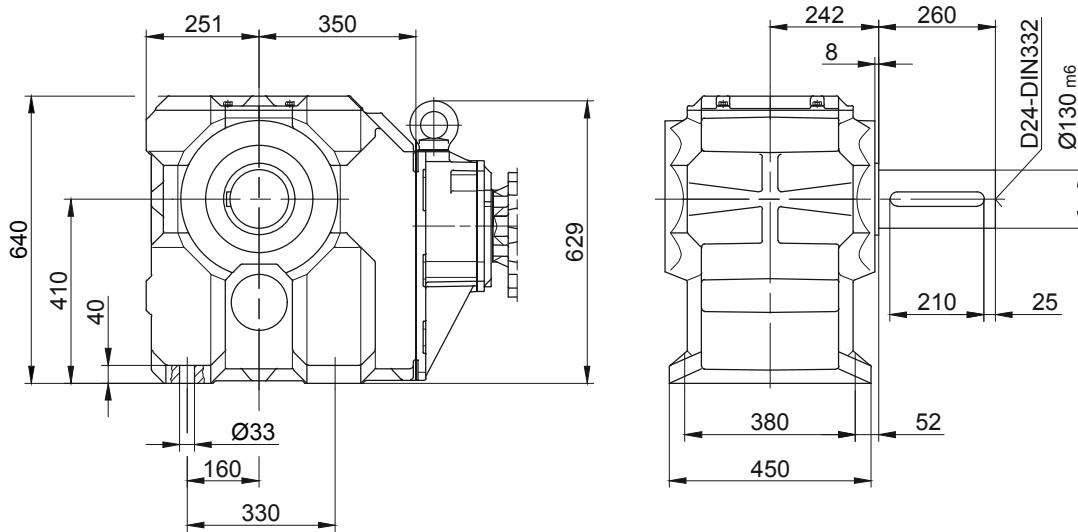

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Energy Efficient Geared Motors


AC Variable Speed

12

BK-series bevel-gear motors

Additional Dimension Sheet

Splined shaft

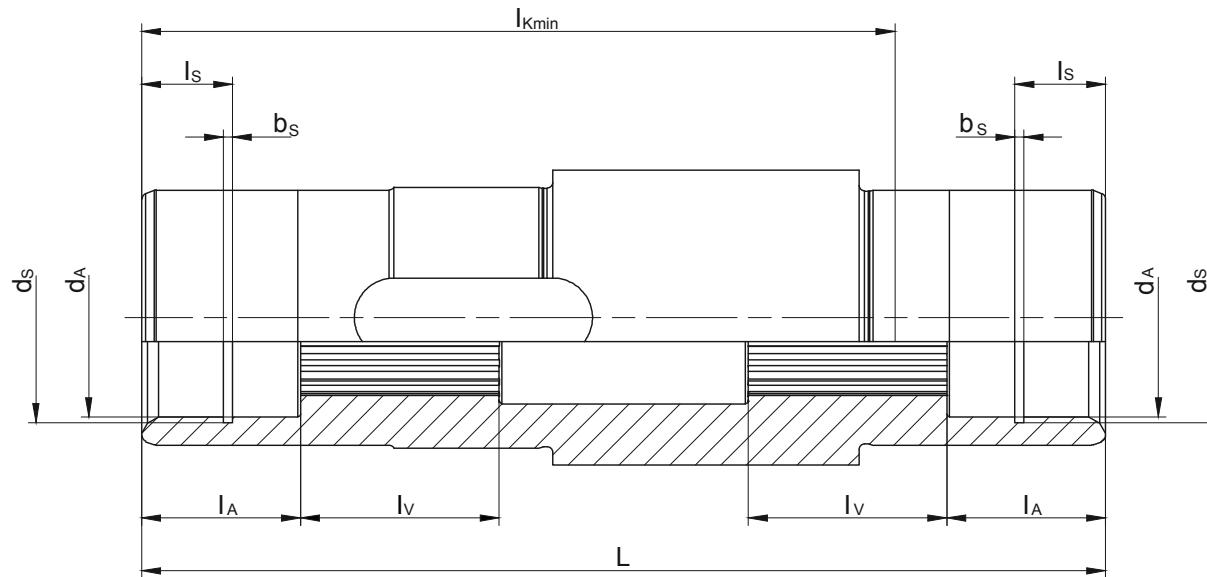

Type	Splined shaft acc. to DIN 5480	d _A	l _A	l _v	l _{Kmin}	L	d _s	l _s	b _s
BK10	N30x1.25x22x9H	35 ^{G7}	28	35	132	170	37 ^{H12}	16	1.6 ^{H13}
BK20	N35x2x16x9H	36 ^{G7}	28	35	154	192	37 ^{H12}	16	1.6 ^{H13}
BK30	N40x2x18x9H	41 ^{G7}	25	42	179	224	42.5 ^{H12}	17	1.85 ^{H13}
BK40	N50x2x24x9H	51 ^{G7}	25	49	214	260	53 ^{H12}	17	2.15 ^{H13}
BK50	N60x2x28x9H	61 ^{G7}	25	58	229	282	63 ^{H12}	17	2.15 ^{H13}
BK60	N70x2x34x9H	72 ^{G7}	25	72	248	302	75 ^{H12}	17	2.65 ^{H13}
BK70	N85x3x27x9H	86 ^{G7}	26	100	295	352	88.5 ^{H12}	17	3.15 ^{H13}
BK80	N110x3x35x9H	112 ^{G7}	60	90	335	404	116 ^{H12}	30	4.15 ^{H13}
BK90	N130x5x24x9H	131.5 ^{G7}	60	110	410	484	134 ^{H12}	30	4.15 ^{H13}
Dimensions in millimetres (mm)									

12


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Additional Dimension Sheet

Shrink disc couplings (SSV)

(Code BK10-5/...)
(Code BK10Z-5/...)

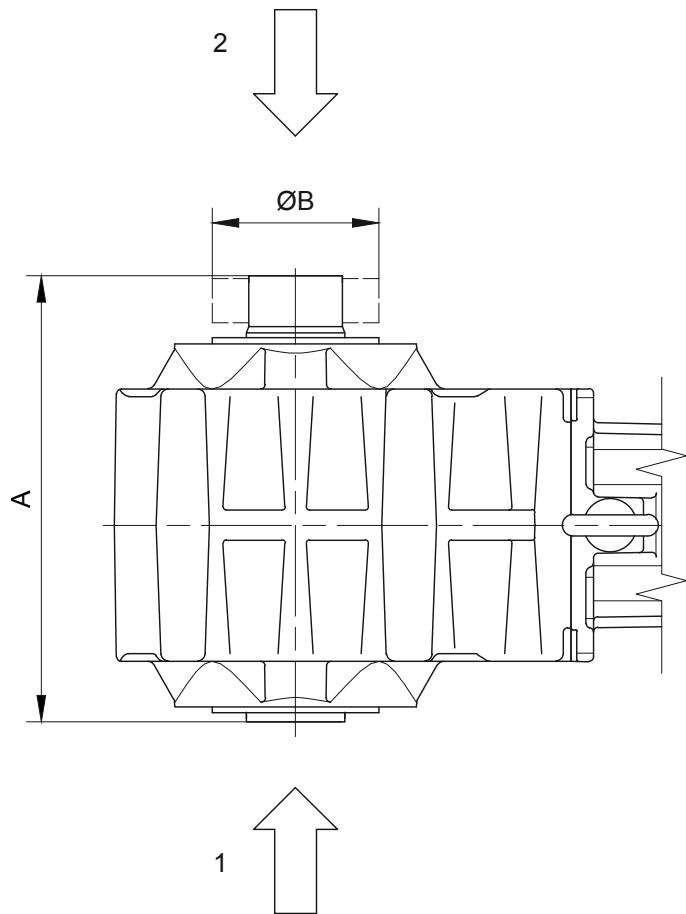

12

- 1 Gear side FRONT (V)
- 2 Gear side REAR (H)

Type	SSV Ringfeder	SSV STÜWE	A	B
BK06	RfN 4161 024x050	HSD 24-22x24	118	50
BK10	RfN 4161 036x022	HSD 36-22x36	195	72
BK20	RfN 4161 044x080	HSD 44-22x44	222	80
BK30	RfN 4161 050x090	HSD 50-22x50	254	90
BK40	RfN 4161 062x110	HSD 62-22x62	295	110
BK50	RfN 4161 068x115	HSD 68-22x68	317	115
BK60	RfN 4161 080x141	HSD 80-22x80	337	140
BK70	RfN 4161 105x185	HSD 110-22x105	407	185
BK80	RfN 4161 130x215	HSD 125-22x130	464	215
BK90	RfN 4161 150x263	HSD 155-22x150	554	263
Dimensions in millimetres (mm)				


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Additional Dimension Sheet

Shrink disc connection with cover (SSV)

(Code BK10-.5A/...)
(Code BK10Z-.5A/...)

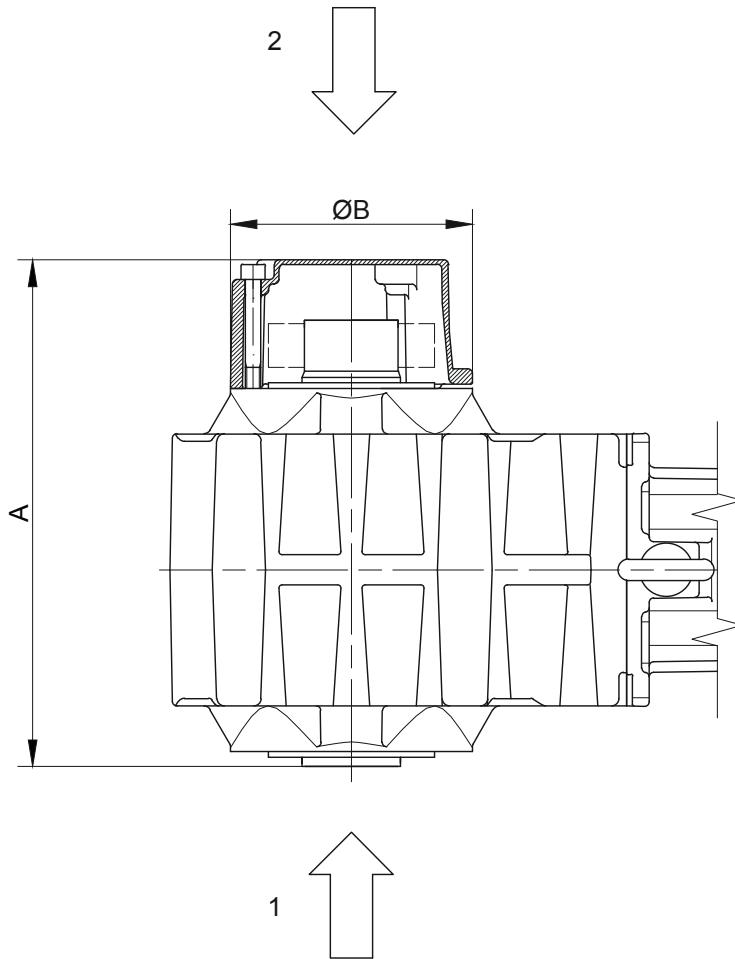

- 1 Gear side FRONT (V)
2 Gear side REAR (H)


Type	SSV Ringfeder	SSV STÜWE	A	B
BK10	RfN 4161 036x072	HSD 36-22x36	217	120
BK20	RfN 4161 044x080	HSD 44-22x44	270	140
BK30	RfN 4161 050x090	HSD 50-22x50	300	160
BK40	RfN 4161 062x110	HSD 62-22x62	335	160
BK50	RfN 4161 068x115	HSD 68-22x68	329	200
BK60	RfN 4161 080x141	HSD 80-22x80	386	210
BK70	RfN 4161 105x185	HSD110-22x105	465	250
BK80	RfN 4161 130x215	HSD125-22x130	502	300
BK90	RfN 4161 150x263	HSD155-22x150	602	350
Dimensions in millimetres (mm)				

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Additional Dimension Sheet

Rubber buffer for torque arm

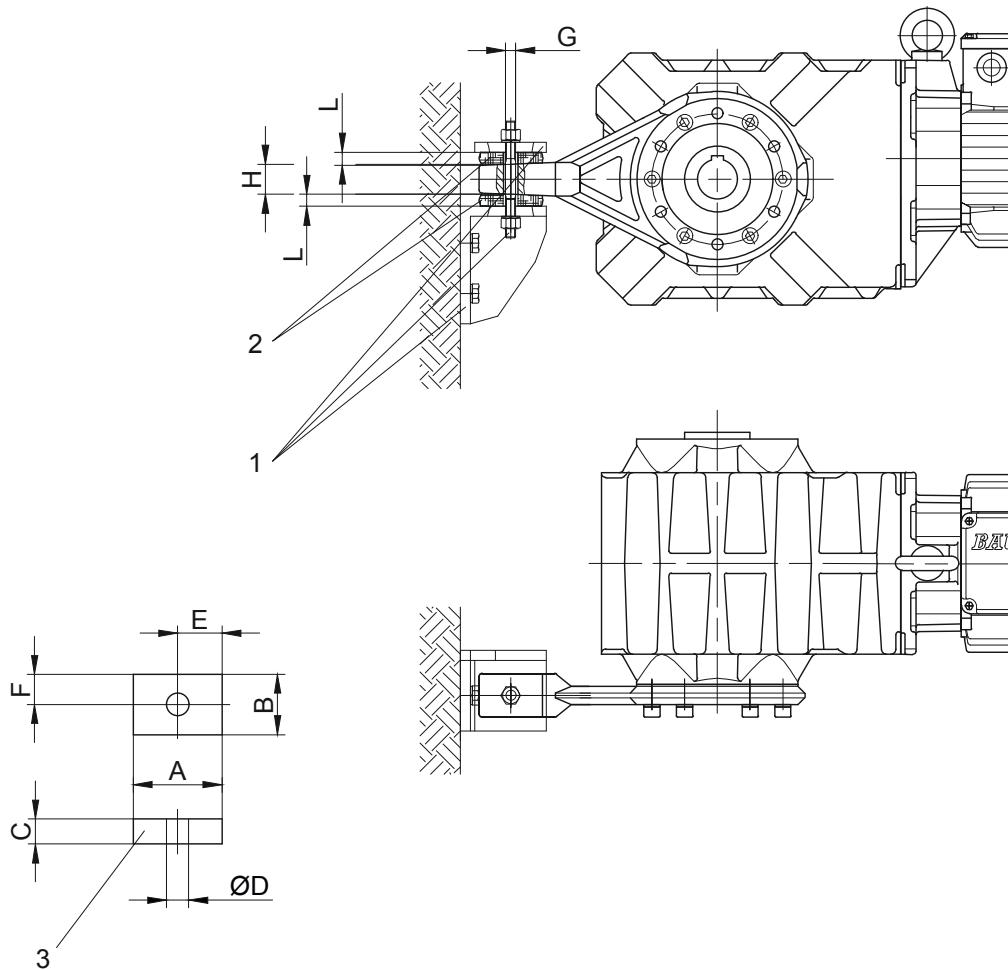

1 not included in delivery

3 Rubber buffer

2 Rubber buffers pretensioned

G Maximum screw diameter

Material:

Natural rubber

Dimensions of the transverse hole:

Hardness 50 +/-5 Shore A

see dimensioned sketch of the respective shaft mounted gearbox

Gear	Position	A	B	C	D	E	F	G	H	L
BK06	0	30	30	12	12	15	15	M10	10	10
BK08	1	48	32	15	14	24	16	M10	19	13.5
BK10	1	48	32	15	14	24	16	M10	19	13.5
BK17	1	48	32	15	14	24	16	M10	19	13
BK20	1	48	32	15	14	24	16	M10	19	13
BK30	2	63	43	20	14	31.5	21.5	M10	30	17
BK40	2	63	43	20	14	31.5	21.5	M10	30	17
BK50	3	88	60	25	22	44	30	M18	36	21.5
BK60	3	88	60	25	22	44	30	M18	38	21
BK70	4	123	88	30	26	61.5	44	M20	40	25.5
BK80	5	133	103	35	26	66.5	51.5	M20	45	30
BK90	5	133	103	35	26	66.5	51.5	M20	45	29.5

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors



Additional Dimension Sheet

Position of the torque arm

BK06

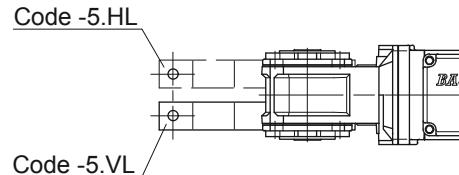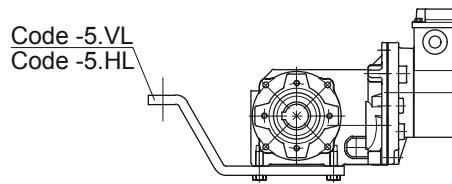

BK08 - BK90

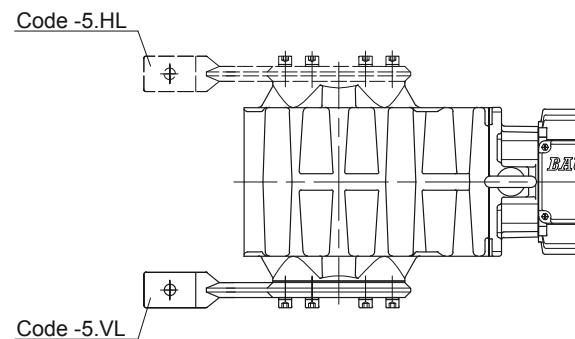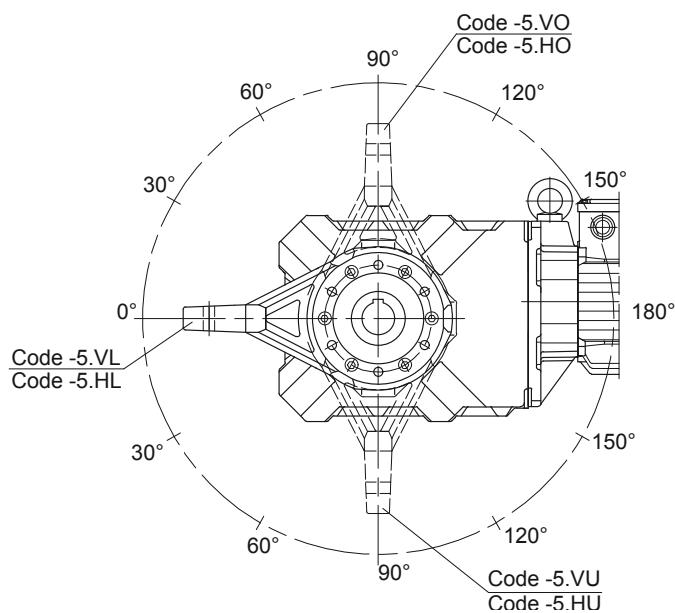

12



Gear	VL/HL	Position					VR/HR
		VO/HO/VU/HU					
BK06	0°	-	-	-	-	-	-
BK08	0°	30°	60°	90°	120°	-	-
BK10	0°	30°	60°	90°	120°	150°	-
BK17	0°	30°	60°	90°	120°	-	-
BK20	0°	30°	60°	90°	120°	150°	-
BK30	0°	30°	60°	90°	120°	150°	-
BK40	0°	30°	60°	90°	120°	150°	-
BK50	0°	30°	60°	90°	120°	150°	-
BK60	0°	30°	60°	90°	120°	150°	-
BK70	0°	30°	60°	90°	120°	150°	-
BK80	0°	30°	60°	90°	120°	150°	-
BK90	0°	45°		90°	120°	135°	-

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BK-series bevel-gear motors

Additional Dimension Sheet

Foot with tapped holes

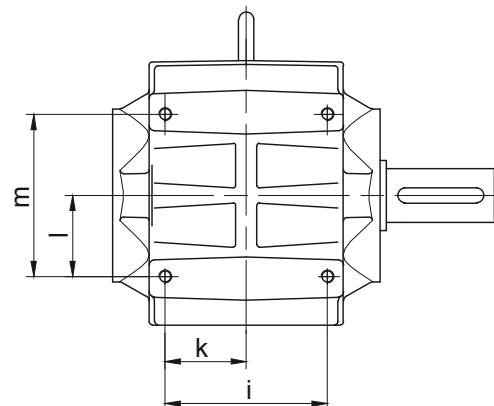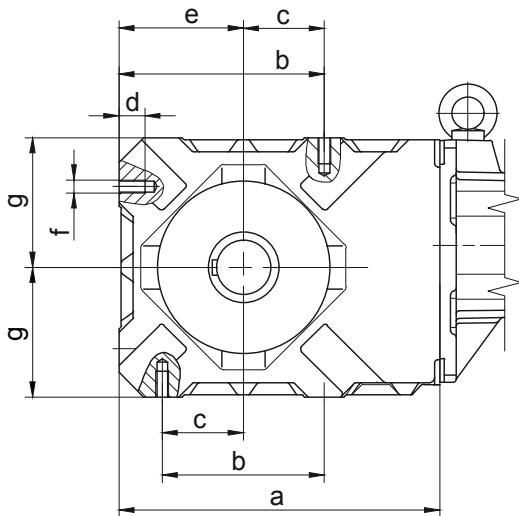

Type	a	b	c	d	e	f	g	i	k	l	m
BK10-BK10Z	202	90	45	16	78	M8	80	95	47.5	45	90
BK20-BK20Z	242	110	55	20	95	M10	100	105	52.5	55	110
BK30-BK30Z	266	125	62.5	24	105	M12	110	120	60	62.5	125
BK40-BK40Z	297	150	75	24	115	M12	120	150	75	75	150
BK50-BK50Z	356	200	100	28	145	M14	150	160	80	100	200

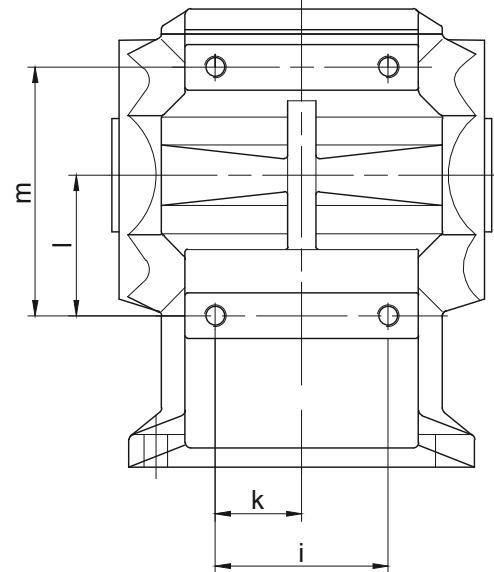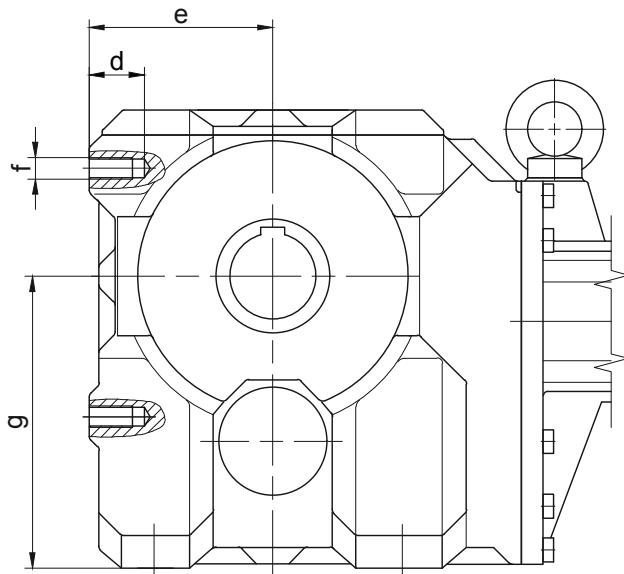


Type	a	b	c	d	e	f	g	i	k	l	m
BK60-BK60Z	-	-	-	40	130	M20	212	160	80	145	230
BK70-BK70Z	-	-	-	40	165	M20	270	160	80	130	230
BK80-BK80Z	-	-	-	60	200	M30	335	210	105	240	360
BK90-BK90Z	-	-	-	60	245	M30	410	210	105	215	360

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Additional Dimension Sheet

Foot plate with clearance holes

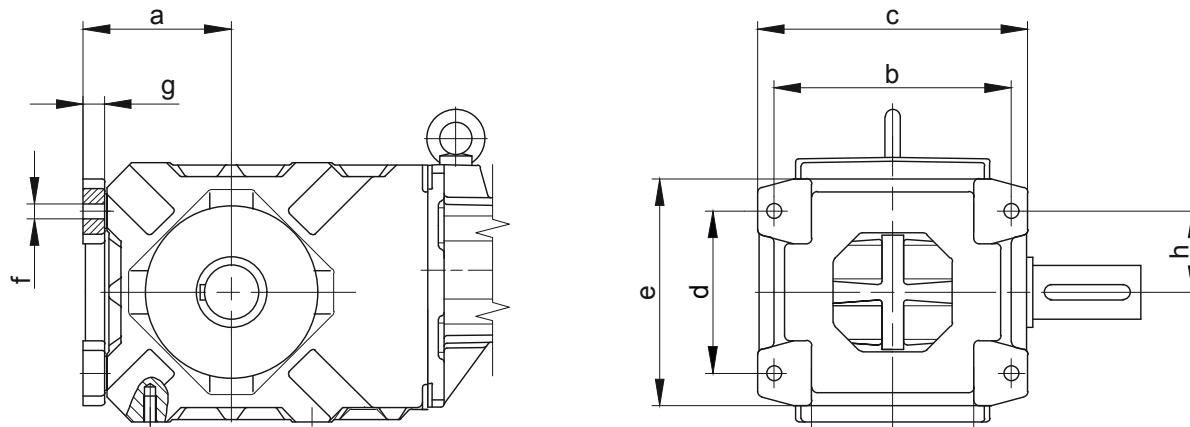

Type	a	b	c	d	e	f	g	h
BK10-BK10Z	96	145	165	90	130	Ø9	16	45
BK20-BK20Z	115	165	195	110	160	Ø11	18	55
BK30-BK30Z	127	190	220	125	185	Ø13.5	20	62.5
BK40-BK40Z	137	220	250	150	210	Ø13.5	20	75
BK50-BK50Z	170	240	280	200	265	Ø17.5	23	100

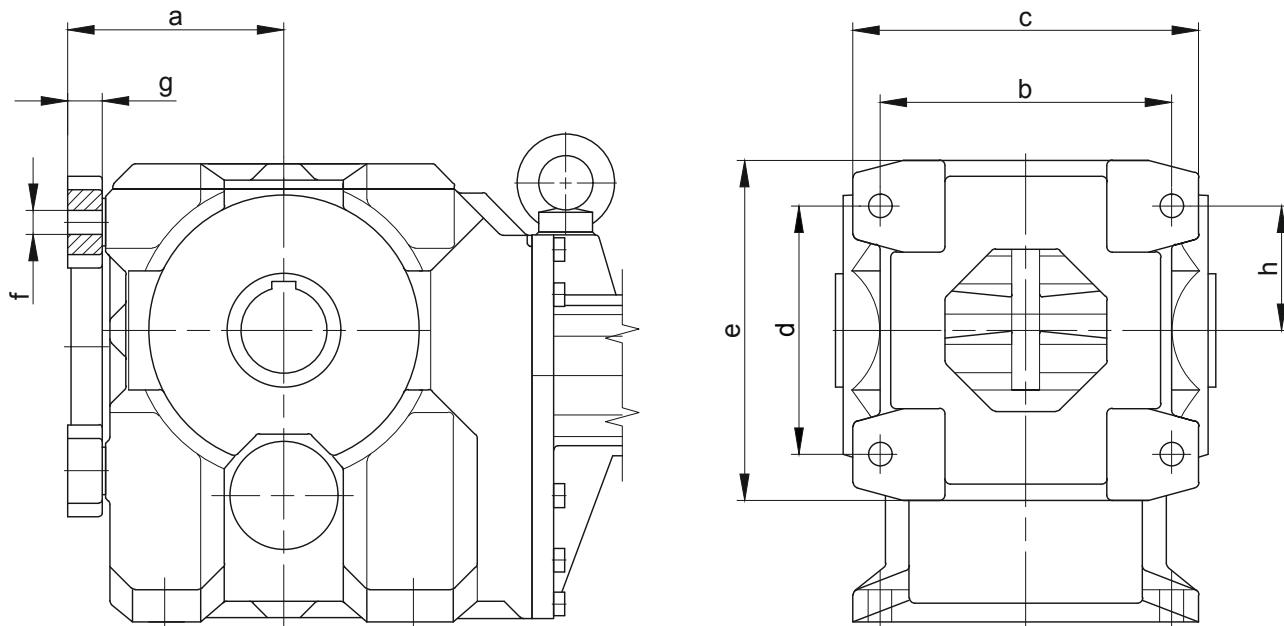


Type	a	b	c	d	e	f	g	h
BK60-BK60Z	165	270	320	230	315	Ø22	32	85
BK70-BK70Z	200	270	320	230	315	Ø22	32	100
BK80-BK80Z	250	400	480	360	480	Ø33	47	120
BK90-BK90Z	295	400	480	360	480	Ø33	47	145

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors


Additional Dimension Sheet

Assembly tools for hollow shaft and keyway

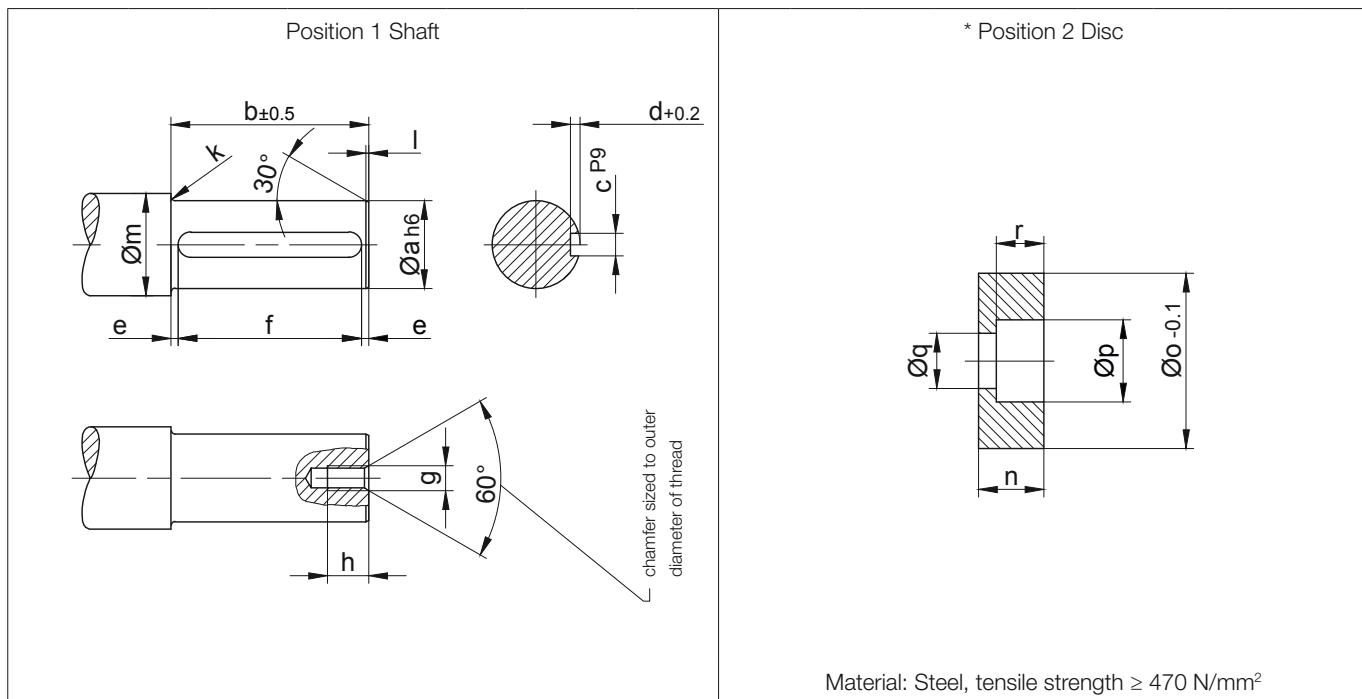

Material: Steel, tensile strength $\geq 470 \text{ N/mm}^2$

Type	Dimensions (mm)															
	Position 1 Shaft												Position 2 Disc			
	a	b	c	d	e	f	g	h	k	l	m	n	o	p	q	r
BK06	20	75	6	3.5	6	$63^{+0.3}$	M8	16	2	1	28	13.5	19.8	11	6.6	6.5
BK10	25	148	8	4	11.5	$125^{+0.5}$	M8	18	2.5	1.5	33	13.5	24.8	15	9	8.5
BK20	30	170	8	4	15	$140^{+0.5}$	M10	20	3	1.5	38	15	29.8	18	11	10
BK30	35	201	10	5	10.5	$180^{+0.5}$	M10	20	3	1.5	43	16	34.8	18	11	10
BK40	40	235	12	5	17.5	$200^{+0.5}$	M12	22	3	2	48	18	39.8	20	13.5	12
BK50	50	254	14	5.5	17	$220^{+0.5}$	M16	30	3.5	2	58	21	49.8	26	17.5	15
BK60	60	273	18	7	11.5	$250^{+0.5}$	M20	38	3.5	2	68	24	59.8	33	22	18
BK70	80	316	22	9	18	$280^{+0.5}$	M20	38	4	2	90	27	79.8	33	22	20
BK70-K70	70	316	20	7.5	18	$280^{+0.5}$	M20	38	4	2	90	27	69.8	33	22	20
BK80	100	360	28	10	20	$320^{+0.5}$	M24	45	4	3	110	32	99.8	40	26	25
BK90	120	432	32	11	16	$400^{+0.5}$	M24	45	4.5	3	130	35	119.8	40	26	28

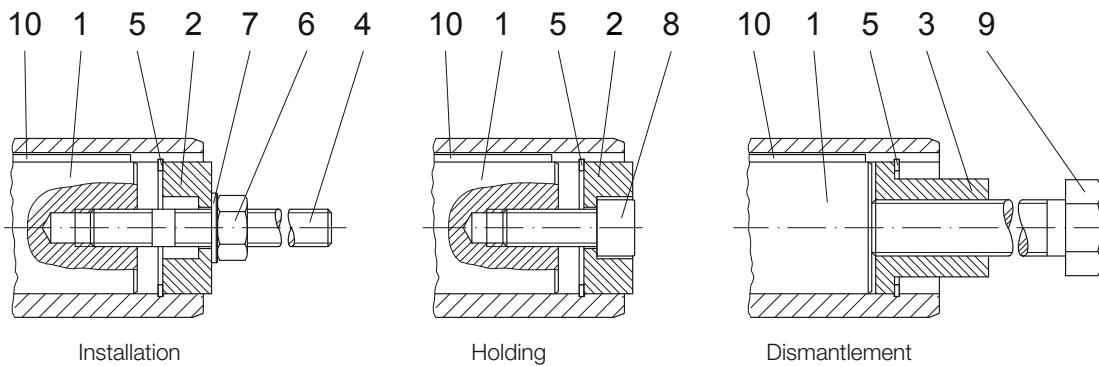

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Additional Dimension Sheet

Assembly tools for hollow shaft and keyway

Position 3 Sleeve													* Position 4 Stud bolt						
Material: Steel, tensile strength $\geq 470 \text{ N/mm}^2$													Material: Steel, tensile strength $\geq 1000 \text{ N/mm}^2$ Thread rolled						
Type	Dimensions (mm)												* Retaining ring DIN 472	Hexagon nut DIN 394-8	Disc DIN 125-St	* Flilister head screw DIN 912-8.8	Starting torque (Nm)	Hexagon bolt DIN EN 24017-8.8	Key DIN 6885 Width/Height/Length
	Position 3 Sleeve						Position 4 Stud bolt												
	s	t	u	v	w	R	x	y	z	z1	Pos.5	Pos.6							
BK06	19.8	20	5	11.1	M8	0.8	130	100	20	M6	20x1	M6	6.4	M6x30	5	M6x120	A 6x6x63		
BK10	24.8	24	5	15.4	M12	0.8	200	170	20	M8	25x1.2	M8	8.4	M8x30		M12x190	A 8x7x125		
BK20	29.8	28	5	19.8	M14	0.8	230	195	23	M10	30x1.2	M10	10.5	M10x30		M14x210	A 8x7x140		
BK30	34.8	28	5	23	M14	-	260	220	23	M10	35x1.5	M10	10.5	M10x35		M14x240	A 10x8x180		
BK40	39.8	40	6	27.7	M20	0.8	300	260	28	M12	40x1.75	M12	13	M12x35		M20x290	A 12x8x200		
BK50	49.8	48	6	36	M24	-	340	290	37	M16	50x2.0	M16	17	M16x40	30	M24x320	A 14x9x220		
BK60	59.8	60	6	44	M30	-	370	310	45	M20	60x2.0	M20	21	M20x50	42	M30x350	A 18x11x250		
BK70	79.8	60	8	55	M30	-	420	360	45	M20	80x2.5	M20	21	M20x50		M30x400	A 22x14x280		
BK70-K70	69.8	60	8	53	M30	-	420	360	45	M20	70x2.5	M20	21	M20x50		M30x400	A 20x12x280		
BK80	99.8	72	10	75	M36	-	480	410	55	M24	100x3.0	M24	25	M24x60		M36x450	A 28x16x320		
BK90	119.8	72	10	80	M36	-	560	480	55	M24	120x4.0	M24	25	M24x60	100	M36x520	A 32x18x400		
The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit. Suitable measures are to be used to secure Bolt Pos. 8 against loosening!																			


Optional	Type	Assembly tool „Holding“
	BK06	Id.Nr.4104013
	BK10	Id.Nr.4103921
	BK20	Id.Nr.4103939
	BK30	Id.Nr.4103947
	BK40	Id.Nr.4103955
	BK50	Id.Nr.4103963
	BK60	Id.Nr.4103971
	BK70	Id.Nr.4103980
	BK70-K70	Id.Nr.4104765
	BK80	Id.Nr.4103998
	BK90	Id.Nr.4104005

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BK-series bevel-gear motors

Additional Dimension Sheet

Assembly tools for splined shaft

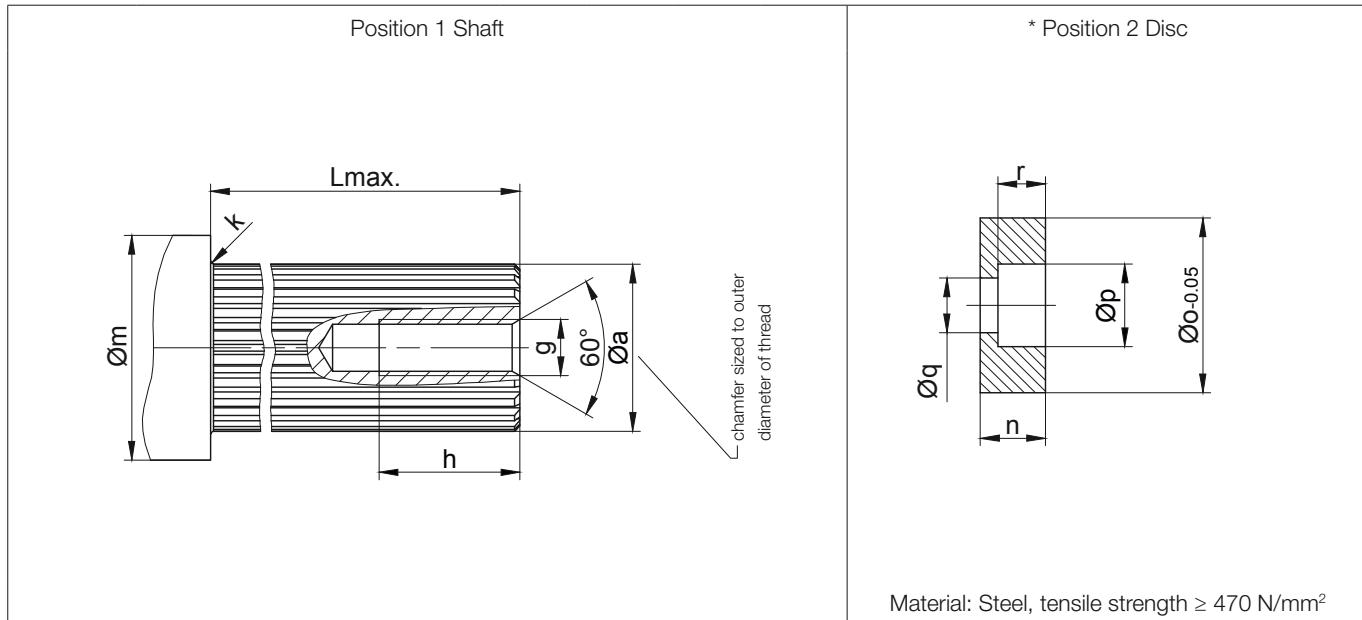

Type	Dimensions (mm)										
	Position 1 Shaft					Position 2 Disc					
	a	g	h	g	Lmax.	m	n	o	p	q	r
BK10	DIN 5480-W30x1.25x22	M10	25	2.5	145	42	15	34.9	18	11	10
BK20	DIN 5480-W35x2x16	M10	25	3	167	44	14	35.9	18	11	10
BK30	DIN 5480-W40x2x18	M12	30	3	200	49	18	40.9	20	13.5	12
BK40	DIN 5480-W50x2x24	M16	35	3	235	59	17.5	50.9	26	17.5	12.5
BK50	DIN 5480-W60x2x28	M20	40	3.5	255	69	24	60.9	33	22	18
BK60	DIN 5480-W70x2x34	M20	40	3.5	275	80	24	71.9	33	22	18
BK70	DIN 5480-W85x3x27	M20	40	4	323	96	22	85.9	33	22	16
BK80	DIN 5480-W110x3x35	M24	50	4	360	122	32	111.9	40	26	25
BK90	DIN 5480-W130x5x24	M24	50	4.5	440	143	25	131.4	40	26	18

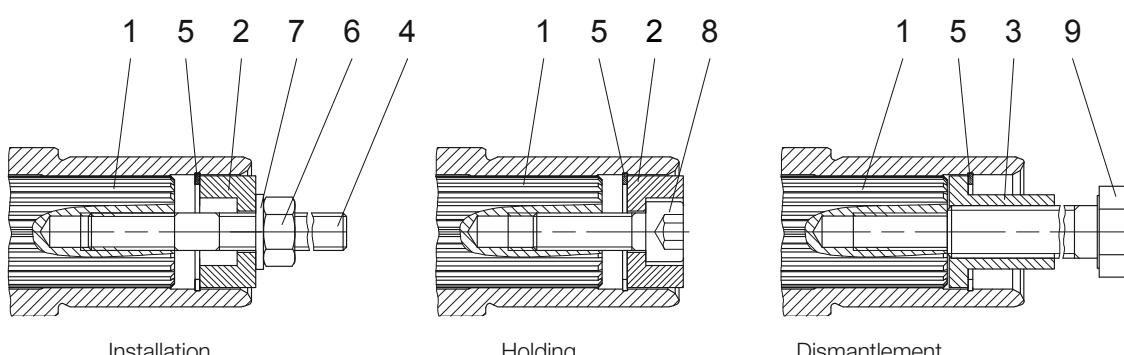

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Additional Dimension Sheet

Assembly tools for splined shaft

Position 3 Sleeve												* Position 4 Stud bolt					
Type	Dimensions (mm)											* Retaining ring DIN 472	Hexagon nut DIN 394-8	Disc DIN 125-S	* Fillister head screw DIN 912-8.8	Tightening torques (Nm)	Hexagon bolt DIN EN 24017-8.8
	Position 3 Sleeve						Position 4 Stud bolt										
	s	t	u	v	w	R	x	y	z	z1	Pos.5	Pos.6	Pos.7	Pos.8		Pos.9	
BK10	30.4	28	5	19.8	M14	-	200	170	23	M10	35x1.5	M10	10.5	M10x30	8	M14x190	
BK20	35.9	28	5	23	M14	-	230	195	23	M10	35x1.5	M10	10.5	M10x35		M14x210	
BK30	40.9	40	6	27.7	M20	-	260	220	28	M12	40x1.75	M12	13	M12x35	16	M20x240	
BK40	50.9	48	6	36	M24	0.8	300	260	37	M16	50x2.0	M16	17	M16x40	30	M24x290	
BK50	60.9	60	6	44	M30	-	340	290	45	M20	60x2.0	M20	21	M20x50	42	M30x320	
BK60	71.9	60	6	53	M30	0.8	370	310	45	M20	72x2.5	M20	21	M20x50		M30x350	
BK70	85.9	60	8	65	M30	0.8	420	360	45	M20	85x3	M20	21	M20x50		M30x400	
BK80	111.9	72	10	85	M36	0.8	480	410	55	M24	112x4	M24	25	M24x60	100	M36x450	
BK90	131.4	72	10	95	M36	0.8	560	480	55	M24	130x4	M24	25	M24x60		M36x520	

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!


Optional	Type	Assembly tool „Holding“
	BK10	Id.Nr. 4105133
	BK20	Id.Nr. 4105141
	BK30	Id.Nr. 4105150
	BK40	Id.Nr. 4105168
	BK50	Id.Nr. 4105176
	BK60	Id.Nr. 4105184
	BK70	Id.Nr. 4105192
	BK80	Id.Nr. 4105206
	BK90	Id.Nr. 4105214

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Additional Dimension Sheet

Shaft cap (VK)

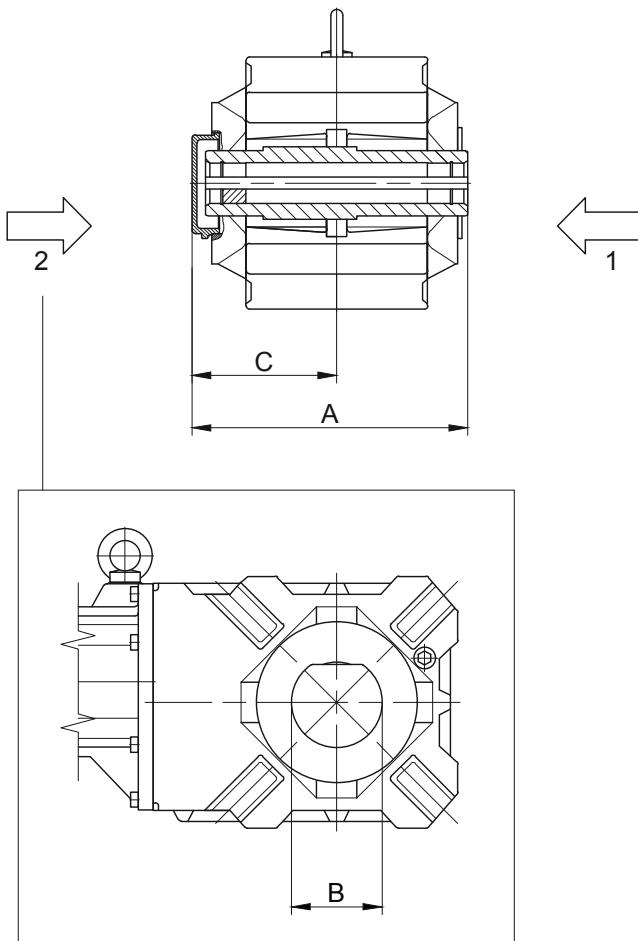

- 1 Gear side FRONT (V)
2 Gear side REAR (H)


Type	A	B	C
BK10	182.5	85	97.5
BK20	204.5	90	108.5
BK40	273.5	100	143.5
BK50	298	115	157
BK60	322	130	171
BK70	370	160	194
Dimensions in millimetres (mm)			

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BK-series bevel-gear motors

Additional Dimension Sheet

Shaft cover (VD)

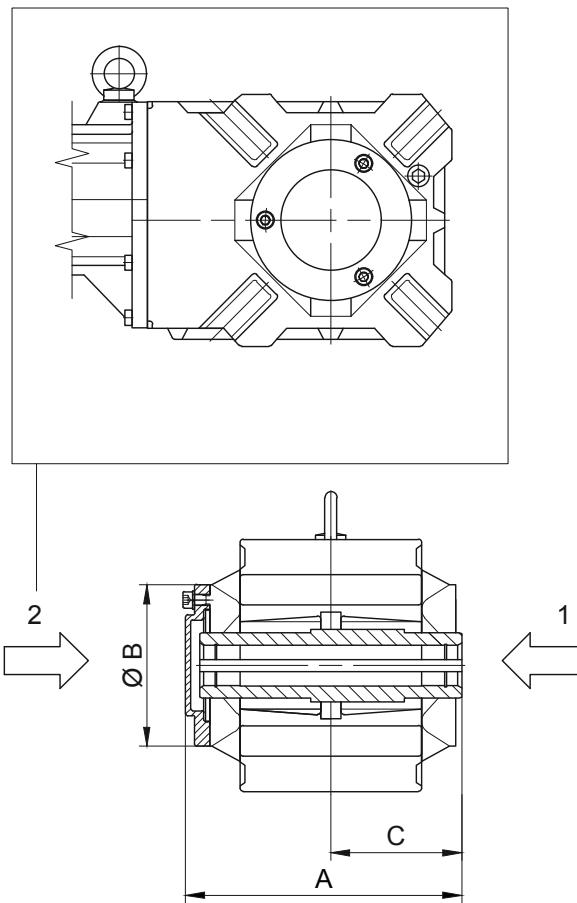

- 1 Gear side FRONT (V)
2 Gear side REAR (H)


12

Type	A	B	C
BK10	181	120	85
BK20	206	139.5	96
BK30	239	160	112
BK40	274	160	130
BK50	297	199	141
BK60	321	210	151
BK70	368	250	176
BK80	419	300	202
BK90	492	351	242
Dimensions in millimetres (mm)			

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Energy Efficient Geared Motors

AC Variable Speed

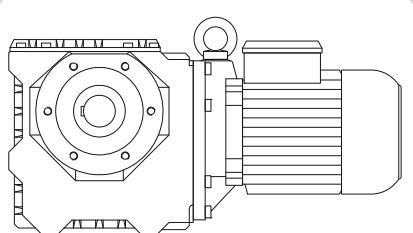

13

BS-series worm-gearred motors - Dimensions

Dimension - Standard	456
BS02	456
BS03	458
BS04	460
BS06	462
BS10-BS10Z	464
BS20-BS20Z	466
BS30-BS30Z	468
BS40-BS40Z	470
Dimension - Tandem Gearbox	472
BS06G04	472
BS10G06	474
BS20G06	476
BS30G06	478
BS40G10	480
Additional Dimension Sheet	482
Shrink disc couplings (SSV)	482
Shrink disc couplings with (SSV) cover	483
Rubber buffer for torque arm	484
Position of the torque arm	485
Threaded foot	486
Foot plate, left	487
Assembly tools for hollow shaft and keyway	488
Shaft cap (VK)	490
Shaft cover (VD)	491


BS-series worm-gear motors

Dimension - Standard


BS02

Flange with clearance holes at front


Code -3.V/
(Code -4.V/)

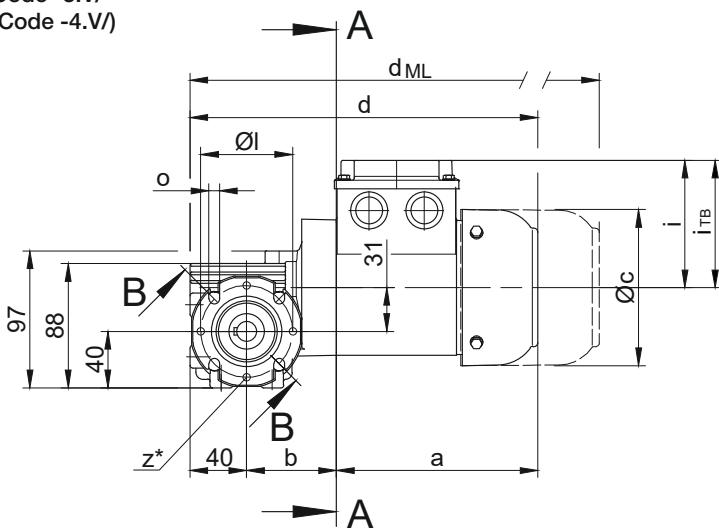


Code -.3/

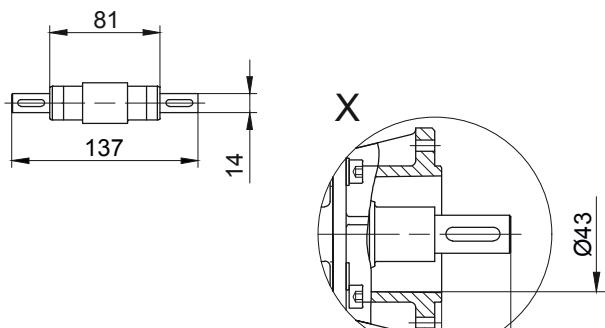



Code -.1/

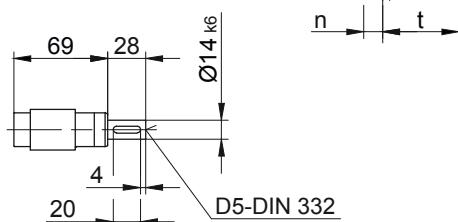

Code -.7/

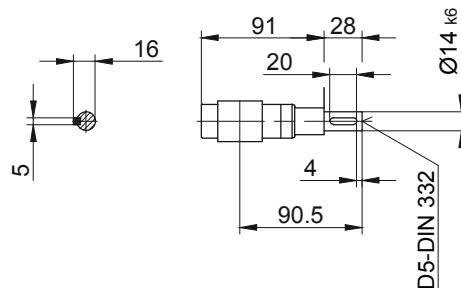

Code -.4/

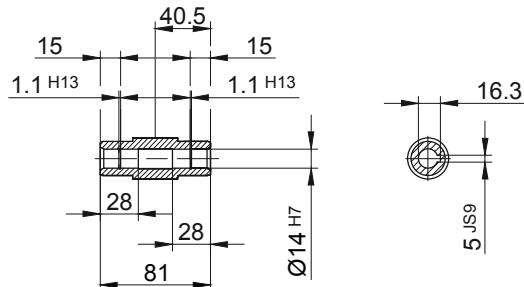

* optional 4xM5 with code -3.
* optional 4xM6 with code -4.

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS02	Code -3.V/	80	65	50	7.5	5.5	105.5	62.5	2.5	28
BS02	Code -4.V/	110	80	60	8	6.6	105.5	62.5	2.5	28

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BS02-../S04S	142.5	63.5	110.5	246	90	112	289.5	333.5	377	-
BS02-../S..06 (M, L)	170.5	65.5	123	276	99	119	318	378.5	416	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gearied motors

Dimension - Standard

BS02



Torque arm at front

Code -5.V/

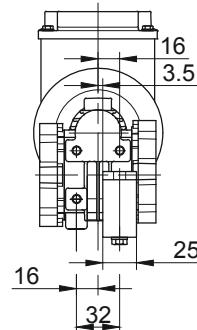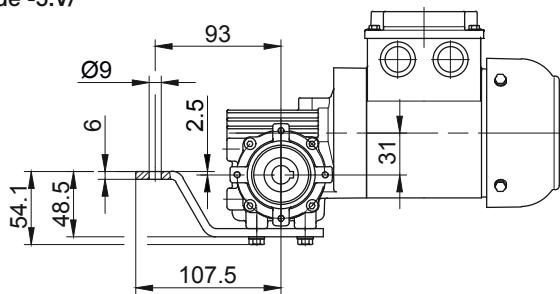



Flange with tapped holes at front

Code -7.V/

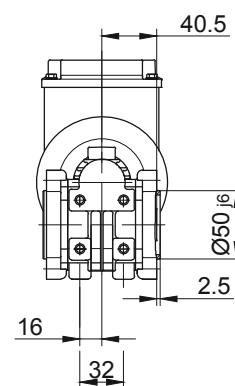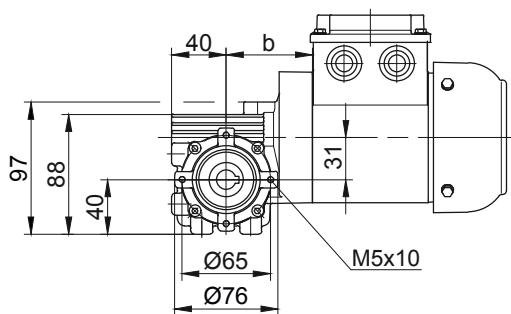



Foot with tapped holes at bottom

Code -6.U/

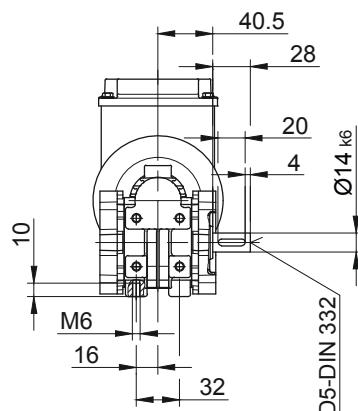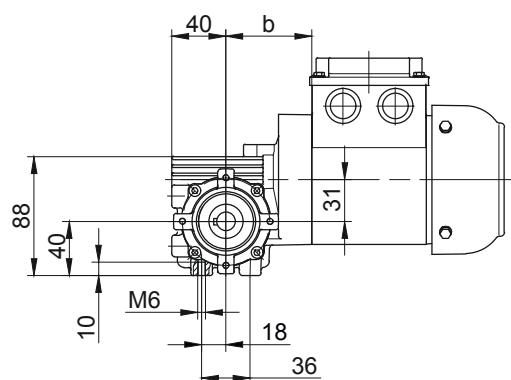

Foot with clearance holes at bottom

Code -1.U/

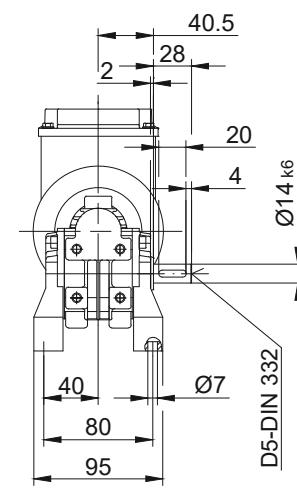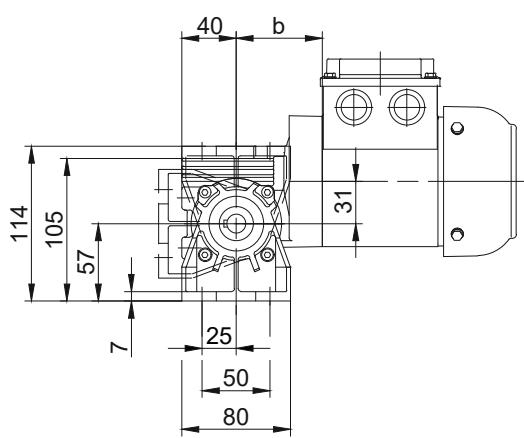

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gear motors

Dimension - Standard


BS03

Flange with clearance holes at front


Code -3.V/

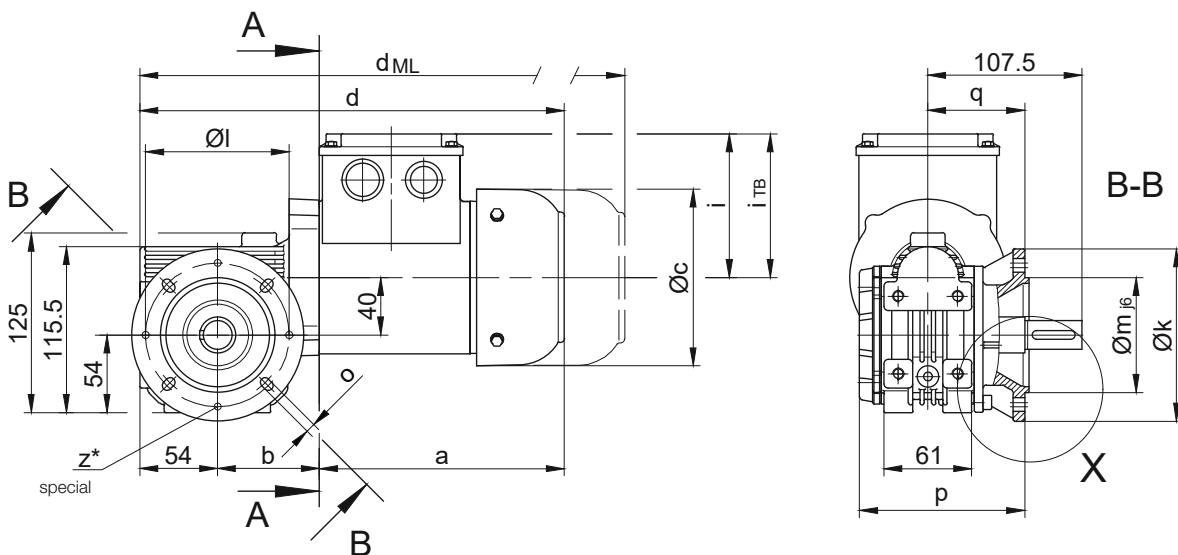


Code -.3/

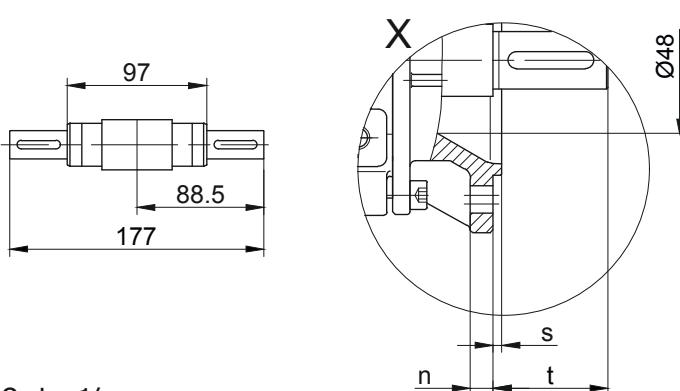



Code -.1/

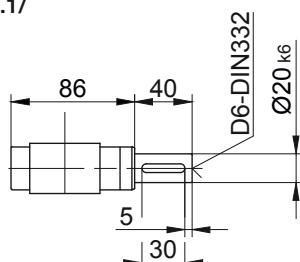

Code -.7/

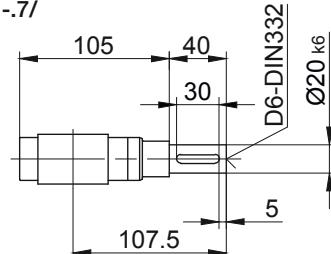

Code -.4/

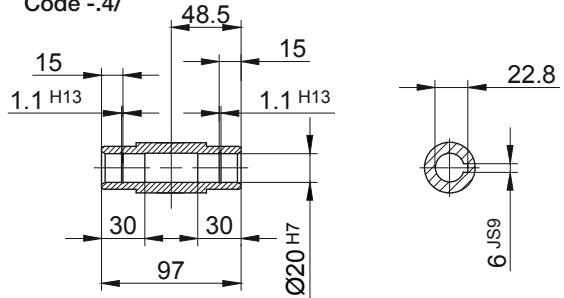

* optional 4xM6 with code -3.

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS03	Code -3.V/	120	100	80	8	6.6	115	67.5	3	40

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BS03-..S..06 (M, L)	170.5	71	123	295.5	99	119	337.5	398	435.5	-
BS03-..S..08 (M, L)	199.5	115	156	368.5	114.5	136.5	434.5	480.5	542	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gear motors

Dimension - Standard

BS03


Torque arm at front

Code -5.V/

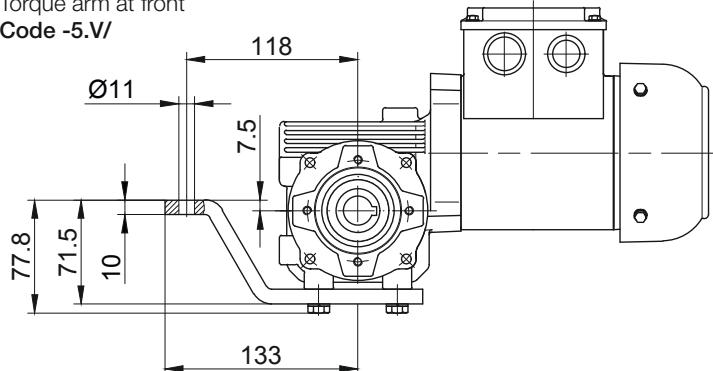


Flange with tapped holes at front

Code -7.V/

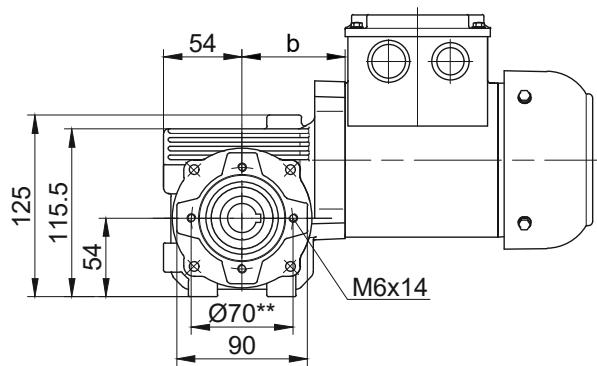





Foot with tapped holes at bottom

Code -6.U/

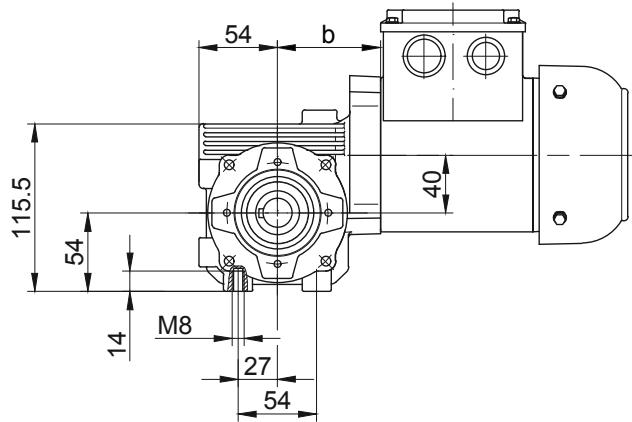

Foot with clearance holes at bottom

Code -1.U/

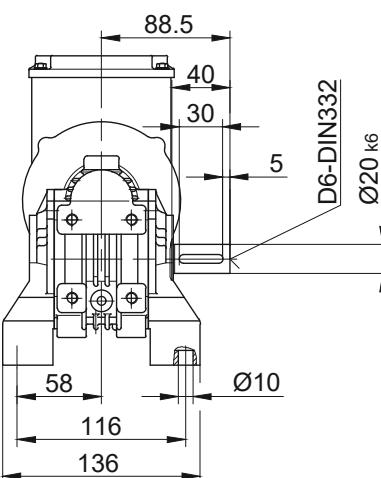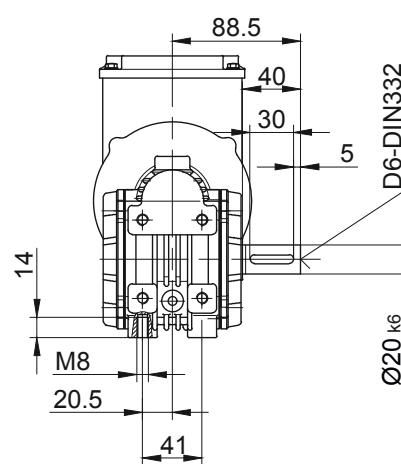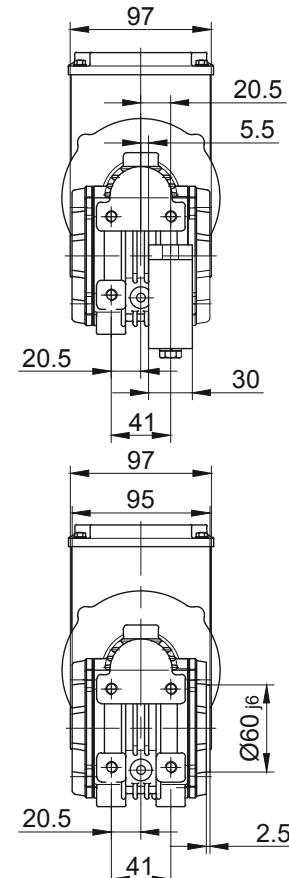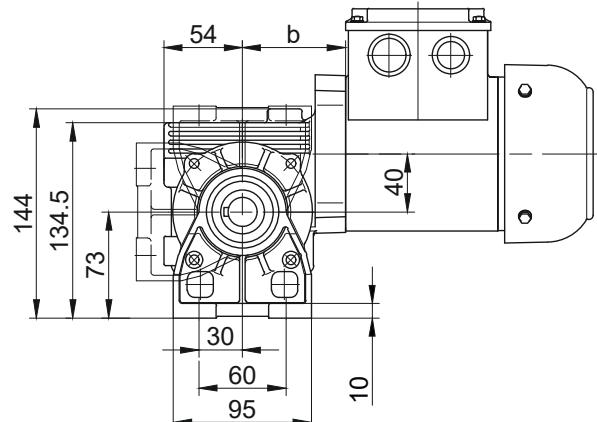

** not for S..08.. with PTO shaft (Code -.1, -.2, -.3., -.7, -.8, -.9)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gear motors

Dimension - Standard


BS04

Flange with clearance holes at front


Code -3.V/

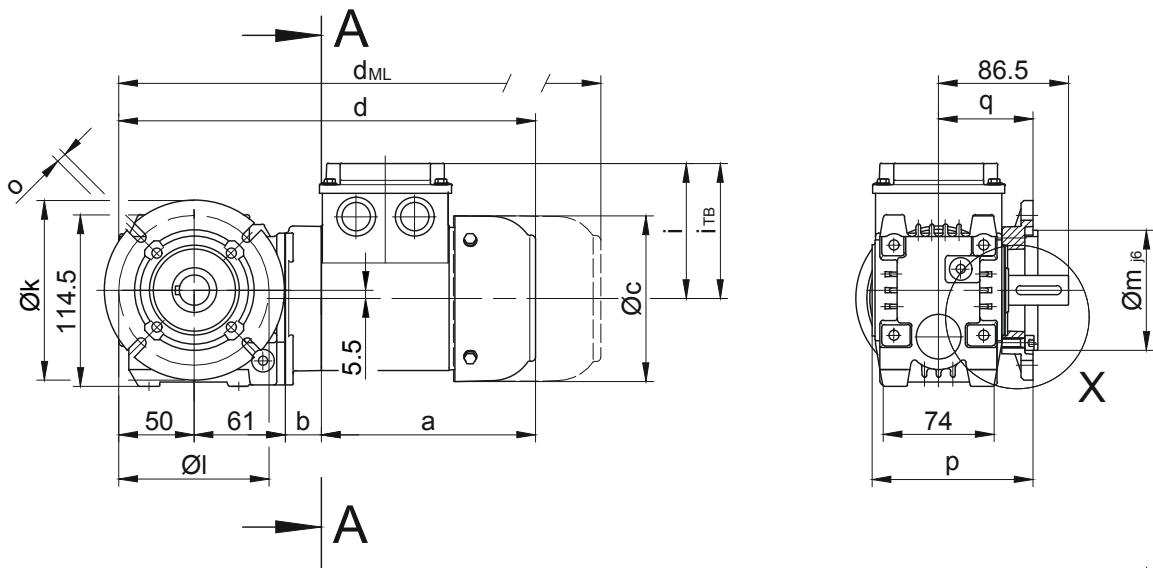




Code -.4/

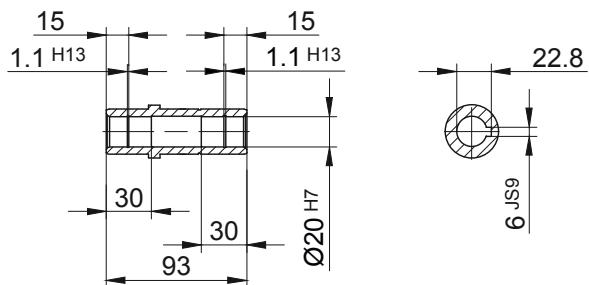

Code -.1/

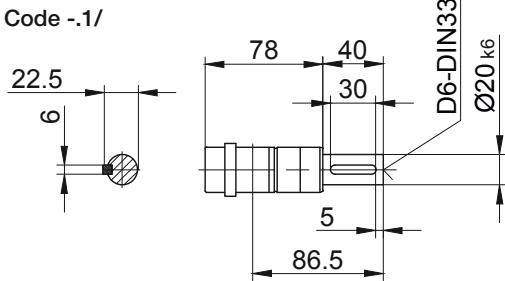

Code -.3/

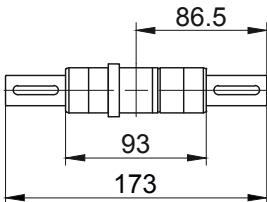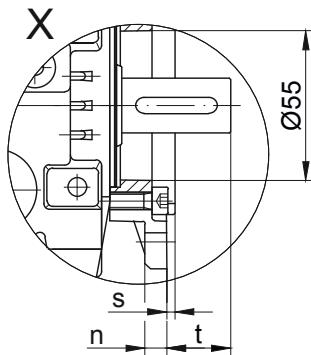

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS04	Code -3.V/	120	100	80	8	6.6	107.5	63	3	23.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BS04-../S04S	142.5	24	110.5	277.5	90	112	321	365	408.5	-
BS04-../S..06 (M, L)	170.5	26	123	307.5	99	119	349.5	410	447.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gear motors

Dimension - Standard

BS04



Torque arm at front

Code -5.V/

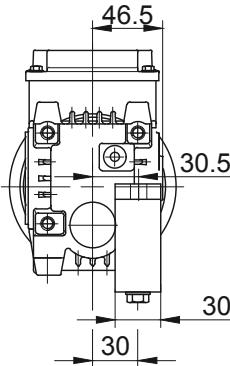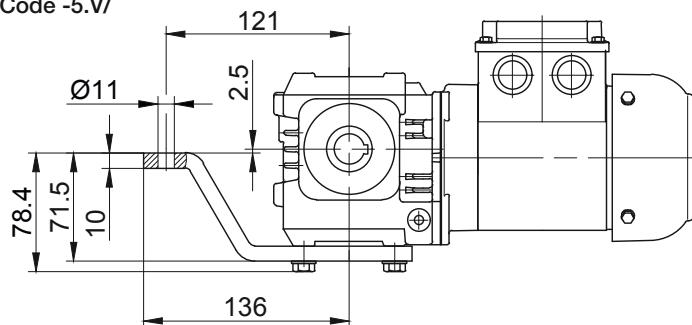



Flange with tapped holes at front

Code -7.V/

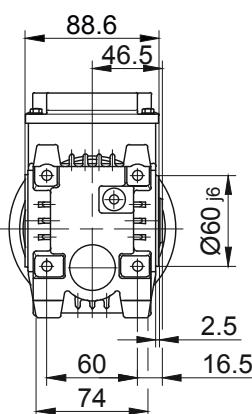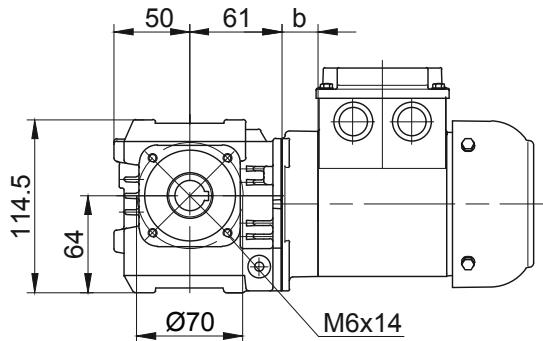



Foot with tapped holes at bottom

Code -6.U/

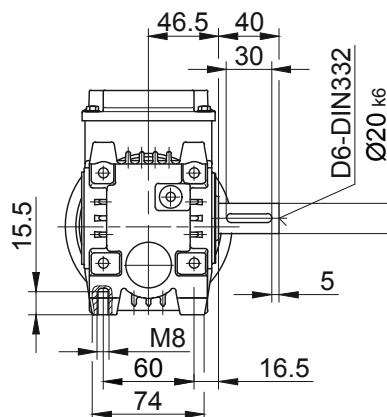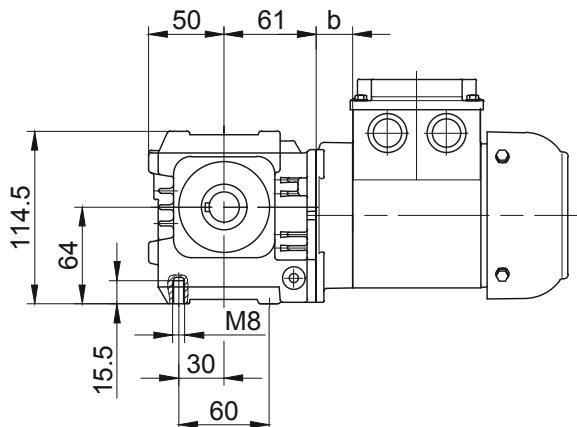

Foot with clearance holes at bottom

Code -1.U/

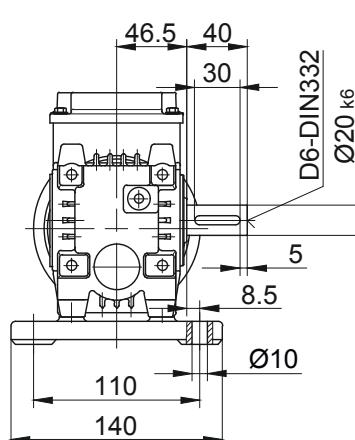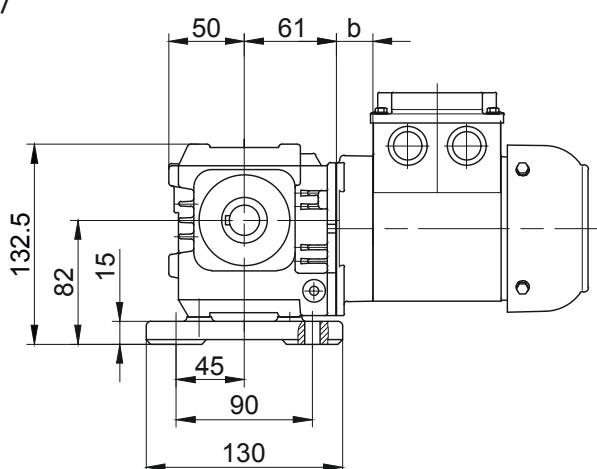

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gear motors

Dimension - Standard


BS06

Flange with clearance holes at front


Code -3.V/
(Code -4.V)

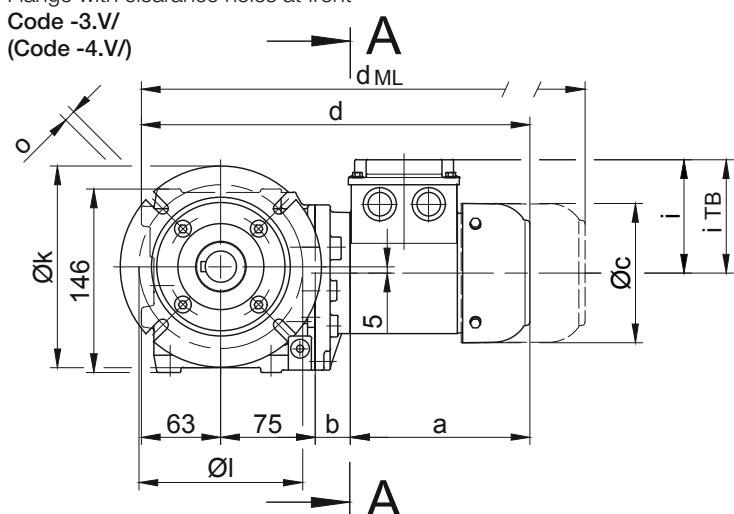


Code -4/
Standard

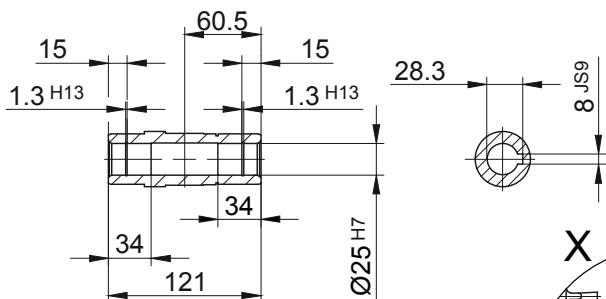



Code -4/K20

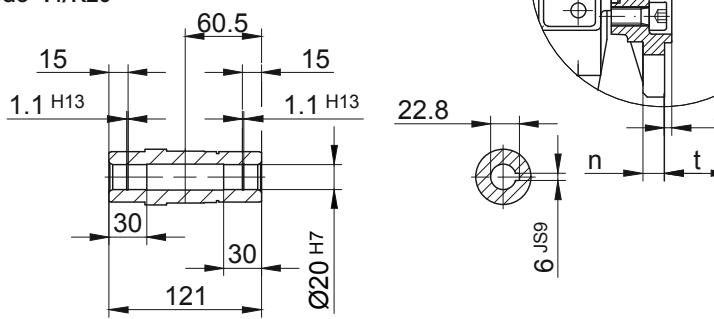

Code -1/

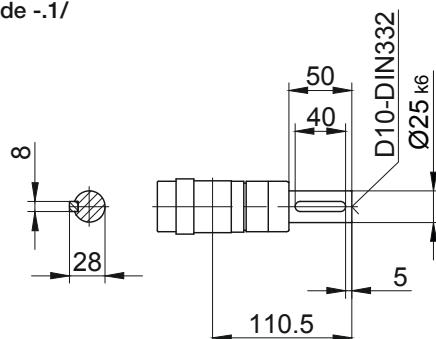

Code -3/

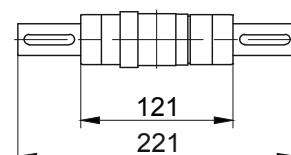

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS06..	Code -3.V/	140	115	95	10	9	138.3	80	3	30.5
BS06..	Code -4.V/	160	130	110	10	9	138.3	80	3.5	30.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							Brake	Encoder	Brake with Encoder	Back Stop
BS06.../S04S	142.5	28	110.5	308.5	90	112	352	396	439.5	-
BS06.../S..06 (M, L)	170.5	30	123	338.5	99	119	380.5	441	478.5	-
BS06.../S..08 (M, L)	199.5	74	156	411.5	114.5	136.5	477.5	523.5	585	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gear motors

Dimension - Standard

BS06



Torque arm at front

Code -5.V/

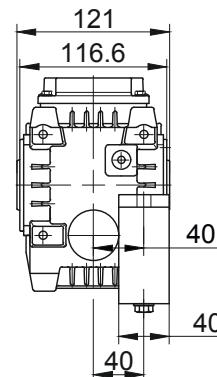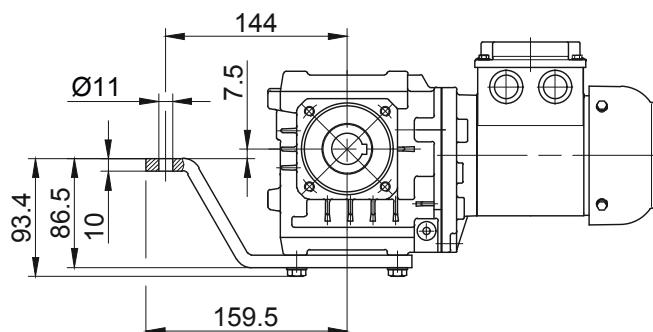



Flange with tapped holes at front

Code -7.V/

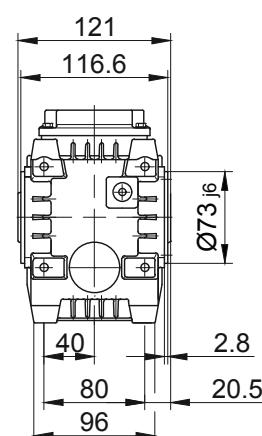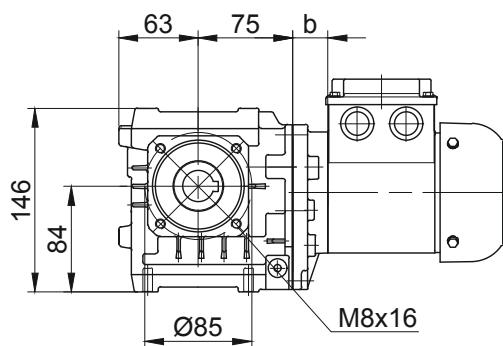



Foot with tapped holes at bottom

Code -6.U/

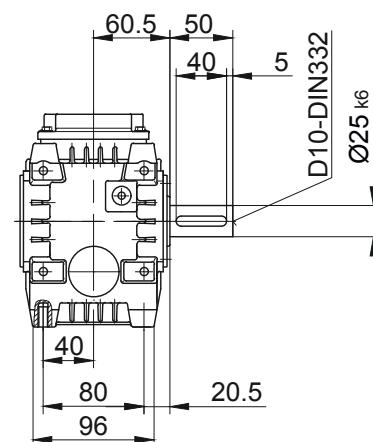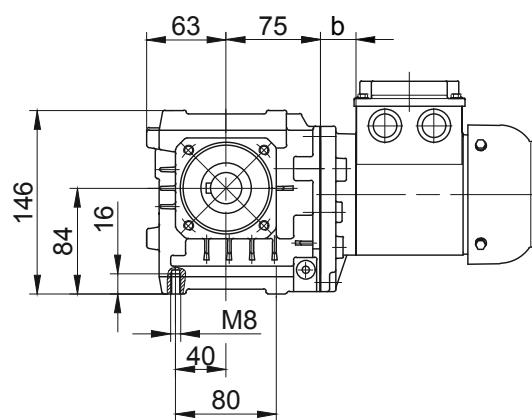

Foot with clearance holes at bottom

Code -1.U/

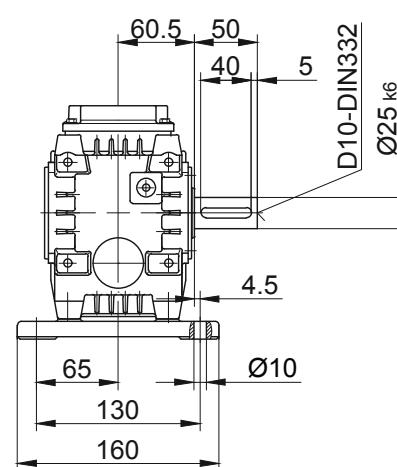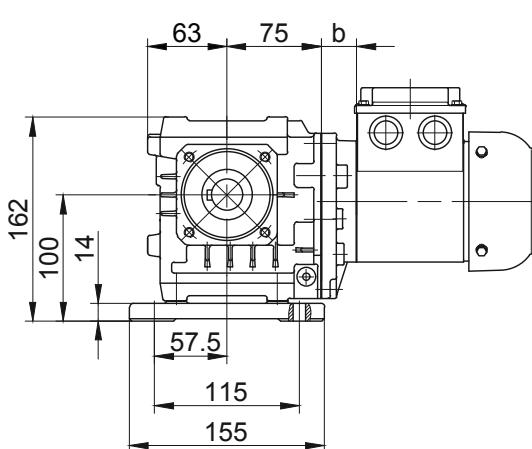

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gear motors

Dimension - Standard


BS10-BS10Z

Flange with clearance holes at front


Code -3.V/
(Code -2.V/)

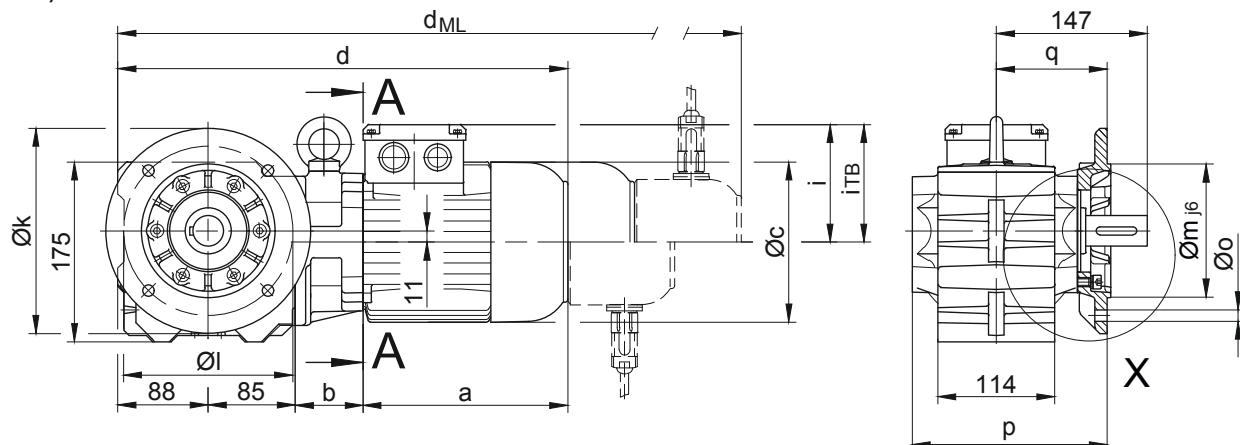


Code -.4/

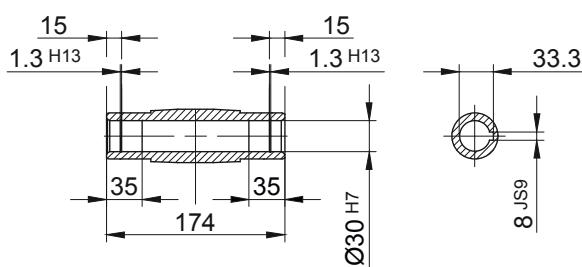



Code -.1/

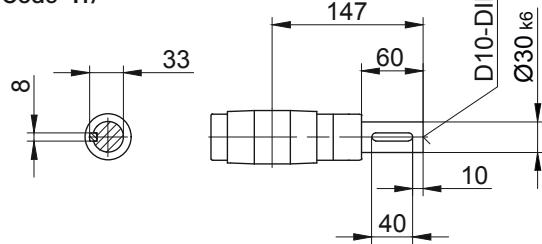

Code -.5/

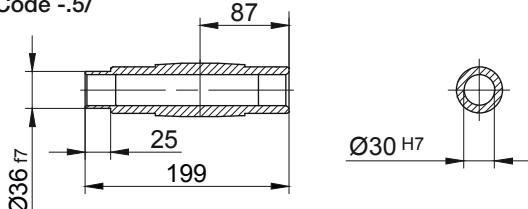

Code -.3/

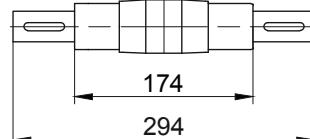

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS10..	Code -3.V/	200	165	130	12	11	190	108	3.5	39
BS10..	Code -2.V/	160	130	110	10	9	183	101	3.5	46

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_TB	Design with motor extensions			
							d_ML	d_ML	d_ML	d_ML
BS10Z-..S04S	142.5	86	110.5	401.5	90	112	445	489	532.5	-
BS10-..S..06 (M, L)	170.5	62	123	405.5	99	119	447.5	508	545.5	-
BS10Z-..S..06 (M, L)	170.5	88	123	431.5	99	119	473.5	534	571.5	-
BS10-..S..08 (M, L)	199.5	66	156	438.5	114.5	136.5	504.5	550.5	612	-
BS10Z-..S..08 (M, L)	199.5	132	156	504.5	114.5	136.5	570.5	616.5	678	-
BS10-..S..09 (S, X)	250.5	80.5	176	504	124	157	597	611.5	701	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gearied motors

Dimension - Standard

BS10-BS10Z



Torque arm at front

Code -5.V/

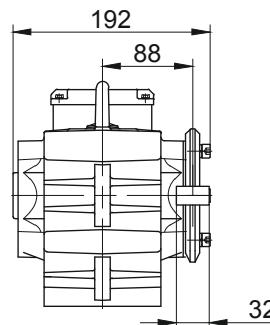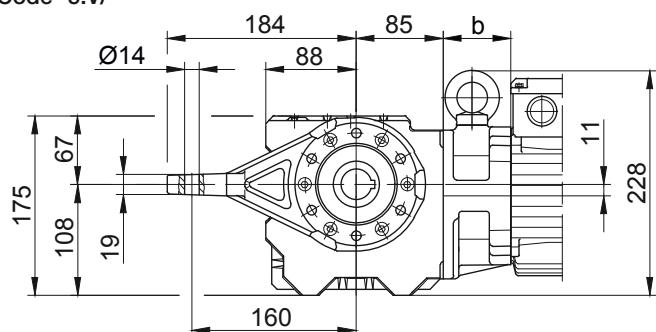



Flange with tapped holes at front

Code -7.V/

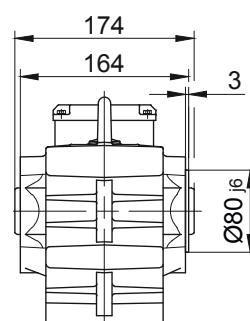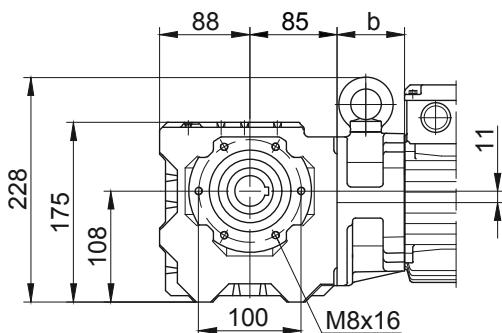



Foot with tapped holes at bottom

Code -6.U/

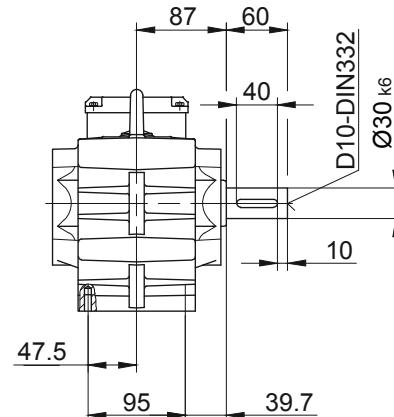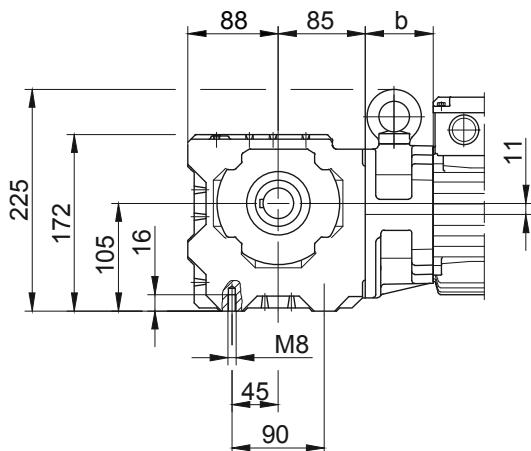

Foot with clearance holes at bottom

Code -1.U/

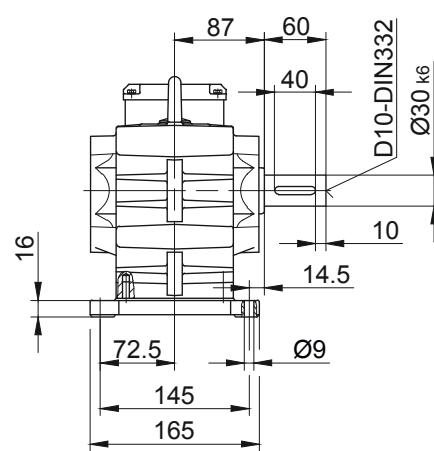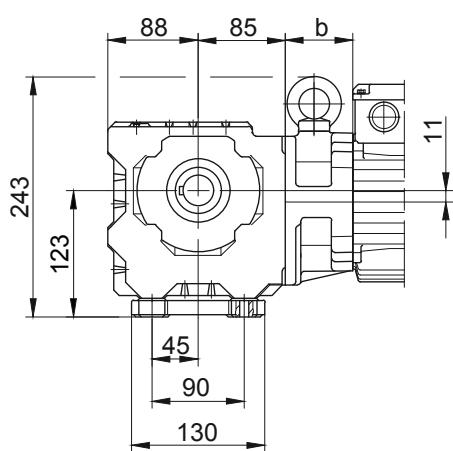

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gear motors

Dimension - Standard


BS20-BS20Z

Flange with clearance holes at front


Code -3.V/
(Code -2.V/)
(Code -4.V/)

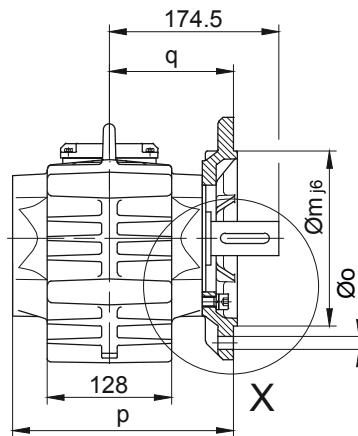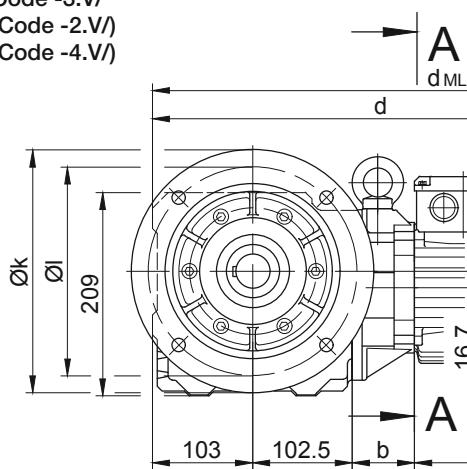



Code -4/

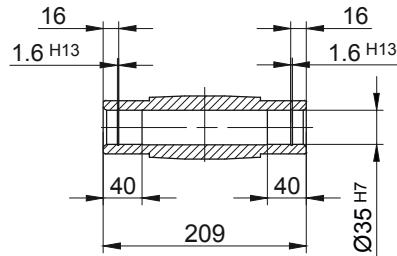



Code -1/

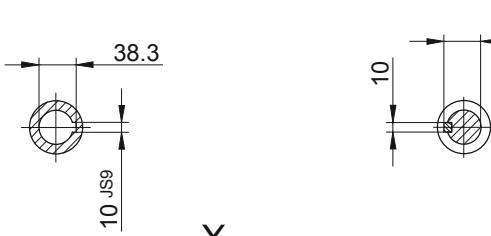

Code -5/

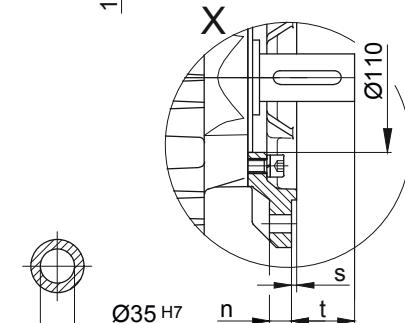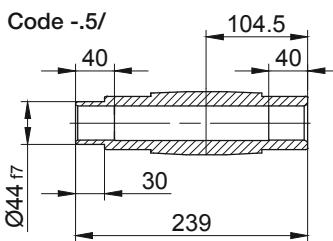

Code -3/

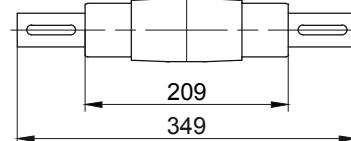

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS20..	Code -3.V/	250	215	180	16	13.5	227.5	128	4	46.5
BS20..	Code -2.V/	200	165	130	12	11	224.5	125	3.5	49.5
BS20..	Code -4.V/	300	265	230	20	13.5	233.5	134	4	40.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i _{TB}	Design with motor extensions			
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BS20Z-../S04S	142.5	100	110.5	448	90	112	491.5	535.5	579	-
BS20-../S..06 (M, L)	170.5	60	123	436	99	119	478	538.5	576	-
BS20Z-../S..06 (M, L)	170.5	102	123	478	99	119	520	580.5	618	-
BS20-../S..08 (M, L)	199.5	64	156	469	114.5	136.5	535	581	642.5	-
BS20Z-../S..08 (M, L)	199.5	146	156	551	114.5	136.5	617	663	724.5	-
BS20-../S..09 (S, X)	250.5	78.5	176	534.5	124	157	627.5	642	731.5	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gearied motors



Dimension - Standard

BS20-BS20Z



Torque arm at front
Code -5.V/

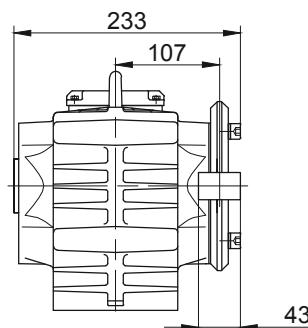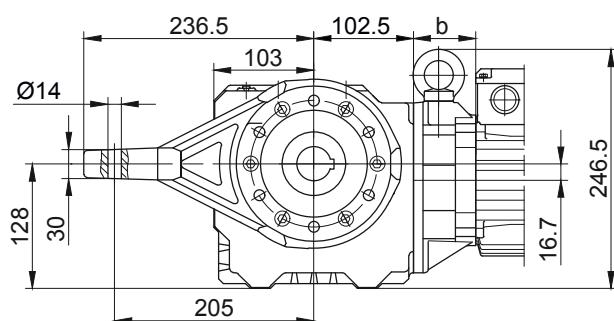



Flange with tapped holes at front
Code -7.V/

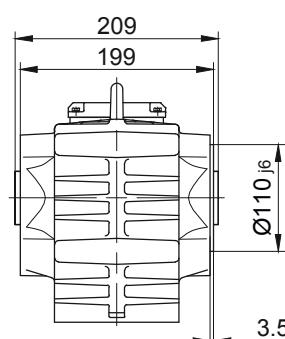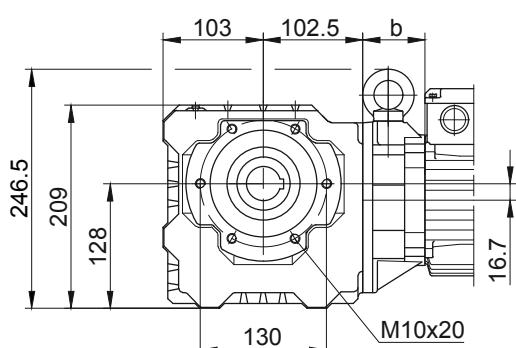

Foot with tapped holes at bottom
Code -6.U/

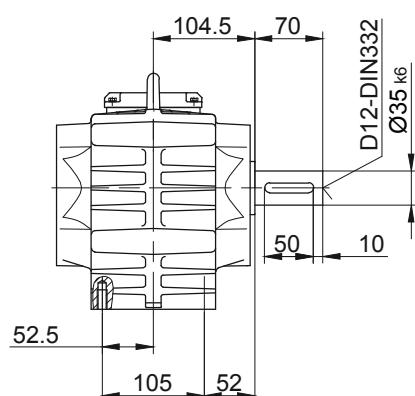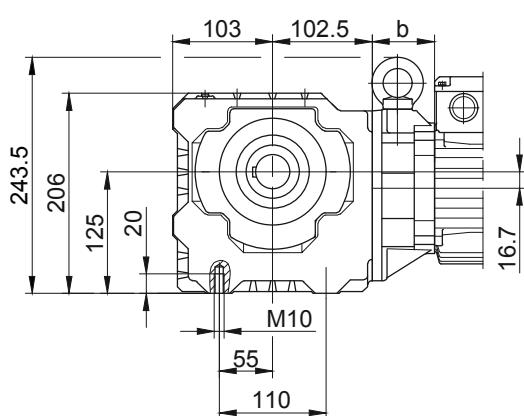

Foot with clearance holes at bottom
Code -1.U/

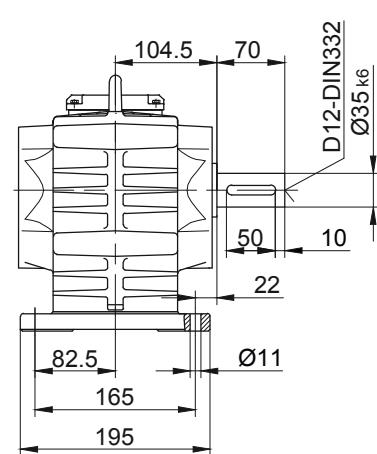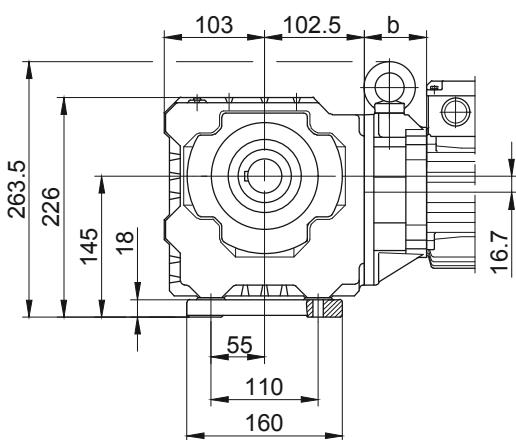

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gear motors

Dimension - Standard


BS30-BS30Z

Flange with clearance holes at front


Code -3.V/
(Code -4.V)

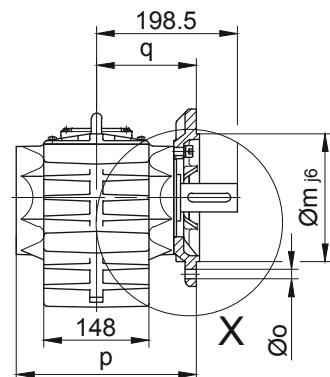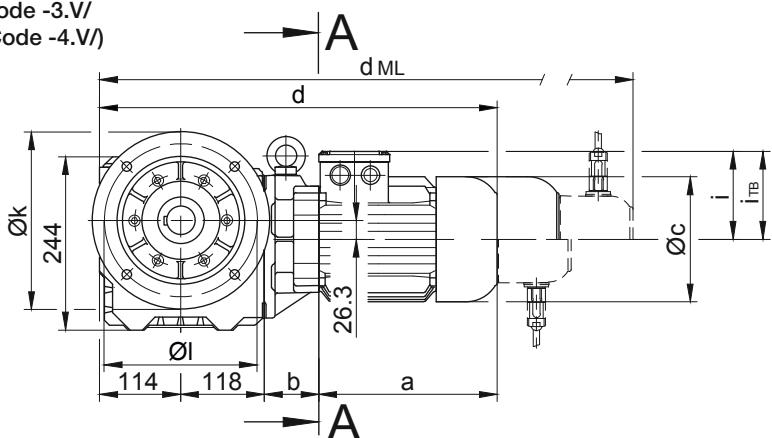



Code -4/

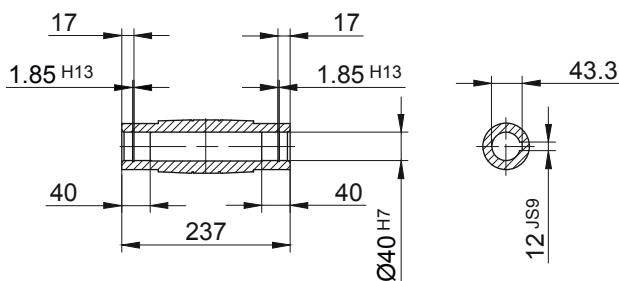



Code -1/



Code -5/

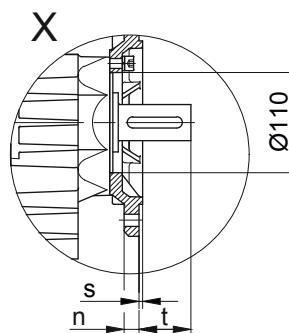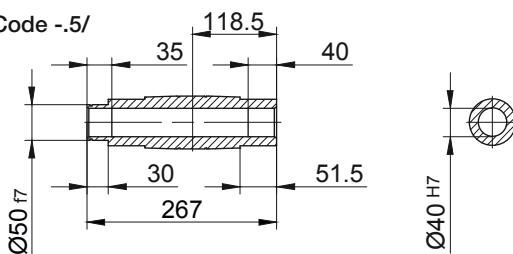

Code -3/

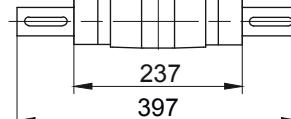

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS30..	Code -3.V/	250	215	180	16	13.5	253.5	141	4	57.5
BS30..	Code -4.V/	300	265	230	20	13.5	259.5	147	4	51.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i _{TB}	Design with motor extensions			
							d _{ML}	d _{ML}	d _{ML}	d _{ML}
BS30-..S..06 (M, L)	170.5	58	123	460.5	99	119	502.5	563	600.5	-
BS30Z-..S..06 (M, L)	170.5	133.5	123	536	99	119	578	638.5	676	-
BS30-..S..08 (M, L)	199.5	62	156	493.5	114.5	136.5	559.5	605.5	667	-
BS30Z-..S..08 (M, L)	199.5	137.5	156	569	114.5	136.5	635	681	742.5	-
BS30-..S..09 (S, X)	250.5	76.5	176	559	124	157	652	666.5	756	-
BS30Z-..S..09 (S, X)	250.5	152	176	634.5	124	157	727.5	742	831.5	-
BS30-..S..11 (S, M, L)	319	83	218	634	165	176	732	741.5	834	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gearied motors

Dimension - Standard

BS30-BS30Z



Torque arm at front

Code -5.V/

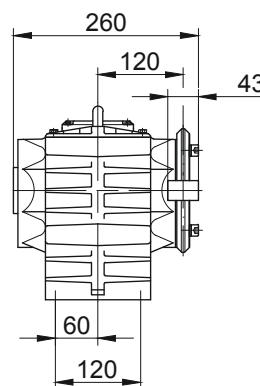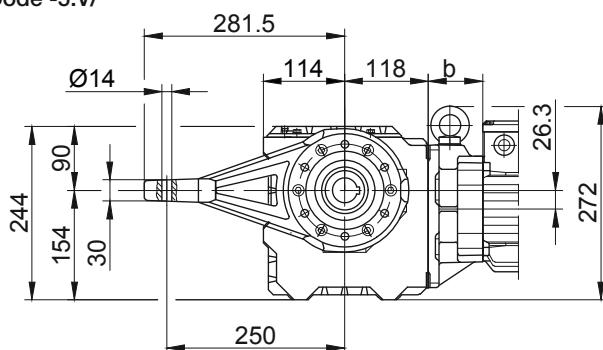



Flange with tapped holes at front

Code -7.V/

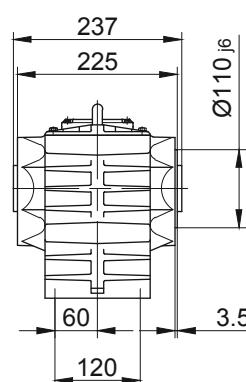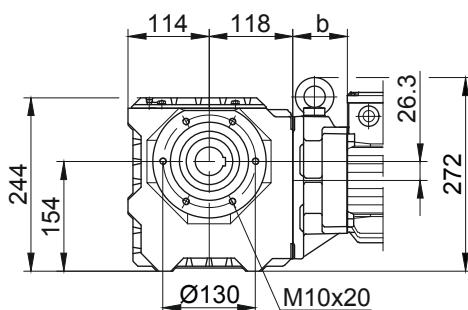



Foot with tapped holes at bottom

Code -6.U/

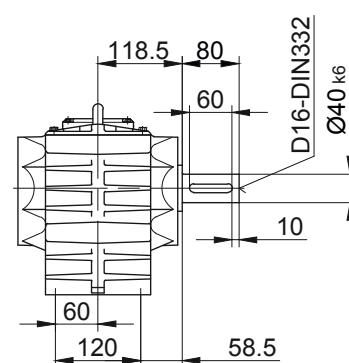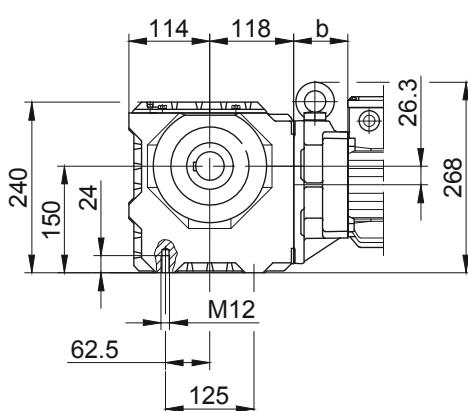

Foot with clearance holes at bottom

Code -1.U/

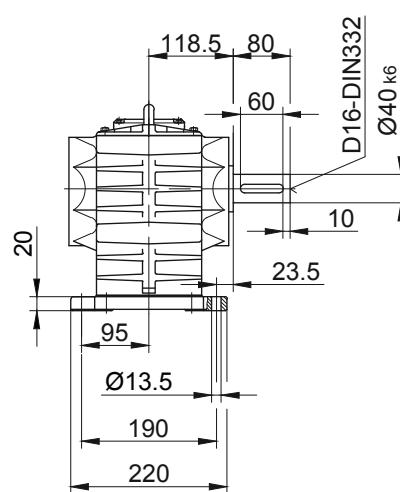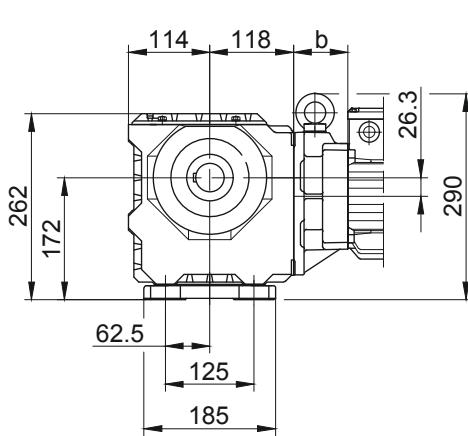

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gear motors

Dimension - Standard


BS40-BS40Z

Flange with clearance holes at front


Code -3.V/

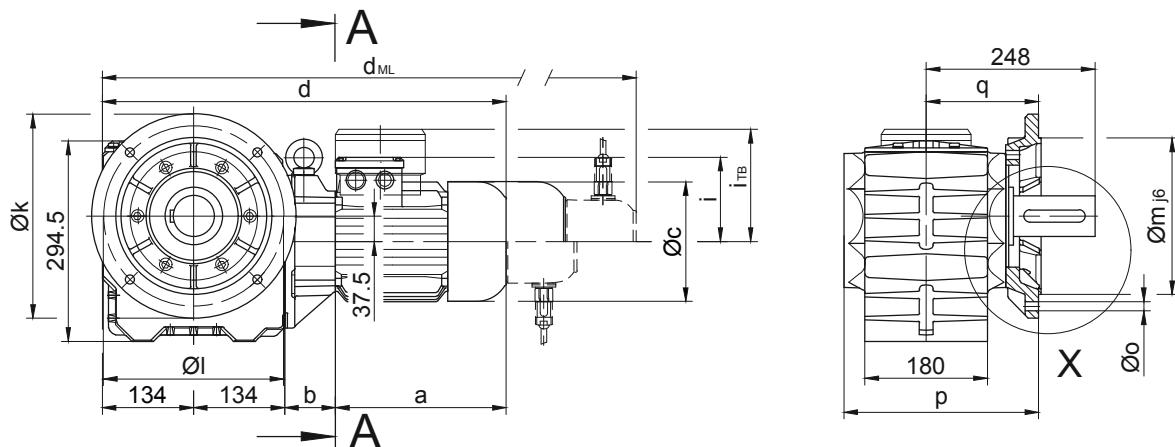


Code -4/

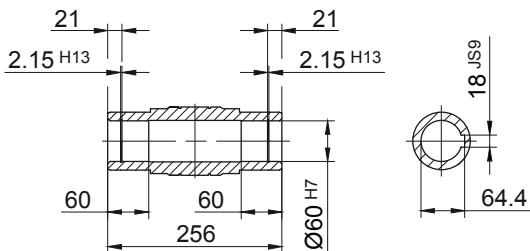



Code -1/

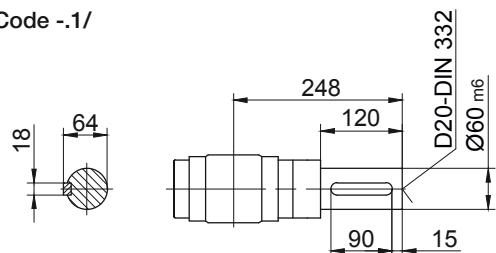

Code -5/

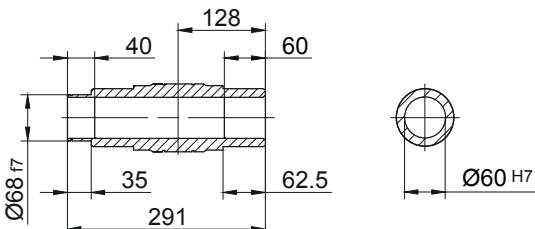

Code -3/

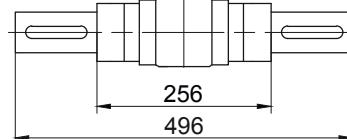

Flange Dimensions										
Type	Design	k	l	m	n	o	p	q	s	t
BS40..	Code -3.V/	300	265	230	20	13.5	286	165	4	83

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							Brake	Encoder	Brake with Encoder	Back Stop
BS40Z-..S..06 (M, L)	170.5	138.5	123	577	99	119	619	679.5	717	-
BS40-..S..08 (M, L)	199.5	60	156	527.5	114.5	136.5	593.5	639.5	701	-
BS40Z-..S..08 (M, L)	199.5	142.5	156	610	114.5	136.5	676	722	783.5	-
BS40-..S..09 (S, X)	250.5	74.5	176	593	124	157	686	700.5	790	-
BS40Z-..S..09 (S, X)	250.5	157	176	675.5	124	157	768.5	783	872.5	-
BS40-..S..11 (S, M, L)	319	81	218	668	165	176	766	775.5	868	-

Dimensions in millimetres (mm)



The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gearied motors



Dimension - Standard

BS40-BS40Z



Torque arm at front
Code -5.V/

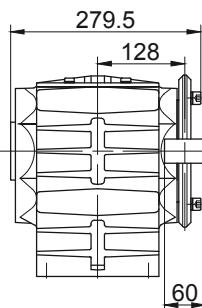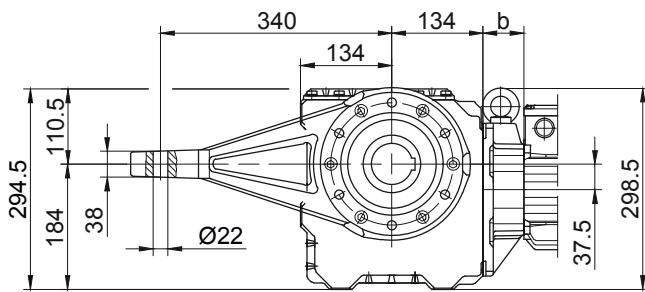



Flange with tapped holes at front
Code -7.V/

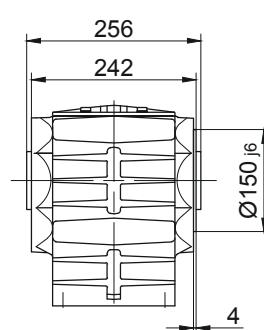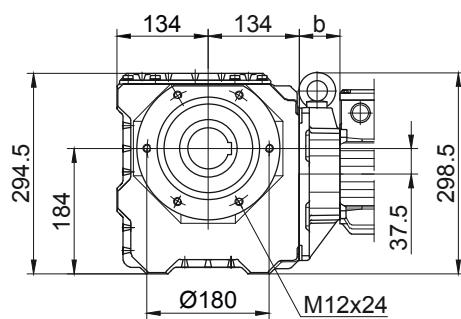

Foot with tapped holes at bottom
Code -6.U/

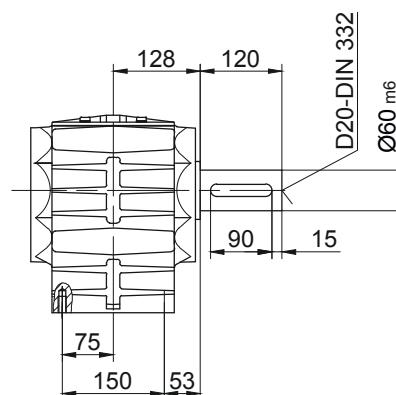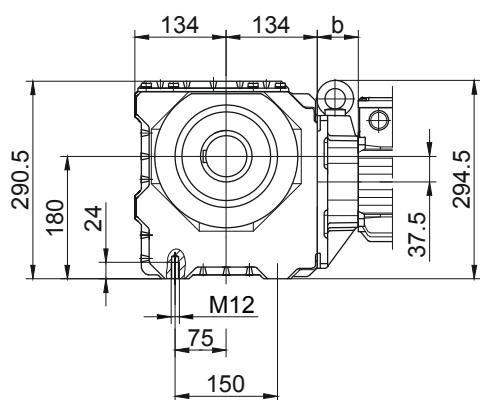

Foot with clearance holes at bottom
Code -1.U/

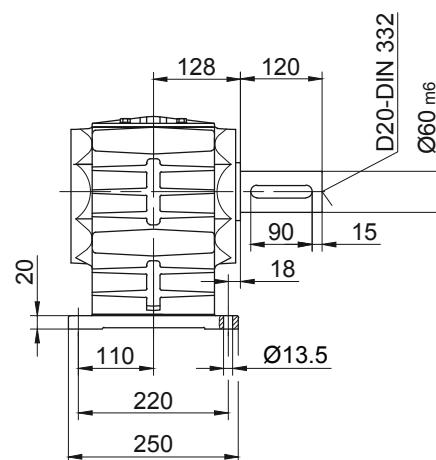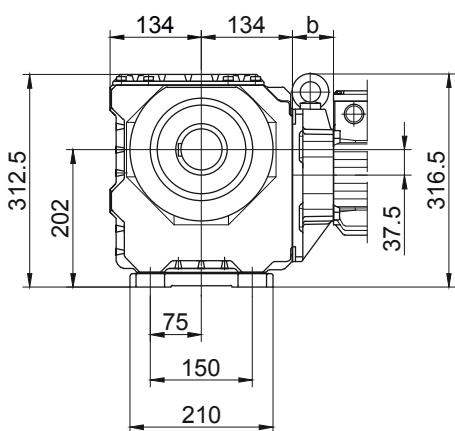

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gearied motors

Dimension - Tandem Gearbox


BS06G04

Flange with clearance holes at front


Code -3.V/
(Code -4.V)

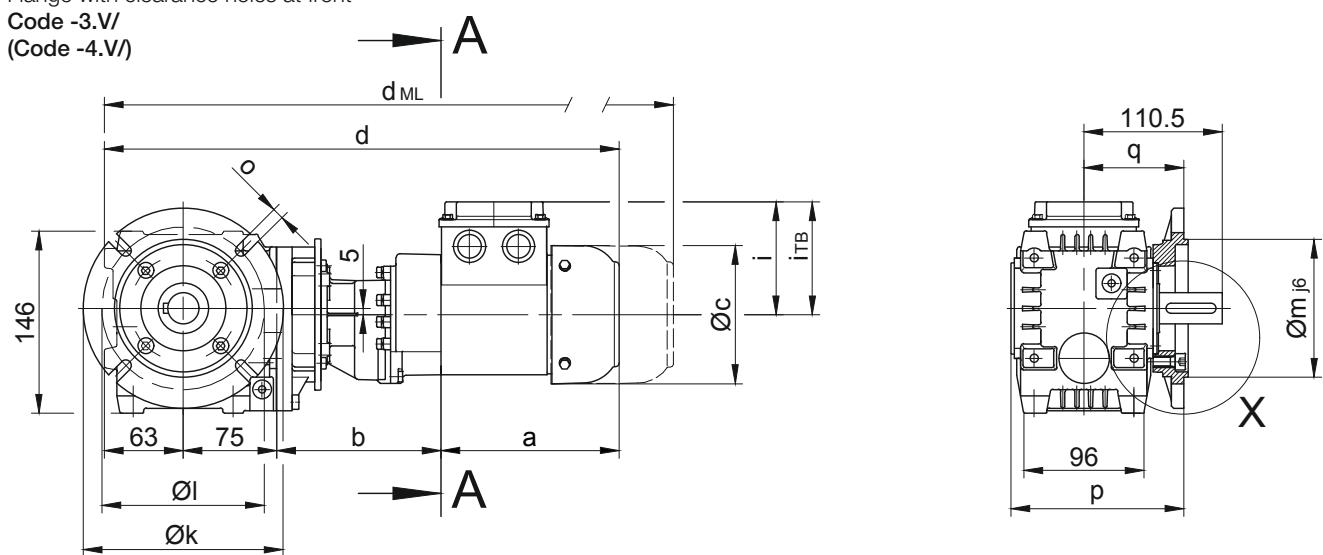


Code -.4/
Standard

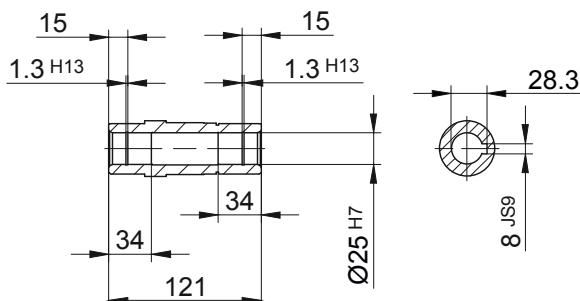



Code -.1/

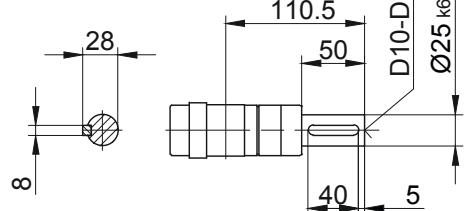

Code -.4/K20

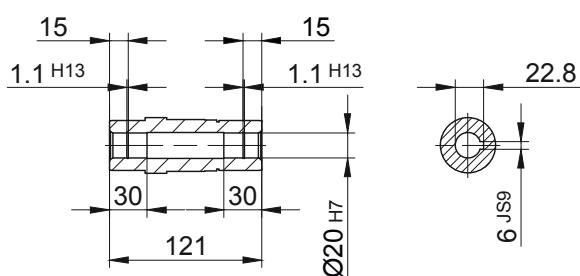

Code -.3/

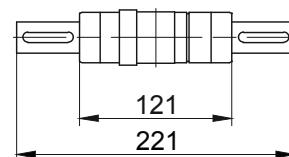

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS06..	Code -3.V/	140	115	95	10	9	138.3	80	3	30.5
BS06..	Code -4.V/	160	130	110	10	9	138.3	80	3.5	30.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							Brake	Encoder	Brake with Encoder	Back Stop
BS06G04.../S04S	142.5	131	110.5	411.5	90	112	455	499	542.5	-
Dimensions in millimetres (mm)										

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gearied motors

Dimension - Tandem Gearbox

BS06G04


Torque arm at front

Code -5.V/

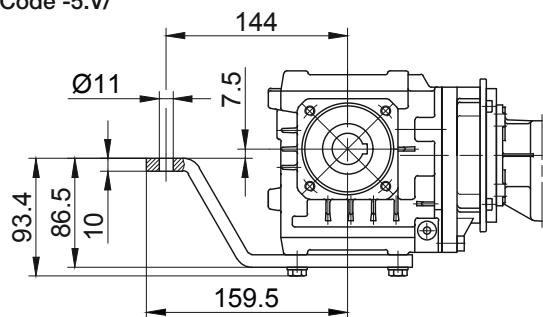


Flange with tapped holes at front

Code -7.V/

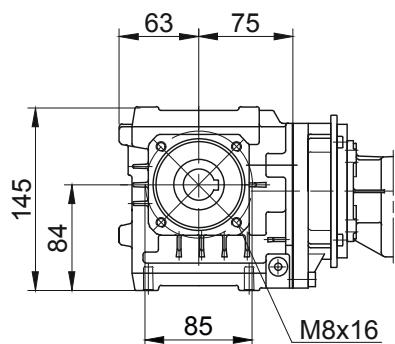






Foot with tapped holes at bottom

Code -6.U/

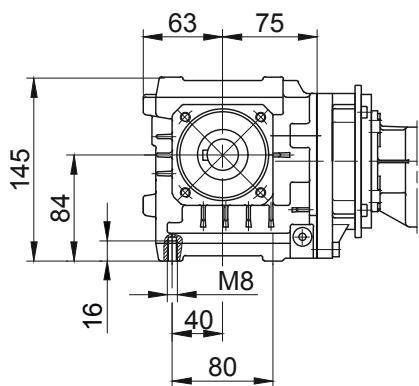

Foot with clearance holes at bottom

Code -1.U/

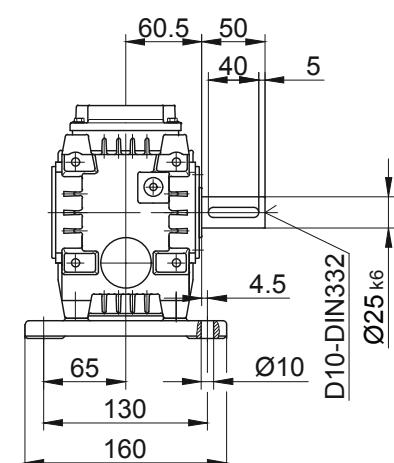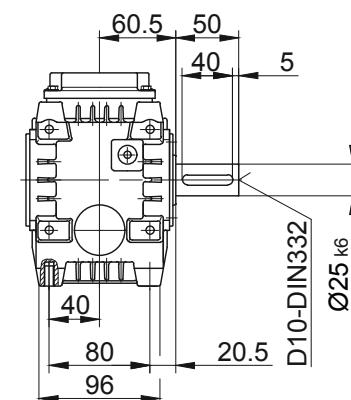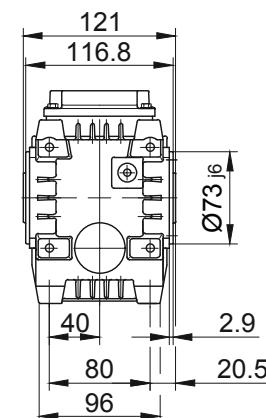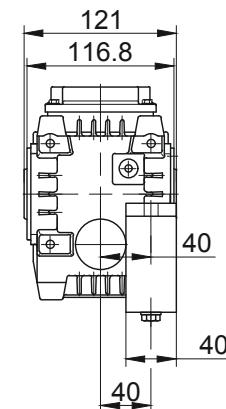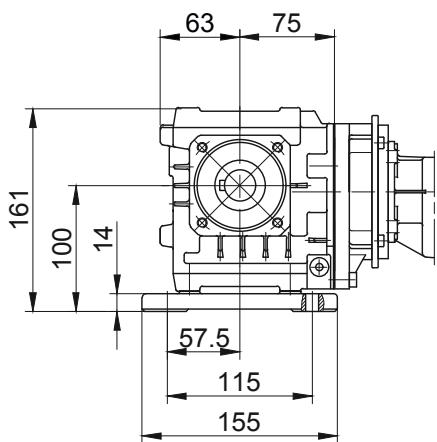


BS-series worm-gearied motors

Dimension - Tandem Gearbox


BS10G06

Flange with clearance holes at front


Code -3.V/
(Code -2.V)

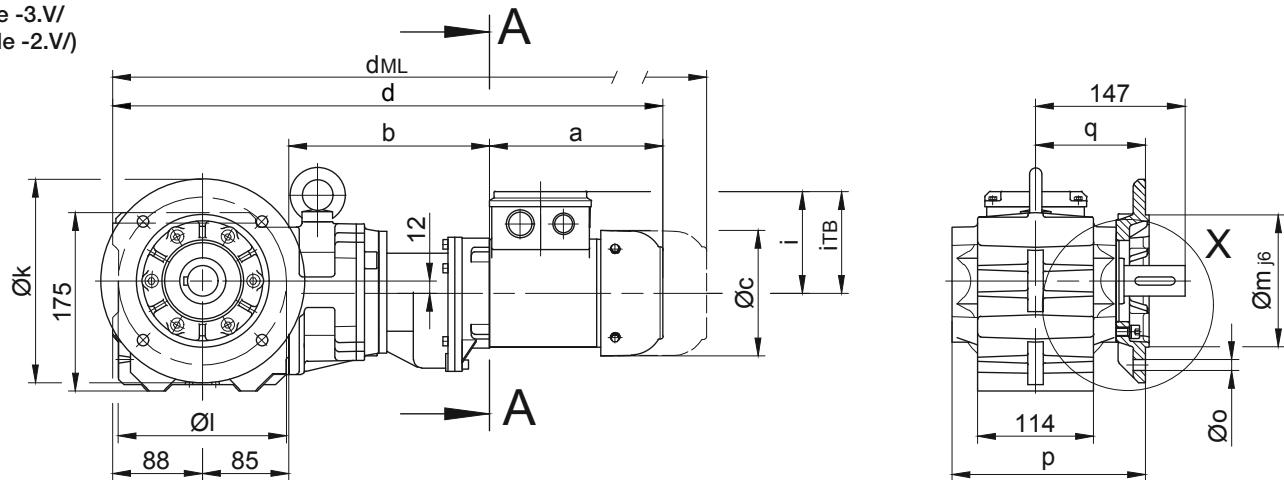



Code -.4/

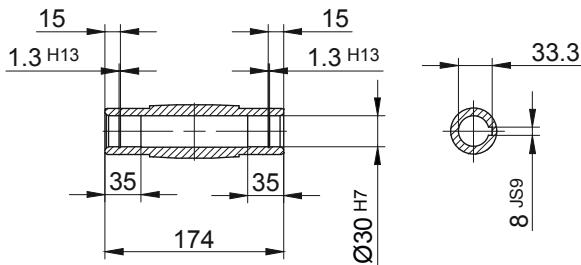



Code -.1/

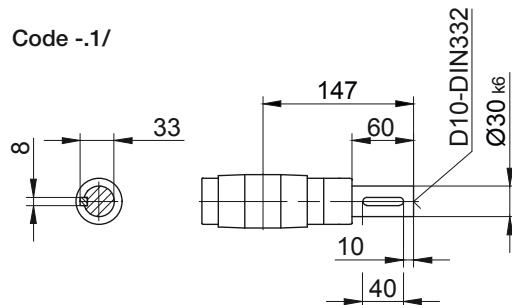

Code -.5/

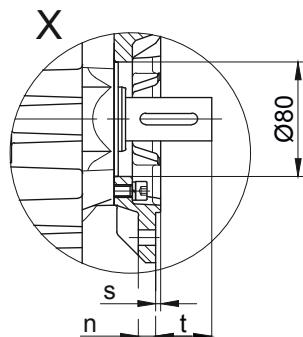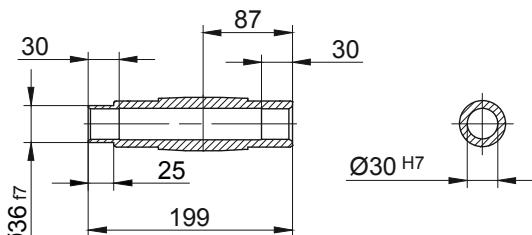

Code -.3/

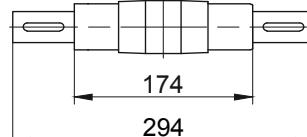

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS10..	Code -3.V/	200	165	130	12	11	190	108	3.5	39
BS10..	Code -2.V/	160	130	110	10	9	183	101	3.5	46

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BS10G06.../S04S	142.5	195	110.5	510.5	90	112	554	598	641.5	-
BS10G06.../S..06 (M, L)	170.5	197	123	540.5	99	119	582.5	643	680.5	-
BS10G06.../S..08 (M, L)	199.5	241	156	613.5	114.5	136.5	679.5	725.5	787	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gearied motors

Dimension - Tandem Gearbox

BS10G06



Torque arm at front

Code -5.V/

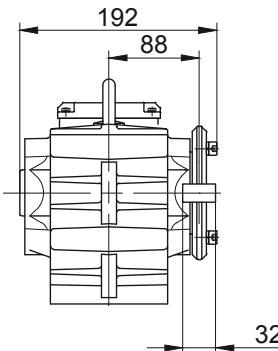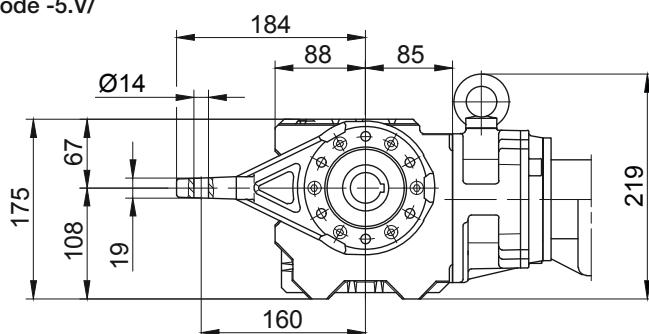



Flange with tapped holes at front

Code -7.V/

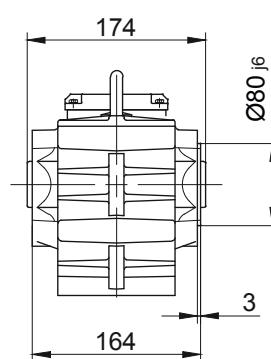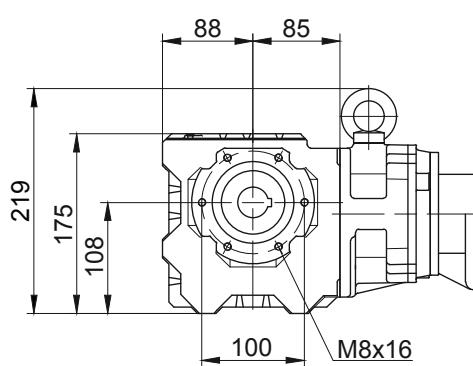



Foot with tapped holes at bottom

Code -6.U/

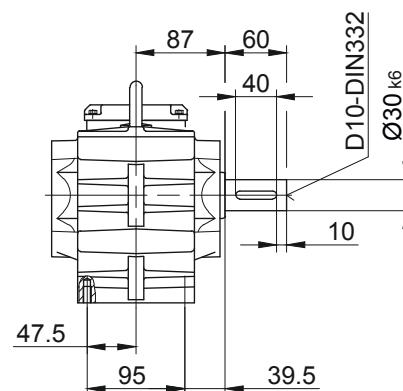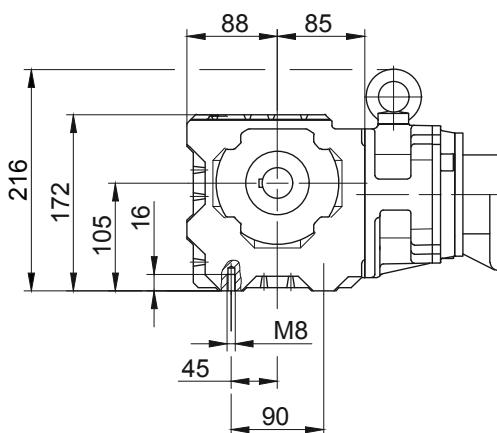

Foot with clearance holes at bottom

Code -1.U/

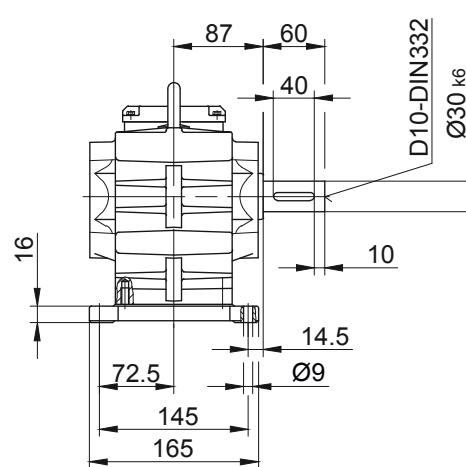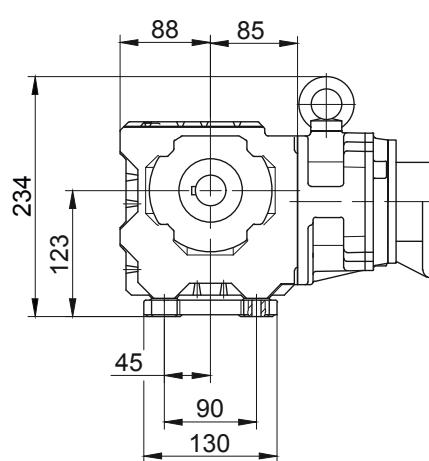

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gearied motors

Dimension - Tandem Gearbox



BS20G06

Flange with clearance holes at front





Code -3.V/
(Code -2.V/)
(Code -4.V/)

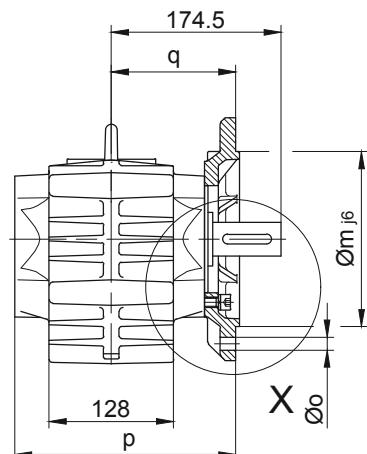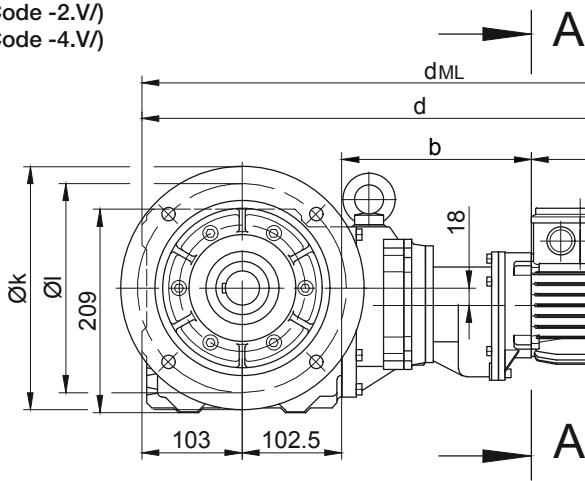



Code -.4/

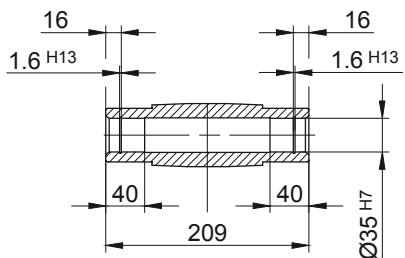

Code -.1/

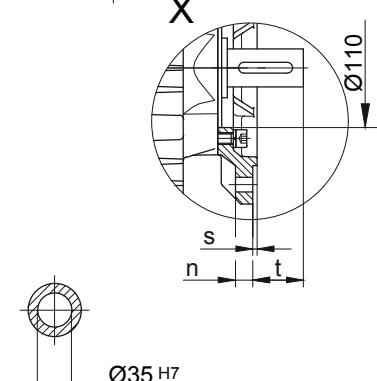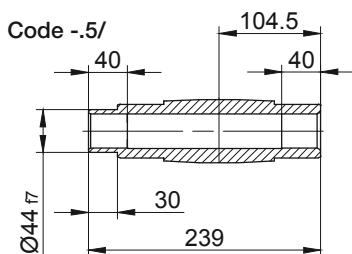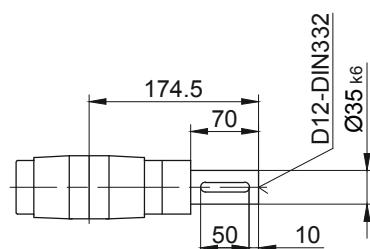

Code -.3/

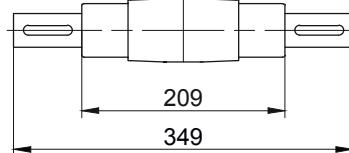

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS20..	Code -3.V/	250	215	180	16	13.5	227.5	128	4	46.5
BS20..	Code -2.V/	200	165	130	12	11	224.5	125	3.5	49.5
BS20..	Code -4.V/	300	265	230	20	13.5	233.5	134	4	40.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BS20G06.../S04S	142.5	193	110.5	541	90	112	584.5	628.5	672	-
BS20G06.../S..06 (M, L)	170.5	195	123	571	99	119	613	673.5	711	-
BS20G06.../S..08 (M, L)	199.5	239	156	644	114.5	136.5	710	756	817.5	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gearied motors

Dimension - Tandem Gearbox

BS20G06



Torque arm at front

Code -5.V/

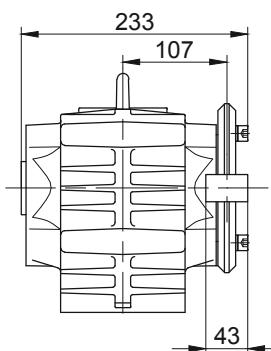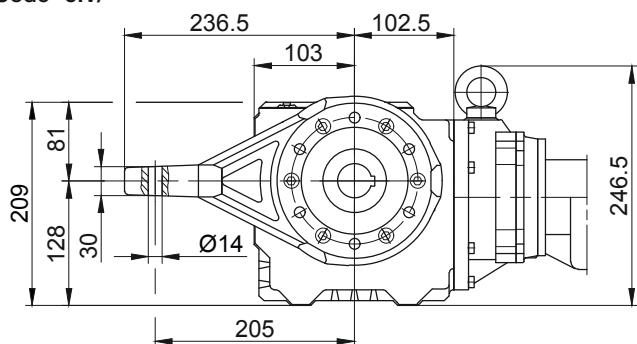



Flange with tapped holes at front

Code -7.V/

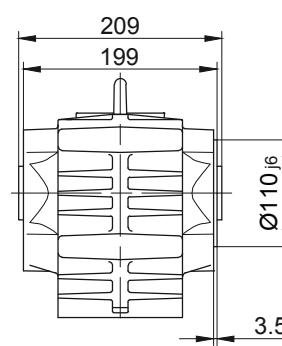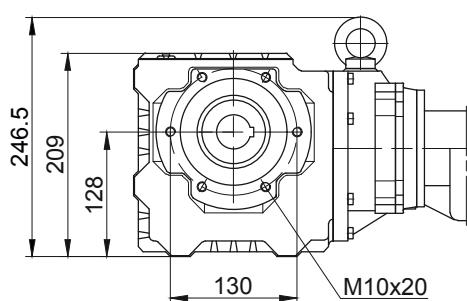



Foot with tapped holes at bottom

Code -6.U/

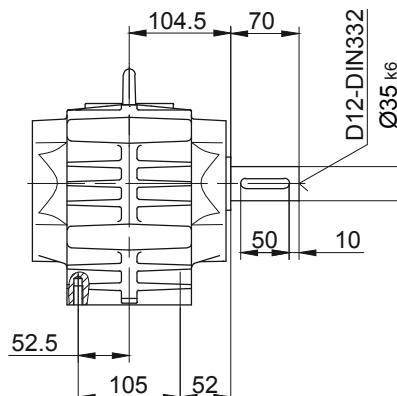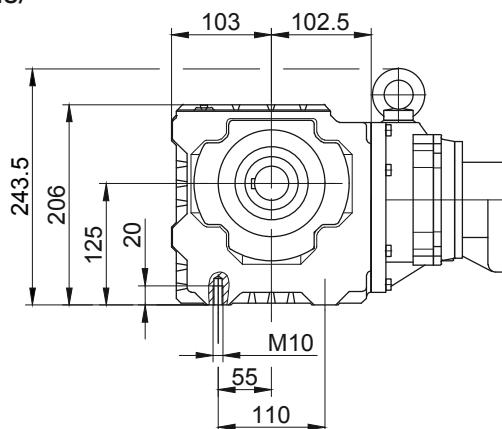

Foot with clearance holes at bottom

Code -1.U/

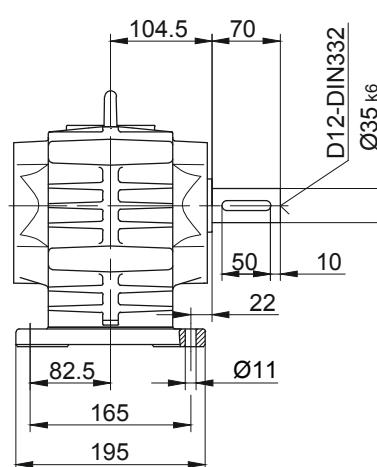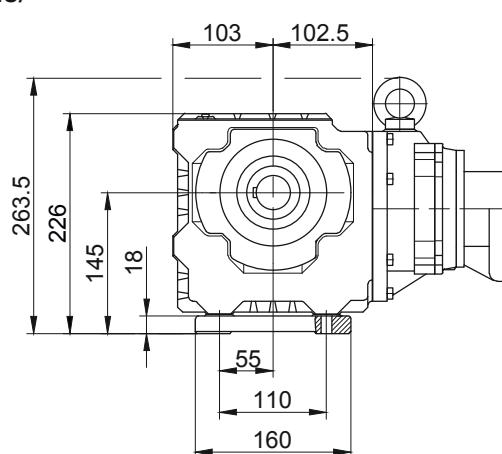

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gearied motors

Dimension - Tandem Gearbox



BS30G06

Flange with clearance holes at front


Code -3.V/
(Code -4.V)

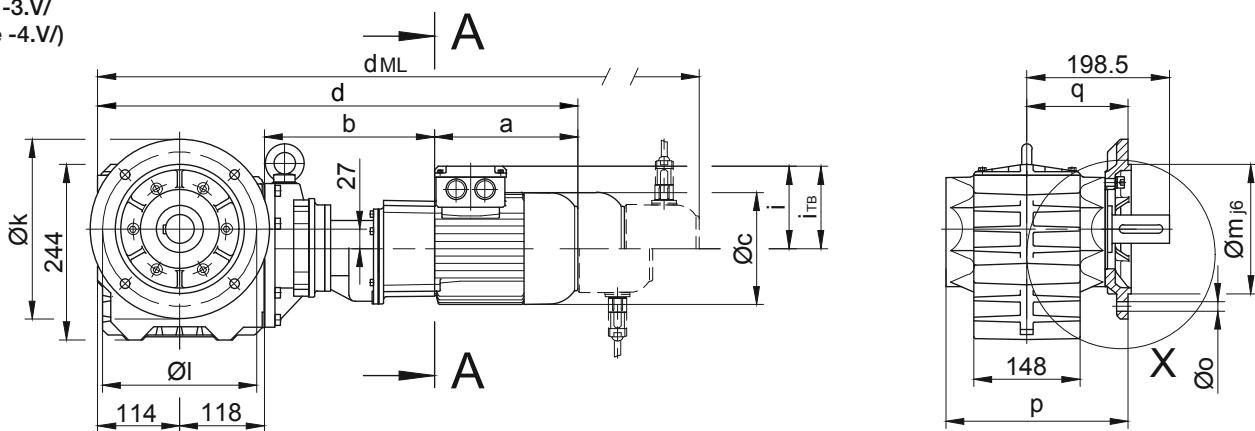



Code -.4/

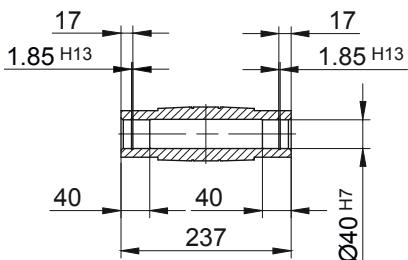



Code -.1/



Code -.5/

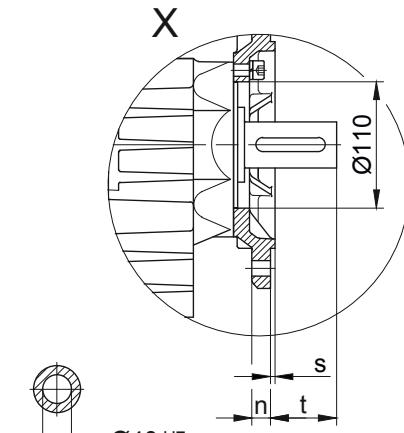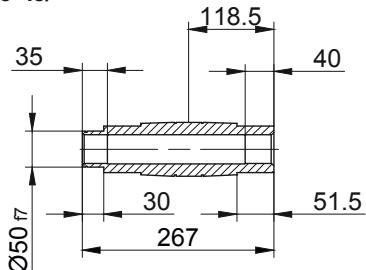

Code -.3/

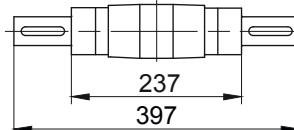

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS30..	Code -3.V/	250	215	180	16	13.5	253.5	141	4	57.5
BS30..	Code -4.V/	300	265	230	20	13.5	259.5	147	4	51.5

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BS30G06.../S04S	142.5	191	110.5	565.5	90	112	609	653	696.5	-
BS30G06.../S..06 (M, L)	170.5	193	123	595.5	99	119	637.5	698	735.5	-
BS30G06.../S..08 (M, L)	199.5	237	156	668.5	114.5	136.5	734.5	780.5	842	-

Dimensions in millimetres (mm)

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gearied motors

Dimension - Tandem Gearbox

BS30G06



Torque arm at front

Code -5.V/

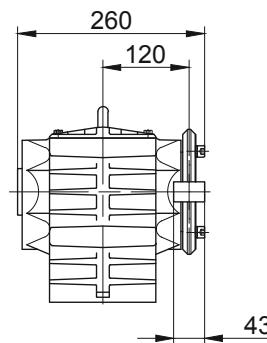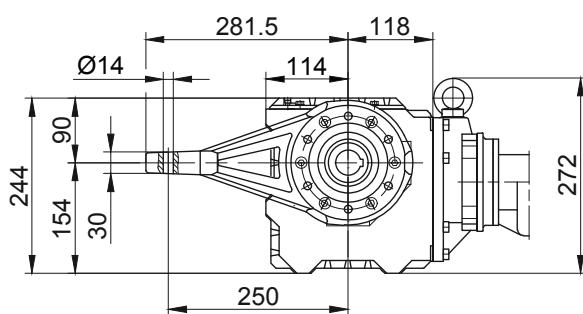



Flange with tapped holes at front

Code -7.V/

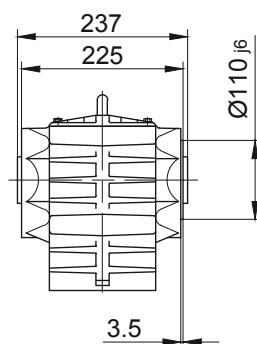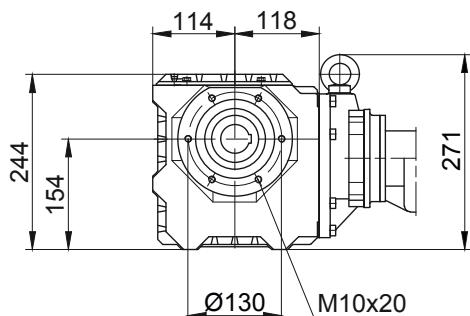



Foot with tapped holes at bottom

Code -6.U/

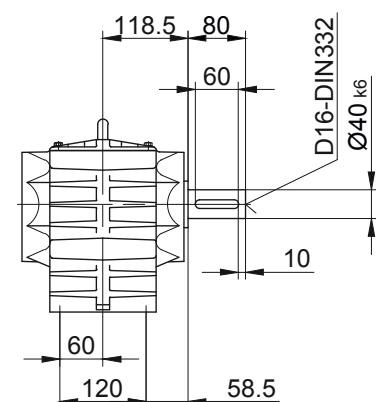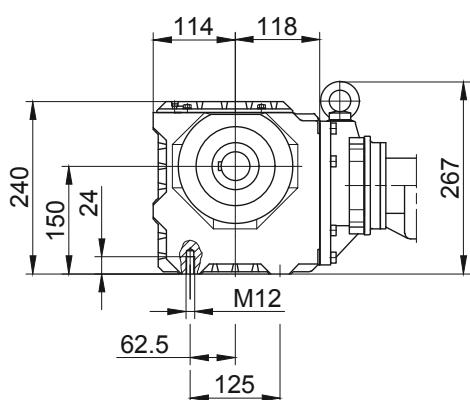

Foot with clearance holes at bottom

Code -1.U/

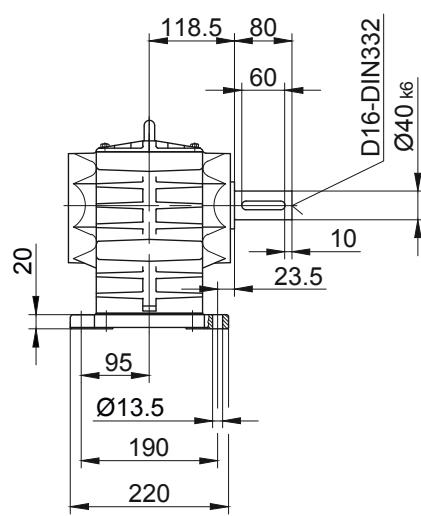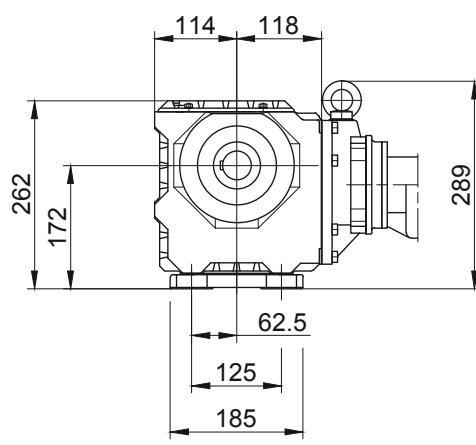

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gearied motors

Dimension - Tandem Gearbox


BS40G10

Flange with clearance holes at front


Code -3.V/

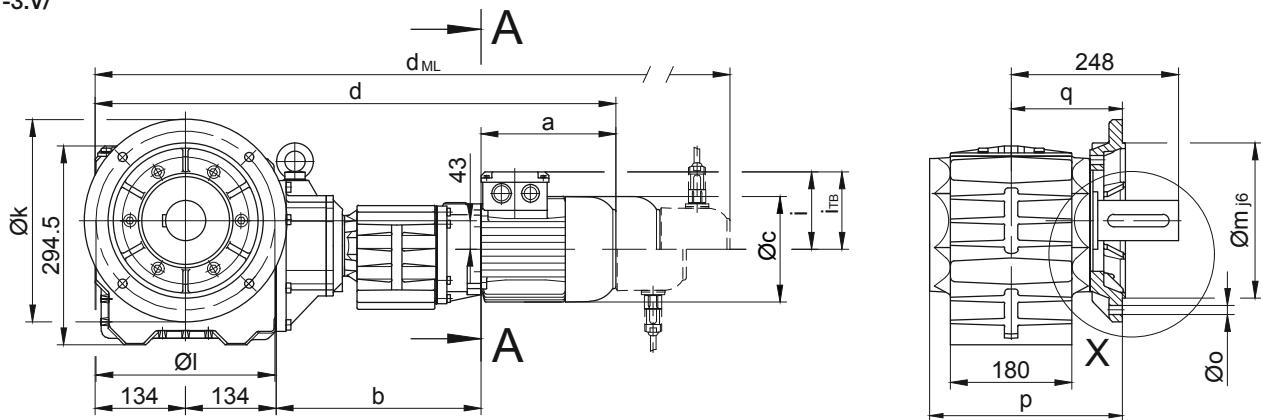


Code -4/

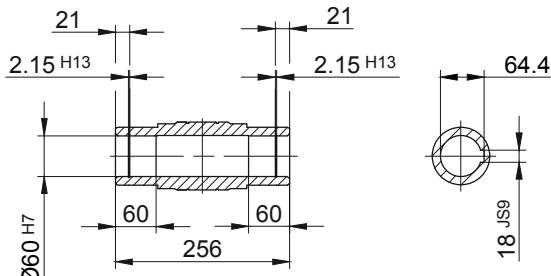



Code -1/

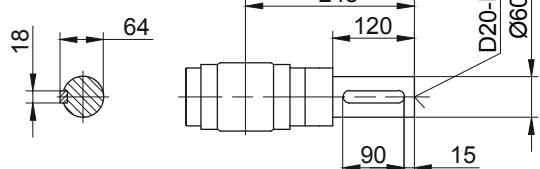

Code -5/

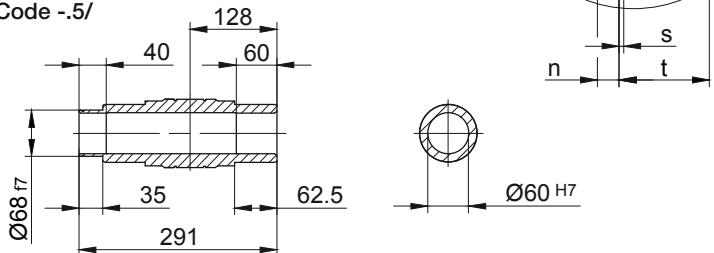

Code -3/

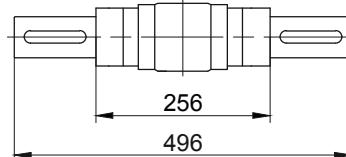

Flange Dimensions

Type	Design	k	l	m	n	o	p	q	s	t
BS40..	Code -3.V/	300	265	230	20	13.5	286	165	4	83

Dimensions in millimetres (mm)

Type	a	b	c	d	i	i_{TB}	Design with motor extensions			
							d_{ML}	d_{ML}	d_{ML}	d_{ML}
BS40G10.../S..06 (M, L)	170.5	300	123	738.5	99	119	780.5	841	878.5	-
BS40G10.../S..08 (M, L)	199.5	304	156	771.5	114.5	136.5	837.5	883.5	945	-
BS40G10.../S..09 (S, X)	250.5	318.5	176	837	124	157	930	944.5	1034	-

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gearied motors


Dimension - Tandem Gearbox

BS40G10


Torque arm at front
Code -5.V/

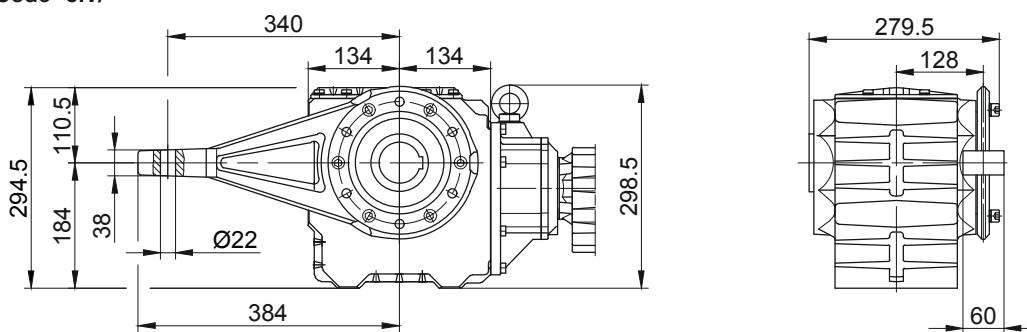


Flange with tapped holes at front
Code -7.V/

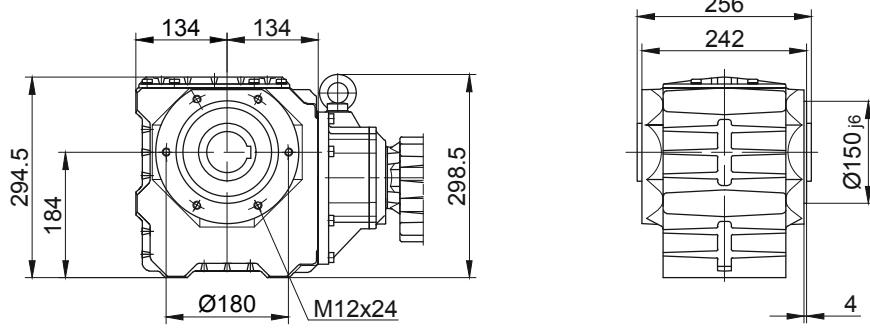

Foot with tapped holes at bottom
Code -6.U/

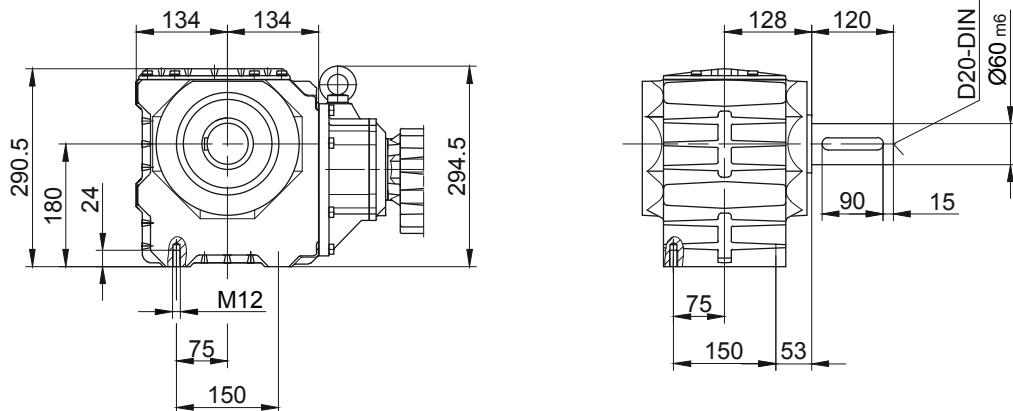

Foot with clearance holes at bottom
Code -1.U/

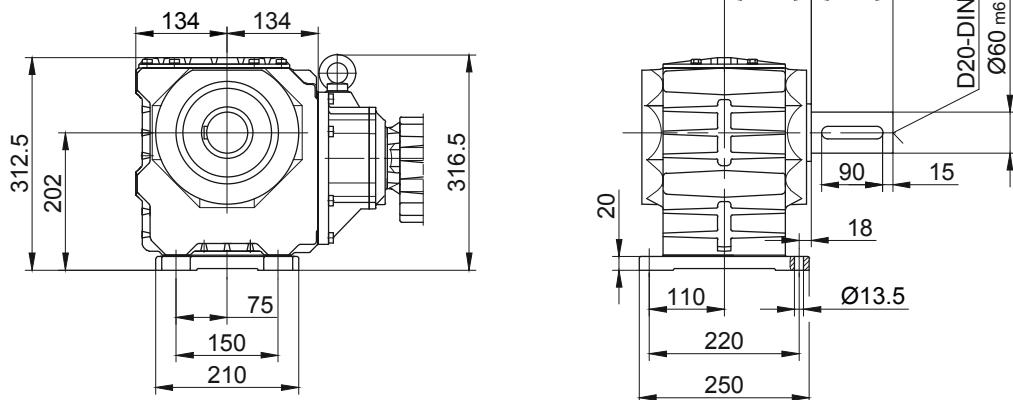


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gear motors

Additional Dimension Sheet

Shrink disc couplings (SSV)

(Code BS10-.5A/...)

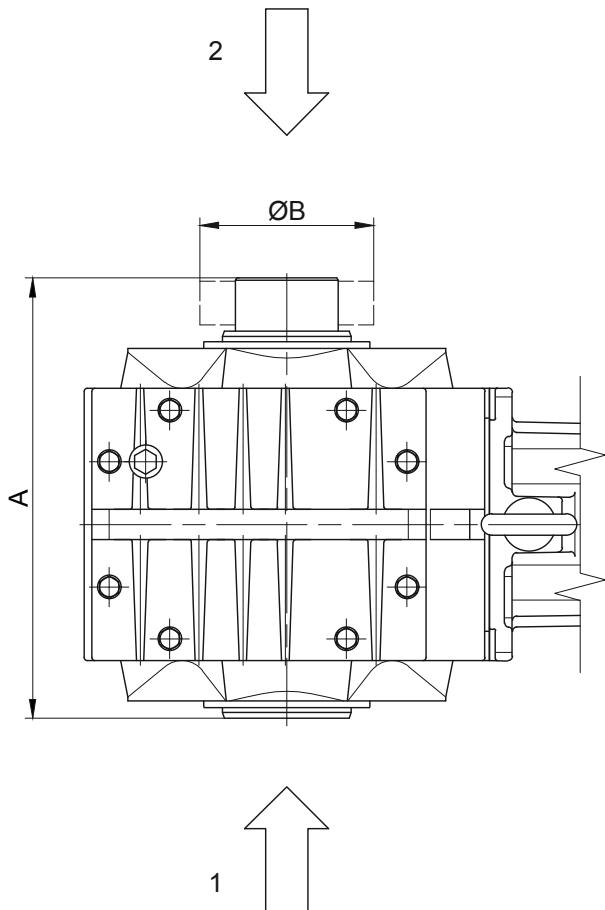

- 1 Gear side FRONT (V)
2 Gear side REAR (H)

Type	SSV Ringfeder	SSV STÜWE	A	B
BS10	RfN 4161 036x072	HSD 36-22x36	199	72
BS20	RfN 4161 044x080	HSD 44-22x44	239	80
BS30	RfN 4161 050x090	HSD 50-22x50	267	90
BS40	RfN 4161 062x110	HSD 68-22x68	291	115
Dimensions in millimetres (mm)				


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gearied motors

Additional Dimension Sheet

Shrink disc couplings with (SSV) cover

(Code BS10-.5A/...)

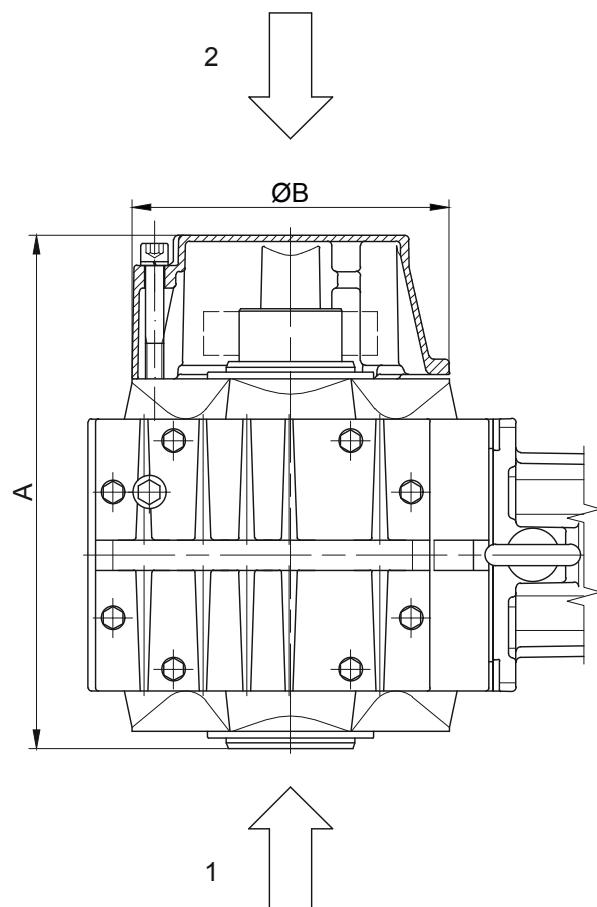

- 1 Gear side FRONT (V)
2 Gear side REAR (H)

13


Type	SSV Ringfeder	SSV STÜWE	A	B
BS10	RfN 4161 036x072	HSD 36-22x36	221	120
BS20	RfN 4161 044x080	HSD 44-22x44	286	160
BS30	RfN 4161 050x090	HSD 50-22x50	313	160
BS40	RfN 4161 062x110	HSD 68-22x68	340	210
Dimensions in millimetres (mm)				

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gear motors

Additional Dimension Sheet

Rubber buffer for torque arm

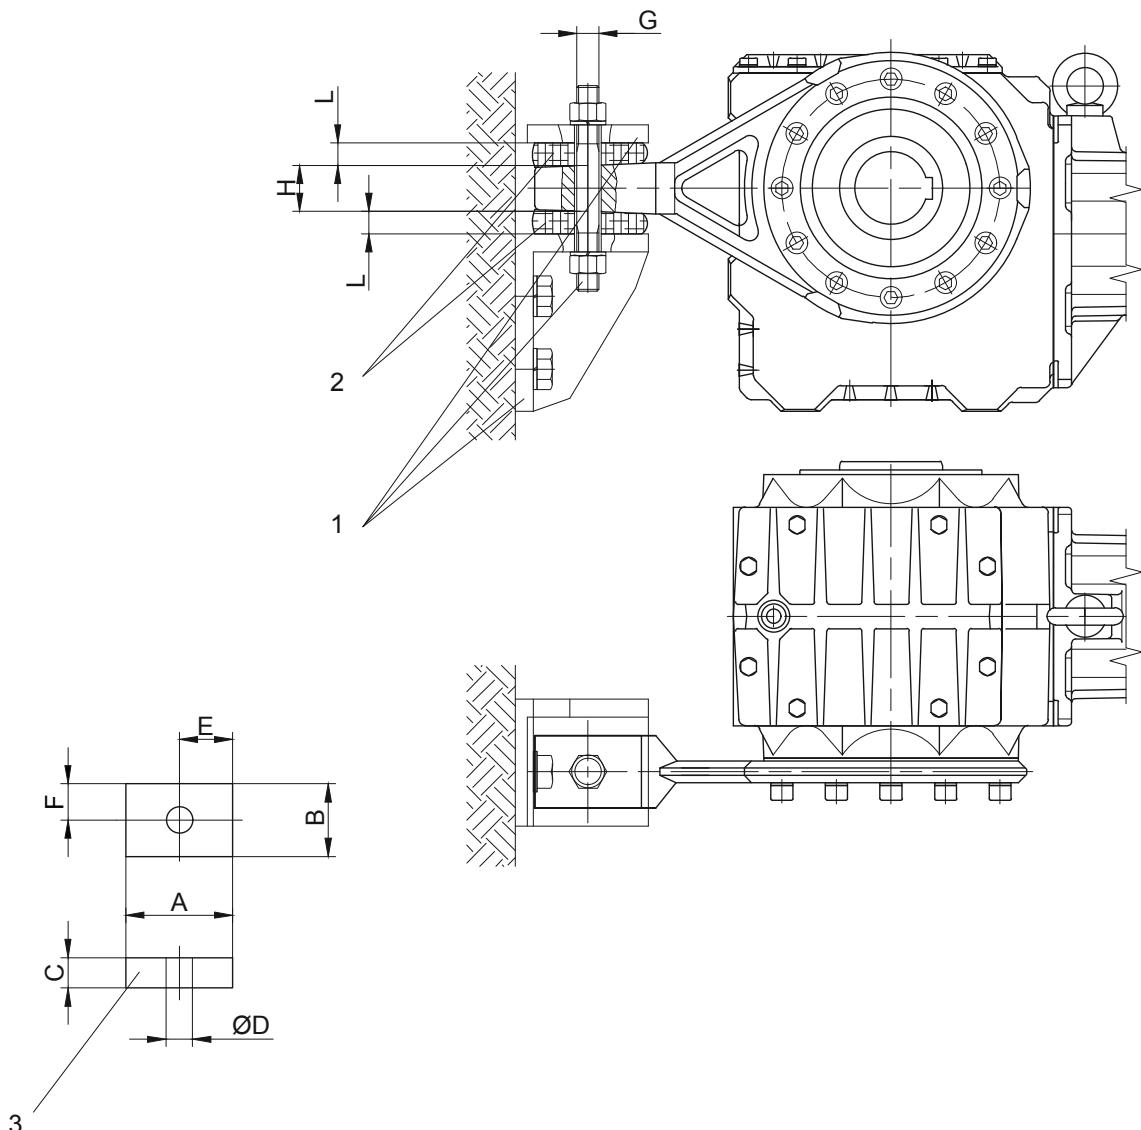

- 1 not included in delivery
2 Rubber buffers pretensioned

- 3 Rubber buffer - only for BS03-BS40
G maximaler Schraubendurchmesser

Material: Natural rubber
Hardness 50 +/-5 Shore A

Dimensions of the transverse hole:
see dimensioned sketch of the respective shaft mounted gearbox

Gear	Position	A	B	C	D	E	F	G	H	L
BS02	-	-	-	-	-	-	-	M8	6	-
BS03	Position 0	30	30	12	12	15	15	M8	10	10.5
BS04	Position 0	30	30	12	12	15	15	M8	10	10.5
BS06	Position 0	30	30	12	12	15	15	M10	10	10
BS10	Position 1	48	32	15	14	24	16	M10	19	13
BS20	Position 2	63	43	20	14	31.5	21.5	M10	30	17.5
BS30	Position 2	63	43	20	14	31.5	21.5	M10	30	17
BS40	Position 3	88	60	25	22	44	30	M18	38	22

Dimensions in millimetres (mm)


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gearied motors


Additional Dimension Sheet

Position of the torque arm


BS02 / BS03

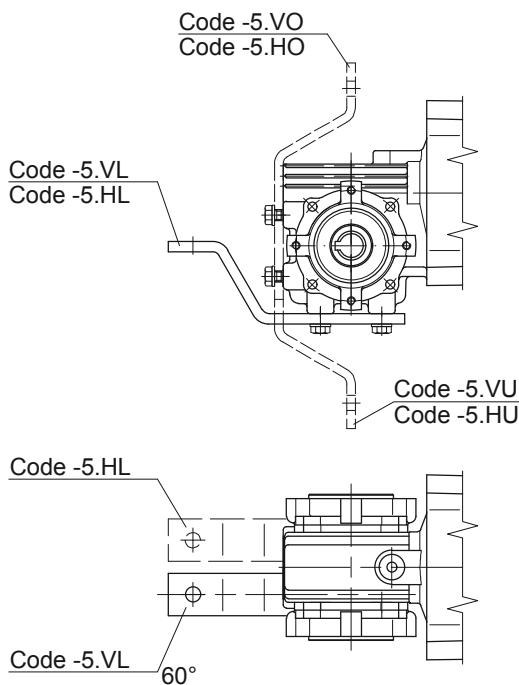

BS04 / BS06

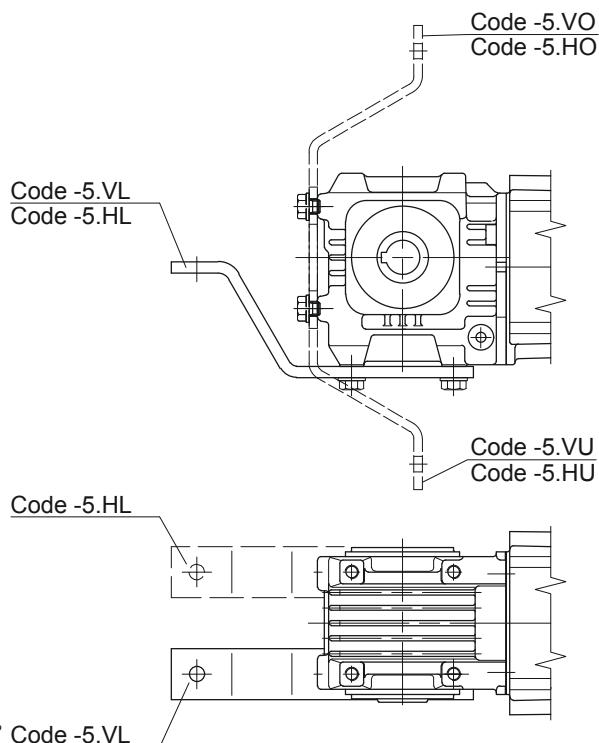

BS10 - BS40

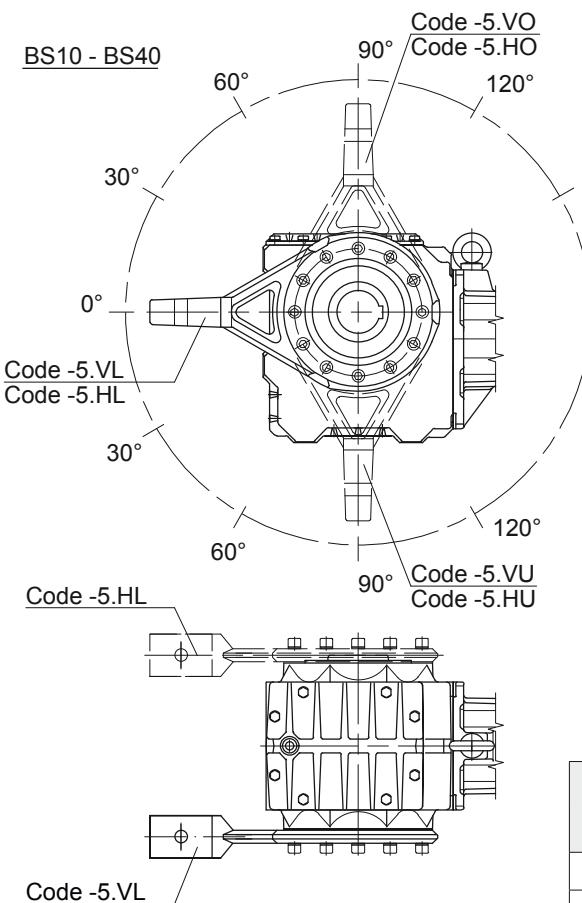



Gear	Position						
	VL/HL	VO/HO/VU/HU				VR/HR	
BS10	0°	30°	60°	90°	120°	150°	-
BS20	0°	30°	60°	90°	120°	150°	-
BS30	0°	30°	60°	90°	120°	150°	-
BS40	0°	30°	60°	90°	120°	150°	-

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.



BS-series worm-gear motors

Additional Dimension Sheet



Threaded foot

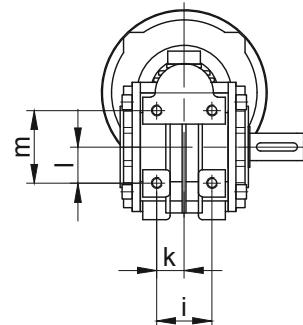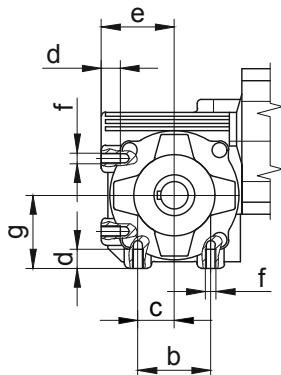

Type	a	b	c	d	e	f	g	-	i	k	l	m
BS02	-	36	18	10	40	M6	40	-	32	16	18	36
BS03	-	54	27	14	54	M8	54	-	41	20.5	27	54

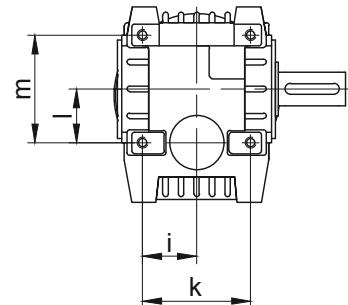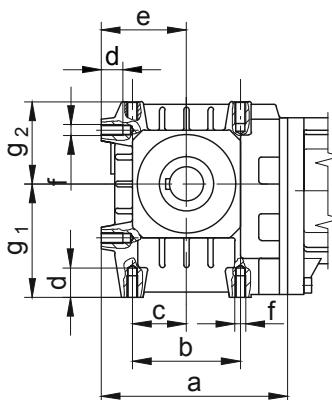

Type	a	b	c	d	e	f	g1	g2	i	k	l	m
BS04	111	60	30	15.5	50	M8	64	49.5	30	60	30	60
BS06	138	80	40	16	63	M8	84	61	40	80	40	80

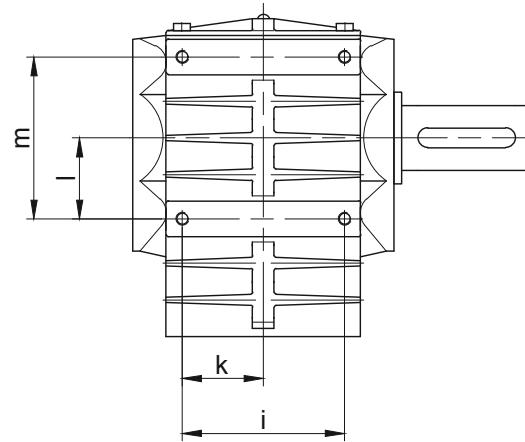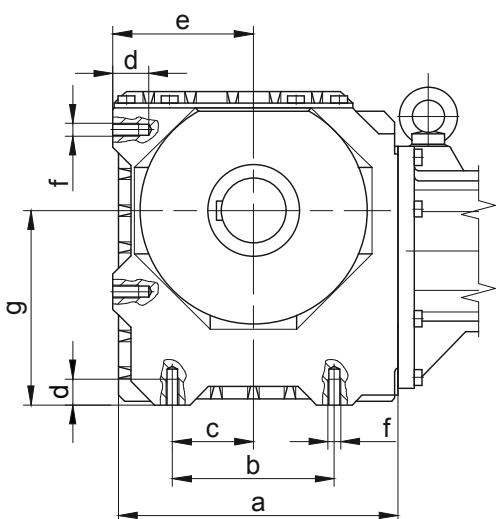


Type	a	b	c	d	e	f	g	-	i	k	l	m
BS10-BS10Z	170	90	45	16	85	M8	105	-	95	47.5	45	90
BS20-BS20Z	202.5	110	55	20	100	M10	125	-	105	52.5	55	110
BS30-BS30Z	228	125	62.5	24	110	M12	150	-	120	60	62.5	125
BS40-BS40Z	264	150	75	24	130	M12	180	-	150	75	75	150

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gearied motors

Additional Dimension Sheet

Foot plate, left

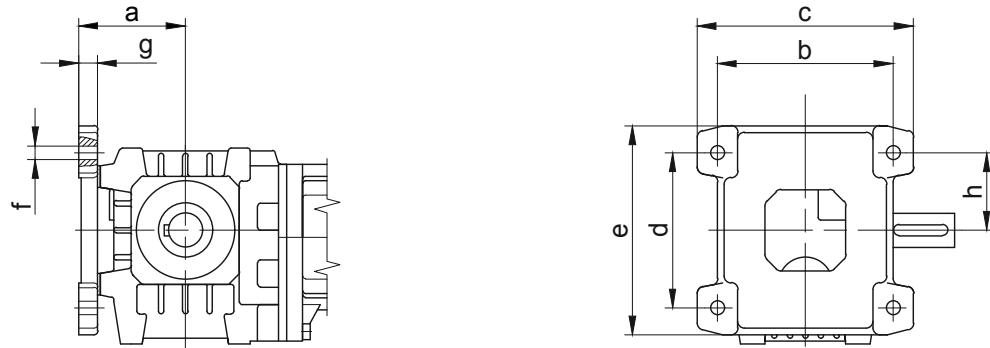

Type	a	b	c	d	e	f	g	h
BS04	68	110	140	90	130	10	15	45
BS06	79	130	160	115	155	10	14	57.5

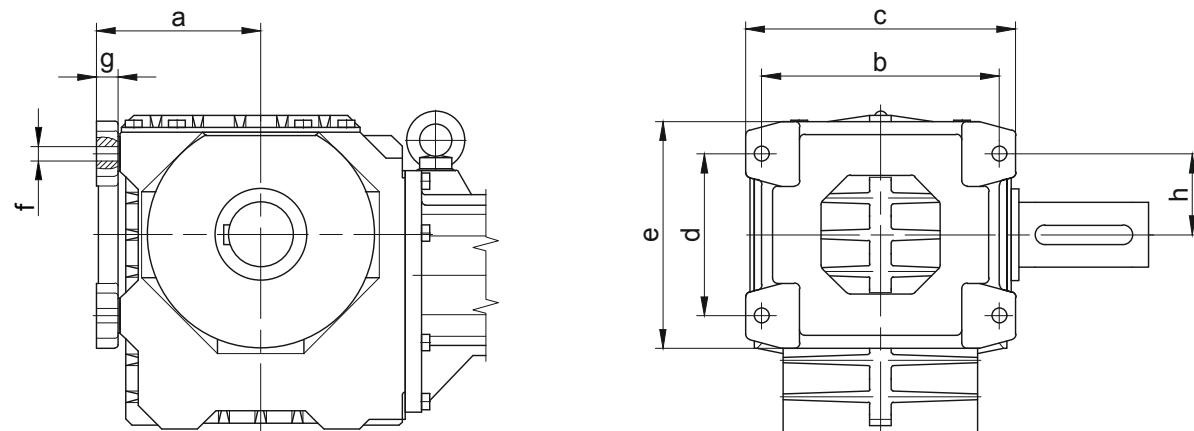

13


Type	a	b	c	d	e	f	g	h
BS10-BS10Z	103	145	165	90	130	Ø9	16	72.5
BS20-BS20Z	120	165	195	110	160	Ø11	18	55
BS30-BS30Z	132	190	220	125	185	Ø13.5	20	62.5
BS40-BS40Z	152	220	250	150	210	Ø13.5	20	75

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.


BS-series worm-gearied motors

Additional Dimension Sheet

Assembly tools for hollow shaft and keyway

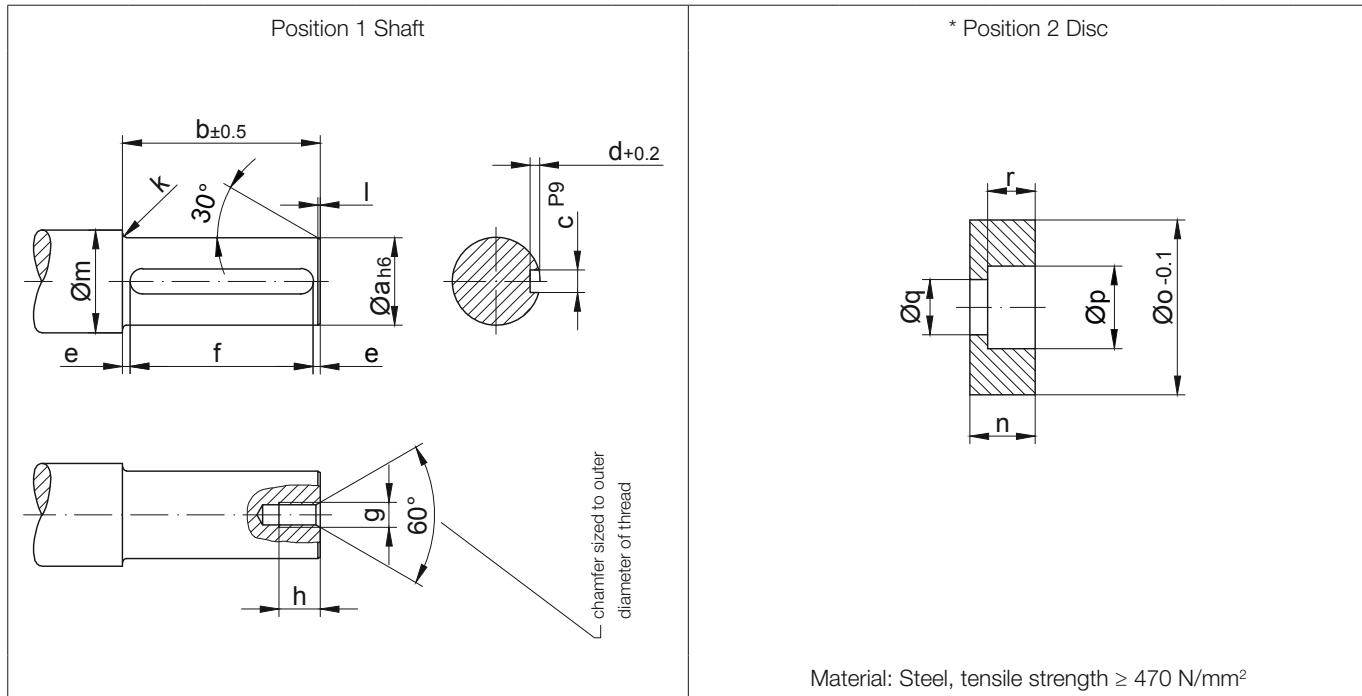

Type	Dimensions (mm)															
	Position 1 Shaft												Position 2 Disc			
	a	b	c	d	e	f	g	h	k	l	m	n	o	p	q	r
BS03	20	75	6	3.5	6	63 ^{+0.3}	M6	16	2	1.5	28	13.5	19.8	11	6.6	6.5
BS04	20	71	6	3.5	7.5	56 ^{+0.3}	M6	16	2	1.5	28	13.5	19.8	11	6.6	6.5
BS06	25	99	8	4	9.5	80 ^{+0.3}	M8	18	2.5	1.5	33	13.5	24.8	15	9	8.5
BS10	30	152	8	4	6	140 ^{+0.5}	M10	20	3	1.5	38	15	29.8	18	11	10
BS20	35	186	10	5	13	160 ^{+0.5}	M10	20	3	1.5	43	16	34.8	18	11	10
BS30	40	212	12	5	6	200 ^{+0.5}	M12	22	3	2	48	18	39.8	20	13.5	12
BS40	60	227	18	7	13.5	200 ^{+0.5}	M20	38	3.5	2	68	24	59.8	33	22	18

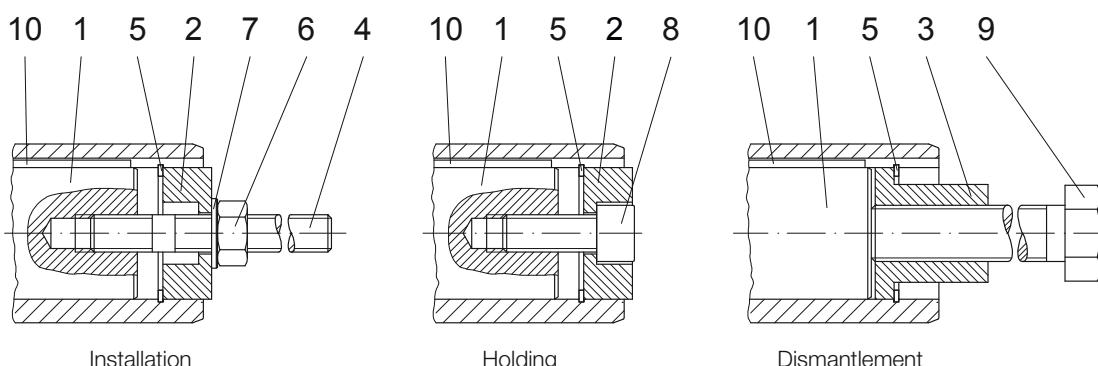

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gearied motors

Additional Dimension Sheet

Assembly tools for hollow shaft and keyway

Position 3 Sleeve												* Position 4 Stud bolt						
Type	Dimensions (mm)											* Retaining ring DIN 472	Hexagon nut DIN 394-8	Disc DIN 125-St	* Filler head screw DIN 912-8.8	Starting torque (Nm)	Hexagon bolt DIN EN 24017-8.8	Key DIN 6885 Width/Height/Length
	Position 3 Sleeve						Position 4 Stud bolt											
	s	t	u	v	w	R	x	y	z	z1	Pos.5	Pos.6	Pos.7	Pos.8	Pos.9	Pos.10		
BS03	19.8	24	5	11	M8	-	120	90	18	M6	20x1.0	M6	6.4	M6x25	5	M8x110	A 8x7x63	
BS04	19.8	24	5	11	M8	-	120	90	18	M6	20x1.0	M6	6.4	M6x25		M8x110	A 8x7x56	
BS06	19.8	24	5	15.4	M12	0.8	150	120	20	M8	25x1.2	M8	8.4	M8x30		M12x140	A 8x7x80	
BS10	29.8	28	5	19.8	M14	0.8	210	175	23	M10	30x1.2	M10	10.5	M10x30	8	M14x190	A 8x7x140	
BS20	34.9	28	5	23	M14	-	250	215	23	M10	35x1.5	M10	10.5	M10x35		M14x230	A 10x8x160	
BS30	39.9	40	6	27.7	M20	0.8	280	240	28	M12	40x1.75	M12	13	M12x35	16	M20x270	A 12x8x200	
BS40	59.8	60	6	44	M30	-	320	260	45	M20	60x2.0	M20	21	M20x50	42	M30x310	A 18x11x200	

The parts shown are necessary for assembly. ONLY * specified parts are enclosed in the assembly kit.
Suitable measures are to be used to secure Bolt Pos. 8 against loosening!



Optional	Type	Assembly tool „Holding“
	BS03	Id.Nr. 4104013
	BS04	Id.Nr. 4104013
	BS06	Id.Nr. 4103921
	BS10	Id.Nr. 4103939
	BS20	Id.Nr. 4103947
	BS30	Id.Nr. 4103955
	BS40	Id.Nr. 4103971

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gearied motors

Additional Dimension Sheet

Shaft cap (VK)

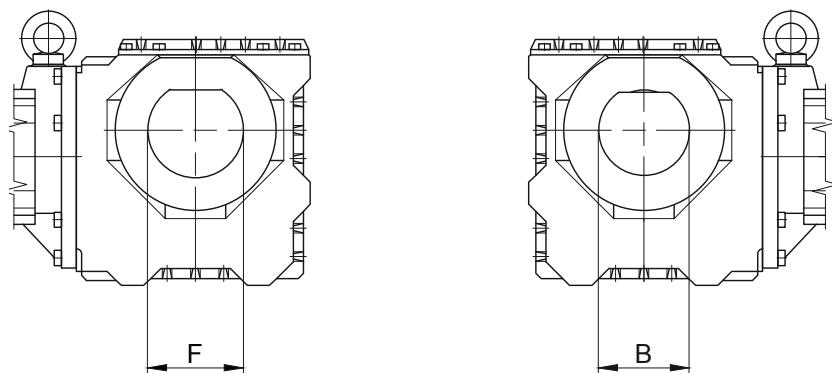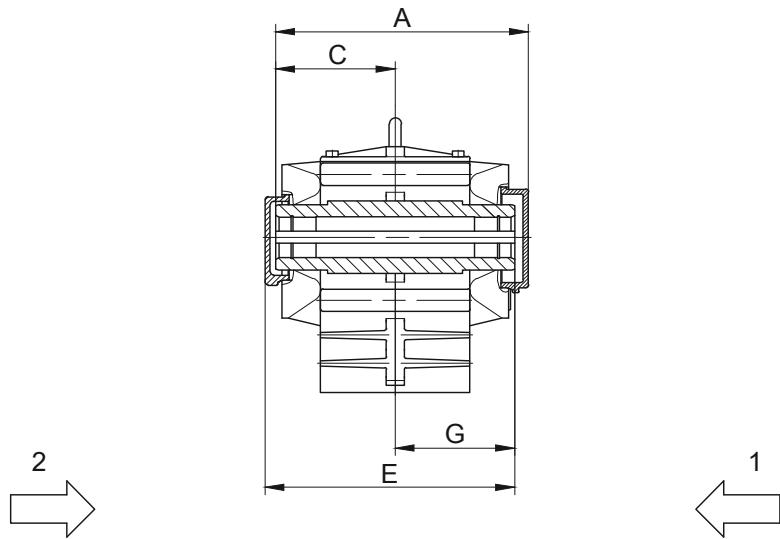

13

- 1 Gear side FRONT (V)
- 2 Gear side REAR (H)

Sealing cap REAR (H)			
Type	A	B	C
BS10	186	68	87
BS30	250.5	100	132
BS40	276	130	128
Dimensions in millimetres (mm)			



Sealing cap FRONT (V)			
Type	E	F	G
BS20	221	78	104.5
Dimensions in millimetres (mm)			

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

BS-series worm-gearied motors

Additional Dimension Sheet

Shaft cover (VD)

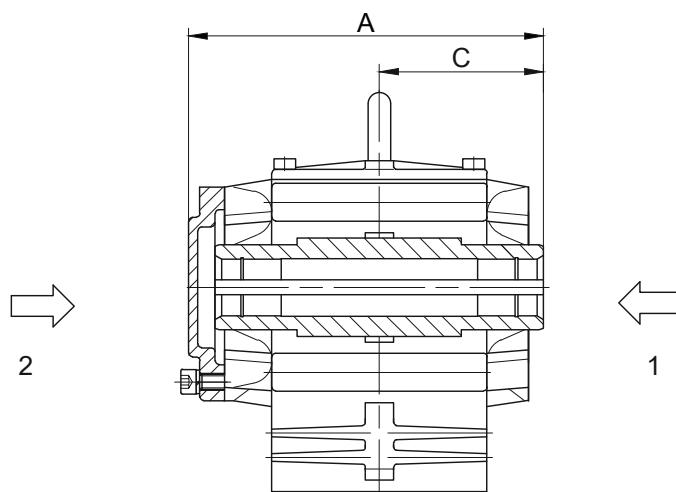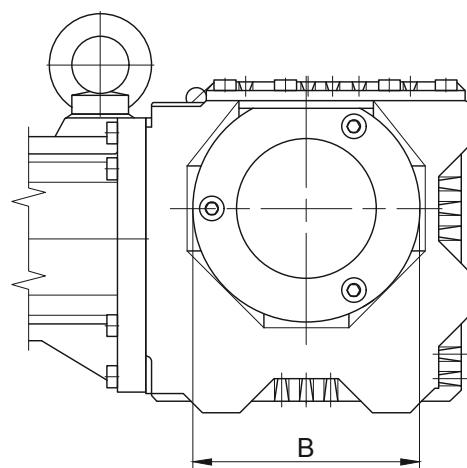

1 Gear side FRONT (V)


2 Gear side REAR (H)

Type	A	B	C
BS04	99.5	68	46.5
BS06	128.5	81	60.5
BS10	185	Ø120	87
BS20	224.5	Ø160	104.5
BS30	251.5	Ø160	118.5
BS40	275	Ø210	128
Dimensions in millimetres (mm)			

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Energy Efficient Geared Motors

AC Variable Speed



Motors

General	495
ErP Directive 2009/125/EC	495
Regulation (EG) 640/2009 & (EU) 4/2014	495
Regulation (EU) 2019/1781	496
Torques	498
Line voltages	498
Line frequencies	499
Rating plate	499
Terminal box	499
Motor connections	500
Terminal connections for single speed motors	501
Terminal connections for single speed motors with thermal motor protection	502
Terminal connections for pole changing motors in Dahlander connection (Δ/YY or Y/YY)	503
Terminal connections for pole changing motors with two separate windings (YY or Δ/Δ)	504
Plug-and-socket connection	505
Motor protection	506
Thermistors (PTC)	506
Thermostatic protection	507
KTY sensors	508
PT100 sensors	509
Insulation	510
IP – Protection classes	510
Degrees of protection provided by enclosures for electrical equipment	510
Speed of output shaft	511
Duty types as defined by EN 60034	512
General	512
Continuous running duty (S1)	512
Short-time duty (S2)	512
Intermittent periodic duty (S3)	513
Intermittent periodic duty with starting (S4)	514
Intermittent periodic duty with electric braking (S5)	515
Continuous-operation periodic duty (S6)	516
Continuous-operation periodic duty with electric braking (S7)	516
Continuous-operation periodic duty with relative load/speed changes (S8)	517
Duty with non-periodic load and speed variations (S9)	517
Duty with discreet constant loads and speeds (S10)	518
Operation with frequency converter	519
Notes on design	519
Increased torque with reduced duty factor	519
Increased torque with external fan	519
Energy-saving function	520
Regeneration	520
Notes on operation with other-make frequency inverters	520
Explosion protection	521
General	521
ATEX	521
Frequency converters	521
Protective device	521
Voltages	522
Gears with non-electrical explosion protection	522

Energy Efficient Geared Motors

AC Variable Speed

Technical data.....	523
Standard Motors	523
Motors with rated speed 1500 1/min	523
Motor torques in the adjusting range 150 1/min - 1800 1/min. duty type S1	525
Motors with rated speed 2250 1/min	529
Motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1	531
Motors with rated speed 3000 1/min	533
Motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1	536
Aseptic-Motors	540
Aseptic motors with rated speed 1500 1/min	540
Aseptic motors torques in the adjusting range 150 1/min - 1800 1/min. duty type S1	540
Aseptic motors with rated speed 3000 1/min	542
Aseptic motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1	542
Stainless Steel Motors	544
Stainless steel motors with rated speed 1500 1/min	544
Stainless steel motors torques in the adjusting range 150 1/min - 1800 1/min. duty type S1	544
Stainless steel motors with rated speed 3000 1/min	546
Stainless steel motors torques in the adjusting range 150 1/min - 3000 1/min. duty type S1	546
Atex-Motors	548
Rated speed 1500 1/min	548
-Type S.XE.08MA4-..	548
-Type S.XE.08LA4-..	550
-Type S.XE.09SA4-..	552
-Type S.XE.09XA4-..	554
-Type S.XE.11SA6-..	556
-Type S.XE.11MA6-..	558
-Type S.XE.11LA6-..	560
Rated speed 3000 1/min	562
-Type S.XE.08MA4-..	562
-Type S.XE.08LA4-..	564
-Type S.XE.09SA4-..	566
-Type S.XE.09XA4-..	568
-Type S.XE.11SA6-..	570
-Type S.XE.11MA6-..	572
-Type S.XE.11LA6-..	574

ErP Directive 2009/125/EC

Directive 2009/125/EC of the European Parliament and the Council, issued in 2009, specifies requirements for the environmentally responsible design of energy-related products (ErPs). In November 2009 it superseded Directive 2005/32/EC, which formed the framework for requirements for the environmentally responsible design of energy-using products (EuPs). This change has no effect on already proclaimed implementation measures.

Objectives

The ErP Directive has several objectives:

1. Mitigating the environmental impact of energy-using products

This objective is intended to be achieved by the documentation and labelling of products, by regulations for inspection, and by the formulation of individual requirements in implementation measures. As the entire product life cycle is taken into consideration, action must be taken as early as the design phase.

2. Climate protection

Achievement of the EU climate protection objectives is to be supported. This can be implemented by reducing energy consumption and the emission of global warming gasses in the production, operation and disposal of energy-using products.

3. Harmonised legislation

The directive creates a framework for the European regulation of environmental design requirements. This avoids trade impediments resulting from differences in national regulations. This can be achieved by means of the proclamation of legally binding implementation measures for the entire Community and protection of free trade in goods against further-reaching regulations of the Member States.

Which motors are excluded from the scheme?

- Motors designed to be operated completely immersed in a liquid
- motors fully integrated into a product (e.g. a gearbox, a pump, a fan or a compressor) whose energy efficiency cannot be measured independently of that productn
- at altitudes above 4000 meters above sea level
- at ambient temperatures above 60 °C
- at ambient temperatures below - 30 °C (any motor) or at ambient temperatures below 0 °C (air-cooled motor)
- in potentially explosive atmospheres within the meaning of Directive 94/9/EC of the European Parliament and of the Council
- Brake motors

Example:



Regulation (EU) 2019/1781

To establish eco-design requirements for electric motors and variable speed drives pursuant to Directive 2009/125/EC

Valid from: 01.07.2021

- Frequency converter 0.12 - 1,000 kW: IE2
- 3-phase motors $0.12 < 0.75 \text{ kW}/2.4$, 6 or 8 poles: IE2 (Excluded: Ex eb (DxE))
- 3-phase motors $0.75 - 1,000 \text{ kW}/2.4$, 6 or 8 poles: IE3 (Excluded: Ex eb (DxE))

ATTENTION:

Brake motors are no longer exempt!!
IE2 for inverter operation is no longer permitted!!!

Valid from: 01.07.2023

- 1-phase motors $\geq 0.12 \text{ kW}$: IE2
- Ex eb (DxE) Motors $\geq 0,12 \text{ kW}$: IE2
- 3-phase motors $75 \text{ kW} - 200 \text{ kW}$ 2, 4 or 6 pole: IE4
(Exempt: brake motor and all explosion-proof motors)

Scope

Induction electric motors without brushes, commutators, slip rings or electrical connections to the rotor, rated for operation on a 50 Hz, 60 Hz or 50/60 Hz sinusoidal voltage and having the following characteristics:

- 2-, 4-, 6- and 8-pole motors
- Rated power PN between 0,12 kW and 1000 kW
- Rated voltage UN over 50 V up to and including 1,000 V
- are designed for continuous operation ($S_1, S_3 \geq 80\% \text{ ED}$, $S_6 \geq 80\% \text{ ED}$) and are intended for direct mains operation

Which engines are excluded from the scheme?

- Motors designed to be operated completely immersed in a liquid
- Motors fully integrated into a product (e.g. a gearbox, a pump, a fan or a compressor) whose energy efficiency cannot be measured independently of that product
- Motors with integrated frequency converter (compact drives) whose energy efficiency cannot be tested independently of the frequency converter
- Motors specifically designed and specified to operate exclusively
 - at altitudes exceeding 4000 m above sea-level
 - at ambient temperatures above 60 °C
 - at ambient temperatures below -30 °C
- Motors with integrated brake, which is an integral part of the inner motor construction and cannot be removed or supplied from a separate power source when testing the motor efficiency.
- Motors specifically qualified for the safety of nuclear installations, as defined in Article 3 of Council Directive 2009/71/EURATOM
- Motors with mechanical commutators
- Totally enclosed Non-Ventilated motors (TENV)
- Engines from the respective scope of application of the two deadlines 01.07.2021 or 01.07.2023, which were placed on the market before these deadlines, may continue to be placed on the market until 30.06.2029 as 1:1 replacements and may be specifically marketed as such
- Multi-speed motors, i.e. pole-changing motors
- Motors designed specifically for the traction of electric vehicles
- Motors in portable equipment whose weight is supported by hand during operation
- Motors in hand-held mobile equipment which are moved during operation
- Motors in cordless or battery-operated equipment
- Motors for underground mining (mines)

Method for determining the motor efficiency according to IEC 60034-2-1

Individual loss procedure

Additional losses according to residual loss method

Low measurement uncertainty

Motors

General

Bauer geared motors for connection to three-phase supply are supplied with specially designed induction motors. This design ensures maximum operating safety with high starting torque and minimum starting current.

The torque/speed characteristic is largely free of torque dips. Torque is optimised to suit requirements and application parameters. See "www.bauergears.com" for more information.

Torques

The torques as stated in the selection tables are fully available at the output shaft. These figures apply for continuous operation (S1-100 %) at a maximum ambient temperature of 40 °C and at site elevations up to 1000 m above sea level. Drives for higher ambient temperatures and site elevations are available on request. Gear efficiencies, which are lower than the usual values for spur gears, are taken into account in the torques listed in the selection tables.

Line voltages

BAUER motors are available as standard for the following three-phase line voltages:

Motor size S04LA4 - S09XA4 0,06 - 2,2 kW	Standard voltages: 220 V Δ / 380 V Y 50 Hz 230 V Δ / 400 V Y 50 Hz* 240 V Δ / 415 V Y 50 Hz** 440 V Y / 60 Hz 460 V Y / 60 Hz 460 V Y / 60 Hz
from S11SA4	220 V Δ / 380 V Y 50 Hz
from 3,0 kW	230 V Δ / 400 V Y 50 Hz 240 V Δ / 415 V Y 50 Hz** 440 V Y / 60 Hz 460 V Y / 60 Hz 380 V Δ / 660 V Y 50 Hz 400 V Δ / 690 V Y 50 Hz* 415 V Δ / 50 Hz** 440 V Δ / 60 Hz 460 V Δ / 60 Hz

*Voltage recommended world-wide by IEC 38 and in Europe by CENELEC.

**= Insulation Class F is necessary.

Designs for other voltages available on request and at extra cost.

Unless otherwise specified, motors for operation in conjunction with frequency converters with a 50 or 60 Hz frequency have a Y-circuit to optimise operating noise and winding load.

Unless otherwise stated, the tolerance for the rated voltage is +/- 5 %, in accordance with IEC 60034-1.


The S04 to S..11 motors in 4 pole design can be operated within a tolerance of +/- 10 % of the rated voltage (400 V 50 Hz).

Line frequencies

All motors are available with the same power ratings for either 50 or 60 Hz. Increased power models are available on request.


Rating plate

Bauer geared motors are supplied with a corrosion-proof rating plate as standard. The standard rating plate is made of special plastic tried and tested in many years of practical use and approved for hazardous areas by the Physikalisch-Technische-Bundesanstalt (PTB).

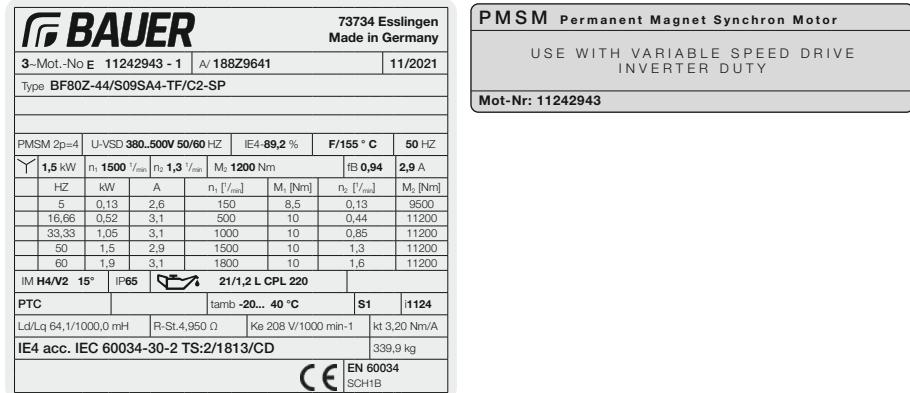

Terminal box

The cables of motors with and without brakes can be introduced into the motor terminal box from side A or side C.

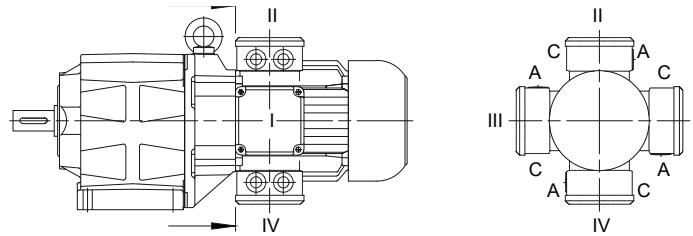


The standard position for the motor terminal box is shown in the dimensional drawings for the geared motors (see chapter 10, 11, 12 and 13). The terminal box can be installed at any of 3 other positions on request, if on-site space is restricted. The 4 possible positions are 90° offsets around the axis of the motor (dimensional drawing and designation for standard terminal box, see chapter 16 "Dimensional drawing standard terminal box").

Cast-on terminal boxes (KAG) are supplied with knock out entries with metric nut for cable gland. Screw- on terminal boxes (TBI...4 are supplied with a metric screw thread as standard.

Motor connections

The electrical connection of gear motors is time consuming and creates costs, which cannot be neglected both during initial installation and in service cases. These costs are reduced considerably by the use of BAUER Gear Motors, have CAGE CLAMP® connection technology instead of the conventional terminal block – and that without extra charge.

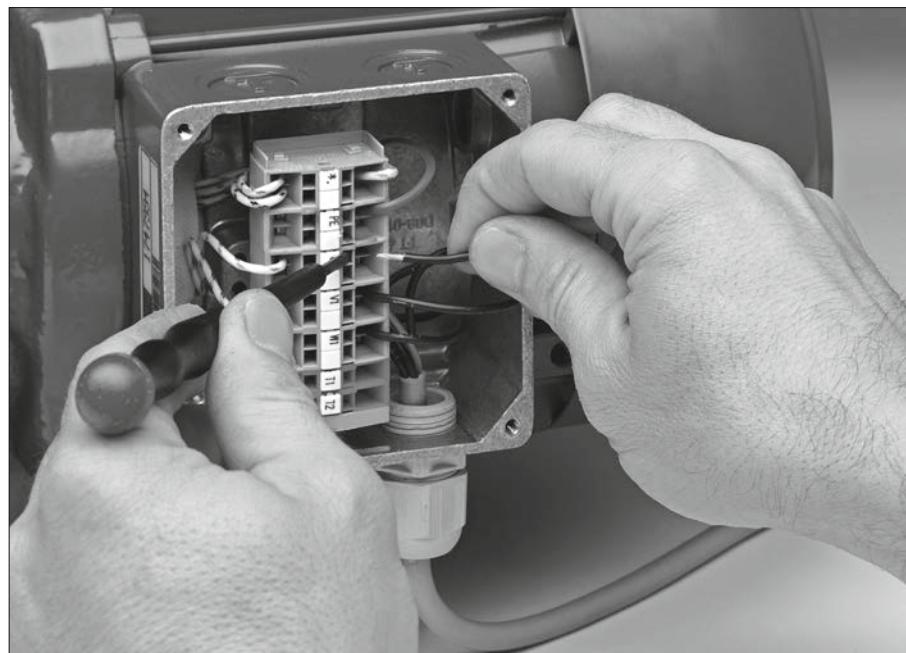

What are the advantages for you ?

Cost reduction during connection

Public timing test have confirmed, that the electrical connection of a cable by means of CAGE CLAMP® technology saves up to 75 % working time compared with the classic screw connection.

Simple Handling

Cable connection from the top, very easily accessible: The CAGE CLAMP® spring is pressed, and the cable inserted from the front, i.e. in the field of vision of the installation engineer.

Which cable core diameters ?

Suitable for all copper wires from 0.5 mm² to 25 mm².

Cost saving in material and tooling

- multicore cable ends, cable eyes or cable ring eyes are no longer needed
- Tools such as crimping pliers are no longer needed
- Inadvertently over tightening or breaking of the terminal bolts and the procurement of new terminal block belong in the past.
- Searching and procurement of nuts and washers for the terminal blocks, which have fallen down, also belongs in the past.

Vibration and shock resistant

Vibration and shock result neither in conductor damage nor in a measurable contact interruption. The connection is service free.

Type of conductors

The CAGE CLAMP®-connector can clamp fine stranded, stranded and solid cores wires.

Terminal connections for single speed motors

Standard connection of three phase motors via CAGE CLAMP®.
S04.. - S..09..

Connection of three-phase motor via CAGE CLAMP®			
	IEC/EN 60034-8	NEMA MG 1	Colour
Supply lines	L1	L1	
	L2	L2	
	L3	L3	
Motor winding	U1	T1	black
	V1	T2	blue
	W1	T3	brown
	U2	T4	yellow
	V2	T5	red
	W2	T6	violet
Δ	Connections for the low rated voltage (e.g.: 230V)		
Y	Connections for the high rated voltage (e.g.: 400V)		

S..11

Connection of three-phase motor via CAGE CLAMP®			
	IEC/EN 60034-8	NEMA MG 1	Colour
Supply lines	L1	L1	
	L2	L2	
	L3	L3	
Motor winding	U1	T1	black
	V1	T2	blue
	W1	T3	brown
	U2	T4	yellow
	V2	T5	red
	W2	T6	violet
Δ	Connections for the low rated voltage (e.g.: 230V)		
Y	Connections for the high rated voltage (e.g.: 400V)		
ZK	Optimal additional connection		

Motors

General

Terminal connections for single speed motors with thermal motor protection

Standard connection of three phase motors with thermal motor protection via CAGE CLAMP®.

S04.. - S..09..


Connection of three-phase motor and thermal motor protection via CAGE CLAMP®			
	IEC/EN 60034-8	NEMA MG 1	Colour
Supply lines	L1	L1	
	L2	L2	
	L3	L3	
Motor winding	U1	T1	black
	V1	T2	blue
	W1	T3	brown
	U2	T4	yellow
	V2	T5	red
	W2	T6	violet
Δ	Schaltung für niedrige Nennspannung (z. B.: 230V)		
Y	Schaltung für hohe Nennspannung (z. B.: 400V)		
T1 T2	Thermal motor protection		

S..11

Connection of three-phase motor via CAGE CLAMP®			
	IEC/EN 60034-8	NEMA MG 1	Colour
Supply lines	L1	L1	
	L2	L2	
	L3	L3	
Motor winding	U1	T1	black
	V1	T2	blue
	W1	T3	brown
	U2	T4	yellow
	V2	T5	red
	W2	T6	violet
Δ	Connections for the low rated voltage (e.g.: 230V)		
Y	Connections for the high rated voltage (e.g.: 400V)		
ZK	Optimal additional connection		


Terminal connections for pole changing motors in Dahlander connection (Δ/YY or Y/YY)

Standard connection of three phase motors without motor protection via CAGE CLAMP®.
S04.. - S..09..

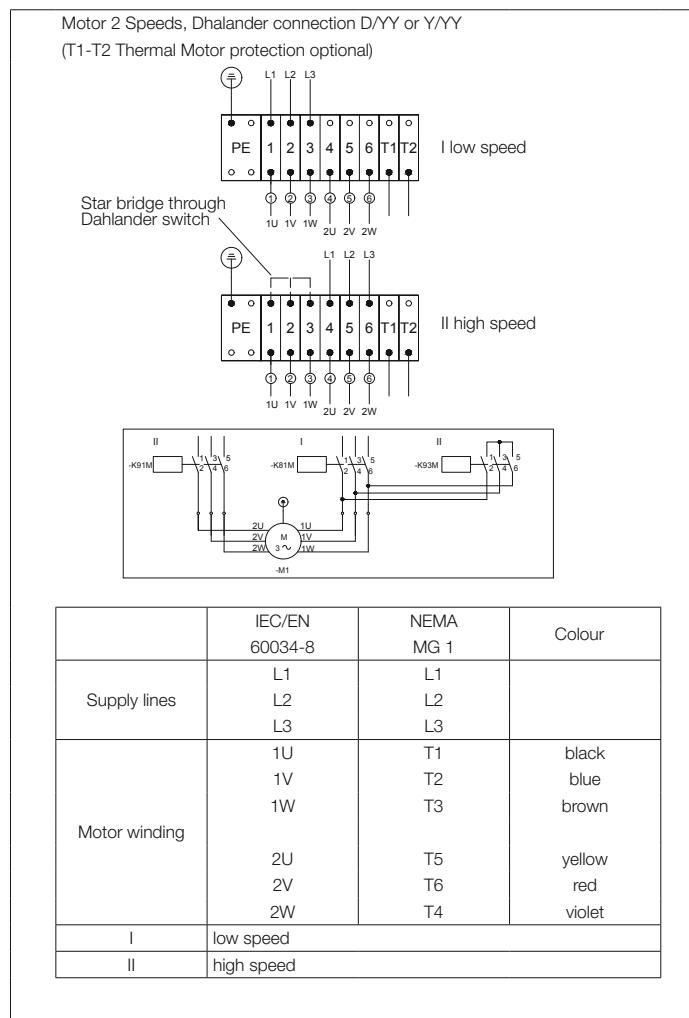

S..11

Connection of three phase motor via CAGE CLAMP®
Pole changing for 2 speeds; Dahlander connection Δ/YY

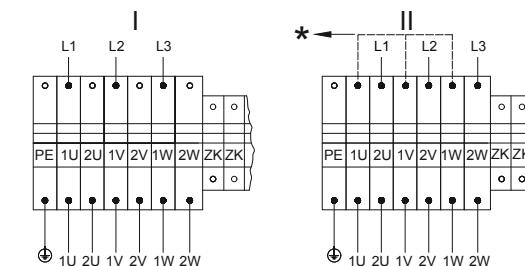


	IEC/EN 60034-8	NEMA MG 1	Colour
Supply lines	L1	L1	
	L2	L2	
	L3	L3	
Motor winding	1U	T1	black
	1V	T2	blue
	1W	T3	brown
	2U	T4	yellow
	2V	T5	red
	2W	T6	violet
I	low speed		
II	high speed		
ZK	Optimal additional connection		
*	Star point over Dahlander Relay		

Motors


General

Terminal connections for pole changing motors with two separate windings (Y/Y or Δ/Δ)

Standard connection of three phase motors with motor protection via CAGE CLAMP®.
S..04.. - S..09..

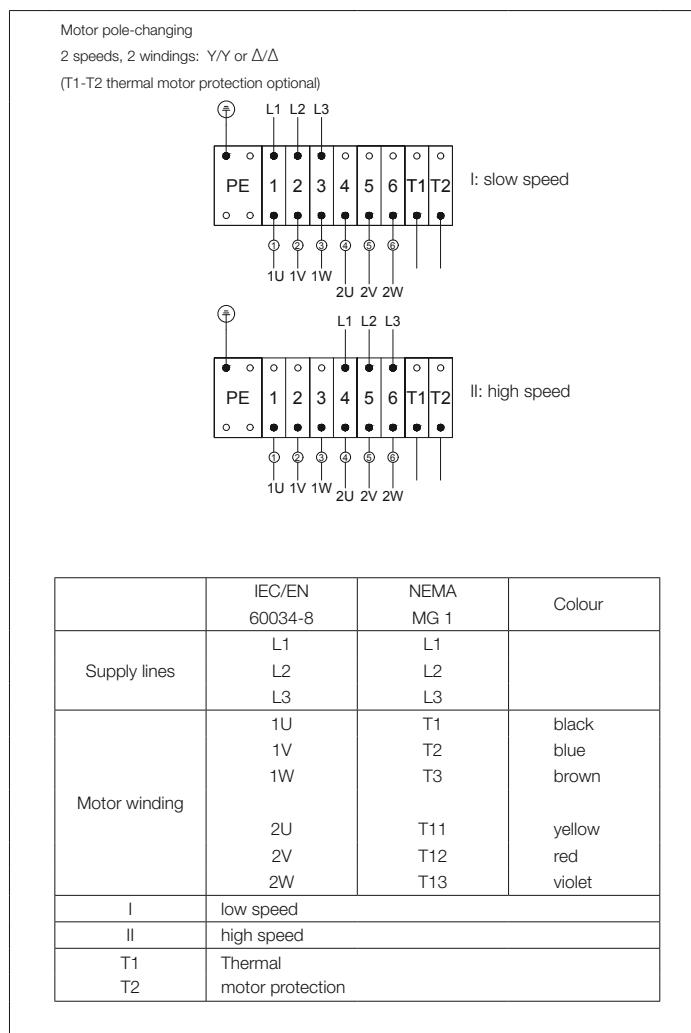

S..11..

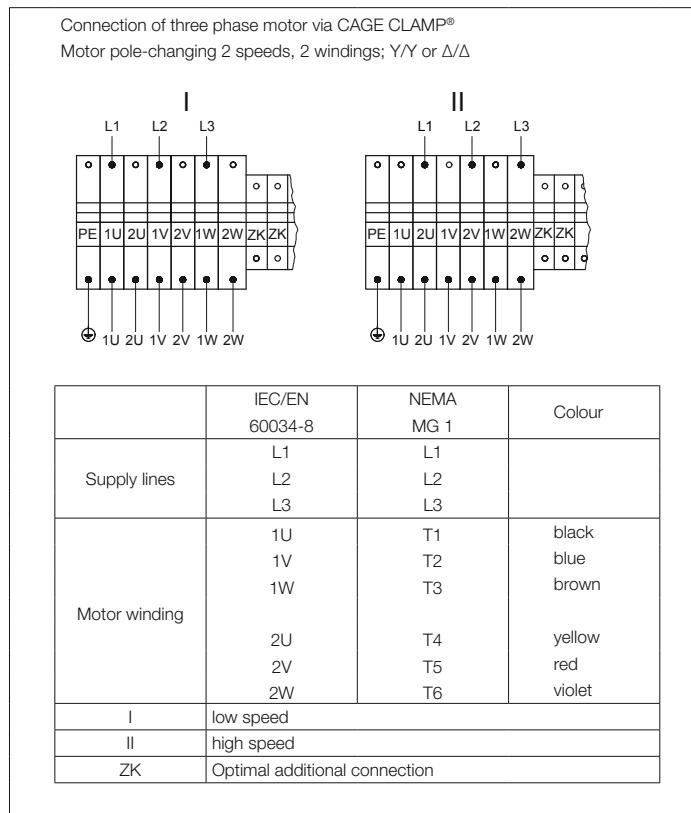


Plug-and-socket connection

D..06.. to D..16.. Bauer motors are available with plug-in motor connection. The socket housing is mounted on the fan-cowl side of the terminal box as standard. This layout minimises the protrusion caused by the plug.

The standard plug-and-socket type connection incorporates the attachment housing, pin insert and cover. Grommet-type housings and jack inserts are available on request at extra cost. Pin assignments on request (dimensional drawing, see chapter 16 "Dimensional drawing, plug-connector terminal box").



A design with single clamp lever according to the DESINA regulation of the „Verbandes Deutscher Werkzeugmaschinenhersteller“ (VDW) is also available.

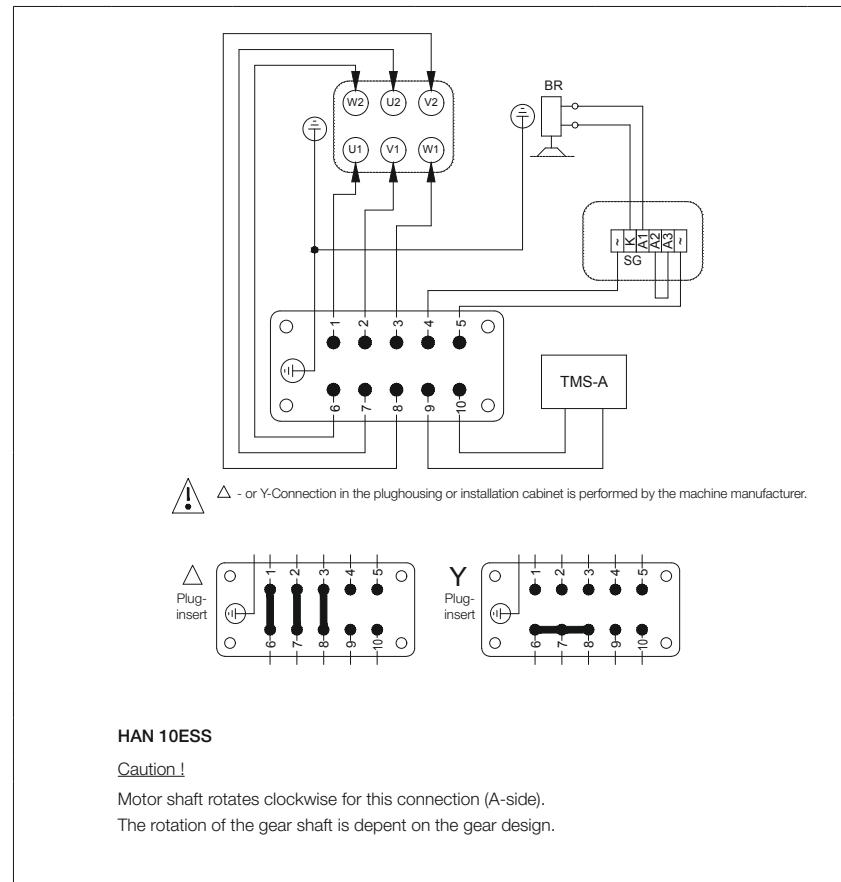

The motors are also available with a low-cost round plug connector as an alternative. This is fitted at the factory in the standard terminal box and is also suitable for brake connection, thermistors and thermostats. Additional information on request.

Bauer motors from S..08.. with motor-mounted brake are also available with plug-in brake connection. This means that if it requires attention, the brake can be replaced on site with no loss of time.

Motors

General


Motor protection

Each geared motor requires a current-dependent motor protection switch or an overcurrent relay with thermal delay in the switchgear to protect the motor windings. The rated motor currents required for settings are stated in the order acknowledgment. Thermal protection for the winding is recommended as an additional safety measure for special operating conditions (short-time or intermittent periodic duty, high switching frequency, severe voltage fluctuations or restricted cooling) and for operation in conjunction with a frequency converter.

Thermistors (PTC)

Thermistors are temperature-dependent resistors which are fitted in each phase winding. In conjunction with a motor protection switch, they ensure optimum protection for the winding in the event of rapid temperature rise. Characteristic to DIN 44081 and "Mark A" to IEC 34-11-2. Thermistors are available for all motors at extra cost. The requisite monitoring device is not included in the scope of supply.

Thermal motor protection with PTC-thermistors

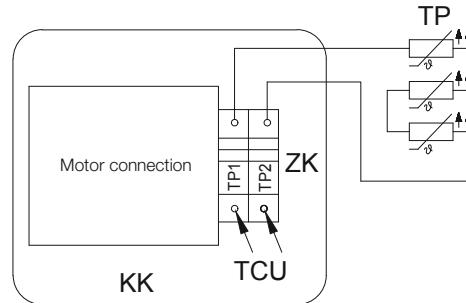

KK	Terminal box
ZK	Additional terminals
TP	PTC-thermistors
TCU	Connection of Thermistor control unit EN 60947 Max. permissible testing voltage 2,5 VDC/thermistor in case of

with auth. certificate:


The location of the additional terminals in the drawing is not necessarily identical with the actual arrangement.

Thermostatic protection

Bimetal switches are used for slow-acting, independent temperature monitoring and are embedded in each winding section of the motor.

The bimetal disc is sized such that when the temperature rises above a specific, previously set value, the disc suddenly snaps from a convex state to a concave state and the contact moves vertically away from the contact plate. In this state the switch is either open (normally closed switch) or closed (normally open switch). A significant temperature change is necessary to allow the bimetal disc to independently snap back to its initial position. When it does, the switch is again closed (normally closed switch) or open (normally open switch). Thermal protection switches are available for all motors at additional cost. For technical reasons, this option is not recommended for large motors (S..11..).


Thermal motor protection with thermostats
(with normally closed contacts)

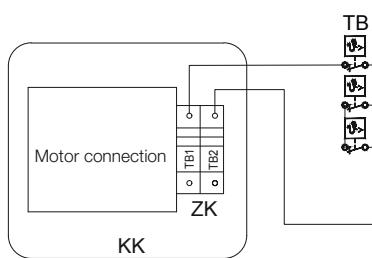

KK	Terminal box
ZK	Additional terminals
TB	Thermostats with normally closed contacts max. 250VAC 1,6A

The location of the additional terminals in the drawing is not necessarily identical with the actual arrangement.

Thermal motor protection with thermostats
(with normally opened contacts)

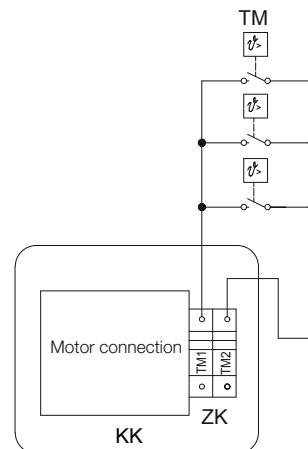

KK	Terminal box
ZK	Additional terminals
TB	Thermostats with normally closed contacts max. 250VAC 1,6A

The location of the additional terminals in the drawing is not necessarily identical with the actual arrangement.

Motors


General

KTY sensors

KTY sensors with heat-shrink insulation can be used to measure and monitor critical surface temperatures and internal temperatures of motors and machines. These sensors are suitable for use in harsh industrial environments in all places where accurate measurements with a single sensor are required. KTY sensors are available for all types of motors at additional cost.

Type 84-130 SH: primarily installed in motors that are operated with Siemens frequency converters.

Working principle: KTY sensors are temperature-dependent components. The resistance of the KTY sensor increases when its temperature rises. The characteristic curve is nearly linear in the sensor's measuring range; the reference resistance (at 100 °C) is 970 to 1030 ohms.

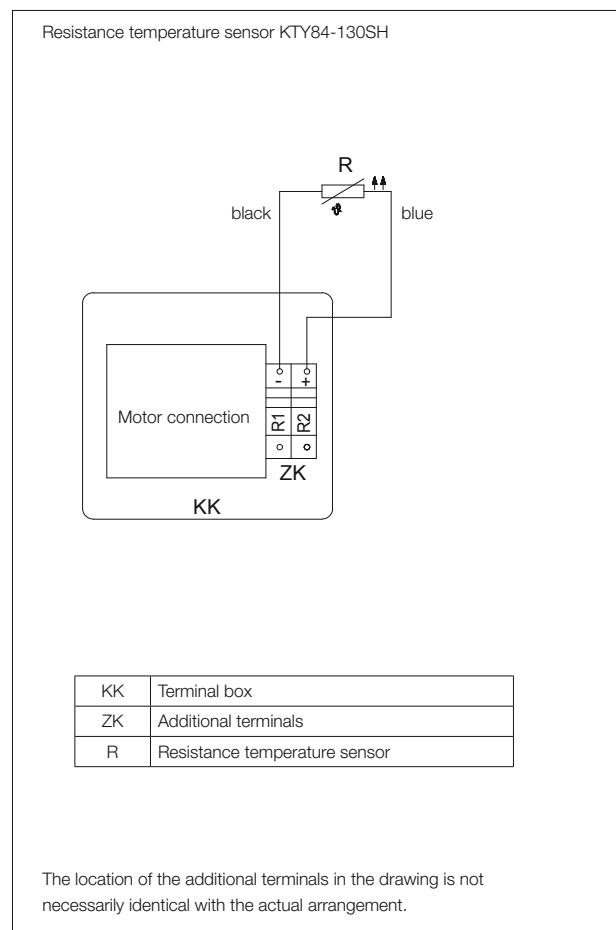


PT100 sensors

Precise monitoring of motor temperatures is necessary in many fields of industry. Pt100 sensors feature high accuracy, short response time and long-term stability, and they are suitable for use over a wide range of temperatures. Pt100 sensors are available for all motor types at additional cost.

Specifications

Nominal resistance: 100 Ω at 0 °C

The resistance characteristics are specified in EN 60751.

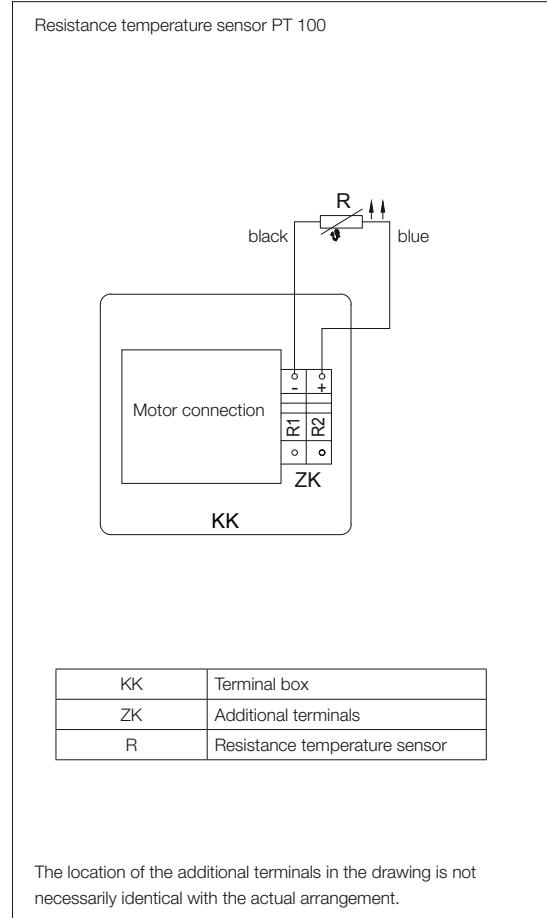

Motors

General

Insulation

The gearmotors described in the selection tables of this catalogue with the motor sizes S..04.., S..05.., S..06.., S..08.., S..09S and S..09L are executed in insulation class B. Temperature class F is available on request at extra cost.

4-pole motors S..07.. and S..09XA4 (2.2 kW) to S..18XA4 (30 kW) and all multi-speed motors are rated in Temperature Class F as standard.

Insulation Class F bestows the winding a multiple protection against high humidity, acidic gases and heavy tropical influences while making the same shock resistant and more resistant to heat. Protection against insects (termites) is guaranteed through the complete enclosure (IP65) as long as the mains cables are encased in metal.

IP – Protection classes

Bauer motors from motor size S..06.. are manufactured to IP65 degree of protection as standard. Motor sizes S..04.. and S..05.. have a smooth motor housing of IP54. Higher IP protection classes on request.

Degrees of protection provided by enclosures for electrical equipment

First IP - code number after DIN EN 60529				Second IP - code number after DIN EN 60529			
	Protection against penetration of solid foreign bodies	Protection of persons against access to hazardous parts with			Protection against penetration of moisture or water		
4	diameter $\geq 1.0 \text{ mm}$			4	Splash water 0.07 l/min per nozzle		
5	Dustproof		Wire 	5	Jet water $qv = 12.5 \text{ l/min}$ $p \sim 0.3 \text{ bar}$ $t = 1 \text{ min}/\text{m}^2$ $> 3 \text{ min}$	 $qv = 100 \text{ l/min}$ $p \sim 1 \text{ bar}$ $t = 1 \text{ min}/\text{m}^2$ $> 3 \text{ min}$	
6	Dust tight			6	Strong Jet water $qv = 100 \text{ l/min}$ $p \sim 1 \text{ bar}$ $t = 1 \text{ min}/\text{m}^2$ $> 3 \text{ min}$		
				7	Temporary Submerge $t = 30 \text{ мин}$	 $t = 30 \text{ мин}$	

First IP - code number after DIN EN 60529		Second IP - code number after DIN EN 60529	
Protection against penetration of solid foreign bodies	Protection of persons against access to hazardous parts with	Protection against penetration of moisture or water	
		8	Permanent Submerge
		9 ($\text{IK} = \text{DIN } 40050-6$)	High pressure and high jet water temperature

$t = \infty \text{ IPX8} > \text{IPX7}$

$x = 5 \text{ m (Standard) or by agreement}$

Housing $\geq 250 \text{ mm}$
 $t = 1 \text{ min } / \text{m}^2$
 $> 3 \text{ min}$
Water temperature $(80 \pm 5)^\circ\text{C}$
15 l/min, 100 bar
Distance $(175 \pm 25) \text{ mm}$

Speed of output shaft

The rated speeds in the selection tables are guidelines for load at rated power. Speed can vary depending on degree of load and temperature (particularly in the case of relatively small motors). Combination gear units for lower speeds are available on request.


Motors

Duty types as defined by EN 60034

General


Aside from special drives (such as lifting equipment), standard motors are always designed for continuous running duty. If the drive is operated with frequent on/off cycles, it may be necessary to select a larger motor with a special design. On the other hand, with pronounced short-time duty it is often possible to select a smaller model. **For this reason, it is technically necessary or economically advantageous to inform the motor manufacturer of any duty type that differs from continuous running.**

Continuous running duty (S1)

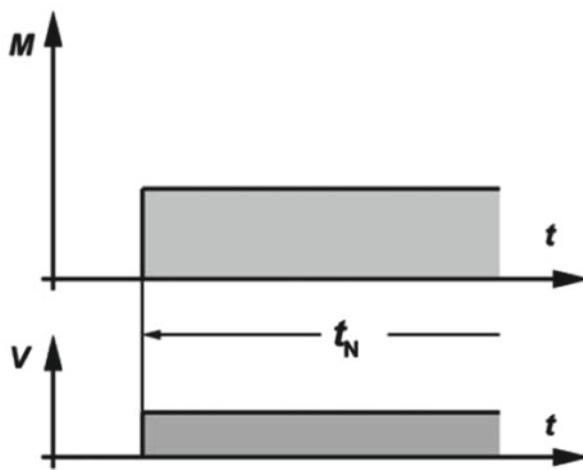

Operation under rated load for sufficient time to allow temperature equilibrium to be attained, such that the temperature does not increase any more with continued operation. The equipment can operate continuously under the rated load without exceeding the allowable temperature.


Short-time duty (S2)

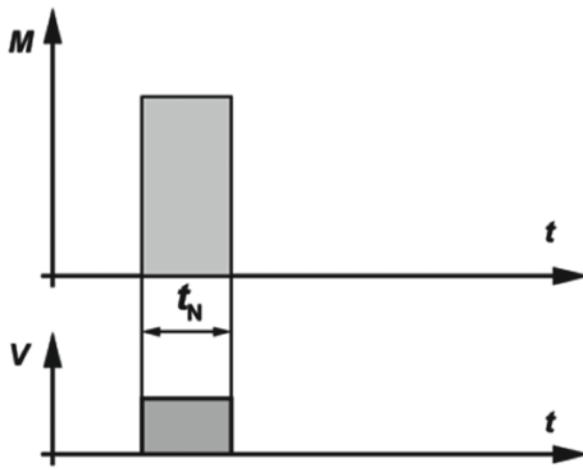

The operating time under rated load is short compared with the subsequent rest period. The standard operating times are 10, 30, 60 and 90 minutes. The equipment can operate for this period under the rated load without exceeding the allowable temperature.

Example: S2 – 60 min

Intermittent periodic duty (S3)

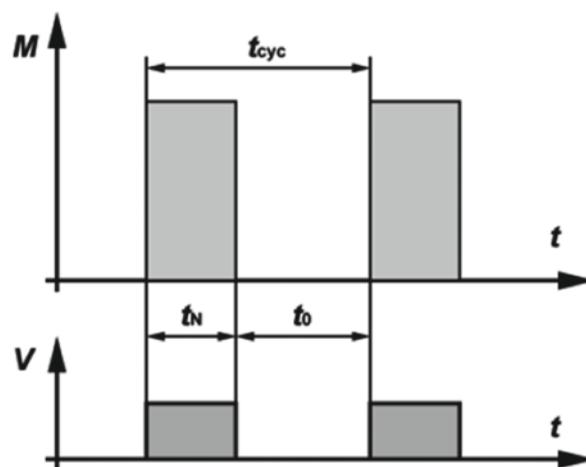

S3 duty consists of a sequence of identical cycles, each composed of an operating time with constant load and a rest time with the windings de-energised. The cycle is such that the starting current does not significantly affect the temperature rise. The operating time under rated load and the subsequent pause are both short. The equipment can operate under load only during the period indicated by the duty cycle as a percentage of the total cycle time (cycle duration).

The standardised duty cycles are 15, 25, 40 and 60 %. The cycle duration is 10 minutes unless otherwise specified.

Intermittent periodic duty means that a state of thermal equilibrium is not reached during the load interval.

The duty cycle can be determined as follows:


$$ED = \frac{t_N}{t_{cyc}} \times 100\% = \frac{t_N}{t_N + t_0} \times 100\%$$

Example: S3 – 25%

Motors

Duty types as defined by EN 60034

Intermittent periodic duty with starting
(S4)

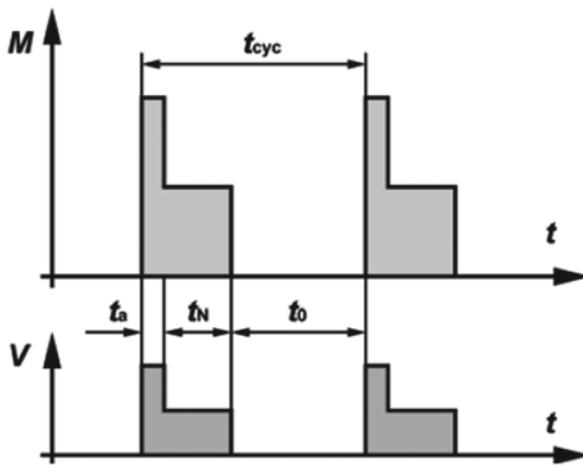

S4 duty consists of a sequence of identical cycles, each of which is composed of a distinct starting time, a time of operation under constant load, and a rest period with the windings de-energised.

The operating time under rated load and the subsequent pause are both short. The equipment can operate under load only during the period indicated by the duty cycle as a percentage of the total cycle time (cycle duration).

The standardised duty cycles are 15, 20, 40 and 60 %. The cycle duration is 10 minutes unless otherwise specified.


The load cycle corresponds to mode S3, but with additional heating during the starting time that must be taken into account.

The duty cycle can be determined as follows:

$$ED = \frac{(t_a + t_N)}{t_{cyc}} \times 100\% = \frac{t_a + t_N}{t_a + t_N + t_0} \times 100\%$$

Example: S4 – 25 %, $J_M = 0.15 \text{ kgm}^2$

Intermittent periodic duty with electric braking (S5)

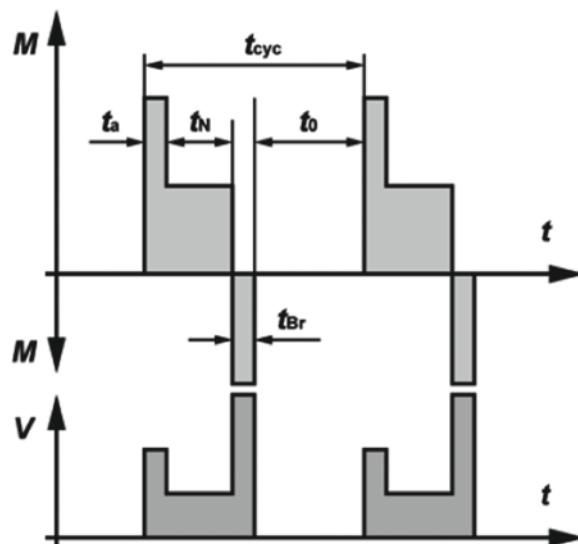

S5 duty consists of a sequence of identical cycles, each of which is composed of a starting time, a time of operation under constant load, a time of fast electric braking, and a rest period with the windings de-energised.

The operating time under rated load and the subsequent pause are both short. The equipment can operate under load only during the period indicated by the duty cycle as a percentage of the total cycle time (cycle duration).

The standardised duty cycles are 15, 20, 40 and 60 %. The cycle duration is 10 minutes unless otherwise specified.

The load cycle corresponds to S3 duty, but with additional warming during the starting time t_a and the braking time t_{Br} taken into account.

The duty cycle can be determined as follows:


$$ED = \frac{(t_a + t_N + t_{Br})}{t_{cyc}} \times 100\% = \frac{t_a + t_N + t_{Br}}{t_a + t_N + t_{Br} + t_0} \times 100\%$$

Example: S5 – 25%; $J_M = 0.15 \text{ kgm}^2$, $J_{ext} = 0.7 \text{ kgm}^2$
(J_M Moment of inertia of the motor / J_{ext} Moment of inertia of the load)

Motors

Duty types as defined by EN 60034

Continuous-operation periodic duty (S6)

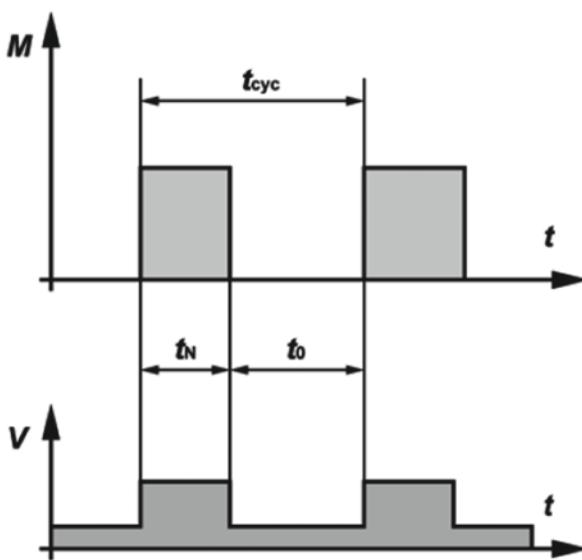


This type of duty corresponds to S3, with the exception that the equipment remains energised during the rest periods. In other words, it operates with no load during these periods. The duty cycle and cycle duration are specified the same way as for S3 duty.

The duty cycle can be determined as follows:

$$ED = \frac{t_N}{t_{cyc}} \times 100\% = \frac{t_N}{t_N + t_0} \times 100\%$$

Example: S6 – 40 %

Continuous-operation periodic duty with electric braking (S7)

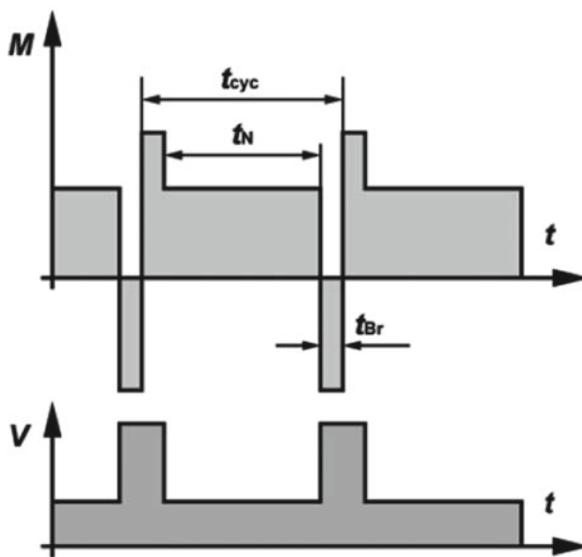


The machine starts up, operates under load, and then is braked electrically, for example by feeding it from a DC power source. Following this, it starts up again immediately. The machine can operate continuously in this manner if the specified moments of inertia of the motor *J_M* and of the load *J_{ext}* as well as the specified duty cycle are not exceeded. If the cycle duration is not specified, it is assumed to be 10 minutes.

The duty cycle can be determined as follows: $DC = 1$

Example: S7 – $J_M = 0.4 \text{ kgm}^2$, $J_{ext} = 7.5 \text{ kgm}^2$
(J_M Moment of inertia of the motor / J_{ext} Moment of inertia of the load)

Continuous-operation periodic duty with relative load/speed changes (S8)

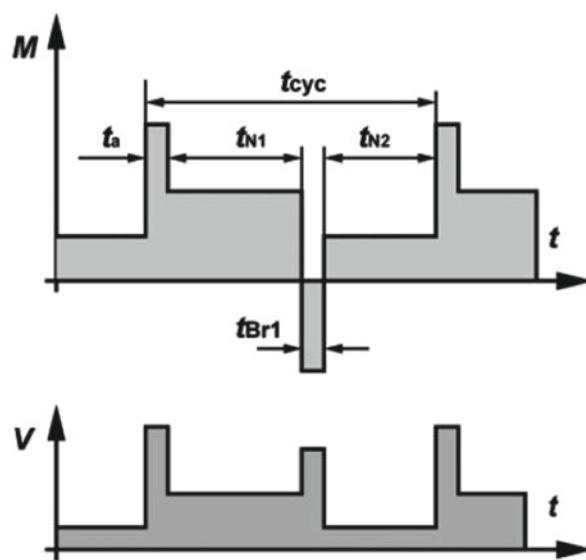


The machine runs continuously under variable load with frequent speed variations. The machine can operate continuously in this manner if at each speed the specified values are not exceeded (moments of inertia J_M and J_{ext} cycle duration (if other than 10 minutes), rated output and duty cycle. With a moment of inertia of 1 kg m², the acceleration characteristics are the same as with a mass of 1 kg at a distance of 1 m from the axis of rotation).

The duty cycle can be determined as follows:

$$ED = \frac{t_a + t_{N1}}{t_{cyc}} \times 100\% = \frac{t_{Br} + t_{N2}}{t_{cyc}} \times 100\%$$

Example: S8 – $J_M = 0.5 \text{ kgm}^2$, $J_{ext} = 6 \text{ kgm}^2$
(J_M Moment of inertia of the motor / J_{ext} Moment of inertia of the load)

Duty with non-periodic load and speed variations (S9)

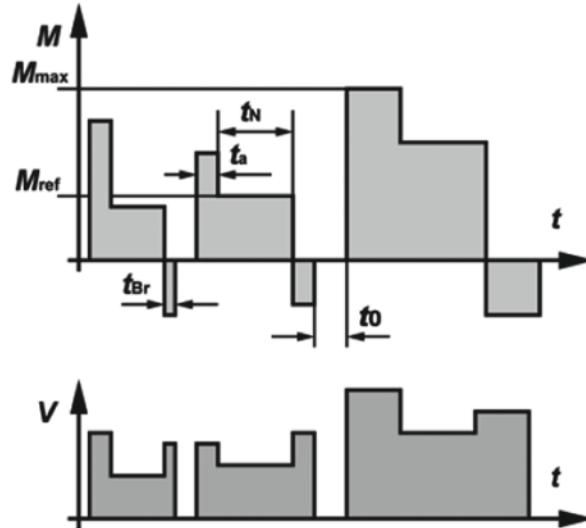


14

In S9 duty the load and the speed vary non-periodically within the permissible operating range. This includes frequently applied overloads, which must never exceed the reference load. For this duty type, a constant load appropriately selected and based on duty type S1 shall be taken as the reference value M_{ref} for the overload.

Motors

Duty types as defined by EN 60034

Duty with discreet constant loads and speeds (S10)

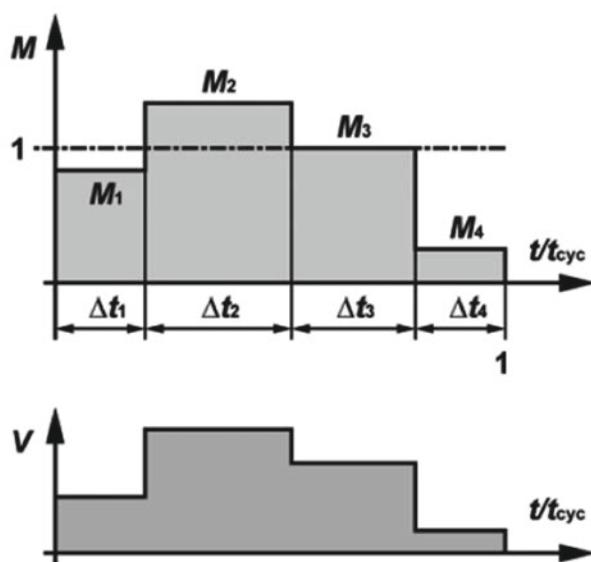

S10 duty comprises operation with at most four different load levels, each of which is maintained long enough to allow the machine to reach thermal equilibrium.

The minimum load within a duty cycle may have a value of zero (no-load operation or at rest with the windings de-energised).

The appropriate abbreviation is S10 followed by the per unit quantities $p/\Delta t$ for the respective load and its duration and the per unit quantity TL for the relative thermal life expectancy of the insulation system. The reference value for the thermal life expectancy is the thermal life expectancy at rating for continuous running duty and permissible limits of temperature rise based on duty type S1. For a time de-energized and at rest, the load shall be indicated by the letter r .

Example: S10 $p/\Delta t = 1.1/0.4, 1/0.3, 0.9/0.2, r/0.1; TL = 0.6$

The figures given in the table below are for Bauer motors operating in conjunction with the frequency inverter. The torques referred to in tables can be entered for the respective frequencies in continuous operation ($S_1 = \text{duty factor } 100\%$).

Notes on design

Use the torque required at the lowest operating speed to select motors for applications which require constant torque over the entire speed range, as is the case, for example, with lifting gear and conveyors. Bear in mind, too, the possibility of torque being lower in the field-weakening range.

Use only the torque required at the highest operating speed to select motors for applications which require square-law torque over the speed range, as is the case, for example, with pumps and fans. Field weakening is not permissible.

The motor's power is frequency-dependent. It can be approximated in kW from torque M in Nm, the 50 Hz or 60 Hz speed n and the frequency f in Hz by means of the equation

$$P = M \times n / 9550 \times f/50$$

or

$$P = M \times n / 9550 \times f/60$$

If a frequency inverter is used in conjunction with a pulse generator, the full 50 Hz or 60 Hz rated torque is available as holding torque at motor standstill (independent fan required for prolonged periods at standstill). In many instances, however, a mechanical brake is necessary for holding a position exactly or for safety reasons.

The use of thermistors for the thermal protection of the motor winding for frequency inverter duty are strictly recommended (available at extra cost for all motor sizes).

Increased torque with reduced duty factor

A reduction in duty factor increases the torque available at the low end of the frequency range (up to the transition frequency for field weakening) in accordance with the factors in the table below:

Duty factor	Motor torque with reduced duty factor	Increase in current requirementapproximate
100 %	-	-
60 %	1.15 x S_1 torque	1.15 x S_1 current
40 %	1.30 x S_1 torque	1.30 x S_1 current
25 %	1.45 x S_1 torque	1.45 x S_1 current
15 %	1.60 x S_1 torque	1.60 x S_1 current

This, in turn, means that short-term overload by a factor of 1.6 is permissible for starting from a low speed, for example. An increase in torque in the field-weakening range due to a reduction in duty factor is possible only under certain conditions; the 1.6x S_1 torque generally cannot be achieved

Increased torque with external fan

If an independent fan is used, the S_1 - torque in the lower frequency range (below 30 Hz) need not be reduced, i.e., when it has an independent fan the motor can provide the 50 Hz or 60 Hz rated torque throughout the entire frequency range to the cut-off frequency of the field weakening.

With a high quality frequency inverter of 160 %, when independent ventilation is combined with a reduced duty factor the 50 Hz or 60 Hz torque is available from rest through to the transition frequency of the field weakening range.

External ventilation is available for motor types S..08.. and larger (see chapter 16 "Motor-independent fan (FV)"). In many instances, a more economical alternative is to select a larger motor without external ventilation.

Motors

Operation with frequency converter

Energy-saving function High quality frequency inverters reduce voltage in part-load operation to lower the motor current and thus improve efficiency. This converter function emulates the method of operation of commercially available "energy-saving devices".

Regeneration Regenerative torques (braking torques) are required for motors used in lifting gear, for example. In conjunction with high quality frequency inverters, the motor torques listed in the table can also be applied as regenerative torques. As with motor torque, an increase in regenerative torque with reduced duty factor is permissible.

Notes on operation with other-make frequency inverters The precondition is that the motor current generated by the frequency converter is largely free of harmonics. The harmonics generated in the motor by some old-style frequency inverters result in additional losses and cut available torque by some 10 % across the entire frequency range. There is also a risk of oscillation causing damage to the gear unit.

At frequencies below approximately 5 Hz, operation without pulse generators is possible only using a frequency inverter with state-of-the-art control. If frequency inverters are used that do not feature load-dependent frequency and current adjustment, the increase in the motor's current consumption means that, particularly in the case of small motors (S..04..-S..09..), torque has to be reduced at frequencies below approximately 10 Hz even if an external fan is used or the duty factor is reduced. Regenerative operation is possible only under certain circumstances.

General

The gears described in this catalogue are suitable for use in explosion hazard areas of zones 1, 2, 21 and 22. An **EC Declaration of Conformity** is available upon request; it is based on an „assessment of the explosion risk“, which has been recorded with a notified body (PTB). The ignition protection type of the corresponding **motors** is determined by the zone in which they are to be used and by the duty type (e.g. operation on a converter). The motor parts are in some cases larger compared to the normal design shown in this catalogue, or in the case of pressurised enclosures, they are designed entirely differently. However, the modular system shown in section 3 allows, in the majority of cases, the retention of the gear size and the connection dimensions laid out in this catalogue.

ATEX

The term **ATEX** is derived from **Atmosphères explosibles**. The designations **95** and **137** relate to the renumbering of the article of the first Treaty establishing the EU. **ATEX 95:** Directive 94/9/EC to approximate the laws of the Member States for devices and protection systems for intended use in potentially explosive atmospheres; mandatory for **bringing to market** since 1 July 2013 **ATEX 137:** Directive 1999/92/EC on minimum requirements for improving the safety and health protection of workers potentially at risk from explosive atmospheres; mandatory for the **operation** of new systems since 1 July 2003 and mandatory for the adaptation of the operating regulations of existing plants from 1 July 2006. Safety guidelines for the operation of explosion-protected gear motors can be found in BA170...

Frequency converters

Frequency converters used must comply with the requirements set out in the EC Type Examination Certificate.

For the corresponding motor type, the EC Type Examination Certificate contains the maximum possible torques depending on the frequency, the corresponding rated current, converter settings and other requirements for the converter.

The pulse voltage at the motor terminals must be limited to a maximum permissible pulse voltage of 1.556 V ($2 \times \sqrt{2} \times 550$ V) by selecting a suitable frequency converter and/or using filters. The maximum permissible frequency converter input voltage is 500 V

Protective device

The motor is protected against unacceptable heating by the defined frequency converter setting, as well as by the integrated thermistor sensor in accordance with DIN 44081 / 44082 Response temperature **140 °C**. Analysis of the built-in thermal winding protection must be done by using a trip unit with Ex-mark II (2) G or II (2) D that fulfills the requirements of Directive 94/9/EC.

Motors

Explosion protection

Voltages

The voltages at the motor terminals depend on the input voltage of the frequency converter, the voltage loss at the filter and in the motor supply cable, and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the case of reduced voltages at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account for the sizing of the motor, the parameterisation of the converter and for the minimum converter input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz. Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.
Max. permissible ambient temperature range -20 °C to +50 °C

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * In
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	Up to 180 Hz, depending on motor design
Permissible operating time below fmin:	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below fmin are based on an interval of 10 minutes

Gears with non-electrical explosion protection

As of 1 July 2003, only mechanical equipment („devices“) which comply with the requirements of ATEX 95 may be placed on the market. The ATEX and ExVO define the following: „Equipment includes machines, apparatus, fixed or mobile devices, control components and instrumentation thereof and detection or prevention systems which, separately or jointly, are intended for the generation, transfer, storage, measurement, control and conversion of energy and/or the processing of material and which are capable of causing an explosion through their own potential sources of ignition.“ The definition therefore applies to the gear component of a gear motor; but also to the process machinery and equipment being driven, if these are installed in explosion hazard areas. An „Assessment of the Ignition Hazard“ must be carried out and documented by the manufacturer for the „Declaration of Conformity“ for the machine being driven; this task is simplified if a dedicated assessment is carried out for the „gear motor“ components. The assessment can only be undertaken in accordance with the ATEX requirements; the „Presumption of Conformity“ applies in favour of the product, however, if a standard or draft standard is taken as a basis.

When difficult conditions combine (e.g. ambient temperature > 40 °C, speed > 1500 r/min, vertical arrangement of the motor component, temperature class T4), there may be restrictions on the selection of gears in the upper power range.

The following standards, among others, were observed for the assessment of the Bauer gears:

- EN 1127 Explosion Protection; basic concepts and methodology
- EN 13463 Non-electrical equipment for use in potentially explosive atmospheres
- EN 13463-1 Basic method
- EN 13463-5 Constructional safety
- EN 13463-8 Liquid immersion

Standard Motors**Motors with rated speed 1500 1/min**

M _n Nm	IE Class	Type	P _n kW	I _n A	2p	n _n 1/min	f Hz	η %	Connec- tion	R ₂₀ Ω	R _{s20} Ω	L _d mH	L _q mH	ke V/1000 1/min	k _t	M _{max} (60s) Nm	I _{max} (60s) A	J kgm ²
0.76	4	S4E04SA4-1	0.12	0.41	4	1500	50	IE4-67.4	Y	154	77.2	268	412	120	1.85	1.6	0.86	0.00014
0.76	3	SPEU04SA4-1	0.12	0.42	4	1500	50	IE3-66	Y	154	77.2	268	412	120	1.8	1.2	0.67	0.00014
1	2	SHE04SA4-1	0.157	0.54	4	1500	50	IE2-61.4	Y	154	77.2	268	412	120	1.85	1.6	0.86	0.00014
1.15	5	S5EU06MA4	0.18	0.49	4	1500	50	IE5-80.8	Y	79	39.5	171	271	152	2.35	2.6	1.1	0.0002
1.3	5	S5E06MA4	0.2	0.55	4	1500	50	IE5-79.6	Y	79	39.5	171	271	152	2.4	3.8	1.6	0.0002
1.3	5	S5EU06MA4	0.2	0.55	4	1500	50	IE5-79.1	Y	79	39.5	171	271	152	2.35	2.6	1.1	0.0002
1.6	4	S4E06MA4	0.25	0.67	4	1500	50	IE4-76.6	Y	79	39.5	171	271	152	2.4	3.8	1.6	0.0002
1.6	4	S4EU06MA4	0.25	0.68	4	1500	50	IE4-75.5	Y	79	39.5	171	271	152	2.35	2.6	1.1	0.0002
1.6	5	S5EU06LA4	0.25	0.7	4	1500	50	IE5-85.5	Y	37.2	18.6	99.5	133	148	2.3	3.8	1.7	0.000295
2.4	1	SSE06MA4	0.37	1	4	1500	50	IE1-66.1	Y	79	39.5	171	271	152	2.4	3.8	1.6	0.0002
2.4	4	S4EU06LA4	0.37	1.05	4	1500	50	IE4-80	Y	37.2	18.6	99.5	133	148	2.3	3.8	1.7	0.000295
2.6	4	S4E06LA4	0.4	1.12	4	1500	50	IE4-79.8	Y	37.2	18.6	99.5	133	148	2.3	5.6	2.4	0.000295
3.5	1	SSE06LA4	0.55	1.5	4	1500	50	IE1-74.1	Y	37.2	18.6	99.5	133	148	2.3	5.6	2.4	0.000295
3.5	5	S5EU08MA4	0.55	1.28	4	1500	50	IE5-87.2	Y	18.7	9.35	97	170	180	2.7	10	3.7	0.00115
5	4	S4E08MA4	0.78	1.8	4	1500	50	IE4-85.7	Y	18.7	9.35	97	170	180	2.8	10	3.7	0.00115
5	5	S5EU08LA4	0.78	1.9	4	1500	50	IE5-86.9	Y	11	5.5	70	117	171	2.6	15	5.6	0.0015
7	3	SPE08LA4	1.1	2.6	4	1500	50	IE3-85.4	Y	11	5.5	70	117	171	2.75	15	5.6	0.0015
7	5	S5EU09SA4	1.1	2.2	4	1500	50	IE5-90.8	Y	9.9	4.95	64.1	110	208	3.2	20	6.4	0.00245
10	1	SSE08LA4	1.55	3.6	4	1500	50	IE1-80.5	Y	11	5.5	70	117	171	2.8	15	5.6	0.0015
10	4	S4E09SA4	1.55	3	4	1500	50	IE4-88.2	Y	9.9	4.95	64.1	110	208	3.3	20	6.4	0.00245
10	5	S5EU09XA4	1.55	3.1	4	1500	50	IE5-89.9	Y	5.25	2.63	41.2	70.1	209	3.2	30	10	0.0038
14	2	SHE09SA4	2.2	4.3	4	1500	50	IE2-83.9	Y	9.9	4.95	64.1	110	208	3.3	20	6.4	0.00245
14	5	S5E09XA4	2.2	4.2	4	1500	50	IE5-90.3	Y	5.25	2.63	41.2	70.1	209	3.35	31	10	0.0038
14	5	S5EU11SA6	2.2	4.4	6	1500	75	IE5-91.3	Y	3.52	1.76	20	30	210	3.1	40	13	0.012
20	3	SPE09XA4	3.1	5.9	4	1500	50	IE3-88	Y	5.25	2.63	41.2	70.1	209	3.35	31	10	0.0038
19	4	S4E11SA6	3	5.9	6	1500	75	IE4-90.1	Y	3.52	1.76	20	30	210	3.2	35	11	0.012
20	5	S5EU11MA6	3.1	6.4	6	1500	75	IE5-93.3	Y	1.78	0.892	12	18.4	206	3.1	55	17	0.0175
25.5	3	SPE11SA6	4	8	6	1500	75	IE3-87.7	Y	3.52	1.76	20	30	210	3.2	35	11	0.012
25.5	5	S5EU11LA6	4	8.1	6	1500	75	IE5-93.2	Y	1.21	0.605	9.3	13.9	210	3.1	75	23	0.0215
26.5	5	S5E11MA6	4.2	8.3	6	1500	75	IE5-92.5	Y	1.78	0.892	12	18.4	206	3.15	55	17	0.0175
35	5	S5E11LA6	5.5	10.8	6	1500	75	IE5-93.2	Y	1.21	0.605	9.3	13.9	210	3.25	75	23	0.0215
35	4	S4E11MA6	5.5	11	6	1500	75	IE4-90.8	Y	1.78	0.892	12	18.4	206	3.15	55	17	0.0175
48	3	SPE11LA6	7.5	14.7	6	1500	75	IE3-91.4	Y	1.21	0.605	9.3	13.9	210	3.25	75	23	0.0215

M_n Rated torque
P_n Rated power
I_n Rated current
2p No. of Motor Poles
n_n Rated speed
f Nominal Frequency
η Motor efficiency
R₂₀ Phase Resistance U-V
R_{s20} Winding Resistance
L_d Inductance D-Axis
L_q Inductance Q-Axis
ke Voltage constant
kt Torque constant
M_{max} (60s) Peak Torque
I_{max} (60s) Peak Current
J Moment of inertia

All motors: converter supply voltage 380 to 500 V

Motors

Technical data

Rated speed 1500 1/min

Rated speed 1500 1/min	n (100%-Load)	n (75%-Load)	n (50%-Load)	%	%	%	IE Class	Manufacturer data	Type	Number of poles	M_n	P	Voltage	Frequency	Σ_z	Power losses in % at operating points (Speed/Torque)								
																Nm	kW	Hz	V	1/min	25/25	25/100	50/25	50/100
67.4	n.A	n.A	n.A	I ^E 4	I ^E 3	I ^E 3	S4E04SA4-1	4	S4E04SA4-1	4	0.76	0.12	50	380	1500	2)	3)	4.1	39.2	5.0	12.2	41.1	14.2	43.9
66.0	n.A	n.A	n.A	I ^E 3	I ^E 3	I ^E 3	SPEU04SA4-1	4	SPEU04SA4-1	4	0.76	0.12	50	380	1500	2)	3)	4.1	42.8	5.2	13.0	44.8	15.2	46.6
61.4	n.A	n.A	n.A	I ^E 2	I ^E 2	I ^E 2	SHE04SA4-1	4	SHE04SA4-1	4	1	0.157	50	380	1500	2)	3)	4.5	54.3	5.4	15.6	55.2	17.3	56.7
80.8	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU06MA4	4	S5EU06MA4	4	1.15	0.18	50	380	1500	2)	3)	2.3	18.9	3.3	6.7	19.8	8.5	21.5
79.6	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU06MA4	4	S5EU06MA4	4	1.3	0.2	50	380	1500	2)	3)	2.5	20.6	3.5	7.2	21.6	9.1	23.5
79.1	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU06MA4	4	S5EU06MA4	4	1.3	0.2	50	380	1500	2)	3)	2.8	21.8	3.6	7.1	22.7	8.6	24.3
76.6	n.A	n.A	n.A	I ^E 4	I ^E 4	I ^E 4	S4E06MA4	4	S4E06MA4	4	1.6	0.25	50	380	1500	2)	3)	2.2	24.8	3.0	7.5	25.6	9.6	27.7
75.5	n.A	n.A	n.A	I ^E 4	I ^E 4	I ^E 4	S4E06MA4	4	S4E06MA4	4	1.6	0.25	50	380	1500	2)	3)	2.4	27.4	3.0	8.0	28.2	9.3	29.4
85.5	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU06LA4	4	S5EU06LA4	4	1.6	0.25	50	380	1500	2)	3)	1.9	12.8	2.8	5.1	13.6	6.6	15.3
66.1	n.A	n.A	n.A	I ^E 1	I ^E 1	I ^E 1	SSE06MA4	4	SSE06MA4	4	2.4	0.37	50	380	1500	2)	3)	3.1	45.5	3.7	11.6	46.2	13.3	47.1
80.0	n.A	n.A	n.A	I ^E 4	I ^E 4	I ^E 4	S4EU06LA4	4	S4EU06LA4	4	2.4	0.37	50	380	1500	2)	3)	2.0	21.4	2.5	6.4	21.9	7.4	22.9
79.8	n.A	n.A	n.A	I ^E 4	I ^E 4	I ^E 4	S4EU06LA4	4	S4EU06LA4	4	2.6	0.4	50	380	1500	2)	3)	2.2	20.5	3.0	6.7	21.5	8.5	23.2
74.1	n.A	n.A	n.A	I ^E 1	I ^E 1	I ^E 1	SSE06LA4	4	SSE06LA4	4	3.6	0.55	50	380	1500	2)	3)	1.5	10.6	2.5	4.4	11.6	5.9	13.2
87.2	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU08MA4	4	S5EU08MA4	4	3.6	0.55	50	380	1500	2)	3)	2.3	29.7	2.9	8.2	30.2	9.4	31.4
85.7	n.A	n.A	n.A	I ^E 4	I ^E 4	I ^E 4	S4E08MA4	4	S4E08MA4	4	5	0.78	50	380	1500	2)	3)	1.4	13.4	1.9	4.4	14.0	5.5	15.2
86.9	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU08LA4	4	S5EU08LA4	4	5	0.78	50	380	1500	2)	3)	1.7	10.4	2.8	4.7	11.7	6.6	13.7
85.4	n.A	n.A	n.A	I ^E 3	I ^E 3	I ^E 3	SPE08LA4	4	SPE08LA4	4	7	1.1	50	380	1500	2)	3)	1.4	12.7	2.2	4.4	13.7	6.3	15.4
90.8	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU09SA4	4	S5EU09SA4	4	7	1.1	50	380	1500	2)	3)	0.9	7.7	1.2	2.7	8.3	3.5	9.1
80.5	n.A	n.A	n.A	I ^E 1	I ^E 1	I ^E 1	SSE08LA4	4	SSE08LA4	4	10	1.55	50	380	1500	2)	3)	1.6	21.2	2.3	6.3	21.8	7.5	22.2
88.2	n.A	n.A	n.A	I ^E 4	I ^E 4	I ^E 4	S4E09SA4	4	S4E09SA4	4	10	1.55	50	380	1500	2)	3)	1.2	10.4	1.7	3.7	11.1	4.9	12.2
89.9	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU09XA4	4	S5EU09XA4	4	10	1.55	50	380	1500	2)	3)	1.6	7.1	2.7	3.9	8.3	5.9	10.3
83.9	n.A	n.A	n.A	I ^E 2	I ^E 2	I ^E 2	SHE09SA4	4	SHE09SA4	4	14	2.2	50	380	1500	2)	3)	1.3	15.9	1.7	4.7	16.4	5.6	17.3
90.3	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5E09XA4	4	S5E09XA4	4	14	2.2	50	380	1500	2)	3)	1.1	7.6	1.8	3.2	8.4	4.4	9.6
91.3	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU11SA6	6	S5EU11SA6	6	14	2.2	50	380	1500	2)	3)	1.0	6.3	1.7	2.9	7.1	4.4	8.6
88.0	n.A	n.A	n.A	I ^E 3	I ^E 3	I ^E 3	SPE09XA4	4	SPE09XA4	4	20	3.1	50	380	1500	2)	3)	1.0	11.4	1.4	3.5	11.7	4.2	12.5
90.1	n.A	n.A	n.A	I ^E 4	I ^E 4	I ^E 4	S4E11SA6	6	S4E11SA6	6	19	3	75	380	1500	2)	3)	1.0	7.4	1.7	3.1	8.3	4.7	9.9
93.3	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU11MA6	6	S5EU11MA6	6	20	3.1	75	380	1500	2)	3)	0.8	5.0	1.4	2.2	5.6	3.3	6.6
87.7	n.A	n.A	n.A	I ^E 3	I ^E 3	I ^E 3	SPE11SA6	6	SPE11SA6	6	25.5	4	75	380	1500	2)	3)	1.0	10.9	1.5	3.4	11.5	4.6	12.7
93.2	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5EU11LA6	6	S5EU11LA6	6	25.5	4	75	380	1500	2)	3)	0.8	4.5	1.4	2.2	5.3	3.4	6.5
92.5	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5E11MA6	6	S5E11MA6	6	26.5	4.2	75	380	1500	2)	3)	0.7	5.5	1.2	2.3	6.2	3.4	7.2
93.2	n.A	n.A	n.A	I ^E 5	I ^E 5	I ^E 5	S5E11LA6	6	S5E11LA6	6	35	5.5	75	380	1500	2)	3)	0.8	5.0	1.3	2.3	5.6	3.4	6.6
90.8	n.A	n.A	n.A	I ^E 4	I ^E 4	I ^E 4	S4E11MA6	6	S4E11MA6	6	35	5.5	75	380	1500	2)	3)	0.8	7.7	1.2	2.6	8.2	3.5	9.1
91.4	n.A	n.A	n.A	I ^E 3	I ^E 3	I ^E 3	SPE11LA6	6	SPE11LA6	6	48	7.5	75	380	1500	2)	3)	0.7	7.2	1.1	2.4	7.7	3.3	8.5

*Dimensioned according to IEC TS 60034-30-2

1) Manufacturer:

Bauer Gear Motor GmbH

Commercial register number: HRB 736269

Eberhard-Bauer-Str. 37,
73734 Esslingen / Germany

2) Type of motor: Three-phase permanent magnet excited synchronous motor

3) Installation altitude above sea level (m):

Ambient temperature: -20 °C to +40 °C

The figures given in the table below are for Bauer motors operating in conjunction with the frequency inverter. The torques referred to in tables can be entered for the respective frequencies in continuous operation (S1 = duty factor 100 %).

Motor torques in the adjusting range 150 1/min - 1800 1/min. duty type S1

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
0.76	0.12	S4E04SA4-1	150	0.76	0.012	0.41	5	Y
			500	0.76	0.04	0.41	16.67	Y
			1000	0.76	0.08	0.41	33.33	Y
			1500	0.76	0.12	0.41	50	Y
			1800	0.76	0.143	0.41	60	Y
0.76	0.12	SPEU04SA4-1	150	0.76	0.012	0.42	5	Y
			500	0.76	0.04	0.42	16.67	Y
			1000	0.76	0.08	0.42	33.33	Y
			1500	0.76	0.12	0.42	50	Y
			1800	0.76	0.143	0.42	60	Y
1	0.157	SHE04SA4-1	150	0.76	0.012	0.41	5	Y
			500	0.85	0.045	0.46	16.67	Y
			1000	1	0.105	0.54	33.33	Y
			1500	1	0.157	0.54	50	Y
			1800	1	0.188	0.54	60	Y
1.15	0.18	S5EU06MA4	150	1.15	0.018	0.49	5	Y
			500	1.15	0.06	0.49	16.67	Y
			1000	1.15	0.12	0.49	33.33	Y
			1500	1.15	0.18	0.49	50	Y
			1800	1.15	0.217	0.49	60	Y
1.3	0.2	S5E06MA4	150	1.3	0.02	0.55	5	Y
			500	1.3	0.068	0.55	16.67	Y
			1000	1.3	0.136	0.55	33.33	Y
			1500	1.3	0.2	0.55	50	Y
			1800	1.3	0.245	0.55	60	Y
1.3	0.2	S5EU06MA4	150	1.3	0.02	0.55	5	Y
			500	1.3	0.068	0.55	16.67	Y
			1000	1.3	0.136	0.55	33.33	Y
			1500	1.3	0.2	0.55	50	Y
			1800	1.3	0.245	0.55	60	Y
1.6	0.25	S4E06MA4	150	1.6	0.025	0.67	5	Y
			500	1.6	0.092	0.67	16.67	Y
			1000	1.6	0.168	0.67	33.33	Y
			1500	1.6	0.25	0.67	50	Y
			1800	1.6	0.3	0.67	60	Y
1.6	0.25	S4EU06MA4	150	1.6	0.025	0.68	5	Y
			500	1.6	0.084	0.68	16.67	Y
			1000	1.6	0.168	0.68	33.33	Y
			1500	1.6	0.25	0.68	50	Y
			1800	1.6	0.3	0.7	60	Y
1.6	0.25	S5EU06LA4	150	1.6	0.025	0.7	5	Y
			500	1.6	0.084	0.7	16.67	Y
			1000	1.6	0.168	0.7	33.33	Y
			1500	1.6	0.25	0.7	50	Y
			1800	1.6	0.3	0.7	60	Y
2.4	0.37	SSE06MA4	150	1.8	0.028	0.75	5	Y
			500	2	0.105	0.84	16.67	Y
			1000	2.2	0.23	0.93	33.33	Y
			1500	2.4	0.37	1	50	Y
			1800	2.4	0.45	1	60	Y

Motors

Technical data

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
2.4	0.37	S4EU06LA4	150	2.4	0.038	1.05	5	Y
			500	2.4	0.126	1.05	16.67	Y
			1000	2.4	0.25	1.05	33.33	Y
			1500	2.4	0.37	1.05	50	Y
			1800	2.4	0.45	1.05	60	Y
2.6	0.37	S4E06LA4	150	2.5	0.04	1.07	5	Y
			500	2.6	0.136	1.12	16.67	Y
			1000	2.6	0.27	1.12	33.33	Y
			1500	2.6	0.4	1.12	50	Y
			1800	2.6	0.5	1.12	60	Y
3.5	0.55	SSE06LA4	150	2.5	0.04	1.07	5	Y
			500	2.9	0.15	1.25	16.67	Y
			1000	3.5	0.37	1.5	33.33	Y
			1500	3.5	0.55	1.5	50	Y
			1800	3.5	0.66	1.5	60	Y
3.5	0.55	S5EU08MA4	150	3.5	0.06	1.28	5	Y
			500	-	-	-	16.67	Y
			1000	-	-	-	33.33	Y
			1500	3.5	0.55	1.28	50	Y
			1800	3.5	0.66	1.28	60	Y
5	0.78	S4E08MA4	150	5	0.08	1.8	5	Y
			500	5	0.26	1.8	16.67	Y
			1000	5	0.52	1.8	33.33	Y
			1500	5	0.78	1.8	50	Y
			1800	5	0.9	1.8	60	Y
5	0.78	S5EU08LA4	150	5	0.08	1.9	5	Y
			500	-	-	-	16.67	Y
			1000	-	-	-	33.33	Y
			1500	5	0.78	1.9	50	Y
			1800	5	0.9	1.9	60	Y
7	1.1	SPE08LA4	150	6.5	0.1	2.4	5	Y
			500	7	0.37	2.6	16.67	Y
			1000	7	0.73	2.6	33.33	Y
			1500	7	1.1	2.6	50	Y
			1800	7	1.3	2.6	60	Y
7	1.1	S5EU09SA4	150	7	0.11	2.2	5	Y
			500	-	-	-	16.67	Y
			1000	-	-	-	33.33	Y
			1500	7	1.1	2.2	50	Y
			1800	7	1.3	2.2	60	Y
10	1.55	SSE08LA4	150	6.5	0.1	2.4	5	Y
			500	8	0.42	2.9	16.67	Y
			1000	10	1.05	3.6	33.33	Y
			1500	10	1.55	3.6	50	Y
			1800	10	1.9	3.6	60	Y
10	1.55	S4E09SA4	150	8.5	0.13	2.6	5	Y
			500	10	0.52	3	16.67	Y
			1000	10	1.05	3	33.33	Y
			1500	10	1.55	3	50	Y
			1800	10	1.9	3	60	Y
10	1.55	S5EU09XA4	150	10	0.16	3.1	5	Y
			500	-	-	-	16.67	Y
			1000	-	-	-	33.33	Y
			1500	10	1.55	3.1	50	Y
			1800	10	1.9	3.2	60	Y

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
14	2.2	SHE09SA4	150	8.5	0.13	2.6	5	Y
			500	10	0.52	3.1	16.67	Y
			1000	14	1.47	4.3	33.33	Y
			1500	14	2.2	4.3	50	Y
			1800	14	2.6	4.5	60	Y
14	2.2	S5E09XA4	150	13	0.2	3.9	5	Y
			500	14	0.73	4.2	16.67	Y
			1000	14	1.47	4.2	33.33	Y
			1500	14	2.2	4.2	50	Y
			1800	14	2.6	4.5	60	Y
14	2.2	S5EU11SA6	150	14	0.22	4.4	7.5	Y
			500	-	-	-	-	Y
			1000	-	-	-	-	Y
			1500	14	2.2	4.4	75	Y
			1800	14	2.6	4.4	90	Y
19	3	S4E11SA6	150	19	0.3	5.9	7.5	Y
			500	19	1	5.9	25	Y
			1000	19	2	5.9	50	Y
			1500	19	3	5.9	75	Y
			1800	19	3.6	5.9	90	Y
20	3.1	SPE09XA4	150	13	0.2	3.9	5	Y
			500	16	0.84	4.8	16.67	Y
			1000	20	2.1	5.9	33.33	Y
			1500	20	3.1	5.9	50	Y
			1800	20	3.8	6.7	60	Y
20	3.1	S5EU11MA6	150	20	0.31	6.4	7.5	Y
			500	-	-	-	-	Y
			1000	-	-	-	-	Y
			1500	20	3.1	6.4	75	Y
			1800	20	3.8	6.4	90	Y
25.5	4	SPE11SA6	150	19	0.3	5.9	7.5	Y
			500	22	1.2	6.9	25	Y
			1000	25.5	2.7	8	50	Y
			1500	25.5	4	8	75	Y
			1800	25.5	4.8	8	90	Y
25.5	4	S5EU11LA6	150	25.5	0.4	8.1	7.5	Y
			500	-	-	-	-	Y
			1000	-	-	-	-	Y
			1500	25.5	4	8.1	75	Y
			1800	25.5	4.8	8.1	90	Y
26.5	4.2	S5E11MA6	150	26.5	0.42	8.3	7.5	Y
			500	26.5	1.4	8.3	25	Y
			1000	26.5	2.8	8.3	50	Y
			1500	26.5	4.2	8.3	75	Y
			1800	26.5	5	8.3	90	Y
35	5.5	S5E11LA6	150	35	0.55	10.8	7.5	Y
			500	35	1.8	10.8	25	Y
			1000	35	3.7	10.8	50	Y
			1500	35	5.5	10.8	75	Y
			1800	35	6.6	10.8	90	Y
35	5.5	S4E11MA6	150	26.5	0.42	8.3	7.5	Y
			500	30	1.6	9.5	25	Y
			1000	35	3.7	11	50	Y
			1500	35	5.5	11	75	Y
			1800	35	6.6	11	90	Y

Motors

Technical data

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
48	7.5	SPE11LA6	150	35	0.55	10.8	7.5	Y
			500	40	2.1	12.3	25	Y
			1000	48	5	14.7	50	Y
			1500	48	7.5	14.7	75	Y
			1800	48	9	14.7	90	Y

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _{1500/min}
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f _{min} :	60 s (in open loop mode)

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Non-standard operating conditions on request.

All motors: converter supply voltage 380 to 500 V

Motors with rated speed 2250 1/min

M _n Nm Nm Classe	IE	Type	P _n kW	I _n A	2p	n _n 1/min	f Hz	η %	Connection	R ₂₀ Ω	R _{s20} Ω	L _d mH	L _q mH	k _e V/1000 1/min	k _t Nm/A	M _{max (60s)} Nm	I _{max (60s)} A	J kgm ²
3.5	5	S5EU08MA4	0.82	2.25	4	2250	75	IE5-88.4	D	6.23	9.35	34	57	103	1.4	10	6.4	0.00115
5	5	S5E08MA4	1.18	3.1	4	2250	75	IE5-87.9	D	6.23	9.35	34	57	103	1.6	10	6.4	0.00115
5	5	S5EU08LA4	1.18	3.6	4	2250	75	IE5-86.5	D	3.67	5.5	24	39	99	1.4	14	9.5	0.0015
7	4	S4E08LA4	1.65	4.7	4	2250	75	IE4-85.9	D	3.67	5.5	24	39	99	1.5	14	9.5	0.0015
7	3	SPE08MA4	1.65	4.3	4	2250	75	IE3-83.8	D	6.23	9.35	34	57	103	1.6	10	6.4	0.00115
7	5	S5EU09SA4	1.65	3.75	4	2250	75	IE5-91.3	D	3.3	4.95	21.4	36.6	120	1.85	20	11	0.00245
10	1	SSE08LA4	2.35	6.6	4	2250	75	IE1-81.4	D	3.67	5.5	24	39	99	1.5	14	9.5	0.0015
10	5	S5E09SA4	2.35	5.3	4	2250	75	IE5-89.3	D	3.3	4.95	21.4	36.6	120	1.9	20	11	0.00245
10	5	S5EU09XA4	2.35	5.5	4	2250	75	IE5-90.6	D	1.75	2.63	13.8	24.4	120	1.8	30	16	0.0038
13	3	SPE09SA4	3	6.9	4	2250	75	IE3-86.8	D	3.3	4.95	21.4	36.6	120	1.9	20	11	0.00245
17.5	4	S4E09XA4	4.1	9.2	4	2250	75	IE4-89.4	D	1.75	2.63	13.8	24.4	120	1.9	29	16	0.0038

M _n	Rated torque
P _n	Rated power
I _n	Rated current
2p	No. of Motor Poles
n _n	Rated speed
f	Nominal Frequency
η	Motor efficiency
R ₂₀	Phase Resistance U-V
R _{s20}	Winding Resistance
L _d	Inductance D-Axis
L _q	Inductance Q-Axis
k _e	Voltage constant
k _t	Torque constant
M _{max (60s)}	Peak Torque
I _{max (60s)}	Peak Current
J	Moment of inertia

All motors: converter supply voltage 380 to 500 V

Motors

Technical data

Rated speed 2250 1/min

Rated speed 2250 1/min		Power losses in % at operating points (Speed/Torque)																					
n	%	n (100 % -Load)		n (75 %-Load)		n (50 %-Load)		n (25 %-Load)		n (10 %-Load)		n (5 %-Load)		n (2.5 %-Load)		n (1.0 %-Load)		n (0.5 %-Load)					
		%	%	%	%	%	%	%	%	%	%	%	%	%	%	%	%	%	%	%	%		
88.4	n.A	n.A	5	1)	S5EU08MA4	4	3.5	0.82	75	380	2250	2)	3)	1.6	8.5	2.6	4.1	9.8	6.0	12.0	4.9	12.3	
87.9	n.A	n.A	5	1)	S5EU08MA4	4	5	1.18	75	380	2250	2)	3)	1.1	9.9	1.7	3.5	10.8	4.9	12.0	4.9	12.3	
86.5	n.A	n.A	5	1)	S5EU08LA4	4	5	1.18	75	380	2250	2)	3)	2.5	10.1	3.8	5.4	11.5	7.7	14.0	5.7	14.0	
85.9	n.A	n.A	4	1)	S4E08LA4	4	7	1.65	75	380	2250	2)	3)	2.2	11.0	3.3	5.2	12.3	7.4	14.8	5.7	14.8	
83.8	n.A	n.A	3	1)	SPE08MA4	4	7	1.65	75	380	2250	2)	3)	1.3	15.2	1.7	4.6	16.1	5.7	17.4	5.7	17.4	
91.3	n.A	n.A	5	1)	S5EU09SA4	4	7	1.65	75	380	2250	2)	3)	1.2	6.4	2.1	3.3	7.3	3.6	8.5	3.6	8.5	
81.4	n.A	n.A	1	1)	SSE08LA4	4	10	2.35	75	380	2250	2)	3)	2.2	17.6	3.0	6.2	18.6	8.1	20.5	8.1	20.5	
89.3	n.A	n.A	5	1)	S5E09SA4	4	10	2.35	75	380	2250	2)	3)	1.4	8.0	1.7	3.3	9.1	4.7	10.8	5.3	9.4	
90.6	n.A	n.A	5	1)	S5EU09XA4	4	10	2.35	75	380	2250	2)	3)	1.3	6.0	2.4	3.4	7.3	5.3	9.4	5.3	9.4	
86.8	n.A	n.A	3	1)	SPE09SA4	4	13	3	75	380	2250	2)	3)	1.2	11.4	1.8	3.9	12.5	5.2	14.0	5.2	14.0	
89.4	n.A	n.A	4	1)	S4E09XA4	4	4	17.5	4.1	75	380	2250	2)	3)	1.1	8.1	1.8	3.3	9.1	4.8	10.7	4.8	10.7

*Dimensioned according to IEC TS 60034-30-2

1) Manufacturer:	Bauer Gear Motor GmbH	2) Type of motor:	Three-phase permanent magnet excited synchronous motor	3) Installation altitude above sea level (m):	1000
Commercial register number:	HRB 736269	Ambient temperature:	-20 °C to +40 °C	Address:	Eberhard-Bauer-Str. 37, 73734 Esslingen / Germany

The figures given in the table below are for Bauer motors operating in conjunction with the frequency inverter. The torques referred to in tables can be entered for the respective frequencies in continuous operation (S1 = duty factor 100 %).

Motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
3.5	0.82	S5EU08MA4	150	3.5	0.06	2.25	5	D
			500	-	-	-	16.66	D
			1000	-	-	-	33.33	D
			2250	3.5	0.82	2.25	75	D
			2600	3.5	1	2.25	87	D
5	1.18	S5E08MA4	150	5	0.08	3.1	5	D
			500	5	0.26	3.1	16.66	D
			1000	5	0.52	3.1	33.33	D
			2250	5	1.18	3.1	75	D
			2600	5	1.4	3.1	87	D
5	1.18	S5EU08LA4	150	5	0.08	3.6	5	D
			500	-	-	-	16.66	D
			1000	-	-	-	33.33	D
			2250	5	1.18	3.6	75	D
			2600	5	1.4	3.6	87	D
7	1.65	S4E08LA4	150	6.5	0.1	4.4	5	D
			500	7	0.37	4.7	16.66	D
			1000	7	0.73	4.7	33.33	D
			2250	7	1.65	4.7	75	D
			2600	7	1.9	4.7	87	D
7	1.65	SPE08MA4	150	5	0.08	3.1	5	D
			500	5.9	0.31	3.7	16.66	D
			1000	7	0.73	4.3	33.33	D
			2250	7	1.65	4.3	75	D
			2600	7	1.9	4.3	87	D
7	1.65	S5EU09SA4	150	7	0.11	3.75	5	D
			500	-	-	-	16.66	D
			1000	-	-	-	33.33	D
			2250	7	1.6	3.75	75	D
			2600	7	1.9	3.75	87	D
10	2.35	SSE08LA4	150	6.5	0.1	4.3	5	D
			500	8	0.42	5.3	16.66	D
			1000	10	1.05	6.6	33.33	D
			2250	10	2.35	6.6	75	D
			2600	10	2.7	6.6	87	D
10	2.35	S5E09SA4	150	8.5	0.13	4.5	5	D
			500	10	0.52	5.3	16.66	D
			1000	10	1.05	5.3	33.33	D
			2250	10	2.35	5.3	75	D
			2600	10	2.7	5.3	87	D
10	2.35	S5EU09XA4	150	10	0.16	5.5	5	D
			500	-	-	-	16.66	D
			1000	-	-	-	33.33	D
			2250	10	2.35	5.5	75	D
			2600	10	2.7	5.5	87	D
13	3	SPE09SA4	150	8.5	0.13	4.5	5	D
			500	10	0.52	5.3	16.66	D
			1000	13	1.36	6.9	33.33	D
			2250	13	3	6.9	75	D
			2600	13	3.5	6.9	87	D

Motors

Technical data

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
17.5	4.1	S4E09XA4	150	13	0.2	6.9	5	D
			500	16	0.84	8.4	16.66	D
			1000	17.5	1.83	9.2	33.33	D
			2250	17.5	4.1	9.2	75	D
			2600	17.5	4.8	9.2	87	D

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _{2250/min}
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	120 Hz
Permissible operating time below f _{min} :	60 s (in open loop mode)

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Non-standard operating conditions on request.

All motors: converter supply voltage 380 to 500 V

Motors with rated speed 3000 1/min

M _n Nm	IE Class	Type	P _n kW	I _n A	2p	n _n 1/min	f Hz	η %	Connection	R ₂₀ Ω	R _{s20} Ω	L _d mH	L _q mH	k _e V/1000 1/min	k _t Nm/A	M _{max (60s)} Nm	I _{max (60s)} A	J kgm ²
0.38	5	S5EU04SA4-1	0.12	0.33	4	3000	100	IE5-82.2	Y	70.6	35.3	120	185	80	1.2	1	0.85	0.00014
0.58	5	S5EU04SA4-1	0.18	0.49	4	3000	100	IE5-80	Y	70.6	35.3	120	185	80	1.2	1	0.85	0.00014
0.65	5	S5E04SA4-1	0.2	0.52	4	3000	100	IE5-80.3	Y	70.6	35.3	120	185	80	1.25	1.6	1.3	0.00014
0.65	5	S5EU04SA4-1	0.2	0.54	4	3000	100	IE5-79.1	Y	70.6	35.3	120	185	80	1.2	1	0.85	0.00014
0.8	5	S5E04SA4-1	0.25	0.64	4	3000	100	IE5-78.5	Y	70.6	35.3	120	185	80	1.25	1.6	1.3	0.00014
0.8	5	S5EU06MA4	0.25	0.63	4	3000	100	IE5-87.8	Y	24.6	12.3	52.3	83.3	84	1.3	2.8	2.2	0.0002
1	4	S4E04SA4-1	0.315	0.8	4	3000	100	IE4-74.5	Y	70.6	35.3	120	185	80	1.25	1.6	1.3	0.00014
1.2	5	S5EU06MA4	0.37	0.93	4	3000	100	IE5-86.6	Y	24.6	12.3	52.3	83.3	84	1.3	2.8	2.2	0.0002
1.3	5	S5E06MA4	0.4	1	4	3000	100	IE5-86.2	Y	24.6	12.3	52.3	83.3	84	1.3	3.8	3	0.0002
1.3	5	S5EU06MA4	0.4	1	4	3000	100	IE5-86.3	Y	24.6	12.3	52.3	83.3	84	1.3	2.8	2.2	0.0002
1.75	5	S5E06MA4	0.55	1.35	4	3000	100	IE5-84	Y	24.6	12.3	52.3	83.3	84	1.3	3.8	3	0.0002
1.75	5	S5EU06LA4	0.55	1.45	4	3000	100	IE5-87.9	Y	11.5	5.75	29.4	40.1	80.3	1.2	3.8	3.2	0.000295
2.4	3	SPE06MA4	0.75	1.85	4	3000	100	IE3-78.6	Y	24.6	12.3	52.3	83.3	84	1.3	3.8	3	0.0002
2.4	5	S5E06LA4	0.75	1.9	4	3000	100	IE5-88.3	Y	11.5	5.75	29.4	40.1	80.3	1.25	5.6	4.5	0.000295
3.5	4	S4E06LA4	1.1	2.8	4	3000	100	IE4-84	Y	11.5	5.75	29.4	40.1	80.3	1.25	5.6	4.5	0.000295
3.5	5	S5EU08MA4	1.1	2.55	4	3000	100	IE5-90.8	Y	4.73	2.36	24.7	43.5	90	1.4	10	7.5	0.00115
5	5	S5E08MA4	1.55	3.5	4	3000	100	IE5-91.2	Y	4.73	2.36	24.7	43.5	90	1.45	10	7.5	0.00115
5	5	S5EU08LA4	1.55	3.9	4	3000	100	IE5-88.9	Y	2.82	1.41	16.8	29.6	87	1.3	15	11.2	0.0015
7	5	S5E08LA4	2.2	5.2	4	3000	100	IE5-89.2	Y	2.82	1.41	16.8	29.6	87	1.35	15	11.2	0.0015
7	4	S4E08MA4	2.2	4.8	4	3000	100	IE4-88.8	Y	4.73	2.36	24.7	43.5	90	1.45	10	7.5	0.00115
7	5	S5EU09SA4	2.2	4.45	4	3000	100	IE5-91.9	Y	2.42	1.21	15.5	27.6	103	1.6	20	12.5	0.00245
10	3	SPE08LA4	3.1	7.4	4	3000	100	IE3-86.9	Y	2.82	1.41	16.8	29.6	87	1.35	15	11.2	0.0015
10	5	S5EU09XA4	3.1	6.3	4	3000	100	IE5-92.8	Y	1.31	0.66	12.7	17.9	102	1.6	30	20	0.0038
10	5	S5EU11SA6	3.1	6.6	6	3000	150	IE5-91.5	Y	0.89	0.447	5	7.7	106	1.52	40	25	0.012
13	4	S4E09SA4	4	8	4	3000	100	IE4-89.7	Y	2.42	1.21	15.5	27.6	103	1.63	20	12.5	0.00245
12.75	5	S5EU11SA6	4	8.4	6	3000	150	IE5-91.9	Y	0.89	0.447	5	7.7	106	1.52	40	25	0.012
13	5	S5EU11MA6	4	8.6	6	3000	150	IE5-92.5	Y	0.43	0.217	3	4.6	104	1.52	55	35	0.0175
17.5	5	S5E09XA4	5.5	10.5	4	3000	100	IE5-92.5	Y	1.31	0.66	12.7	17.9	102	1.67	30	20	0.0038
17.5	4	S4E11SA6	5.5	11	6	3000	150	IE4-91.2	Y	0.89	0.447	5	7.7	106	1.55	40	25	0.012
17.5	5	S5EU11LA6	5.5	11.5	6	3000	150	IE5-91.9	Y	0.3	0.15	2.4	3.5	105	1.52	75	48	0.0215
17.5	5	S5EU11MA6	5.5	11.5	6	3000	150	IE5-93.3	Y	0.43	0.217	3	4.6	104	1.52	55	35	0.0175
20	5	S5E09XA4	6.3	12	4	3000	100	IE5-92	Y	1.31	0.66	12.7	17.9	102	1.67	30	20	0.0038
24	5	S5E11MA6	7.5	15.4	6	3000	150	IE5-93.2	Y	0.43	0.217	3	4.6	104	1.55	55	35	0.0175
24	4	S4E11SA6	7.5	15.2	6	3000	150	IE4-90.8	Y	0.89	0.447	5	7.7	106	1.55	40	25	0.012
23.9	5	S5EU11LA6	7.5	15.7	6	3000	150	IE5-93.3	Y	0.3	0.15	2.4	3.5	105	1.52	75	48	0.0215
30	5	S5E11LA6	9.5	18.5	6	3000	150	IE5-93.8	Y	0.3	0.15	2.4	3.5	105	1.6	75	48	0.0215
30	5	S5E11MA6	9.5	19.3	6	3000	150	IE5-93.2	Y	0.43	0.217	3	4.6	104	1.55	55	35	0.0175
35	5	S5E11LA6	11	21.5	6	3000	150	IE5-94.1	Y	0.3	0.15	2.4	3.5	105	1.6	75	48	0.0215
35	4	S4E11MA6	11	22.5	6	3000	150	IE4-93.1	Y	0.43	0.217	3	4.6	104	1.55	55	35	0.0175
48	5	S5E11LA6	15	30	6	3000	150	IE5-93.8	Y	0.3	0.15	2.4	3.5	105	1.6	75	48	0.0215

M _n	Rated torque
P _n	Rated power
I _n	Rated current
2p	No. of Motor Poles
n _n	Rated speed
f	Nominal Frequency
η	Motor efficiency
R ₂₀	Phase Resistance U-V
R _{s20}	Winding Resistance
L _d	Inductance D-Axis
L _q	Inductance Q-Axis
k _e	Voltage constant
k _t	Torque constant
M _{max (60s)}	Peak Torque
I _{max (60s)}	Peak Current
J	Moment of inertia

All motors: converter supply voltage 380 to 500 V

Motors

Technical data

Rated speed 3000 1/min

n (100 % -Load)	n (75 % -Load)	n (50 % -Load)	η	P kW	M _n	P kW	M _n	n 1/min	Operating conditions		Power losses in % at operating points (Speed/Torque)									
									Voltage	Frequency	Number of poles	Type	Manufacturer data	η (100 % -Load)	η (75 % -Load)	η (50 % -Load)	η %	η %	η %	
82.2	n.A	n.A	5	1)	S5EU04SA4-1	4	0.38	0.12	100	380	3000	2)	3)	3.5	12.5	6.0	7.9	15.1	12.1	19.5
80	n.A	n.A	5	1)	S5EU04SA4-1	4	0.58	0.18	100	380	3000	2)	3)	3.0	18.0	4.5	7.8	19.8	10.9	22.8
80.3	n.A	n.A	5	1)	S5EU04SA4-1	4	0.65	0.2	100	380	3000	2)	3)	2.9	17.7	4.5	7.7	19.5	11.0	22.6
79.1	n.A	n.A	5	1)	S5EU04SA4-1	4	0.65	0.2	100	380	3000	2)	3)	2.8	20.1	4.1	7.8	21.8	10.3	24.3
78.5	n.A	n.A	5	1)	S5EU04SA4-1	4	0.8	0.25	100	380	3000	2)	3)	2.6	20.7	3.9	7.6	22.3	10.5	24.8
87.8	n.A	n.A	5	1)	S5EU06MA4	4	0.8	0.25	100	380	3000	2)	3)	2.1	7.8	3.8	5.0	9.5	8.2	12.6
74.5	n.A	n.A	4	1)	S4E04SA4-1	4	1	0.315	100	380	3000	2)	3)	2.8	27.2	3.8	8.9	28.5	11.7	30.9
86.6	n.A	n.A	5	1)	S5EU06MA4	4	1.2	0.37	100	380	3000	2)	3)	1.8	11.0	3.0	4.8	12.1	7.1	14.2
86.2	n.A	n.A	5	1)	S5EU06MA4	4	1.3	0.4	100	380	3000	2)	3)	1.7	10.5	3.0	4.9	11.8	7.9	14.7
86.3	n.A	n.A	5	1)	S5EU06MA4	4	1.3	0.4	100	380	3000	2)	3)	1.7	11.6	2.7	4.7	12.7	6.6	14.6
84	n.A	n.A	5	1)	S5EU06MA4	4	1.75	0.55	100	380	3000	2)	3)	1.6	14.0	2.5	5.0	15.0	7.3	17.2
87.9	n.A	n.A	5	1)	S5EU06LA4	4	1.75	0.55	100	380	3000	2)	3)	1.8	8.8	3.0	4.5	10.2	6.7	12.5
78.6	n.A	n.A	3	1)	SPE06MA4	4	2.4	0.75	100	380	3000	2)	3)	1.8	22.3	2.6	6.5	22.9	8.3	24.7
88.3	n.A	n.A	5	1)	S5EU06LA4	4	2.4	0.75	100	380	3000	2)	3)	1.2	9.6	1.8	3.4	10.2	5.1	11.9
84	n.A	n.A	4	1)	S4E06LA4	4	3.5	1.1	100	380	3000	2)	3)	1.3	15.3	1.9	4.4	16.0	5.7	17.2
90.8	n.A	n.A	5	1)	S5EU08MA4	4	3.5	1.1	100	380	3000	2)	3)	1.5	6.2	2.4	3.4	7.2	5.3	9.1
91.2	n.A	n.A	5	1)	S5E08MA4	4	5	1.55	100	380	3000	2)	3)	0.9	6.7	1.4	2.6	7.3	4.1	8.8
88.9	n.A	n.A	5	1)	S5EU08LA4	4	5	1.55	100	380	3000	2)	3)	1.9	7.0	3.3	4.5	8.7	7.1	11.5
89.2	n.A	n.A	5	1)	S5E08LA4	4	7	2.2	100	380	3000	2)	3)	1.4	7.2	2.5	3.8	8.5	6.0	10.9
88.8	n.A	n.A	4	1)	S4E08MA4	4	7	2.2	100	380	3000	2)	3)	0.9	9.7	1.3	3.1	10.2	4.1	11.3
91.9	n.A	n.A	5	1)	S5EU09SA4	4	7	2.2	100	380	3000	2)	3)	1.1	5.2	2.1	3.0	6.2	4.6	7.9
86.9	n.A	n.A	3	1)	SPE08LA4	4	10	3.1	100	380	3000	2)	3)	1.5	10.7	2.4	4.4	11.8	6.3	13.8
92.8	n.A	n.A	5	1)	S5EU09XA4	4	10	3.1	100	380	3000	2)	3)	1.3	4.2	2.2	2.8	5.3	4.7	7.1
91.5	n.A	n.A	5	1)	S5EU11SA6	6	10	3.1	150	380	3000	2)	3)	1.4	3.7	3.0	3.5	5.4	6.6	8.5
89.7	n.A	n.A	4	1)	S4E09SA4	4	13	4	100	380	3000	2)	3)	1.1	8.0	1.8	3.2	8.9	4.8	10.6
91.9	n.A	n.A	5	1)	S5EU11SA6	6	12.75	4	150	380	3000	2)	3)	1.2	4.2	2.4	3.1	5.6	5.5	8.0
92.5	n.A	n.A	5	1)	S5EU11MA6	6	13	4	150	380	3000	2)	3)	1.5	2.8	3.2	3.3	4.5	6.3	7.5
92.5	n.A	n.A	5	1)	S5E09XA4	4	17.5	5.5	100	380	3000	2)	3)	0.8	5.1	1.5	2.4	5.9	4.0	7.3
91.2	n.A	n.A	4	1)	S4E11SA6	6	17.5	5.5	150	380	3000	2)	3)	1.0	4.4	2.2	3.0	5.7	5.9	8.7
91.9	n.A	n.A	5	1)	S5EU11LA6	6	17.5	5.5	150	380	3000	2)	3)	1.3	2.3	3.0	3.1	4.0	7.1	7.9
93.3	n.A	n.A	5	1)	S5EU11MA6	6	17.5	5.5	150	380	3000	2)	3)	1.1	3.0	2.3	2.6	4.2	4.7	6.5
92	n.A	n.A	5	1)	S5E09XA4	4	20	6.3	100	380	3000	2)	3)	0.8	5.9	1.4	2.4	6.5	3.7	7.8
93.2	n.A	n.A	5	1)	S5E11MA6	6	24	7.5	150	380	3000	2)	3)	0.9	2.9	1.9	2.4	4.1	4.8	6.6
90.8	n.A	n.A	4	1)	S4E11SA6	6	24	8	150	380	3000	2)	3)	0.9	5.9	1.8	2.8	7.0	5.0	9.2
93.3	n.A	n.A	5	1)	S5EU11LA6	6	24	8	150	380	3000	2)	3)	1.0	2.3	2.2	2.5	3.6	5.3	6.5
93.8	n.A	n.A	5	1)	S5E11LA6	6	30	10	150	380	3000	2)	3)	0.8	2.5	1.7	2.2	3.5	4.4	5.9
93.2	n.A	n.A	5	1)	S5E11MA6	6	30	10	150	380	3000	2)	3)	0.8	3.4	1.6	2.2	4.4	4.2	6.6



Rated speed 3000 1/min

Rated speed 3000 1/min		n (100 % -Load)		n (75 %-Load)		n (50 %-Load)		Number of poles		Frequency		Voltage		nZ		Operating conditions		Power losses in % at operating points (Speed/Torque)				
		%	%	%	%	n	n	M _n	P	Hz	kHz	V	1/min			25/25	25/100	50/25	50/50	50/100	90/50	90/100
94.1	n.A.	5	1)	S5E11LA6	6	35	11	150		380	3000	2)	3)	0.7	2.8	1.6	2.0	3.7	3.9	5.7		
93.1	n.A.	4	1)	S4E11MA6	6	35	11	150		380	3000	2)	3)	0.7	3.9	1.5	2.1	4.8	3.9	6.7		
93.8	n.A.	5	1)	S5E11LA6	6	48	15	150		380	3000	2)	3)	0.7	3.6	1.3	1.9	4.4	3.3	6.0		

* Dimensioned according to IEC TS 60034-30-2

1) Manufacturer:	Bauer Gear Motor GmbH	2) Type of motor:	Three-phase permanent magnet excited synchronous motor	3) Installation altitude above sea level (m):	1000
Commercial register number: Address:	HRB 736269 Eberhard-Bauer-Str. 37, 73734 Esslingen / Germany			Ambient temperature:	-20 °C to +40 °C

Motors

Technical data

The figures given in the table below are for Bauer motors operating in conjunction with the frequency inverter. The torques referred to in tables can be entered for the respective frequencies in continuous operation (S1 = duty factor 100 %).

Motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
0.38	0.12	S5EU04SA4-1	150	0.38	0.006	0.33	5	Y
			500	0.38	0.02	0.33	16.67	Y
			1000	0.38	0.04	0.33	33.33	Y
			3000	0.38	0.12	0.33	100	Y
			3600	0.38	0.14	0.33	120	Y
0.58	0.18	S5EU04SA4-1	150	0.58	0.009	0.49	5	Y
			500	0.58	0.03	0.49	16.67	Y
			1000	0.58	0.06	0.49	33.33	Y
			3000	0.58	0.18	0.49	100	Y
			3600	0.58	0.22	0.49	120	Y
0.65	0.2	S5E04SA4-1	150	0.65	0.01	0.52	5	Y
			500	0.65	0.034	0.52	16.67	Y
			1000	0.65	0.068	0.52	33.33	Y
			3000	0.65	0.2	0.52	100	Y
			3600	0.65	0.245	0.52	120	Y
0.65	0.2	S5EU04SA4-1	150	0.65	0.01	0.54	5	Y
			500	0.65	0.034	0.54	16.67	Y
			1000	0.65	0.068	0.54	33.33	Y
			3000	0.65	0.2	0.54	100	Y
			3600	0.65	0.245	0.54	120	Y
0.8	0.25	S5E04SA4-1	150	0.76	0.012	0.61	5	Y
			500	0.8	0.042	0.64	16.67	Y
			1000	0.8	0.084	0.64	33.33	Y
			3000	0.8	0.25	0.64	100	Y
			3600	0.8	0.3	0.64	120	Y
0.8	0.25	S5EU06MA4	150	0.8	0.013	0.63	5	Y
			500	0.8	0.042	0.63	16.67	Y
			1000	0.8	0.084	0.63	33.33	Y
			3000	0.8	0.25	0.63	100	Y
			3600	0.8	0.3	0.63	120	Y
1	0.315	S4E04SA4-1	150	0.76	0.012	0.61	5	Y
			500	0.85	0.045	0.68	16.67	Y
			1000	1	0.105	0.8	33.33	Y
			3000	1	0.315	0.8	100	Y
			3600	1	0.38	0.8	120	Y
1.2	0.37	S5EU06MA4	150	1.2	0.019	0.93	5	Y
			500	1.2	0.063	0.93	16.67	Y
			1000	1.2	0.126	0.93	33.33	Y
			3000	1.2	0.37	0.93	100	Y
			3600	1.2	0.45	0.93	120	Y
1.3	0.4	S5E06MA4	150	1.3	0.02	1	5	Y
			500	1.3	0.068	1	16.67	Y
			1000	1.3	0.136	1	33.33	Y
			3000	1.3	0.4	1	100	Y
			3600	1.3	0.5	1	120	Y
1.3	0.4	S5EU06MA4	150	1.3	0.02	1	5	Y
			500	1.3	0.068	1	16.67	Y
			1000	1.3	0.136	1	33.33	Y
			3000	1.3	0.4	1	100	Y
			3600	1.3	0.5	1	120	Y



M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
1.75	0.55	S5E06MA4	150	1.75	0.027	1.35	5	Y
			500	1.75	0.092	1.35	16.67	Y
			1000	1.75	0.183	1.35	33.33	Y
			3000	1.75	0.55	1.35	100	Y
			3600	1.75	0.66	1.35	120	Y
1.75	0.55	S5EU06LA4	150	1.75	0.027	1.45	5	Y
			500	1.75	0.092	1.45	16.67	Y
			1000	1.75	0.183	1.45	33.33	Y
			3000	1.75	0.55	1.45	100	Y
			3600	1.75	0.66	1.45	120	Y
2.4	0.75	SPE06MA4	150	1.8	0.028	1.38	5	Y
			500	2	0.105	1.51	16.67	Y
			1000	2.2	0.23	1.68	33.33	Y
			3000	2.4	0.75	1.85	100	Y
			3600	2.4	0.9	1.85	120	Y
2.4	0.75	S5E06LA4	150	2.4	0.038	1.9	5	Y
			500	2.4	0.126	1.9	16.67	Y
			1000	2.4	0.25	1.9	33.33	Y
			3000	2.4	0.75	1.9	100	Y
			3600	2.4	0.9	1.9	120	Y
3.5	1.1	S4E06LA4	150	2.5	0.04	2	5	Y
			500	2.9	0.15	2.3	16.67	Y
			1000	3.5	0.37	2.8	33.33	Y
			3000	3.5	1.1	2.8	100	Y
			3600	3.5	1.3	2.8	120	Y
3.5	1.1	S5EU08MA4	150	3.5	0.06	2.55	5	Y
			500	-	-	-	16.67	Y
			1000	-	-	-	33.33	Y
			3000	3.5	1.1	2.55	100	Y
			3600	3.5	1.3	2.55	120	Y
5	1.55	S5E08MA4	150	5	0.08	3.5	5	Y
			500	5	0.26	3.5	16.67	Y
			1000	5	0.52	3.5	33.33	Y
			3000	5	1.55	3.5	100	Y
			3600	5	1.9	3.5	120	Y
5	1.55	S5EU08LA4	150	5	0.08	3.9	5	Y
			500	-	-	-	16.67	Y
			1000	-	-	-	33.33	Y
			3000	5	1.55	3.9	100	Y
			3600	5	1.9	3.9	120	Y
7	2.2	S5E08LA4	150	6.5	0.1	4.8	5	Y
			500	7	0.37	5.2	16.67	Y
			1000	7	0.73	5.2	33.33	Y
			3000	7	2.2	5.2	100	Y
			3600	7	2.6	5.2	120	Y
7	2.2	S4E08MA4	150	5	0.08	3.5	5	Y
			500	5.9	0.31	4.1	16.67	Y
			1000	7	0.73	4.8	33.33	Y
			3000	7	2.2	4.8	100	Y
			3600	7	2.6	4.8	120	Y
7	2.2	S5EU09SA4	150	7	0.11	4.45	5	Y
			500	-	-	-	16.67	Y
			1000	-	-	-	33.33	Y
			3000	7	2.2	4.45	100	Y
			3600	7	2.6	4.45	120	Y

Motors

Technical data

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
10	3.1	SPE08LA4	150	6.5	0.1	4.8	5	Y
			500	8	0.42	5.9	16.67	Y
			1000	10	1.05	7.4	33.33	Y
			3000	10	3.1	7.4	100	Y
			3600	10	3.8	7.4	120	Y
10	3.1	S5EU09XA4	150	10	0.16	6.3	5	Y
			500	-	-	-	16.67	Y
			1000	-	-	-	33.33	Y
			3000	10	3.1	6.3	100	Y
			3600	10	3.8	6.3	120	Y
10	3.1	S5EU11SA6	150	10	0.16	6.6	7.5	Y
			500	-	-	-	25	Y
			1000	-	-	-	50	Y
			3000	10	3.1	6.6	150	Y
			3600	10	3.8	6.6	180	Y
13	4	S4E09SA4	150	8.5	0.13	5.3	5	Y
			500	10	0.52	6.2	16.67	Y
			1000	13	1.36	8	33.33	Y
			3000	13	4	8	100	Y
			3600	13	4.9	8.7	120	Y
12.75	4	S5EU11SA6	150	12.75	0.2	8.4	7.5	Y
			500	-	-	-	25	Y
			1000	-	-	-	50	Y
			3000	12.75	4	8.4	150	Y
			3600	12.75	4.8	8.4	180	Y
13	4	S5EU11MA6	150	13	0.2	8.6	7.5	Y
			500	-	-	-	25	Y
			1000	-	-	-	50	Y
			3000	13	4	8.6	150	Y
			3600	13	4.9	8.6	180	Y
17.5	5.5	S5E09XA4	150	13	0.2	7.8	5	Y
			500	16	0.84	9.6	16.67	Y
			1000	17.5	1.83	10.5	33.33	Y
			3000	17.5	5.5	10.5	100	Y
			3600	17.5	6.6	11.1	120	Y
17.5	5.5	S4E11SA6	150	17.5	0.27	11	7.5	Y
			500	17.5	0.9	11	25	Y
			1000	17.5	1.8	11	50	Y
			3000	17.5	5.5	11	150	Y
			3600	17.5	6.6	11	180	Y
17.5	5.5	S5EU11MA6	150	17.5	0.27	11.5	7.5	Y
			500	-	-	-	25	Y
			1000	-	-	-	50	Y
			3000	17.5	5.5	11.5	150	Y
			3600	17.5	6.6	11.5	180	Y
17.5	5.5	S5EU11LA6	150	17.5	0.27	11.5	7.5	Y
			500	-	-	-	25	Y
			1000	-	-	-	50	Y
			3000	17.5	5.5	11.5	150	Y
			3600	17.5	6.6	11.5	180	Y
20	6.3	S5E09XA4	150	13	0.2	7.8	5	Y
			500	16	0.84	9.6	16.67	Y
			1000	20	2.1	12	33.33	Y
			3000	20	6.3	12	100	Y
			3600	17.5	6.6	11.1	120	Y

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
24	7.5	S4E11SA6	150	19	0.3	12	7.5	Y
			500	21.5	1.1	13.6	25	Y
			1000	24	2.5	15.2	50	Y
			3000	24	7.5	15.2	150	Y
			3600	24	9	15.2	180	Y
24	7.5	S5E11MA6	150	24	0.38	15.4	7.5	Y
			500	24	1.3	15.4	25	Y
			1000	24	2.5	15.4	50	Y
			3000	24	7.5	15.4	150	Y
			3600	24	9	15.4	180	Y
23.9	7.5	S5EU11LA6	150	23.9	0.38	15.7	7.5	Y
			500	-	-	-	25	Y
			1000	-	-	-	50	Y
			3000	23.9	7.5	15.7	150	Y
			3600	23.9	9	15.7	180	Y
30	9.5	S5E11MA6	150	26.5	0.42	17	7.5	Y
			500	30	1.6	19.3	25	Y
			1000	30	3.1	19.3	50	Y
			3000	30	9.5	19.3	150	Y
			3600	30	11	19.3	180	Y
30	9.5	S5E11LA6	150	30	0.47	18.5	7.5	Y
			500	30	1.6	18.5	25	Y
			1000	30	3.1	18.5	50	Y
			3000	30	9.5	18.5	150	Y
			3600	30	11	18.5	180	Y
35	11	S4E11MA6	150	26.5	0.42	17	7.5	Y
			500	30	1.6	19.3	25	Y
			1000	35	3.7	22.5	50	Y
			3000	35	11	22.5	150	Y
			3600	35	13	22.5	180	Y
35	11	S5E11LA6	150	35	0.55	21.5	7.5	Y
			500	35	1.8	21.5	25	Y
			1000	35	3.7	21.5	50	Y
			3000	35	11	21.5	150	Y
			3600	35	13	21.5	180	Y
48	15	S5E11LA6	150	35	0.55	21.5	7.5	Y
			500	40	2.1	25	25	Y
			1000	48	5	30	50	Y
			3000	48	15	30	150	Y
			3600	40	15	25.8	180	Y

Converter Settings:

Minimum clock frequency:

3 kHz

Short-term current limit:

160 % * I_{3000/min}

Maximum overload time:

60 s

Minimum frequency:

5 Hz

Maximum frequency:

120 Hz

Permissible operating time below f_{min}:

60 s (in open loop mode)

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Non-standard operating conditions on request.

All motors: converter supply voltage 380 to 500 V

Motors

Technical data

Aseptic-Motors

Aseptic motors with rated speed 1500 1/min

M _n Nm	IE Classe	Type	P _n kW	I _n A	2p	n _n 1/min	f Hz	η %	Connec- tion	R ₂₀ Ω	R _{s20} Ω	L _d mH	L _q mH	k _e V/1000 1/min	k _t Nm/A	M _{max} (60s) Nm	I _{max} (60s) A	J kgm ²
3.5	5	SA5E08MB4	0.55	1.3	4	1500	50	IE5-86.5	Y	18.7	9.35	97	170	180	2.7	10	3.7	0.00115
5	5	SA5E08LB4	0.78	1.85	4	1500	50	IE5-88.4	Y	11	5.5	70	117	171	2.7	15	5.6	0.0015
7	5	SA5E09SB4	1.1	2.2	4	1500	50	IE5-89.2	Y	9.9	4.95	64.1	110	208	3.2	20	6.4	0.00245
10	5	SA5E09XB4	1.55	3.1	4	1500	50	IE5-91	Y	5.25	2.63	41.2	70.1	209	3.2	30	10	0.0038

Aseptic motors torques in the adjusting range 150 1/min - 1800 1/min. duty type S1

M _n Nm	P _n kW	Type	Speed		Torque		Power kW	Current A	Frequency Hz	Connection
			1/min	Nm	150	3.5				
3.5	0.55	SA5E08MB4	1500	3.5	0.55	1.3	50	Y		
			1800	3.5	0.66	1.3	60	Y		
			150	5	0.08	1.85	5	Y		
5	0.78	SA5E08LB4	1500	5	0.78	1.85	50	Y		
			1800	5	0.94	1.85	60	Y		
			150	7	0.11	2.2	5	Y		
7	1.1	SA5E09SB4	1500	7	1.1	2.2	50	Y		
			1800	7	1.3	2.2	60	Y		
			150	10	0.16	3.1	5	Y		
10	1.55	SA5E09XB4	1500	10	1.55	3.1	50	Y		
			1800	10	1.9	3.1	60	Y		

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _{1500/min}
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f _{min} :	60 s (in open loop mode)

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Non-standard operating conditions on request.

All motors: converter supply voltage 380 to 500 V

Aseptic motors with rated speed 1500 1/min

Aseptic motors with rated speed 1500 1/min										Power losses in % at operating points (Speed/Torque)										
Operating conditions																				
Type of motor	M _n	P	n _z																	
Voltage				Nm	kW	Hz	V	1/min		25/25	25/100	50/25	50/50	50/100	90/50					
Frequency									3)	1.3	11.2	2.0	4.2	12.0	5.9					
86.5	n.A	n.A	5	1)	SA5E08MB4	4	3.5	0.55	2)	3)	1.3	11.2	2.0	4.2	12.0	5.9				
88.4	n.A	n.A	5	1)	SA5E08LB4	4	5	0.78	50	380	1500	2)	3)	1.4	9.5	2.3	4.0	10.5	5.8	
89.2	n.A	n.A	5	1)	SA5E09SB4	4	7	1.1	50	380	1500	2)	3)	1.6	8.0	2.5	3.5	9.0	5.2	10.9
91	n.A	n.A	5	1)	SA5E09XB4	4	10	1.55	50	380	1500	2)	3)	1.1	6.6	2.0	3.1	7.6	4.6	9.0

* Dimensioned according to IEC TS 60034-30-2

1) Manufacturer:

Bauer Gear Motor GmbH

HRB 736269

Commercial register number:
Address:
Eberhard-Bauer-Str. 37,
73734 Esslingen / Germany

2) Type of motor:

Three-phase permanent magnet excited

synchronous motor

3) Installation altitude above sea level (m):

Ambient temperature:

-20 °C to +40 °C

Motors

Technical data

Aseptic motors with rated speed 3000 1/min

M _n Nm	IE Classe	Type	P _n kW	I _n A	2p	n _n 1/min	f Hz	η %	Connec- tion	R ₂₀ Ω	R _{s20} Ω	L _d mH	L _q mH	k _e V/1000 1/min	k _t Nm/A	M _{max} (60s) Nm	I _{max} (60s) A	J kgm ²
2.5	5	SA5E08MB4	0.78	1.85	4	3000	100	IE5-90.2	Y	4.73	2.36	24.7	43.5	90	1.35	10	7.5	0.00115
3.5	5	SA5E08LB4	1.1	2.6	4	3000	100	IE5-92.3	Y	2.82	1.41	16.8	29.6	87	1.35	15	11.5	0.0015
4.8	5	SA5E08LB4	1.5	3.55	4	3000	100	IE5-91.8	Y	2.82	1.41	16.8	29.6	87	1.35	15	11.5	0.0015
5	5	SA5E09SB4	1.55	3.3	4	3000	100	IE5-90.7	Y	2.42	1.21	15.5	27.6	103	1.5	20	12.5	0.00245
7	5	SA5E09XB4	2.2	4.5	4	3000	100	IE5-92.9	Y	1.31	0.66	12.7	17.9	102	1.56	30	20	0.0038
9.55	5	SA5E09XB4	3	6.1	4	3000	100	IE5-92.5	Y	1.31	0.66	12.7	17.9	102	1.56	30	20	0.0038

Aseptic motor torques in the adjusting range 150 1/min - 3600 1/min. duty type S1

M _n Nm	P _n kW	Type	Speed	Torque	Power	Current	Frequency	Connection
			1/min	Nm	kW	A	Hz	
2.5	0.78	SA5E08MB4	150	2.5	0.04	1.85	5	Y
			3000	2.5	0.78	1.85	100	Y
			3600	2.5	0.94	1.85	120	Y
3.5	1.1	SA5E08LB4	150	3.5	0.06	2.6	5	Y
			3000	3.5	1.1	2.6	100	Y
			3600	3.5	1.3	2.6	120	Y
4.8	1.5	SA5E08LB4	150	4.8	0.08	3.55	5	Y
			3000	4.8	1.5	3.55	100	Y
			3600	3.5	1.3	2.6	120	Y
5	1.55	SA5E09SB4	150	5	0.08	3.3	5	Y
			3000	5	1.55	3.3	100	Y
			3600	5	1.9	3.3	120	Y
7	2.2	SA5E09XB4	150	7	0.11	4.5	5	Y
			3000	7	2.2	4.5	100	Y
			3600	7	2.6	4.5	120	Y
9.55	3	SA5E09XB4	150	9.55	0.15	6.1	5	Y
			3000	9.55	3	6.1	100	Y
			3600	-	-	-	120	Y

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _{3000/min}
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	120 Hz
Permissible operating time below f _{min} :	60 s (in open loop mode)

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Non-standard operating conditions on request.

All motors: converter supply voltage 380 to 500 V

Aseptic motors with rated speed 3000 1/min

Aseptic motors with rated speed 3000 1/min										Power losses in % at operating points (Speed/Torque)																													
n	(100 % -Load)			(75 %-Load)			(50 %-Load)			n _n	P	M _n	n _n	Voltage	Frequency	Hz	V	1/min	380	3000	2)	3)	1.7	5.2	3.2	4.1	6.9	6.9	90/100	50/50	50/100	50/25	25/25	25/100	50/100	90/50	90/100		
	%	%	%	%	%	%	%	%	%																														
90.2	n.A	n.A	n.A	5	1)	SA5E08MB4	4	2.5	0.78	100	380	3000	2)	3)	1.7	5.2	3.2	4.1	6.9	6.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9				
92.3	n.A	n.A	n.A	5	1)	SA5E08LB4	4	3.5	1.1	100	380	3000	2)	3)	1.2	4.3	2.4	3.0	5.4	5.4	5.0	5.0	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	
91.8	n.A	n.A	n.A	5	1)	SA5E08LB4	4	4.8	1.5	100	380	3000	2)	3)	1.0	5.5	2.0	2.9	6.4	6.4	4.6	4.6	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1
90.7	n.A	n.A	n.A	5	1)	SA5E09SB4	4	5	1.55	100	380	3000	2)	3)	1.7	4.6	3.2	4.0	6.4	6.4	7.2	7.2	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
92.9	n.A	n.A	n.A	5	1)	SA5E09XB4	4	7	2.2	100	380	3000	2)	3)	1.2	3.4	2.4	2.8	4.6	4.6	5.0	5.0	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8	
92.5	n.A	n.A	n.A	5	1)	SA5E09XB4	4	9.55	3	100	380	3000	2)	3)	1.0	4.3	1.9	2.7	5.4	5.4	4.7	4.7	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	

* Dimensioned according to IEC TS 60034-30-2

1) Manufacturer:	Bauer Gear Motor GmbH	2) Type of motor:	Three-phase permanent magnet excited synchronous motor	3) Installation altitude above sea level (m):	1000
Commercial register number:	HRB 736269	Ambient temperature:	-20 °C to +40 °C		
Address:	Eberhard-Bauer-Str. 37, 73734 Esslingen / Germany				

Motors

Technical data

Stainless Steel Motors

Stainless steel motors with rated speed 1500 1/min

M _n Nm	IE Classe	Type	P _n kW	I _n A	2p	n _n 1/min	f Hz	η %	Connec- tion	R ₂₀ Ω	R _{s20} Ω	L _d mH	L _q mH	k _e V/1000 1/min	k _t Nm/A	M _{max} (60s) Nm	I _{max} (60s) A	J kgm ²
1.6	5	SA5E08MA4	0.25	0.56	4	1500	50	IE5-88.2	Y	18.7	9.35	97	170	180	2.8	5.6	2.1	0.00115
2.4	5	SA5E08MA4	0.37	0.86	4	1500	50	IE5-88	Y	18.7	9.35	97	170	180	2.8	5.6	2.1	0.00115
2.4	5	SA5E09SA4	0.37	0.75	4	1500	50	IE5-89.2	Y	9.9	4.95	64.1	110	208	3.2	7.7	2.4	0.00245
3.5	5	SA5E08MA4	0.55	1.3	4	1500	50	IE5-85.5	Y	18.7	9.35	97	170	180	2.7	5.6	2.1	0.00115
3.5	5	SA5E09SA4	0.55	1.1	4	1500	50	IE5-90.3	Y	9.9	4.95	64.1	110	208	3.2	7.7	2.4	0.00245
3.5	5	SA5E09XA4	0.55	1.1	4	1500	50	IE5-89.9	Y	5.25	2.63	41.2	70.1	209	3.2	11.2	3.7	0.0038
4.8	5	SA5E09SA4	0.75	1.5	4	1500	50	IE5-90.5	Y	9.9	4.95	64.1	110	208	3.2	7.7	2.4	0.00245
4.8	5	SA5E09XA4	0.75	1.6	4	1500	50	IE5-91.2	Y	5.25	2.63	41.2	70.1	209	3	11.2	3.7	0.0038
7	5	SA5E09XA4	1.1	2.3	4	1500	50	IE5-91.4	Y	5.25	2.63	41.2	70.1	209	3	11.2	3.7	0.0038

Stainless steel motors torques in the adjusting range 150 1/min - 1800 1/min. duty type S1

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
1.6	0.25	SA5E08MA4	150	1.6	0.025	0.56	5	Y
			1500	1.6	0.25	0.56	50	Y
			1800	1.6	0.3	0.56	60	Y
2.4	0.37	SA5E08MA4	150	2.4	0.037	0.86	5	Y
			1500	2.4	0.37	0.86	50	Y
			1800	2.4	0.45	0.86	60	Y
2.4	0.37	SA5E09SA4	150	2.4	0.037	0.75	5	Y
			1500	2.4	0.37	0.75	50	Y
			1800	2.4	0.45	0.75	60	Y
3.5	0.55	SA5E08MA4	150	3.5	0.055	1.3	5	Y
			1500	3.5	0.55	1.3	50	Y
			1800	3.5	0.66	1.3	60	Y
3.5	0.55	SA5E09SA4	150	3.5	0.055	1.1	5	Y
			1500	3.5	0.55	1.1	50	Y
			1800	3.5	0.66	1.1	60	Y
3.5	0.55	SA5E09XA4	150	3.5	0.055	3.5	5	Y
			1500	3.5	0.55	3.5	50	Y
			1800	3.5	0.66	3.5	60	Y
4.8	0.75	SA5E09SA4	150	4.8	0.075	1.5	5	Y
			1500	4.8	0.75	1.5	50	Y
			1800	4.8	0.9	1.5	60	Y
4.8	0.75	SA5E09XA4	150	4.8	0.075	1.6	5	Y
			1500	4.8	0.75	1.6	50	Y
			1800	4.8	0.9	1.6	60	Y
7	1.1	SA5E09XA4	150	7	0.11	2.3	5	Y
			1500	7	1.1	2.3	50	Y
			1800	7	1.32	2.3	60	Y

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _{1500/min}
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f _{min} :	60 s (in open loop mode)

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Non-standard operating conditions on request.

All motors: converter supply voltage 380 to 500 V

Stainless steel motors with rated speed 1500 1/min

Stainless steel motors with rated speed 1500 1/min									
η	η (100 % -Load)		η (75 %-Load)		η (50 %-Load)		Manufacturer data		(Speed/Torque) (% at operating points)
	%	%	%	%	%	%	M _n	P	
88.2	n.A	n.A	5	1)	SA5E08MA4	4	1.6	0.25	50
88	n.A	n.A	5	1)	SA5E08MA4	4	2.4	0.37	50
89.2	n.A	n.A	5	1)	SA5E09SA4	4	2.4	0.37	50
85.5	n.A	n.A	5	1)	SA5E08MA4	4	3.5	0.55	50
90.3	n.A	n.A	5	1)	SA5E09SA4	4	3.5	0.55	50
89.9	n.A	n.A	5	1)	SA5E09XA4	4	3.5	0.55	50
90.5	n.A	n.A	5	1)	SA5E09SA4	4	4.8	0.75	50
91.2	n.A	n.A	5	1)	SA5E09XA4	4	4.8	0.75	50
91.4	n.A	n.A	5	1)	SA5E09XA4	4	7	1.1	50

* Dimensioned according to IEC TS 60034-30-2

1) Manufacturer:	Bauer Gear Motor GmbH	2) Type of motor:	Three-phase permanent magnet excited synchronous motor	3) Installation altitude above sea level (m):
Commercial register number: Address:	HRB 736269 Eberhard-Bauer-Str. 37, 73734 Esslingen / Germany	Ambient temperature:	-20 °C to +40 °C	

Motors

Technical data

Stainless steel motors with rated speed 3000 1/min

M _n Nm	IE Classe	Type	P _n kW	I _n A	2p	n _n 1/min	f Hz	η %	Connec- tion	R ₂₀ Ω	R _{s20} Ω	L _d mH	L _q mH	k _e V/1000 1/min	k _t Nm/A	M _{max (60s)} Nm	I _{max (60s)} A	J kgm ²
1.2	5	SA5E08MA4	0.37	0.9	4	3000	100	IE5-87.5	Y	4.73	2.36	24.7	43.5	90	1.33	3.8	2.9	0.00115
1.75	5	SA5E08MA4	0.55	1.32	4	3000	100	IE5-89.7	Y	4.73	2.36	24.7	43.5	90	1.33	3.8	2.9	0.00115
2.4	5	SA5E08MA4	0.75	1.8	4	3000	100	IE5-90.5	Y	4.73	2.36	24.7	43.5	90	1.33	3.8	2.9	0.00115
2.4	5	SA5E09SA4	0.75	1.6	4	3000	100	IE5-89.3	Y	2.42	1.21	15.5	27.6	103	1.5	7.7	5.1	0.00245
3.5	5	SA5E09SA4	1.1	2.3	4	3000	100	IE5-91.3	Y	2.42	1.21	15.5	27.6	103	1.5	7.7	5.1	0.00245

Stainless steel motors torques in the adjusting range 150 1/min - 3000 1/min. duty type S1

M _n Nm	P _n kW	Type	Speed 1/min	Torque Nm	Power kW	Current A	Frequency Hz	Connection
1.2	0.37	SA5E08MA4	150	1.2	0.019	0.9	5	Y
			3000	1.2	0.37	0.9	100	Y
1.75	0.55	SA5E08MA4	150	1.75	0.027	1.32	5	Y
			3000	1.75	0.55	1.32	100	Y
2.4	0.75	SA5E08MA4	150	2.4	0.038	1.8	5	Y
			3000	2.4	0.75	1.8	100	Y
2.4	0.75	SA5E09SA4	150	2.4	0.038	1.6	5	Y
			3000	2.4	0.75	1.6	100	Y
3.5	1.1	SA5E09SA4	150	3.5	0.055	2.3	5	Y
			3000	3.5	1.1	2.3	100	Y

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _{3000/min}
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	120 Hz
Permissible operating time below f _{min} :	60 s (in open loop mode)

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Non-standard operating conditions on request.

All motors: converter supply voltage 380 to 500 V

Stainless steel motors with rated speed 3000 1/min

Stainless steel motors with rated speed 3000 1/min										Power losses in % at operating points (Speed/Torque)													
n	n (100 % -Load)	n (75 %-Load)	n (50 %-Load)	%	%	%	%	%	%	%	%	%	%	%	%								
Manufacturer data	IE ClassKlasse	Type	Number of poles	M _n	P	n _z	V	Hz	kW	Nm	1/min	380	3000	2)	3)	2.5	4.2	5.6	5.8	7.4	11.7	13.2	
IE5-87.5	n.A	SA5E08MA4	4	1.2	0.37	100	380	55	4	1.2	0.37	100	380	3000	2)	3)	2.5	4.2	5.6	5.8	7.4	11.7	13.2
IE5-89.7	n.A	SA5E08MA4	4	1.75	0.55	100	380	55	4	1.75	0.55	100	380	3000	2)	3)	1.4	4.0	3.3	3.9	5.9	8.3	10.4
IE5-90.5	n.A	SA5E08MA4	4	2.4	0.75	100	380	55	4	2.4	0.75	100	380	3000	2)	3)	1.1	4.8	2.5	3.3	6.2	6.5	9.4
IE5-89.3	n.A	SA5E09SA4	4	2.4	0.75	100	380	55	4	2.4	0.75	100	380	3000	2)	3)	1.9	3.3	4.1	4.3	5.7	9.8	10.9
IE5-91.3	n.A	SA5E09SA4	4	3.5	1.1	100	380	55	4	3.5	1.1	100	380	3000	2)	3)	1.3	3.4	3.0	3.3	5.0	6.9	8.6

* Dimensioned according to IEC TS 60034-30-2

1) Manufacturer:	Bauer Gear Motor GmbH	2) Type of motor:	Three-phase permanent magnet excited synchronous motor	3) Installation altitude above sea level (m):	1000
Commercial register number: Address:	HRB 736269 Eberhard-Bauer-Str. 37, 73734 Esslingen / Germany			Ambient temperature:	-20 °C to +40 °C

Motors

Technical data

Atex-Motors

Rated speed 1500 1/min
-Type S.XE.08MA4-..

Rated data of the motor

Type: **S.XE.08MA4-..** Ignition protection type: Increased Safety
S.XC.08MA4-.. Dust explosion protection – Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3 Gb

Labelling:  II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x

Rated parameters and data of the motor

Rated power Pn	1.0	1.75	kW
Rated torque Mn	6.5	6.5	Nm
Rated current In	2.3	4.0	A
No. of Motor Poles 2p	4	4	
Rated speed n _n	1500	2600	1/min
Nominal Frequency	50	87	Hz
Motorcircuit	Wye circuit	Delta circuit	
Strang-Resistance Rs20	9.35*		Ohm
Strang-Inductance D-Axis Ld	97*		mH
Strang-Inductance Q-Axis Lq	170*		mH
Voltage constant ke	180	103	V / 1000 1/min
Torque constant kt	2.82	1.62	Nm / A
Peak Torque Mmax (60s)	10	10	Nm
Peak Current Imax (60s)	3.7	6.4	A
Converter supply voltage	380 - 500		V

Δ * Input value Danfoss Frequency converter FC302 => delta circuit 1/3 of the phase value


Data operation with frequency converter S1 operation. wye circuit

Torque	5.0	5.6	6.5	6.5	6.5	Nm
Power	0.08	0.29	0.68	1.0	1.2	kW
Voltage *	66	138	243	340	378	V
Current	1.9	2.1	2.3	2.3	2.3	A
Frequenz	5	16.66	33.33	50	60	Hz
Speed	150	500	1000	1500	1800	1/min
Duty type				S1		

Data operation with frequency converter S1 operation. delta circuit

Torque	5.0	5.6	6.5	6.5	6.5	Nm
Power	0.08	0.29	0.68	1.0	1.75	kW
Voltage *	38	79	142	198	320	V
Current	3.3	3.6	4.0	4.0	4.0	A
Frequenz	5	16.66	33.33	50	87	Hz
Speed	150	500	1000	1500	2600	1/min
Duty type				S1		

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

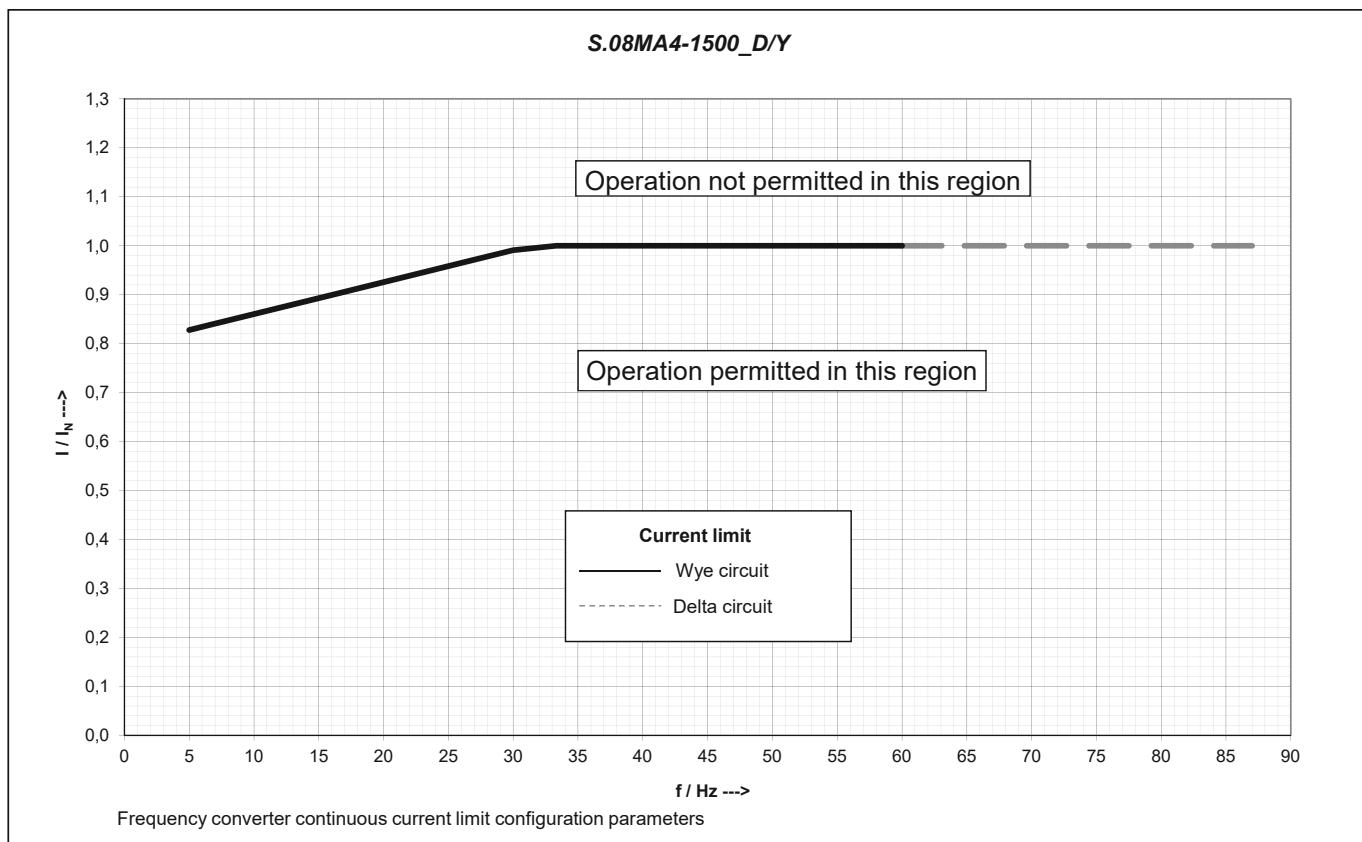Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 1500 1/min

-Type S.XE.08LA4-..

Rated data of the motor

Type: **S.XE.08LA4-..** Ignition protection type: Increased Safety
S.XC.08LA4-.. Dust explosion protection - Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3

Labelling:  II 2 D Ex tb IIIC T 120 °C - T160 °C Db IP6x

Rated parameters and data of the motor

Rated power Pn	1.50	2.45	kW
Rated torque Mn	9.55	9.0	Nm
Rated current In	3.5	5.9	A
No. of Motor Poles 2p	4	4	
Rated speed n _n	1500	2600	1/min
Nominal Frequency	50	87	Hz
Motorcircuit	Wye circuit	Delta circuit	
Strang-Resistance Rs20	5.5 *		Ohm
Strang-Inductance D-Axis Ld	70 *		mH
Strang-Inductance Q-Axis Lq	117 *		mH
Voltage constant ke	171	99	V / 1000 1/min
Torque constant kt	2.73	1.52	Nm / A
Peak Torque Mmax (60s)	15	14	Nm
Peak Current Imax (60s)	5.6	9.5	A
Converter supply voltage	380 - 500		V

Δ * Input value Danfoss Frequency converter FC302 => delta circuit 1/3 of the phase value


Data operation with frequency converter S1 operation. wye circuit

Torque	6.5	8.0	9.55	9.55	9.55	Nm
Power	0.1	0.42	1.0	1.5	1.8	kW
Voltage *	55	125	225	315	378	V
Current	2.5	3.0	3.5	3.5	3.5	A
Frequenz	5	16.66	33.33	50	60	Hz
Speed	150	500	1000	1500	1800	1/min
Duty type	S1					

Data operation with frequency converter S1 operation. delta circuit

Torque	6.25	8.0	9.0	9.0	9.0	Nm
Power	0.10	0.39	0.94	1.4	2.45	kW
Voltage *	33	72	131	182	300	V
Current	4.3	5.0	5.9	5.9	5.9	A
Frequenz	5	16.66	33.33	50	87	Hz
Speed	150	500	1000	1500	2600	1/min
Duty type	S1					

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

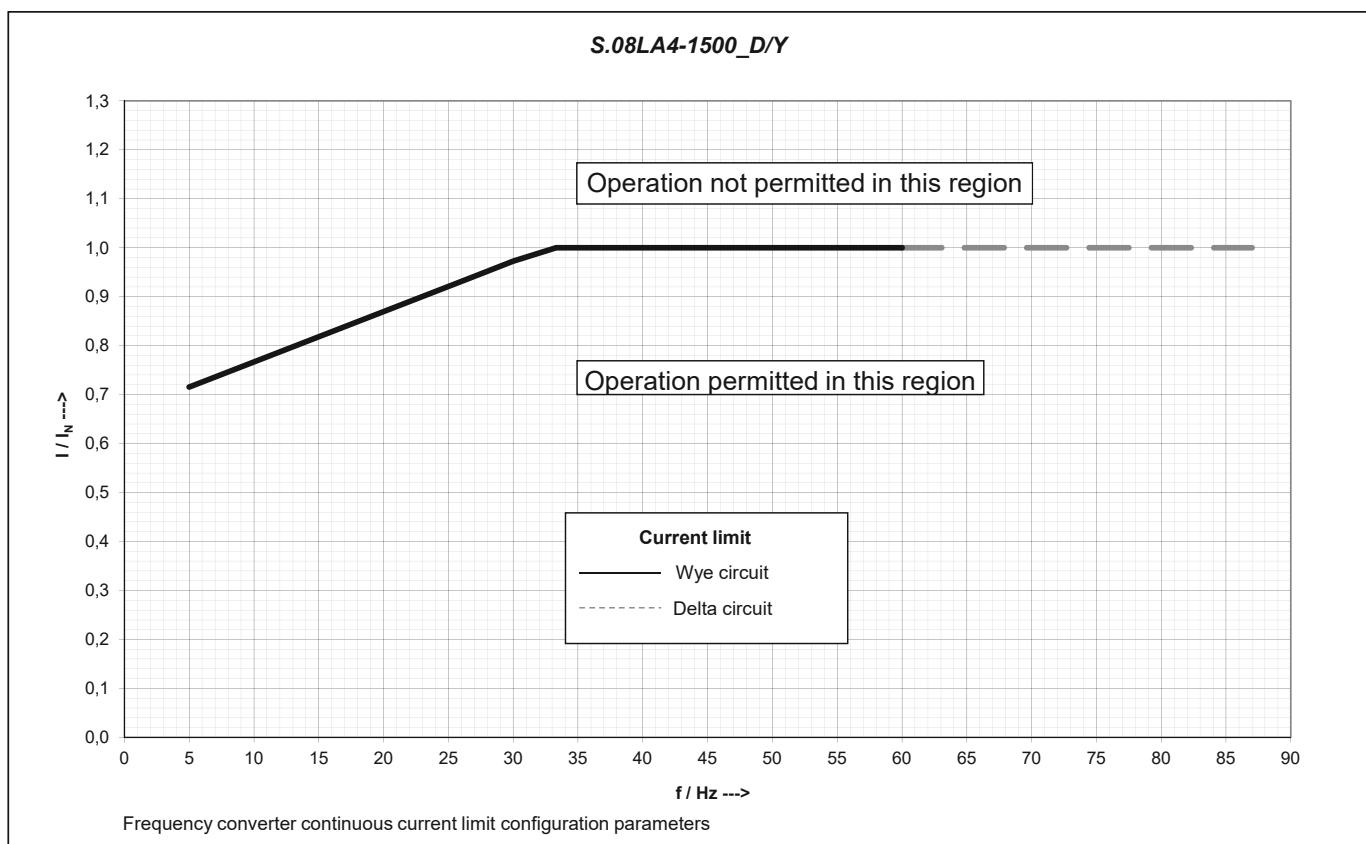Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 1500 1/min

-Type S.XE.09SA4-..

Rated data of the motor

Type: **S.XE.09SA4-..** Ignition protection type: Increased Safety
S.XC.09SA4-.. Dust explosion protection - Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3Gb

Labelling:  II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x

Rated parameters and data of the motor

Rated power Pn	2.0	3.5	kW
Rated torque Mn	13	13	Nm
Rated current In	4.0	7.0	A
No. of Motor Poles 2p	4	4	
Rated speed n _n	1500	2600	1/min
Nominal Frequency	50	87	Hz
Motorcircuit	Wye circuit	Delta circuit	
Strang-Resistance Rs20	4.95*		Ohm
Strang-Inductance D-Axis Ld	64.1*		mH
Strang-Inductance Q-Axis Lq	109.8*		mH
Voltage constant ke	208	120	V / 1000 1/min
Torque constant kt	3.2	1.85	Nm / A
Peak Torque Mmax (60s)	20	20	Nm
Peak Current Imax (60s)	6.4	11.0	A
Converter supply voltage	380 - 500		V

Δ * Input value Danfoss Frequency converter FC302 => delta circuit 1/3 of the phase value

Data operation with frequency converter S1 operation. wye circuit


Torque	8	10	13	13	11.5	Nm
Power	0.13	0.53	1.36	2	2.2	kW
Voltage *	56	140	258	370	375	V
Current	2.5	3.2	4.0	4.0	4.0	A
Frequenz	5	16.66	33.33	50	60	Hz
Speed	150	500	1000	1500	1800	1/min
Duty type	S1					

Data operation with frequency converter S1 operation. delta circuit

Torque	8	10	13	13	13	Nm
Power	0.13	0.53	1.36	2	3.5	kW
Voltage *	33	81	149	214	370	V
Current	4.3	5.5	7.0	7.0	7.0	A
Frequenz	5	16.66	33.33	50	87	Hz
Speed	150	500	1000	1500	2600	1/min
Duty type	S1					

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

Frequency converter continuous current limit configuration parameters

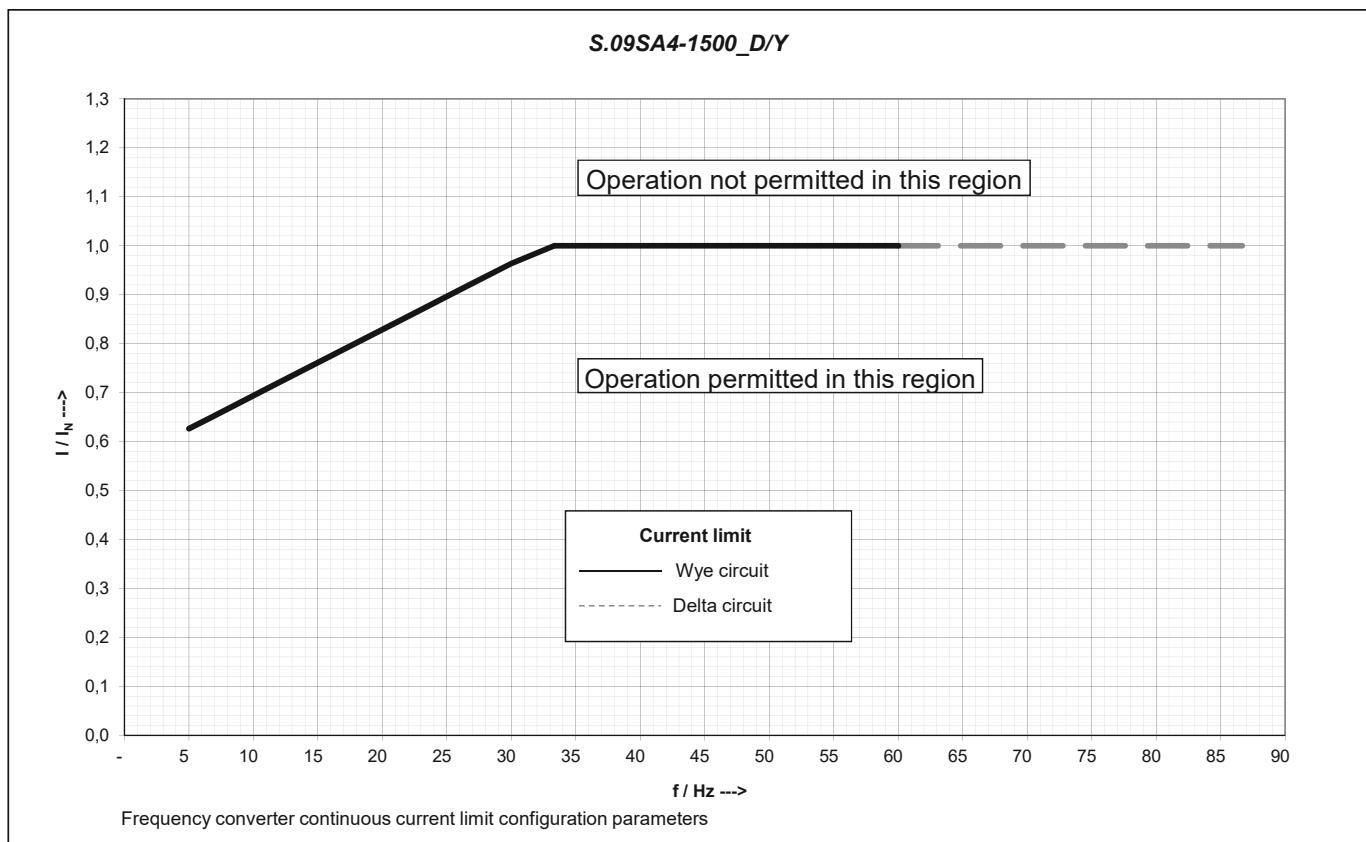

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 1500 1/min

-Type S.XE.09XA4-..

Rated data of the motor

Type: **S.XE.09XA4-..** Ignition protection type: Increased Safety
S.XC.09XA4-.. Dust explosion protection - Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3 Gb

Labelling:  II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x

Rated parameters and data of the motor

Rated power Pn	3.1	5.5	kW
Rated torque Mn	20	20	Nm
Rated current In	6.3	10.9	A
No. of Motor Poles 2p	4	4	
Rated speed n _n	1500	2600	1/min
Nominal Frequency	50	87	Hz
Motorcircuit	Wye circuit	Delta circuit	
Strang-Resistance Rs20	2.625*		Ohm
Strang-Inductance D-Axis Ld	41.2*		mH
Strang-Inductance Q-Axis Lq	70.1*		mH
Voltage constant ke	209	120	V / 1000 1/min
Torque constant kt	3.2	1.85	Nm / A
Peak Torque Mmax (60s)	31	29	Nm
Peak Current Imax (60s)	10	16	A
Converter supply voltage	380 - 500		V

Δ * Input value Danfoss Frequency converter FC302 => delta circuit 1/3 of the phase value


Data operation with frequency converter S1 operation. wye circuit

Torque	13	16	20	20	19	Nm
Power	0.20	0.84	2.1	3.1	3.6	kW
Voltage *	53	134	253	364	380	V
Current	4.0	5.0	6.3	6.3	6.3	A
Frequenz	5	16.66	33.33	50	60	Hz
Speed	150	500	1000	1500	1800	1/min
Duty type	S1					

Data operation with frequency converter S1 operation. delta circuit

Torque	13	16	20	20	20	Nm
Power	0.2	0.84	2.1	3.1	5.5	kW
Voltage *	31	78	146	210	348	V
Current	7.0	8.7	10.9	10.9	10.9	A
Frequenz	5	16.66	33.33	50	87	Hz
Speed	150	500	1000	1500	2600	1/min
Duty type	S1					

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

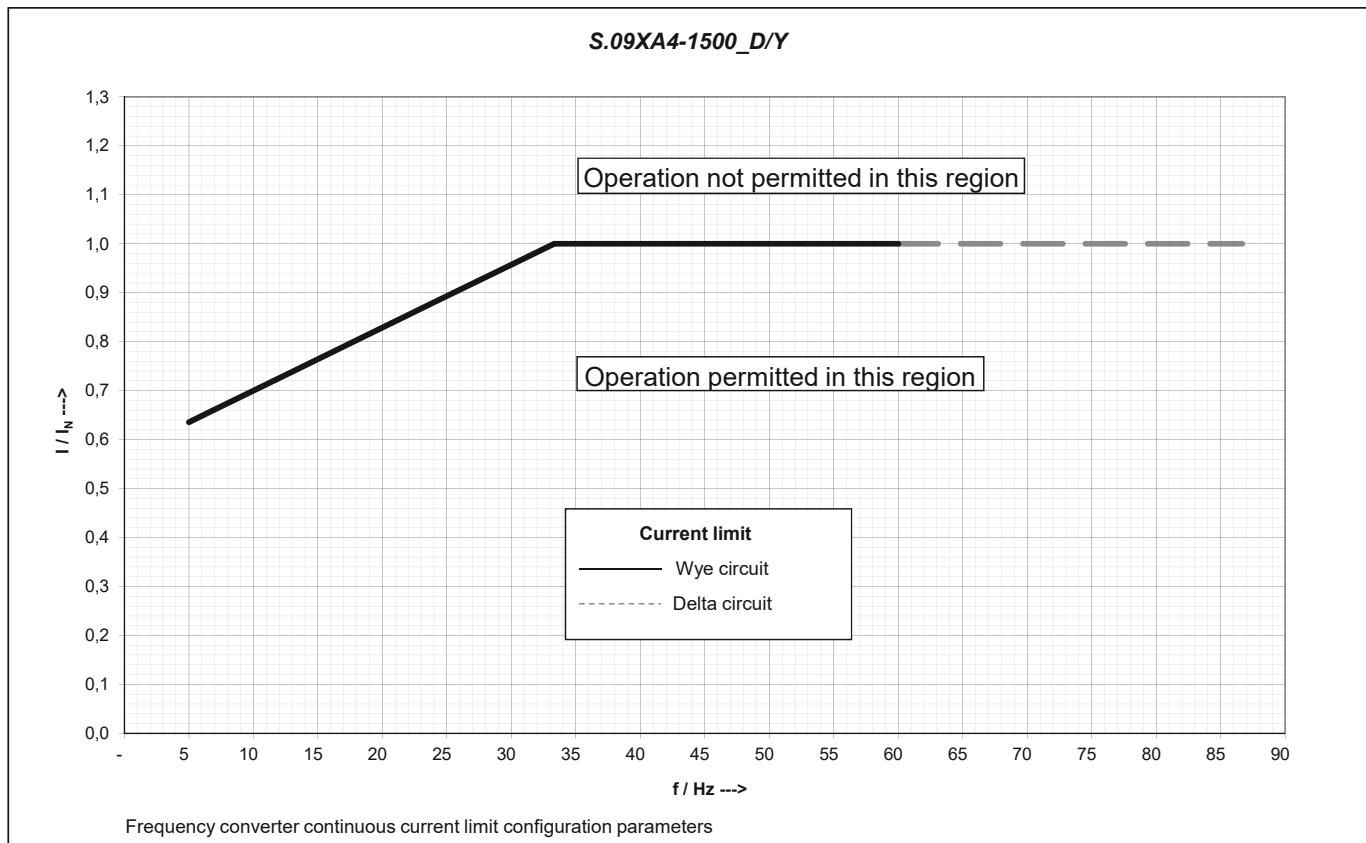Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 1500 1/min

-Type S.XE.11SA6-..

Rated data of the motor

Type: **S.XE.11SA6-..** Ignition protection type: Increased Safety
S.XC.11SA6-.. Dust explosion protection - Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3 Gb

Labelling:  III 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x

Rated parameters and data of the motor

Rated power Pn	3.5	6.1	kW
Rated torque Mn	22.5	22.5	Nm
Rated current In	7.0	12.5	A
No. of Motor Poles 2p	6	6	
Rated speed n _n	1500	2600	1/min
Nominal Frequency	75	130	Hz
Motorcircuit	Wye circuit	Delta circuit	
Strang-Resistance Rs20	1.76*		Ohm
Strang-Inductance D-Axis Ld	20*		mH
Strang-Inductance Q-Axis Lq	30*		mH
Voltage constant ke	210	121	V / 1000 1/min
Torque constant kt	3.20	1.80	Nm / A
Peak Torque Mmax (60s)	35	35	Nm
Peak Current Imax (60s)	11	19	A
Converter supply voltage	380 - 500		V

Δ * Input value Danfoss Frequency converter FC302 => delta circuit 1/3 of the phase value


Data operation with frequency converter S1 operation. wye circuit

Torque	18	20	22.5	22.5	22.5	Nm
Power	0.28	1.0	2.4	3.5	6.1	kW
Voltage *	54	132	245	351	381	V
Current	5.6	6.2	7.0	7.0	7.0	A
Frequenz	7.5	25	50	75	90	Hz
Speed	150	500	1000	1500	1800	1/min
Duty type	S1					

Data operation with frequency converter S1 operation. delta circuit

Torque	18	20	22.5	22.5	22.5	Nm
Power	0.28	1.0	2.4	3.5	6.1	kW
Voltage *	31	76	142	203	341	V
Current	10	11	12.5	12.5	12.5	A
Frequenz	7.5	25	50	75	130	Hz
Speed	150	500	1000	1500	2600	1/min
Duty type	S1					

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

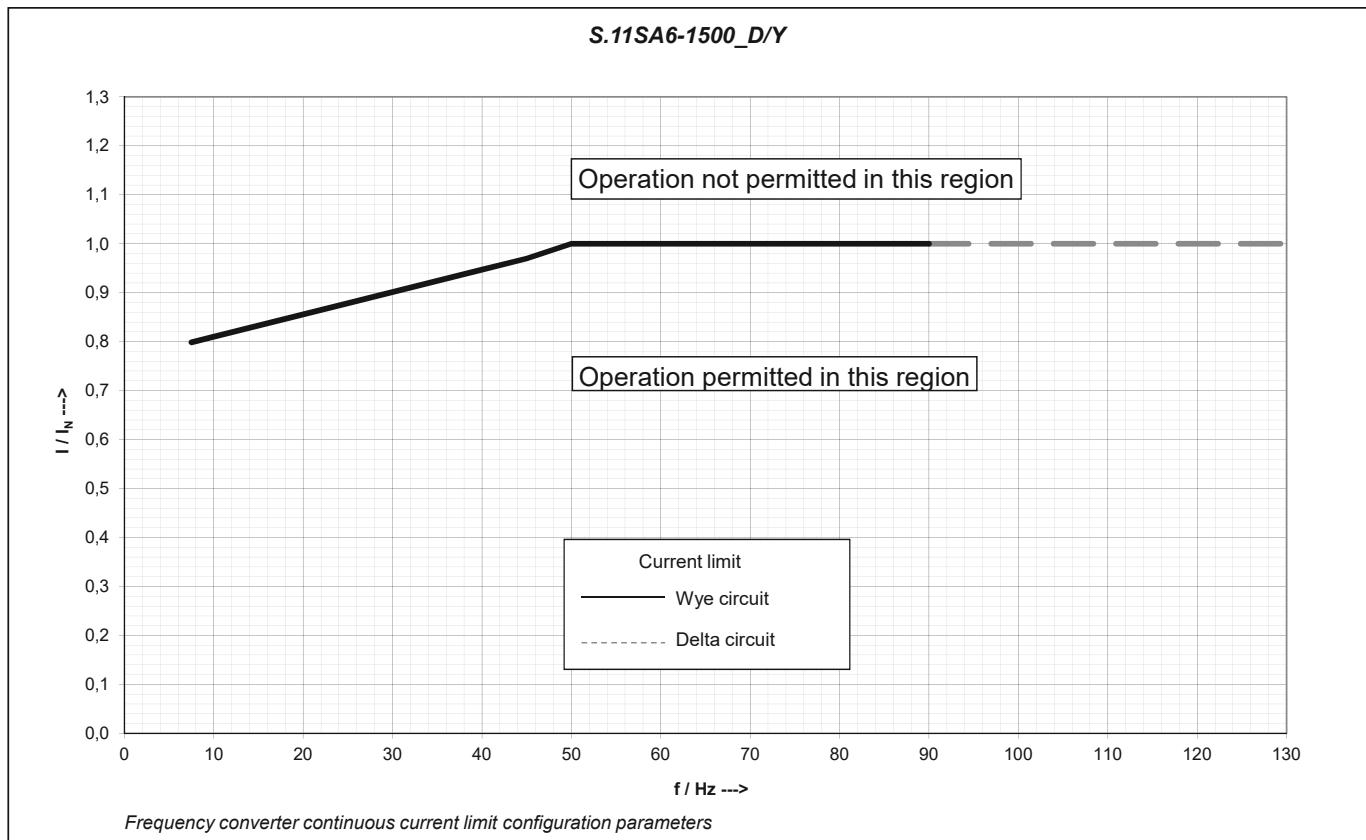Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 1500 1/min

-Type S.XE.11MA6-..

Rated data of the motor

Type: **S.XE.11MA6-..** Ignition protection type: Increased Safety
S.XC.11MA6-.. Dust explosion protection - Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3 Gb

Labelling:  II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x

Rated parameters and data of the motor

Rated power Pn	5.50	9.50	kW
Rated torque Mn	35	35	Nm
Rated current In	11.0	19.1	A
No. of Motor Poles 2p	6	6	
Rated speed n _n	1500	3600	1/min
Nominal Frequency	75	130	Hz
Motorcircuit	Wye circuit	Delta circuit	
Strang-Resistance Rs20	0.892*		Ohm
Strang-Inductance D-Axis Ld	12*		mH
Strang-Inductance Q-Axis Lq	18.4*		mH
Voltage constant ke	206	117	V / 1000 1/min
Torque constant kt	3.15	1.79	Nm / A
Peak Torque Mmax (60s)	55	55	Nm
Peak Current Imax (60s)	17	30	A
Converter supply voltage	380 - 500		V

Δ * Input value Danfoss Frequency converter FC302 => delta circuit 1/3 of the phase value


Data operation with frequency converter S1 operation. wye circuit

Torque	26.5	30	35	35	35	Nm
Power	0.42	1.6	3.7	5.5	6.5	kW
Voltage *	46	121	229	331	377	V
Current	8.5	9.5	11.0	11.0	11.0	A
Frequenz	7.5	25	50	75	90	Hz
Speed	150	500	1000	1500	1800	1/min
Duty type	S1					

Data operation with frequency converter S1 operation. delta circuit

Torque	26.2	30	35	35	35	Nm
Power	0.41	1.6	3.7	5.5	9.5	kW
Voltage *	27	70	132	190	321	V
Current	14.7	16.7	19.1	19.1	19.1	A
Frequenz	7.5	25	50	75	130	Hz
Speed	150	500	1000	1500	2600	1/min
Duty type	S1					

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

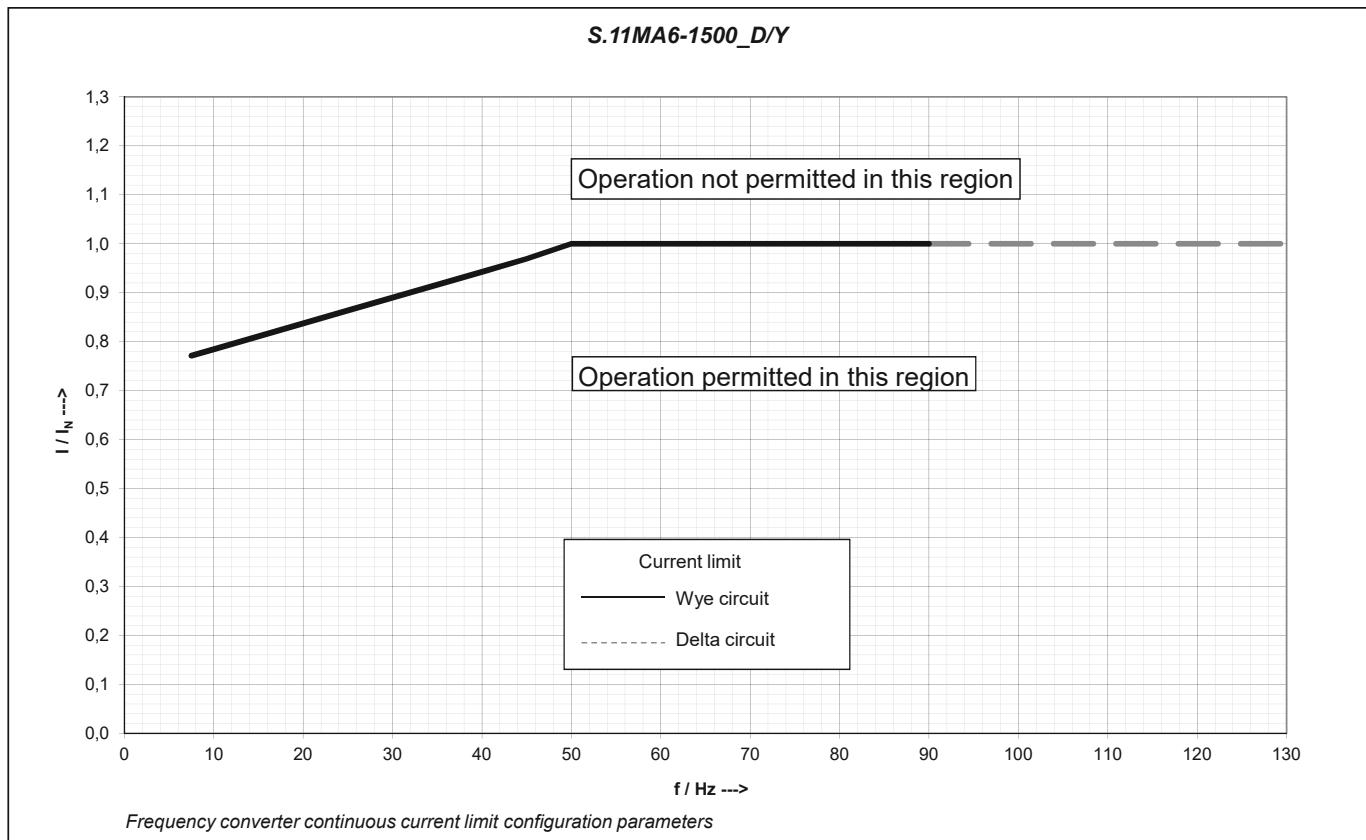Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 1500 1/min

-Type S.XE.11LA6-..

Rated data of the motor

Type: **S.XE.11LA6-..** Ignition protection type: Increased Safety
S.XC.11LA6-.. Dust explosion protection - Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3 Gb

Labelling:  II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x

Rated parameters and data of the motor

Rated power Pn	7.50	13	kW
Rated torque Mn	48	48	Nm
Bemessungsstrom In	14.7	26	A
No. of Motor Poles 2p	6	6	
Rated speed n _n	1500	2600	1/min
Nominal Frequency	75	130	Hz
Motorcircuit	Wye circuit	Delta circuit	
Strang-Resistance Rs20	0.605*		Ohm
Strang-Inductance D-Axis Ld	9.3*		mH
Strang-Inductance Q-Axis Lq	13.9*		mH
Voltage constant ke	210	121	V / 1000 1/min
Torque constant kt	3.25	1.84	Nm / A
Peak Torque Mmax (60s)	75	75	Nm
Peak Current Imax (60s)	23	40	A
Converter supply voltage	380 - 500		V

Δ * Input value Danfoss Frequency converter FC302 => delta circuit 1/3 of the phase value


Data operation with frequency converter S1 operation. wye circuit

Torque	32.5	39.4	48	48	47.5	Nm
Power	0.51	2.0	5.0	7.5	9.0	kW
Voltage *	44	121	231	338	375	V
Current	9.8	12.0	14.7	14.7	14.7	A
Frequenz	7.5	25	50	75	90	Hz
Speed	150	500	1000	1500	1800	1/min
Duty type	S1					

Data operation with frequency converter S1 operation. delta circuit

Torque	32.5	39.5	48	48	48	Nm
Power	0.51	2.0	5.0	7.5	13	kW
Voltage *	26	71	134	197	328	V
Current	17.6	21.1	26	26	26	A
Frequenz	7.5	25	50	75	130	Hz
Speed	150	500	1000	1500	2600	1/min
Duty type	S1					

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

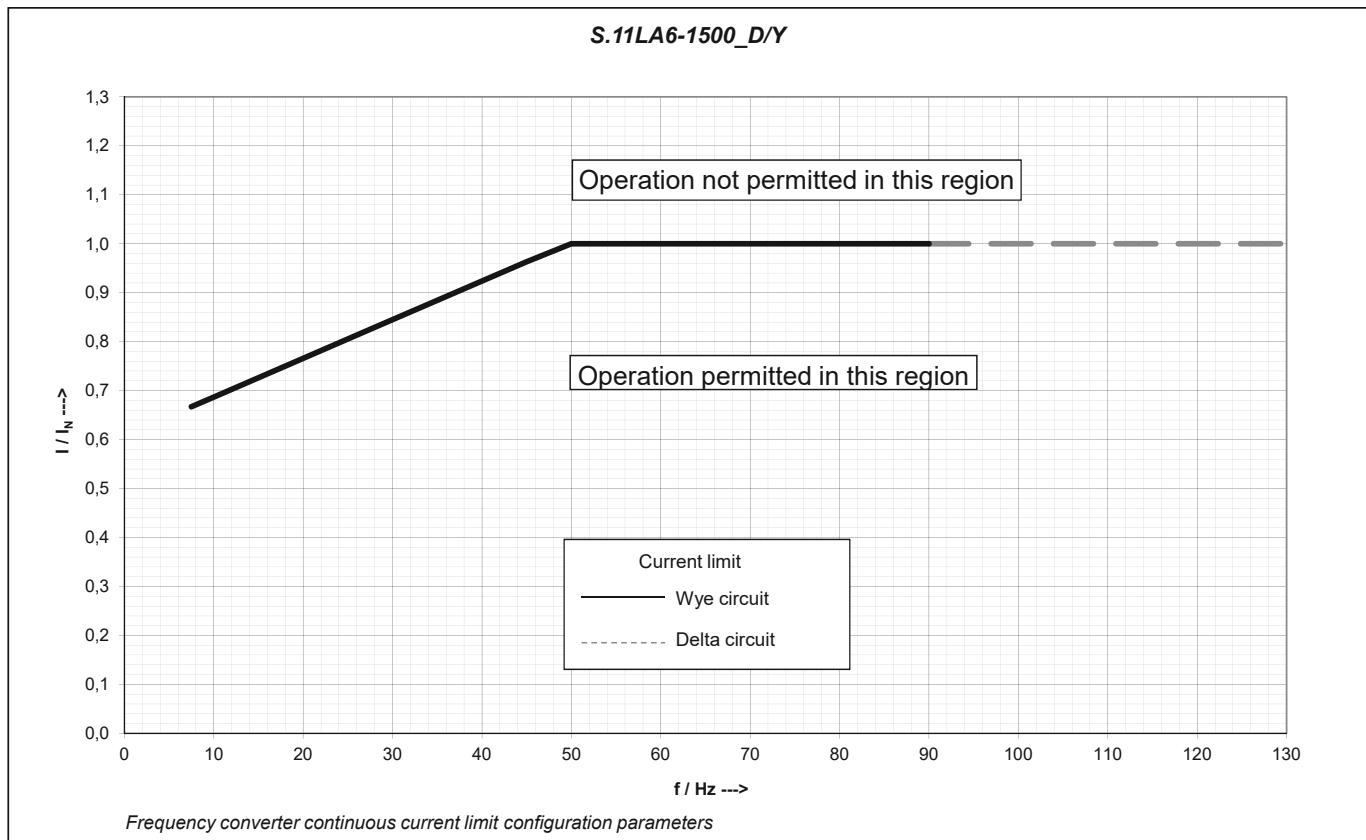Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 3000 1/min

-Type S.XE.08MA4-..

Rated data of the motor

Type: **S.XE.08MA4-..** Ignition protection type: Increased Safety
S.XC.08MA4-.. Dust explosion protection - Zone 21

Labelling: II 2 G Ex e IIC T1 - T3 Gb

Labelling: II 2 D Ex tb IIIC T120 °C – T160 °C Db IP6x


Rated parameters and data of the motor

Rated power Pn	2.0	kW
Rated torque Mn	6.50	Nm
Rated current In	4.7	A
No. of Motor Poles 2p	4	
Rated speed n _n	3000	1/min
Nominal Frequency	100	Hz
Motorcircuit	Wye circuit	
Strang-Resistance Rs20	2.36	Ohm
Strang-Inductance D-Axis Ld	24.7	mH
Strang-Inductance Q-Axis Lq	43.5	mH
Voltage constant ke	90	V / 1000 1/min
Torque constant kt	1.28	Nm / A
Peak Torque Mmax (60s)	10	Nm
Peak Current Imax (60s)	7.5	A
Converter supply voltage	380 - 500	V

Data operation with frequency converter

Torque	5.0	5.6	6.5	6.5	6.5	Nm
Power	0.08	0.29	0.68	2.0	2.5	kW
Voltage *	34	68	119	308	372	V
Current	3.7	4.1	4.7	4.7	4.7	A
Frequenz	5	16.66	33.33	100	120	Hz
Speed	150	500	1000	3000	3600	1/min
Duty type				S1		

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

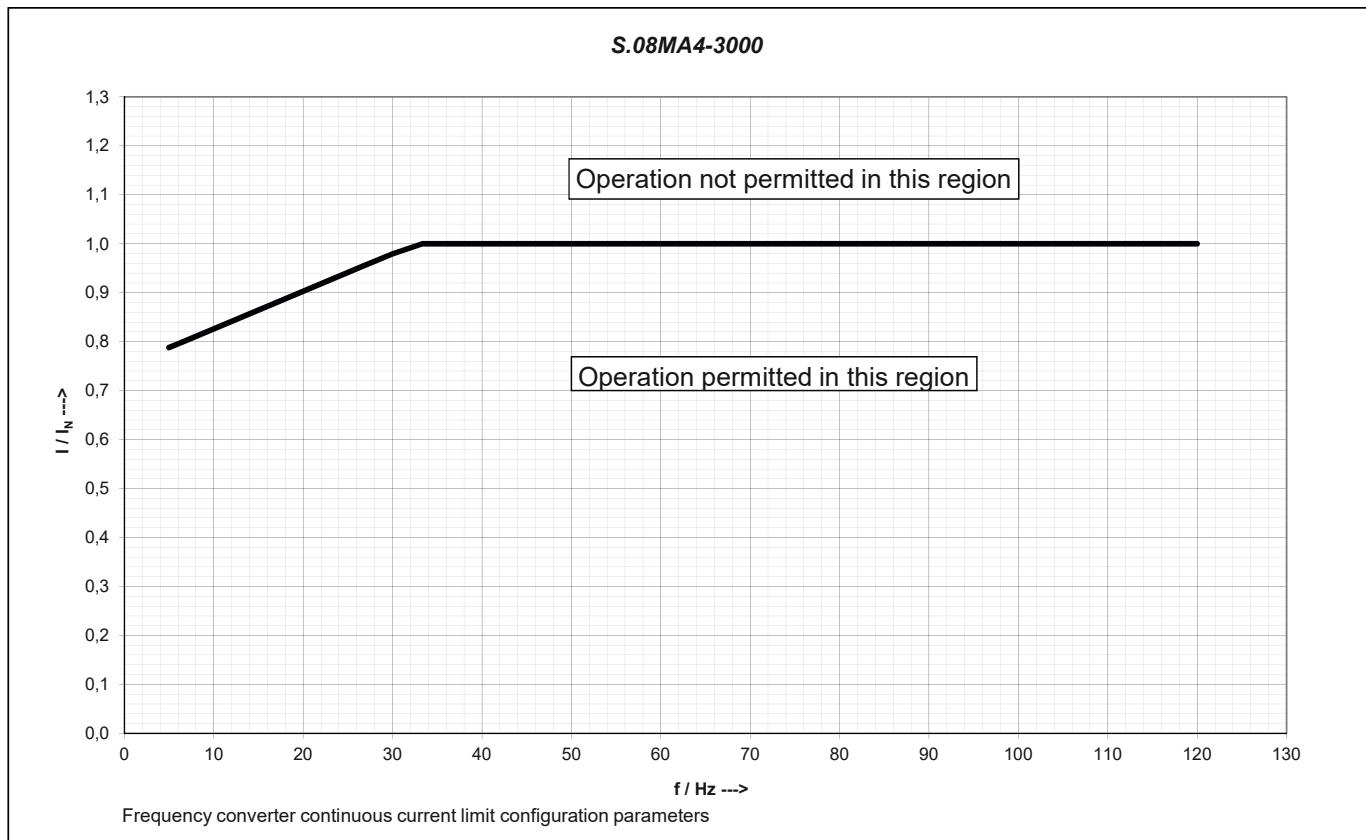Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{\min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{\min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 3000 1/min

-Type S.XE.08LA4-..

Rated data of the motor

Type: **S.XE.08LA4-..** Ignition protection type: Increased Safety
S.XC.08LA4-.. Dust explosion protection - Zone 21

Labelling: II 2 G Ex e IIC T1 - T3 Gb

Labelling: II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x


Rated parameters and data of the motor

Rated power Pn	3.0	kW
Rated torque Mn	9.55	Nm
Rated current In	7.0	A
No. of Motor Poles 2p	4	
Rated speed n _n	3000	1/min
Nominal Frequency	100	Hz
Motorcircuit	Wye circuit	
Strang-Resistance Rs20	1.41	Ohm
Strang-Inductance D-Axis Ld	16.8	mH
Strang-Inductance Q-Axis Lq	29.6	mH
Voltage constant ke	87	V / 1000 1/min
Torque constant kt	1.36	Nm / A
Peak Torque Mmax (60s)	15	Nm
Peak Current Imax (60s)	11.2	A
Converter supply voltage	380 - 500	V

Data operation with frequency converter

Torque	6.5	8.0	9.55	9.55	9.55	Nm
Power	0.1	0.42	1.0	3.0	3.6	kW
Voltage *	28	63	114	296	358	V
Current	5.2	5.9	7.0	7.0	7.0	A
Frequenz	5	16.66	33.33	100	120	Hz
Speed	150	500	1000	3000	3600	1/min
Duty type				S1		

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

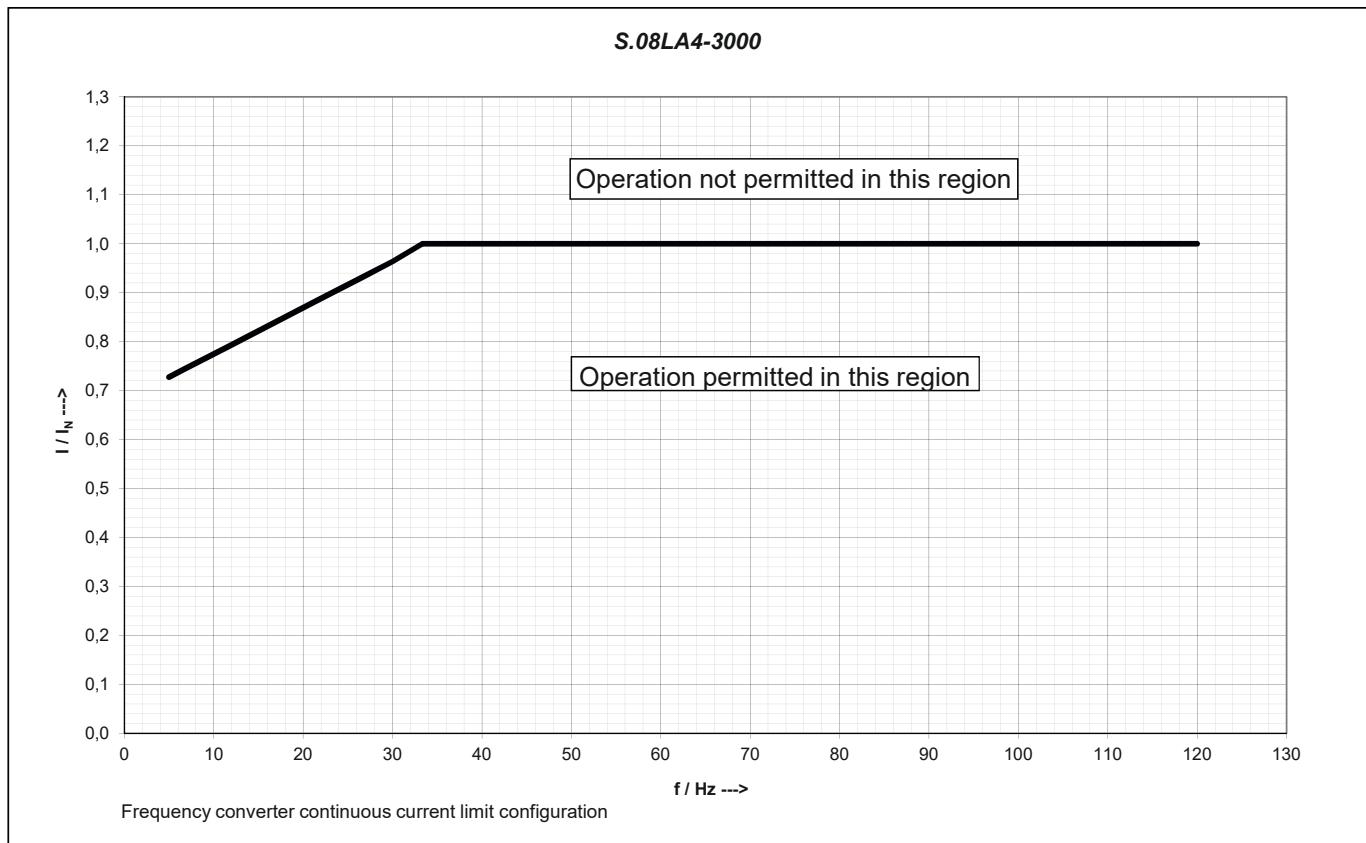Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f _{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 3000 1/min

-Type S.XE.09SA4-..

Rated data of the motor

Type: **S.XE.09SA4-..** Ignition protection type: Increased Safety
S.XC.09SA4-.. Dust explosion protection - Zone 21

Labelling: II 2 G Ex e IIC T1 - T3 Gb

Labelling: II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x


Rated parameters and data of the motor

Rated power Pn	6.3	kW
Rated torque Mn	20	Nm
Rated current In	12.5	A
No. of Motor Poles 2p	4	
Rated speed n _n	3000	1/min
Nominal Frequency	100	Hz
Motorcircuit	Wye circuit	
Phase Resistance U-V R20	1.305	Ohm
Strang-Resistance Rs20	0.653	Ohm
Strang-Inductance D-Axis Ld	12.7	mH
Strang-Inductance Q-Axis Lq	17.9	mH
Voltage constant ke	102	V / 1000 1/min
Torque constant kt	1.60	Nm / A
Peak Torque Mmax (60s)	30	Nm
Peak Current Imax (60s)	20	A
Converter supply voltage	380 - 500	V

Data operation with frequency converter

Torque	12.5	15.7	20	20	14.5	Nm
Power	0.196	0.84	2.1	6.3	5.5	kW
Voltage *	26	66	124	334	380	V
Current	8	9.9	12.5	12.5	9.2	A
Frequenz	5	16.66	33.33	100	120	Hz
Speed	150	500	1000	3000	3600	1/min
Duty type				S1		

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

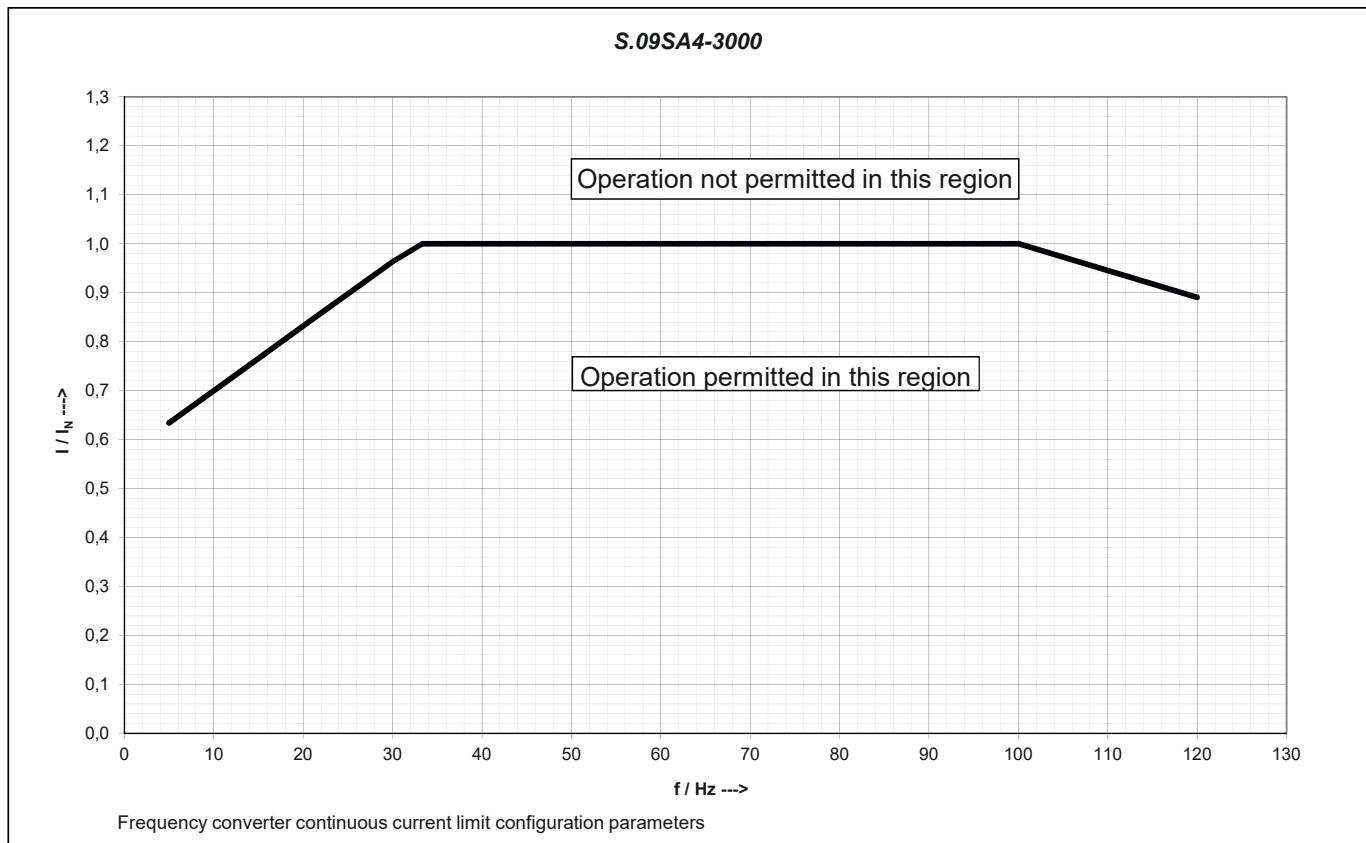Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{\min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{\min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 3000 1/min

-Type S.XE.09XA4-..

Rated data of the motor

Type: **S.XE.09XA4-..** Ignition protection type: Increased Safety
S.XC.09XA4-.. Dust explosion protection - Zone 21

Labelling: II 2 G Ex e IIC T1 - T3 Gb

Labelling: II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x

Rated parameters and data of the motor


Rated power Pn	6.3	kW
Rated torque Mn	20	Nm
Rated current In	12.5	A
No. of Motor Poles 2p	4	
Rated speed n _n	3000	1/min
Nominal Frequency	100	Hz
Motorcircuit	Wye circuit	
Phase Resistance U-V R20	1.305	Ohm
Strang-Resistance Rs20	0.653	Ohm
Strang-Inductance D-Axis Ld	12.7	mH
Strang-Inductance Q-Axis Lq	17.9	mH
Voltage constant ke	102	V / 1000 1/min
Torque constant kt	1.60	Nm / A
Peak Torque Mmax (60s)	30	Nm
Peak Current Imax (60s)	20	A
Converter supply voltage	380 - 500	V

Data operation with frequency converter

Torque	12.5	15.7	20	20	14.5	Nm
Power	0.196	0.84	2.1	6.3	5.5	kW
Voltage *	26	66	124	334	380	V
Current	8	9.9	12.5	12.5	9.2	A
Frequenz	5	16.66	33.33	100	120	Hz
Speed	150	500	1000	3000	3600	1/min
Duty type				S1		

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

Frequency converter continuous current limit configuration parameters

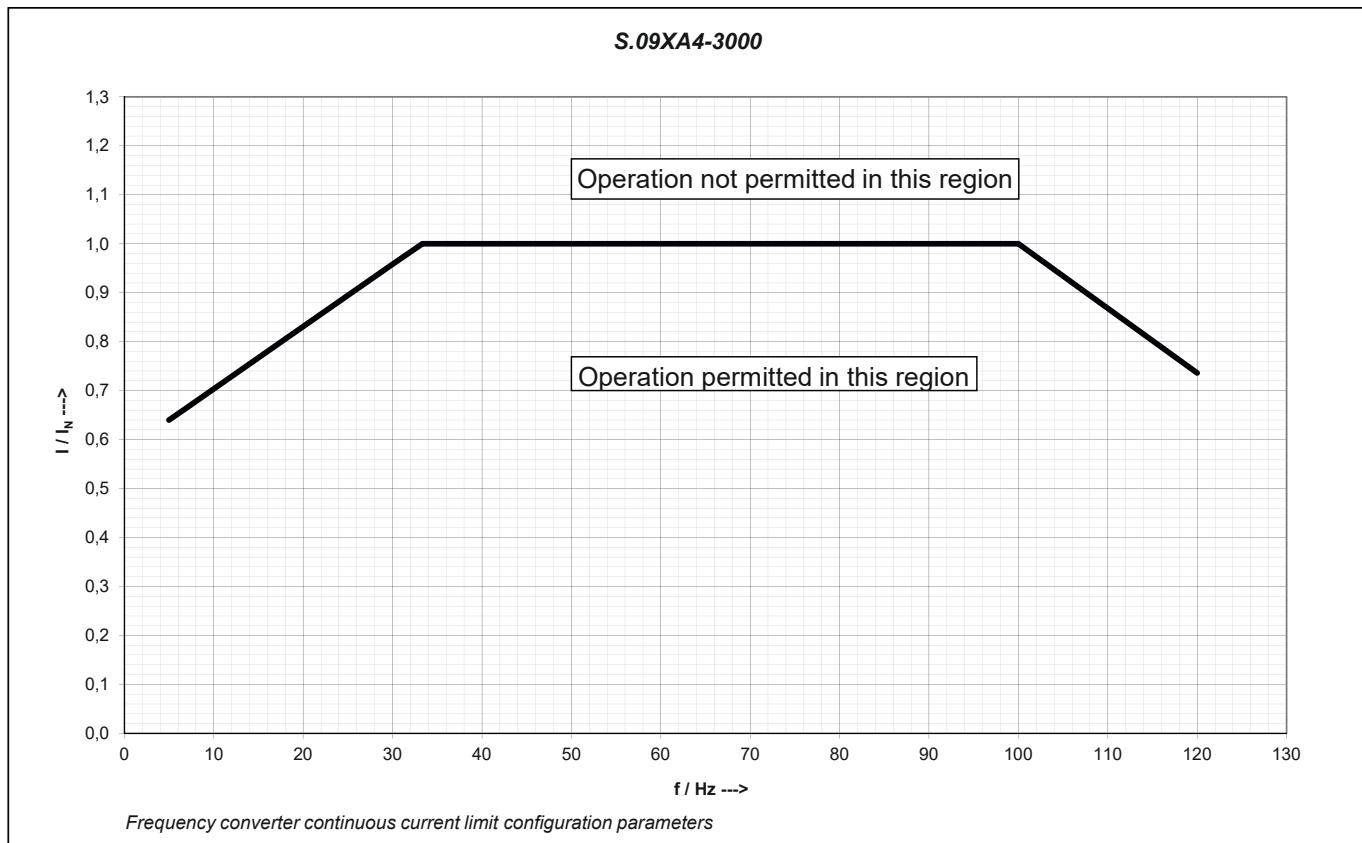

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{\min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{\min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 3000 1/min

-Type S.XE.11SA6-..

Rated data of the motor

Type: **S.XE.11SA6-..** Ignition protection type: Increased Safety
S.XC.11SA6-.. Staubexplosionsschutz - Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3 Gb

Labelling:  II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x


Rated parameters and data of the motor

Rated power Pn	7.1	kW
Rated torque Mn	22.5	Nm
Rated current In	15.0	A
No. of Motor Poles 2p	6	
Rated speed n _n	3000	1/min
Nominal Frequency	150	Hz
Motorcircuit	Wye circuit	
Strang-Resistance Rs20	0.447	Ohm
Strang-Inductance D-Axis Ld	5.0	mH
Strang-Inductance Q-Axis Lq	7.7	mH
Voltage constant ke	106	V / 1000 1/min
Torque constant kt	1.55	Nm / A
Peak Torque Mmax (60s)	35	Nm
Peak Current Imax (60s)	23	A
Converter supply voltage	380 - 500	V

Data operation with frequency converter

Torque	18	20	22.5	22.5	22.5	Nm
Power	0.28	1.0	2.4	7.1	8.5	kW
Voltage *	28	66	122	333	368	V
Current	12	13.3	15	15	15	A
Frequenz	7.5	25	50	150	180	Hz
Speed	150	500	1000	3000	3600	1/min
Duty type				S1		

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

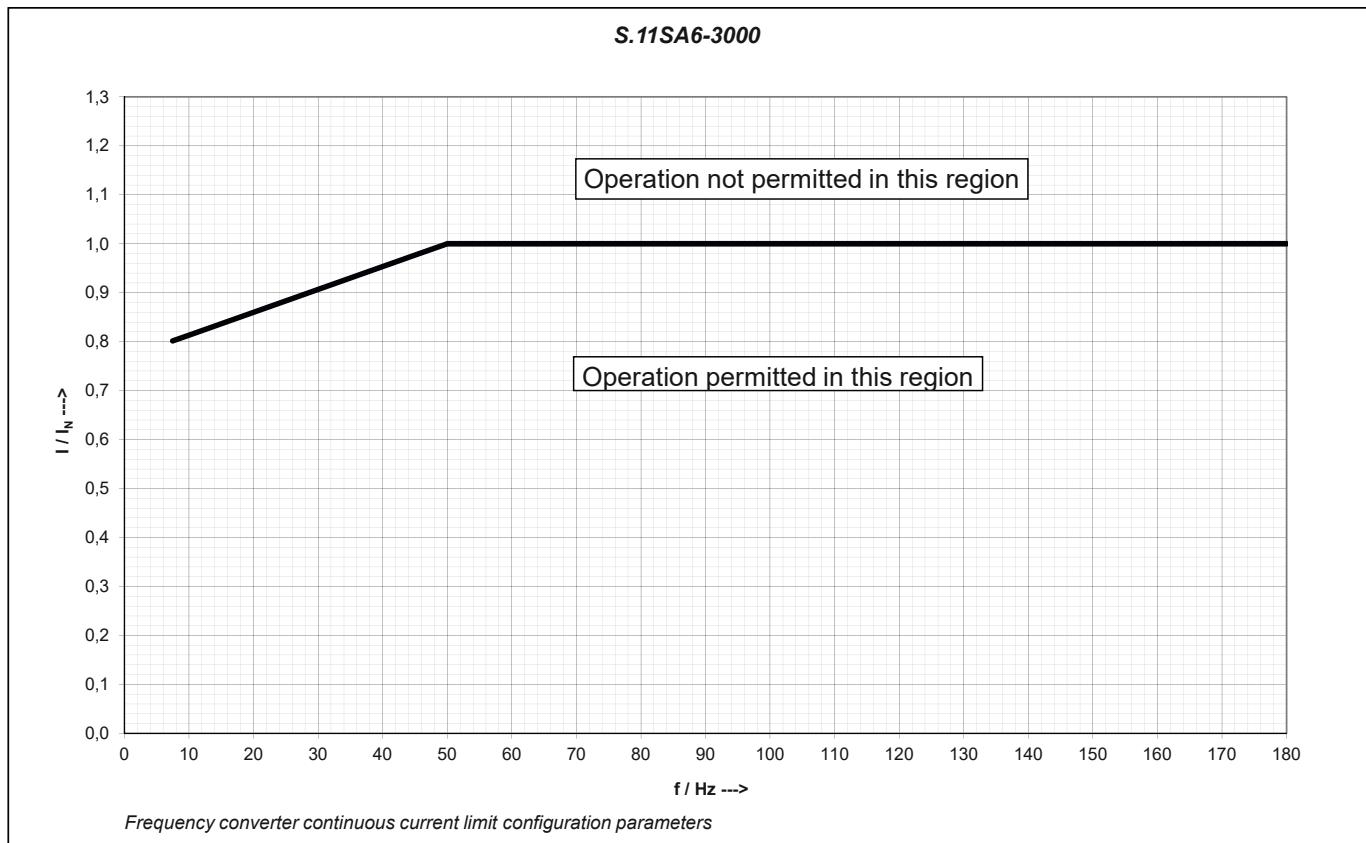Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f _{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 3000 1/min

-Type S.XE.11MA6-..

Rated data of the motor

Type: **S.XE.11MA6-..** Ignition protection type: Increased Safety
S.XC.1MA6-.. Dust explosion protection - Zone 21

Labelling: II 2 G Ex e IIC T1 - T3 Gb

Labelling: II 2 D Ex tb IIIC T120 °C – T160 °C Db IP6x


Rated parameters and data of the motor

Rated power Pn	11.0	kW
Rated torque Mn	35	Nm
Rated current In	22.5	A
No. of Motor Poles 2p	6	
Rated speed n _n	3000	1/min
Nominal Frequency	150	Hz
Motorcircuit	Wye circuit	
Strang-Resistance Rs20	0.217	Ohm
Strang-Inductance D-Axis Ld	3.0	mH
Strang-Inductance Q-Axis Lq	4.6	mH
Voltage constant ke	104	V / 1000 1/min
Torque constant kt	1.55	Nm / A
Peak Torque Mmax (60s)	55	Nm
Peak Current Imax (60s)	35	A
Converter supply voltage	380 - 500	V

Data operation with frequency converter

Torque	26.5	30	35	35	34.3	Nm
Power	0.42	1.6	3.7	11	12.9	kW
Voltage *	23	61	115	320	368	V
Current	17	19.3	22.5	22.5	22.5	A
Frequenz	7.5	25	50	150	180	Hz
Speed	150	500	1000	3000	3600	1/min
Duty type				S1		

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

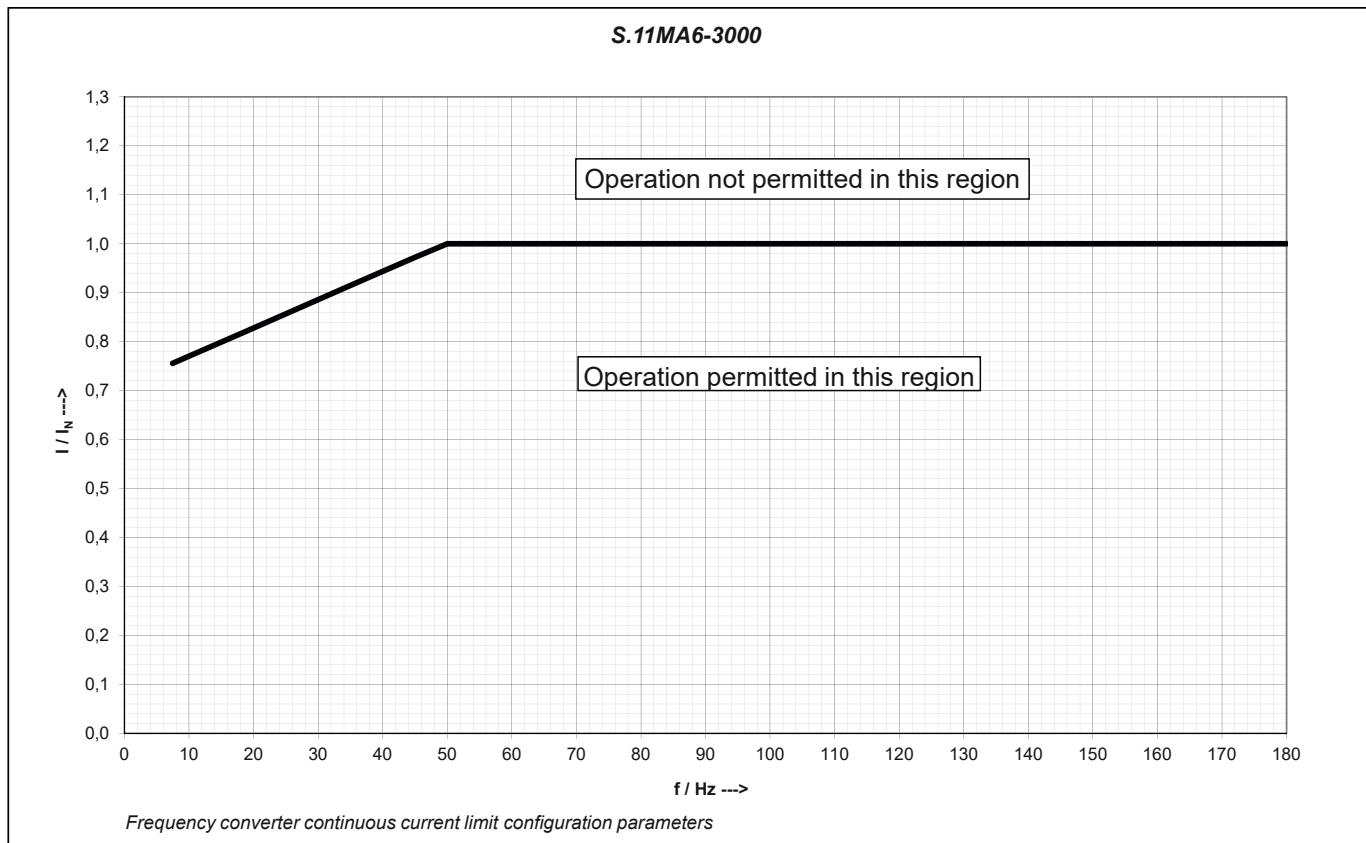Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:

Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I _n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f _{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Motors

Technical data

Rated speed 3000 1/min

-Type S.XE.11LA6-..

Rated data of the motor

Type: **S.XE.11LA6-..** Ignition protection type: Increased Safety
S.XC.11LA6-.. Dust explosion protection - Zone 21

Labelling:  II 2 G Ex e IIC T1 - T3 Gb

Labelling:  II 2 D Ex tb IIIC T120 °C - T160 °C Db IP6x


Rated parameters and data of the motor

Rated power Pn	15.0	kW
Rated torque Mn	48	Nm
Rated current In	30	A
No. of Motor Poles 2p	6	
Rated speed n _n	3000	1/min
Nominal Frequency	150	Hz
Motorcircuit	Wye circuit	
Strang-Resistance Rs20	0.150	Ohm
Strang-Inductance D-Axis Ld	2.4	mH
Strang-Inductance Q-Axis Lq	3.5	mH
Voltage constant ke	105	V / 1000 1/min
Torque constant kt	1.59	Nm / A
Peak Torque Mmax (60s)	75	Nm
Peak Current Imax (60s)	48	A
Converter supply voltage	380 - 500	V

Data operation with frequency converter

Torque	32.5	39.4	48	48	40	Nm
Power	0.5	2.1	5.0	15.0	15.0	kW
Voltage *	22.6	61.4	116	327	368	V
Current	20	24	30	30	25.8	A
Frequenz	7.5	25	50	150	180	Hz
Speed	150	500	1000	3000	3600	1/min
Duty type				S1		

* Basic oscillation at the motor terminals (output voltage of the frequency converter)

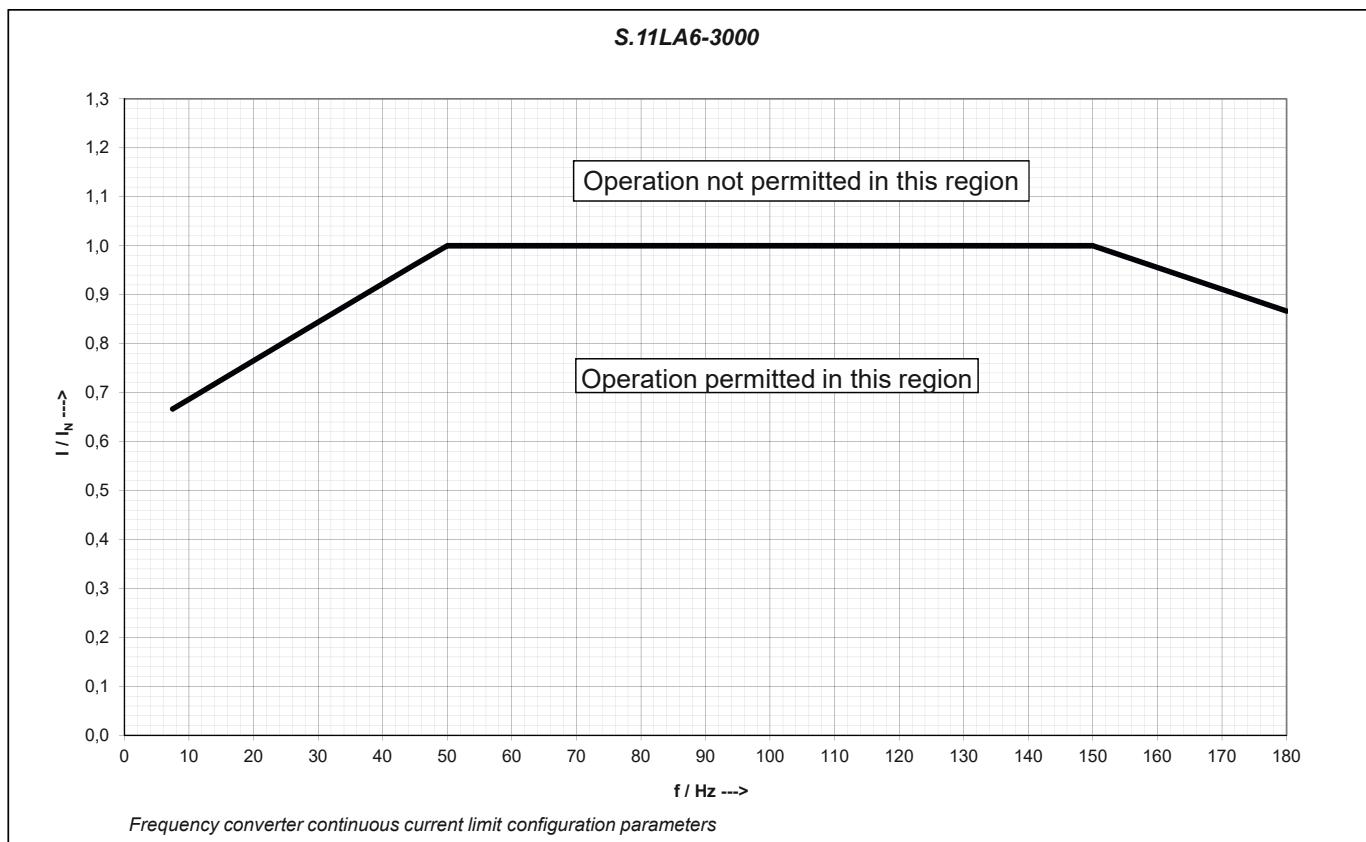Frequency converter continuous current limit configuration parameters

The voltage at the motor terminals depends on the input voltage from the frequency converter, the loss of voltage at the filter and in the motor supply cable and may not fall below the rated value by more than 10 % according to IEC 60034 - 1 Range „B“, even with minimum input voltage from the frequency converter. In the event of reduced voltage at the motor terminals, the permissible motor torque must be reduced proportionally to the change in voltage. This must be taken into account when sizing the motor, and the parameterisation of the converter and for the converter minimum input voltage.

The maximum permissible frequency converter input voltage is 500 V +10 %, 50/60 Hz.

Max. permissible ambient temperature range -20 °C to +50 °C

Changes to the rated values (torque, speed adjusting range) within the permissible operating range are permissible and are determined by the manufacturer. Permissible continuous current limit, torque and speed adjusting range are specified on the nameplate.

Converter Settings:


Minimum clock frequency:	3 kHz
Short-term current limit:	160 % * I_n
Maximum overload time:	60 s
Minimum frequency:	5 Hz
Maximum frequency:	60 Hz
Permissible operating time below f_{min} :	60 s

All other settings must be selected according the requirements of the drive.

The maximum overload time and the permissible operating time below f_{min} are based on an interval of 10 minutes.

Energy Efficient Geared Motors

AC Variable Speed

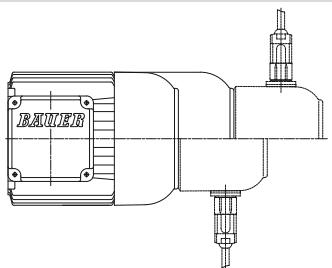

15

Motor Mounted Components

Brake	579
Functional description	579
Product description of type ES(X) spring-actuated brakes	579
Product description of type ZS(X) spring-actuated brakes	580
Brake selection and sizing	581
Electrical connection	584
Specifications of holding brakes with emergency stop capability	587
Specifications of working brakes	588
Connection	590
DC connection via terminals (K)	590
Standard rectifier (S)	591
Rectifier for electronic rapid shutdown (E)	592
Rectifier for overexcitation and rapid shutdown (M)	593
Brake connection, operation with frequency converter	594
Manual release (HA, HN)	594
Second motor shaft extension (ZW, ZV)	595
Protective fan cowl (D)	595
Motor-independent fan (FV)	595
Technical Data Motor-independent fan	595
Encoder system	596
Shaft encoder (G)	596
Incremental rotary encoder	597
Functional description	597
Electrical specifications	597
Plug end view with male pin insert	597
Signal assignments	597
SinCos feedback	598
Functional description	598
Electrical specifications	598
Ansichten auf Steckseite, Stiftkontakteinsatz	598
Terminal assignment	598
Absolute rotary encoders	599
Functional description	599
Profibus DP interface	599
SSI interface	600
Modular motor system	601
Motor and encoder	601
Motor, brake and encoder	601
Motor and forced ventilation	601

Energy Efficient Geared Motors

AC Variable Speed

Motor Mounted Components

Brake

Functional description

The compression springs act on the anchor disc, which is free to move in the axial direction and presses the brake disc, which is keyed to the rotor shaft, against the friction plate or the motor bearing plate. This produces the braking torque.

When a DC voltage is applied to the coil in the electromagnet housing, it generates a magnetic force that opposes the spring force and causes the anchor disc to be pulled toward the electromagnet enclosure.

This releases the brake disc and disengages the brake.

Brakes are classified into two types according to how they are used: holding brakes and working brakes.

Holding brake ES.. / ZS..

brake that in normal operation does not convert kinetic energy into frictional energy but is only used to hold a mechanism in a particular position, but which can also be used for motion braking in an emergency.

Service brake ESX.. / ZX..

A brake that converts kinetic energy into frictional energy in normal operation, which means that it brakes mechanical motion.

When a working brake is used as a holding brake, the braking torque tolerance of up to -30 % (in new condition) must be taken into account.

Product description of type ES(X) spring-actuated brakes

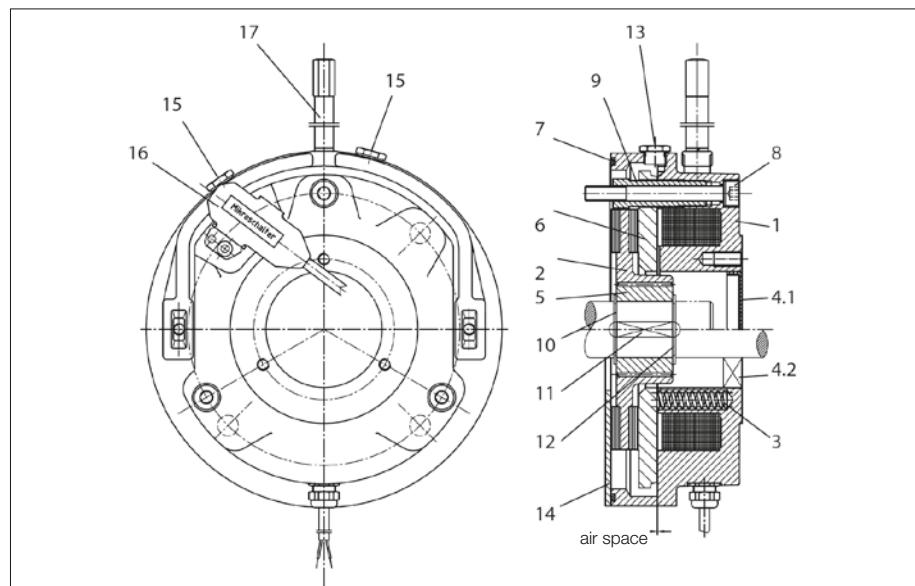


Figure 1: Construction of ES(X) brake

Construction of ES(X) brake

1 Electromagnet housing	9 Hollow screw
2 Brake disc	10 Retaining ring
3 Compression spring	11 Key
4.1 Cover plate with closed brake	12 Retaining ring
4.2 Shaft seal with through shaft	13 Screw plug for checking air gap
5 Drive bush	14 Friction plate (only with motor size Dxx08 or Dxx09)
6 Anchor disc	15 Screw plug for checking microswitch setting
7 O-ring	16 Microswitch (optional)
8 Fitting screw with copper washer	17 Manual release (optional)

Brake mounting

ES and ESX: Brake mounting is under the fan cover
EH and EHX: Brake mounting is on the fan cover

Options

- Manual release, non-locking or locking
- Microswitch for monitoring operation or wear

Motor Mounted Components

Brake

Product description of type ZS(X)
spring-actuated brakes

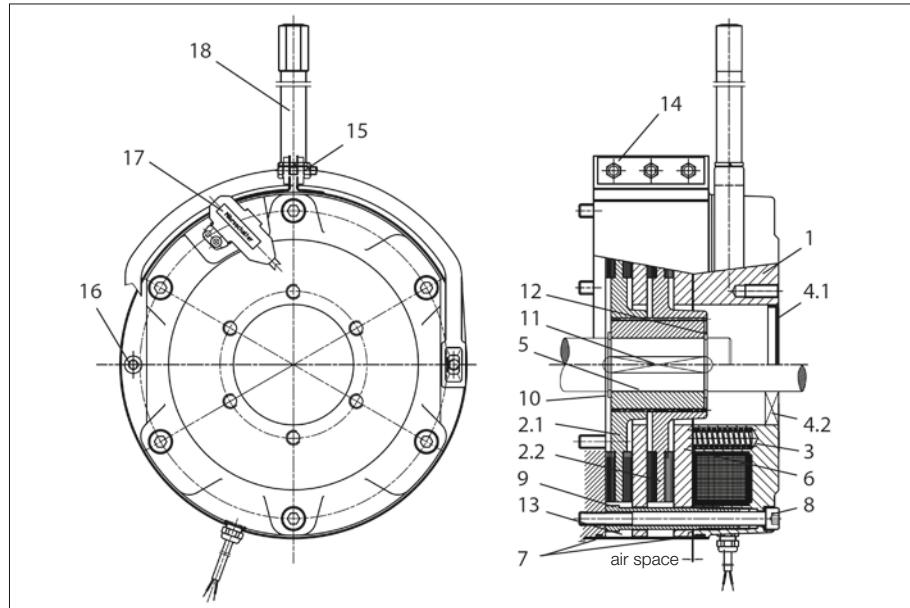


Figure 2: Construction of ZS(X) brake

Construction of ZS(X) brake

1 Electromagnet housing	9 Hollow screw
2.1 Brake disc	10 Retaining ring
2.2 Brake disc	11 Key
3 Compression spring	12 Retaining ring
4.1 Cover plate	13 Cover
4.2 Shaft seal with through shaft	14 Fitting screws
5 Drive bush	15 Bracket
6 Anchor disc	16 Assembly screw/assembly aid
7 O-ring	17 Microswitch (optional)
8 Fitting screw with copper washer	18 Manual release (optional)

Options

- Manual release, non-locking or locking
- Microswitch for monitoring operation or wear

Motor Mounted Components

Brake

Brake selection and sizing

If the working brake is undersized, it will have increased wear and a shorter lifetime. If it is oversized, the resulting mechanical forces may overload the drive.

If specific application data is not available, in the case of horizontally driven equipment we recommend selecting a braking torque with a safety factor (K) of 1 to 1.5 times the rated torque of the motor.

For braking to standstill, the selected braking torque should be at least 80 % of the rated torque of the drive.

Rated torque:

$$M_{\text{Berk}} = \frac{P \times 9550}{n_2} \times K$$

M_{Berk}	Braking torque	[Nm]
P	Motor power	[kW]
n	Rated speed at rotor shaft	[rpm]

For lifting operation, a braking torque equal to twice the rated motor torque should always be chosen for safety reasons.

If the moment of inertia, speed and allowable deceleration time of the machine are known, the braking torque can be calculated as described below.

External moments of inertia

If the masses to be decelerated by the brake do not run at the same speed as the rotor shaft, the moment of inertia (J_{ext}) must be reduced to the value at the rotor shaft

$$J_{\text{ext}'} = \frac{J_{\text{ext1}} \times n_1^2 + J_{\text{ext2}} \times n_2^2 + \dots + J_{\text{extn}} \times n_n^2}{i^2}$$

or the external moment of inertia reduced by the gear ratio of the gear unit to the value at the rotor shaft.

$$J_{\text{ext}'} = \frac{J_{\text{ext}}}{i^2}$$

J_{ext}	Total external moment of inertia [kgm ²]
$J_{\text{ext}'}$	Total external moment of inertia referenced to the rotor shaft [kgm ²]
$J_{\text{ext1,2,...}}$	Individual external moments of inertia [kgm ²]
i	Gear reduction ratio
n	Rotor shaft speed
$n_{1,2,\dots}$	Speeds of the individual moments of inertia [rpm]
	Load torque under static load

$$M_L = F \times r$$

M_L	Load torque [Nm]
F	Force [N]
r	radius [m]

Motor Mounted Components

Brake

Braking torque with dynamic load

A purely dynamic load is present when flywheels, rolls, etc. must be decelerated and the static load torque is negligible.

$$M_a = \frac{J_{\text{ges}} \times n_a}{9,55 \times (t_a - t_A)} = \frac{(J_{\text{ext}} + J_{\text{rot}} + J_{\text{br}}) \times n_a}{9,55 \times (t_a - t_A)}$$

J_{br}	Moment of inertia of the brake [kgm ²]
J_{rot}	Moment of inertia of the rotor shaft and rotor [kgm ²]
M_a	Deceleration torque [Nm]
n_a	Initial speed at start of deceleration [rpm]
t_a	Total deceleration time (from switch-off until drive is stationary) [s]
t_A	The response time of the brake for braking corresponds to t_{AC} or t_{DC} in the specification tables [s]

Dynamic and static loads

In most application situations, both static and dynamic loads are present.

$$M_{\text{Bref}} = (M_a \pm M_L) \times K \quad \text{where} \quad M_{\text{Bref}} \leq M_{\text{Br}} \quad \text{must hold true.}$$

M_L braking (positive) or driving (negative) load torque [Nm]

Heat generated by each brake cycle

Friction converts the kinetic energy of the moving masses into heat.

This amounts to

$$W = \frac{J_{\text{ges}} \times n^2}{182,5} = \frac{(J_{\text{ext}} + J_{\text{rot}} + J_{\text{br}}) \times n^2}{182,5} \quad \text{where} \quad W \leq W_{\text{max}} \quad \text{must hold true.}$$

W	Braking energy for each brake cycle [J]
M_{max}	Maximum permissible frictional energy per brake cycle (see brake tables)

Thermally allowable braking energy of working brakes

With a uniform sequence of brake cycles, which means a certain average number of brake cycles per hour, the temperature rises until an equilibrium between heat input and heat dissipation is reached. The temperature rise must be sized to avoid overheating the coil and the friction layer, taking the ambient temperature into account.

Braking to standstill:

$$W_z = W \times Z \leq W_{th}$$

W_{th} Maximum allowable braking energy per hour

W_z Braking energy with Z brake cycles

Z Number of brake cycles per hour

Lifting operation

In lowering operation, the drive motor acts as a generator and its braking effect results in a steady downward motion (constant speed). If we ignore transmission losses, under full load the drive must brake the load with the rated motor torque. If a mechanical brake with a braking torque equal to the braking torque of the motor is applied after the drive is switched off, the downward motion will continue at the same speed. This means that additional braking torque is necessary to stop the motion of the load. For example, if the brake is dimensioned for 200 % braking torque, approximately 100 % is used for "static" deceleration and the rest is used for "dynamic" deceleration.

If part of the braking torque is required for braking the load during lowering (downward motion), the brake engagement time is greater, and the thermal load is therefore greater.

In this case

$$W_h = \frac{M_{Br}}{M_{Br} - M_L} \times W_z$$

W_h Friction energy per hour in lifting operation

M_{Br} Braking torque of the brake

Brake lifetime

The energy absorbed during braking causes the brake disc to wear, which increases the air gap. If the air gap increases beyond a certain maximum gap size, the magnetic field is so weak that the pulling force of the electromagnet is no longer sufficient to release the brake. A proper air gap must be restored by adjusting the air gap or by replacing the brake disc, depending on the type of brake construction.

The maximum number of brake cycles until service is necessary can be calculated as follows:

$$Z_L = \frac{W_L}{W}$$

Z_L Number of brake cycles until the air gap limit is reached

W_L Maximum allowable braking energy until maintenance; i.e. replacing the brake disc or adjusting the air gap. Adjustment of the air gap is possible only with type ZXsxx brakes.

15

Deceleration time

The pure braking time from the start of mechanical braking to standstill depends on the braking deceleration.

Especially with lifting operation, but also in other types of operation, it is necessary to check whether the load torque reinforces the braking effect or counters the braking effect.

The deceleration time is therefore calculated as follows:

$$t_a = \frac{J_{ges} \times n_a}{9,55 \times (M_{Br} \pm M_L)}$$

Motor Mounted Components

Brake

Electrical connection

General

There are two basic options for providing the supply voltage for the DC electromagnet:

1. Externally from an existing DC control voltage mains or a rectifier in the cabinet.
2. From a rectifier built into the motor or brake terminal box. In this case, the rectifier can be powered either directly from the motor terminal board or from the mains.

Note that in the following cases the rectifier is not allowed to be connected to the terminal board of the motor:

- Pole-changing motors and motors with wide operating voltage range
- Operation from a frequency converter
- Other configurations in which the motor voltage is not constant, such as operation with soft-start devices, start-up transformers, etc.

Release

When the rated voltage is applied to the electromagnet coil, the current through the coils increases exponentially and with it the generated magnetic field. The current must rise to a certain value (I_{release}) before it overcomes the spring force and starts to release the brake.

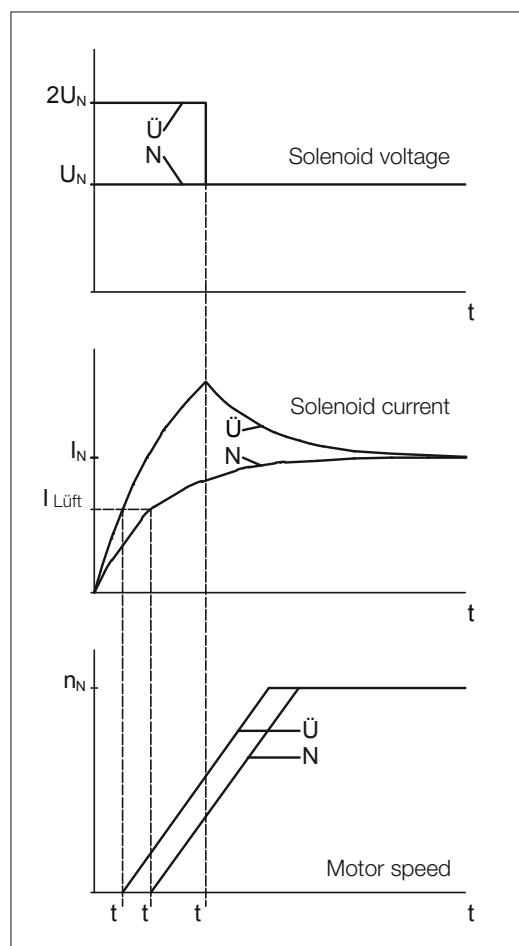


Figure 3: Idealised curves of coil voltage, coil current and motor speed with normal excitation (N) and overexcitation (Ü).
 t_0 : overexcitation time; t_{AN} , $t_{AÜ}$: Response time with normal excitation and overexcitation.

Motor Mounted Components

Brake

Two different situations can arise during the response time t_A , assuming that the voltage is applied to the motor and the brake simultaneously:

- The motor is locked if $M_A < M_L + M_{Br}$
The motor draws its locked-rotor current, which increases the thermal load on the motor.
This situation is illustrated in Figure 3.
- The brake slips if $M_A > M_L + M_{Br}$
In this case, the brake is also thermally stressed during start-up and wears faster.
-

M_A : locked rotor torque of the motor; M_L : load torque; M_{Br} : braking torque

As can be seen, there is an additional load on the motor and brake in both cases. The effect of the response time increases with increasing brake size. Consequently, it is advisable to reduce the response time, especially with medium-sized and large brakes and with a high cycle rate. This can be achieved relatively easily by means of electrical overexcitation. With this approach, the coil is briefly operated at twice its rated voltage after switch-on.

This causes the current to rise faster than with normal excitation, and it reduces the response time by approximately 50 %. This overexcitation function is built into the type MSG special rectifier.

The release current increases with increasing air gap, and with it the response time. When the release current exceeds the rated coil current, the brake will not be released with normal excitation and the brake has reached its wear limit.

Braking

The brake does not start generating braking torque immediately after the coil voltage is switched off. First the magnetic energy must decline to the point that the spring force can overcome the magnetic force. This occurs at the holding current I_{hold} , which is lower than the release current.

The response time depends on how the voltage is switched off.

Switching off the AC supply voltage to a type SG standard rectifier

- a) Rectifier powered from the motor terminal board (Figure 4, curve 1)
Response time t_{A1} : very long

Cause: Due to the residual magnetism of the motor, after the motor voltage is switched off a slowly decaying voltage is induced, and it continues to supply power to the rectifier and thereby to the brake. In addition, the magnetic energy of the brake coil is dissipated relatively slowly in the freewheel circuit of the rectifier.

- b) Rectifier powered separately (Figure 4, curve 2)
Response time t_{A2} : long

Cause: After the rectifier voltage is switched off, the magnetic energy of the brake coil is dissipated relatively slowly in the freewheel circuit of the rectifier.

If the supply voltage is interrupted on the AC side, no significant switch-off voltage occurs on the electromagnet coil.

Motor Mounted Components

Brake

Interrupting the DC circuit of the electromagnet coil (Figure 4, curve 3)

a) By a mechanical switch

- with separate power supply from a DC control voltage mains or
 - at the DC switch contacts (A2 and A3) of the type SG standard rectifier
- Response time t_{A3} : very short

Cause: The magnetic energy of the brake coil is dissipated very quickly by arcing across the switch contacts.

b) Electronic

Using a type ESG or MSG special rectifier

Response time t_{A3} : short

Cause: The magnetic energy of the brake coil is dissipated quickly by a varistor integrated in the rectifier.

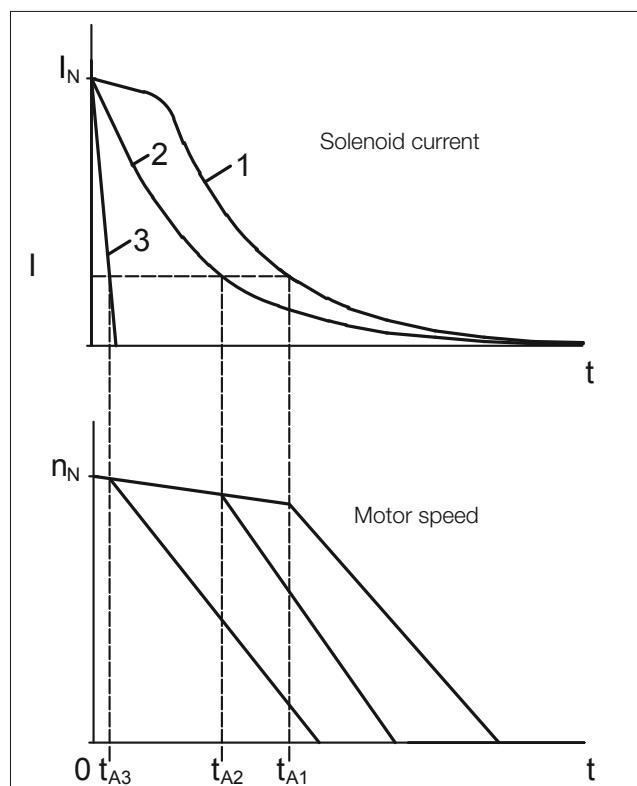


Figure 4: Idealised coil current and motor speed curves after switching off power on the AC side (1 and 2) or DC side (3)

If the circuit is interrupted on the DC side, a high voltage u_q is induced by the electromagnet coil. The magnitude of this voltage depends on the inductance L of the coil and the switch-off speed di/dt according to the formula

$$u_q = L \cdot \frac{di}{dt}$$

Due to the winding design, the inductance L increases with increasing rated coil voltage. Consequently, the voltage spikes induced at switch-off can reach hazardous levels with relatively high coil voltages. For this reason, a varistor is included in the circuit for all brakes with voltages greater than 24 V.

This varistor is solely intended to protect the electromagnet coil; it is not intended to protect adjacent electronic components or devices against electromagnetic interference. On request, brakes with rated voltages of 24 V or less can also be fitted with a varistor.

If the circuit is interrupted on the DC side by a mechanical switch, the resulting arcing over the switch contacts causes strong erosion of the contacts. For this reason, only special DC contactors or adapted AC contactors with contacts rated for use class AC3 as specified in EN 60947-4-1 may be used.

Motor Mounted Components

Brake

Specifications of holding brakes with emergency stop capability

The maximum allowable friction energy values stated here do not apply to brake motors for use in areas with potentially explosive atmospheres.
Refer to separate data in appropriate documents for explosion-proof drives.

Type	M _{Br} [Nm]	W _{max} [10 ³ J]	W _{th} [10 ³ J]	W _L [10 ⁶ J]	t _A [ms]	t _{AC} [ms]	t _{DC} [ms]	P _{el} [W]	J [10 ⁻³ kgm ²]
E003B9	3	1.5	-	-	35	150	15	20	0.01
E003B7	2.2	1.8	-	-	28	210	20		
E003B4	1.5	2.1	-	-	21	275	30		
E004B9	5	2.5	-	-	37	125	15		
E004B8	4	3	-	-	30	160	18		
E004B6	2.8	3.6	-	-	23	230	26		
E004B4	2	4.1	-	-	18	290	37	30	0.017
E004B2	1.4	4.8	-	-	15	340	47		
ES/EH010AX	15*	3	-	-	110	-	30		
ES/EH010A9	10	3	-	-	60	100	15		
ES/EH010A8	8	3	-	-	55	150	20		
ES/EH010A5	5	3	-	-	45	220	20		
ES/EH010A4	4	3	-	-	30	250	20		
ES/EH010A2	2.5	3	-	-	25	350	25		
ES027AX	32*	2.5	-	-	80	-	30	50	0.172
ES/EH027A9	27	2.5	-	-	120	100	15		
ES/EH027A7	20	2.5	-	-	100	130	20		
ES/EH027A6	16	2.5	-	-	80	170	25		
ES/EH040A9	40	3.5	-	-	100	100	20		
ES/EH040A8	34	3.5	-	-	80	200	25		
ES/EH040A7	27	3.5	-	-	70	250	30	65	0.45
ES/EH070AX	90*	3.5	-	-	120	-	40		
ES/EH070A9	70	3.5	-	-	120	150	18		
ES/EH070A8	63	3.5	-	-	120	200	20		
ES/EH070A7	50	3.5	-	-	90	220	25		
ES/EH125A9	125	4.5	-	-	170	220	25		
ES/EH125A8	105	4.5	-	-	150	320	28	105	1.22
ES/EH125A7	85	4.5	-	-	135	350	30		
ES/EH125A6	70	4.5	-	-	120	440	35		
ES125A5	57	4.5	-	-	100	600	40		
ES125A3	42	4.5	-	-	90	700	45		
ES/EH200A9**	200	8	-	-	400	150	22	105	2.85
ES/EH200A8**	150	8	-	-	280	250	35		
ES/EH200A7**	140	8	-	-	200	320	35		
ES250A9**	250	9	-	-	300	500	45	135	6.65
ES250A8**	200	9	-	-	200	960	60		
ES250A6**	150	9	-	-	160	1100	60		
ES250A5**	125	9	-	-	150	1500	90		
ES250A4**	105	9	-	-	130	1800	110		
ZS300A9**	300	8	-	-	280	220	35	75	5.7
ZS300A8**	250	8	-	-	210	380	45	180	19.5
EH400A9**	400	10	-	-	300	600	60		
EH400A7**	300	10	-	-	200	850	75		
EH400A5**	200	10	-	-	150	1400	85	100	13.3
ZS500A9**	500	9	-	-	320	320	50		
ZS500A8**	400	9	-	-	260	600	60		

* Requires overexcitation; permissible only with MSG rectifier

** Cannot be combined with PMSM motors of the S series

Braking torque tolerance: -10 / +30 %

W_{th} and WL are not specified because little or no braking energy is dissipated by holding brakes when they are used as intended.

For versions with braking torque marked with *, which may only be used with an MSG rectifier, the values of t_A and t_{DC} apply to operation with an MSG rectifier; i.e. t_A for overexcitation or t_{DC} for electronic circuit interruption on the DC side.

Due to the effects of operating temperature and manufacturing tolerances, actual response times may differ from the guideline values listed here.

Motor Mounted Components

Brake

Specifications of working brakes

The maximum braking energy values stated here do not apply to brake motors for use in areas with potentially explosive atmospheres.

Refer to separate data in appropriate documents for explosion-proof drives.

Type	M _{Br} [Nm]	W _{max} [10 ³ J]	W _{th} [10 ³ J]	W _L [10 ⁶ J]		t _A [ms]	t _{AC} [ms]	t _{DC} [ms]	P _{el} [W]	J [10 ⁻³ kgm ²]
				without HL***	with HL***					
E003B9	3	1.5	36	55	55	35	150	15	20	0.01
E003B7	2.2	1.8	36	90	90	28	210	20		
E003B4	1.5	2.1	36	140	140	21	275	30		
E004B9	5	2.5	60	50	50	37	125	15		
E004B8	4	3	60	100	100	30	160	18		
E004B6	2.8	3.6	60	180	180	23	230	26		
E004B4	2	4.1	60	235	235	18	290	37		
E004B2	1.4	4.8	60	310	310	15	340	47		
ESX/EHX010AX	15*	3	250	120	120	110	-	30		
ESX/EHX010A9	10	3	250	120	120	60	100	15		
ESX/EHX010A8	8	3	250	150	150	55	150	20	35	0.045
ESX/EHX010A5	5	3	250	240	240	45	220	20		
ESX/EHX010A4	4	3	250	300	240	30	250	20		
ESX/EHX010A2	2.5	3	250	390	240	25	350	25		
ESX027AX	27*	10	350	150	150	80	-	30		
ESX/EHX027A9	22	10	350	150	150	120	100	15	50	0.172
ESX/EHX027A7	16	10	350	300	300	100	130	20		
ESX/EHX027A6	13	10	350	350	350	80	170	25		
ESX/EHX040A9	32	20	450	420	420	100	100	20		
ESX/EHX040A8	27	20	450	560	490	80	200	25	65	0.45
ESX/EHX040A7	22	20	450	700	490	70	250	30		
ESX/EHX070AX	72*	28	550	700	700	120	-	40		
ESX/EHX070A9	58	28	550	500	500	120	150	18	85	0.86
ESX/EHX070A8	50	28	550	800	700	120	200	20		
ESX/EHX070A7	40	28	550	1200	700	90	220	25		
ESX/EHX125AX	100*	40	700	1900	1900	100	-	70		
ESX/EHX125A9	85	40	700	1700	1700	150	320	28	105	1.22
ESX/EHX125A8	70	40	700	1900	1700	135	350	30		
ESX/EHX125A7	58	40	700	2700	1700	120	440	35		
ESX125A5	45	40	700	3300	1700	100	600	40		
ESX125A3	34	40	700	3300	1700	90	700	45		
ESX/EHX200AX**	160*	60	850	2000	2000	105	-	70	105	2.85
ESX/EHX200A9**	120	60	850	1700	1700	280	250	35		
ESX/EHX200A8**	110	60	850	2600	2600	200	320	35		
ESX250A9**	200	84	1000	2800	2800	300	500	45	135	6.65
ESX250A8**	160	84	1000	6800	5700	200	960	60		
ESX250A6**	120	84	1000	8500	5700	160	1100	60		
ESX250A5**	100	84	1000	11000	5700	150	1500	90		
ESX250A4**	85	84	1000	11000	5700	130	1800	110		
ZSX300A9**	250	60	850	1300	1300	280	220	35	75	5.7
ZSX300A8**	200	60	850	2000	2000	210	380	45		
EHX400A9**	320	120	1100	3000	3000	300	600	60	180	19.5
EHX400A7**	240	120	1100	4800	4800	200	850	75		
EHX400A5**	160	120	1100	6000	4800	150	1400	85		
ZSX500A9**	400	84	1000	2800	2800	320	320	50	100	13.3
ZSX500A8**	320	84	1000	4000	4000	260	600	60		

* Requires overexcitation; permissible only with MSG rectifier

** Cannot be combined with PMSM motors of the S series

*** HL = manual release

Braking torque tolerance:

E003 / E004: -10 / +30 %

ESXXX / ZSXXX: -20 / +30 % after run-in; up to -30 % in new condition.

For versions with braking torque marked with *, which may only be used with an MSG rectifier, the values of t_A and t_{DC} apply for operation with an MSG rectifier; i.e. t_A for overexcitation or t_{DC} for electronic circuit interruption on the DC side.

The values for W_L are guidelines; actual values may vary significantly depending on the application situation. Periodic inspection of the air gap or brake disc thickness is recommended.

Actual response times may differ from the times listed here due to the effects of operating temperature, brake disc wear and manufacturing tolerances.

Motor Mounted Components

Brake

Key to symbols

M_{Br}	Rated braking torque
W_{max}	Maximum allowable friction energy for an emergency stop with a holding brake
W_{max}	Maximum allowable friction energy for each brake cycle with working brakes
W_{th}	Maximum allowable braking energy per hour
W_L	Maximum allowable braking energy until maintenance; i.e. brake disc replacement or air gap adjustment. Air gap adjustment is possible only with type ZSXxx brakes.
H_L	Manual release
t_A	Response time for release with normal excitation. Overexcitation with a type MSG special rectifier reduces the response time by approximately 50 %.
t_{AC}	Response time for brakes with AC-side switch-off, i.e. by switching off the supply voltage to a separately powered standard rectifier. If the supply voltage for the rectifier is taken from the motor terminals, considerably longer response times should be expected (depending on the motor size and winding design).
t_{DC}	Response time for braking with DC-side circuit interruption by a mechanical switch. In the case of electronic circuit interruption on the DC side by a type ESG or MSG special rectifier, the response times will be approximately two to three times as long.
P_{el}	Electromagnet coil power consumption at 20 °C. Depending on the rated voltage of the coil, the actual power may differ from the guideline value stated here.
J	Moment of inertia of the drive bush and brake disc(s)

Motor Mounted Components

Brake

Connection


The electrical connections to the brake are made in the motor terminal box using terminals or the rectifier. Standard voltages:

380–420 V 50/60 Hz (brake coil voltage 180 V DC)
220–230 V 50/60 Hz (brake coil voltage 105 V DC)
24 V DC (brake coil voltage 24 V DC)

Other voltages are available at additional cost.

DC connection via terminals (K)

The brake must be connected via separate terminals in the motor or brake terminal box directly to the DC voltage. The standard voltages are 180 V DC, 105 V DC and 24 V DC. Brakes with other operating voltages are available at additional cost.

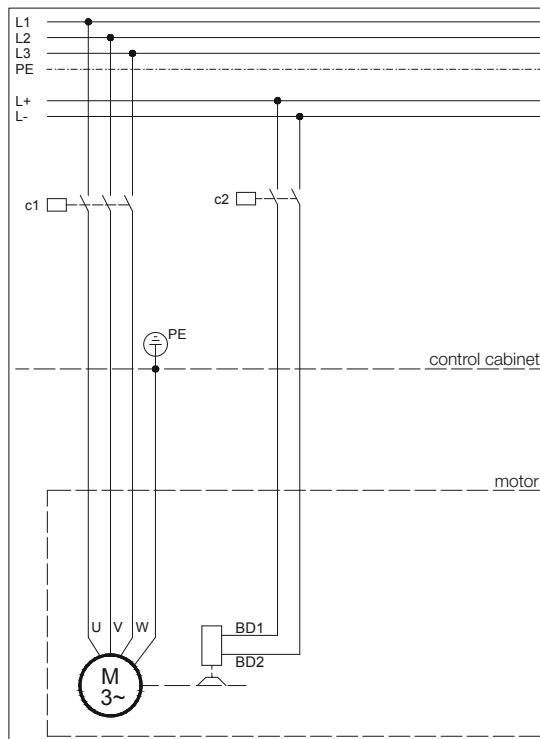

Motor Mounted Components

Brake

Standard rectifier (S)


Working principle

Input voltage U_1
 Output voltage
 Max. output current
 Ambient temperature
 Connection
 Clampable conductor cross-section

Approvals

Half-wave rectifier with switch contacts for DC-side circuit interruption
 max. 575 VAC +5 %
 0.45 x U_1 VDC
 2.5 A DC
 -40 to +40 °C
 Caged Clamp terminals with clamp lever
 max. 1.5 mm² without wire end sleeve
 max. 1.5 mm² with wire end sleeve
 c-CSA-us
 c-UL-us (only in combination with B2000 geared motors and brakes in the ES(X) or ZS(X) product series)

The brake must be connected to the AC supply via the standard rectifier in the motor terminal box or brake terminal box. The standard voltages are 380 ... 420 V 50/60 Hz or 220 ... 230 V 50/60 Hz. Other voltages up to 575 V are available at extra cost. In a configuration with standard rectifier, the brake circuit can be interrupted by an extra contact on the d.c. side in order to reduce the response time. This significantly reduces the braking time and overtravel distance.

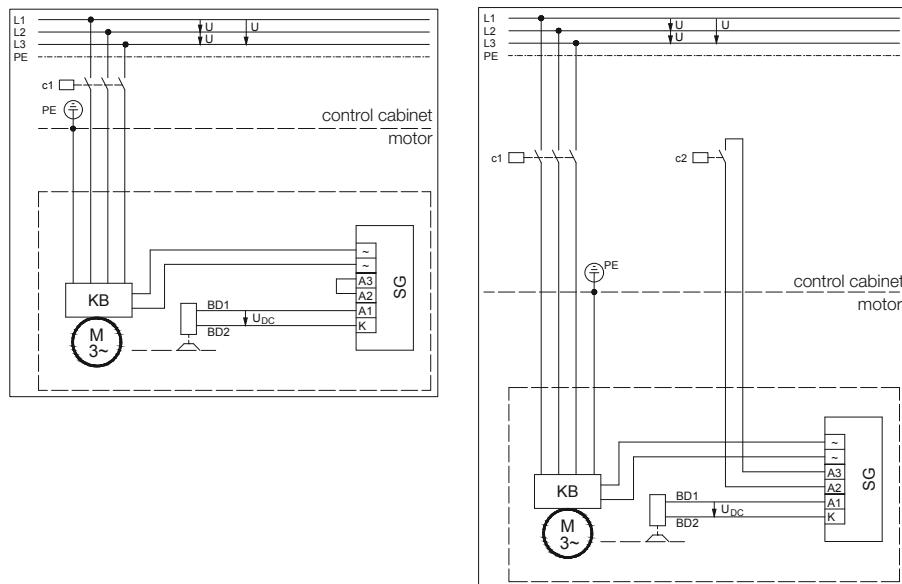

Voltage connection for the rectifier from the motor terminal block or cage clamp (see Rectifier Connection on Motor Terminal Block or Cage Clamp)

Motor Mounted Components

Brake

Rectifier for electronic rapid shutdown (E)

Working principle

Half-wave rectifier with electronic

DC-side circuit interruption

220–460 V AC ±5 %, 50/60 Hz

Input voltage U_1

Output voltage

Max. output current

Ambient temperature

Clampable conductor cross-section

0.45 $\times U_1$ V DC


1 A DC

-20 °C to +40 °C

max. 1.5 mm²

This rectifier permits electronic DC-side interruption of the brake circuit. No additional cable to the rectifier is necessary. The rectifier is supplied complete with a protective resistor which prevents a mains short-circuit via the shutdown arc of the high-speed motor contactor.

Brake response times are significantly shorter than those achievable by AC-side interruption of the brake circuit. They are, however, longer than those achievable with DC-side interruption by a mechanical switch. The brake must be connected to the alternating current via the rapid shutdown rectifier in the motor terminal box or the brake terminal box. The standard voltages are 380 ... 420 V 50/60 Hz or 220 ... 230 V 50/60 Hz. Other voltages up to 460 V are available at extra cost.

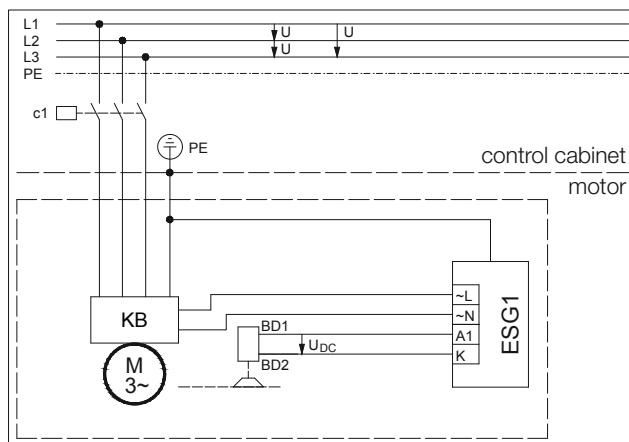

Voltage connection for the rectifier from the motor terminal block or cage clamp (see Rectifier Connection on Motor Terminal Block or Cage Clamp)

Motor Mounted Components

Brake

Rectifier for overexcitation and rapid shutdown (M)

Working principle

MSG 1.5.480I

Half-wave rectifier with time-limited overexcitation and electronic DC-side circuit interruption

Fast shutdown due to no motor current in one phase

220–480 V AC +6 / -10 %, 50/60 Hz

0.9 x U₁ V DC during overexcitation

0.45 x U₁ V DC over overexcitation period

0.3 s

1.5 A DC

-20 °C to +40 °C

Overexcitation time
Max. output current
Ambient temperature
Clampable

conductor cross-section

max. 1.5 mm²

Working principle

MSG 1.5.500U

Half-wave rectifier with time-limited overexcitation and electronic DC-side circuit interruption

Fast shutdown due to the absence of input voltage

220–500 V AC ±10 %, 50/60 Hz

0.9 x U₁ V DC during overexcitation

0.45 x U₁ V DC over overexcitation period

0.3 s

1.5 A DC


-20 °C to +40 °C

Overexcitation time
Max. output current
Ambient temperature
Clampable

conductor cross-section

max. 1.5 mm²

In cases where there are high motor switching frequencies, the brake can be de-energised more rapidly with this rectifier thereby significantly reducing the thermal stress on the motor. In addition, interrupting the brake's DC circuit by electronic means significantly reduces response times. Depending on the circumstances in which they are to be used, either the MSG 1.5.500 U (rapid shutdown brought about by removed supply voltage) or MSG 1.5.480 I (rapid shutdown brought about by removed motor current in a phase) is used. Power supply 220 to 480 V AC.

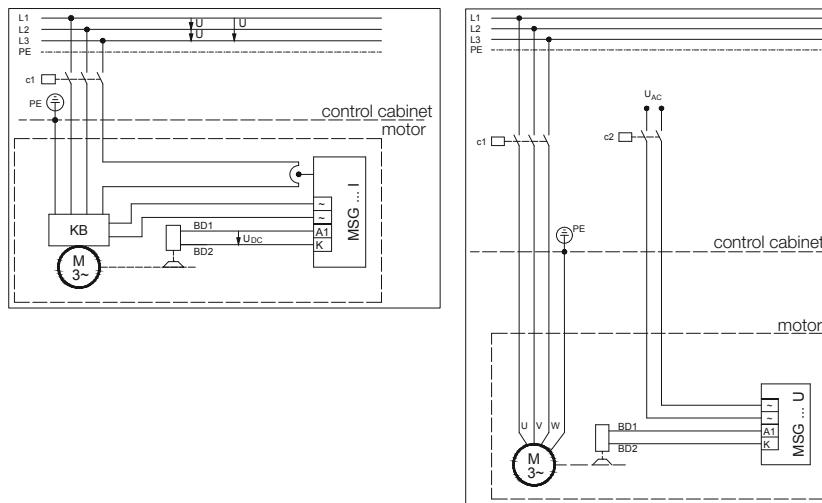

Motor Mounted Components

Brake

Brake connection, operation with frequency converter

The voltage present at the motor terminal block when operating with a frequency converter is frequency-dependent. Brakes require a constant voltage, so they need a separate electrical connection. This is the reason why the brake is not connected to the motor terminals ex-works.

Manual release (HA, HN)

All brakes are available with mechanical manual release on request. Non-latching manual release is the standard version (HN). A latching manual release (HA) can be supplied if required for all brake sizes.

Second motor shaft extension (ZW, ZV)

The motors are also available on request with a second motor shaft extension in design ZW (shaft with key) or ZV (shaft with square end).

Half the central motor's rated power is available at each of the two shafts. Permissible radial loads available on request. Guards are not included in the scope of supply (for dimensional drawing see chapter 17).

Motors with brakes are available on request with a second shaft stub extended through the brake.

Protective fan cowl (D)

A protective hood over the fan cowl is recommended for outdoor installations where the motor is pointing upward and subject to severe or prolonged exposure to water (dimensional drawing, see chapter 17).

A special fan cowl for the textiles industry is available on request at extra cost. This design prevents airborne fibres and fluff clogging the fan cowl.

Motor-independent fan (FV)

For special applications, standard motors and brake motors of size S08 and larger are available with externally mounted motor-independent fans. The standard line voltage of the motor-independent fan matches the voltage of the geared motor (dimensional drawing for motor-independent fan, see chapter 17).

Technical Data:

Multivolt Conception Running capacitor for single phase duty enclosed as standard.

Technical Data Motor-independent fan

Mode	Frame size	Blower Diameter [mm]	Range of voltage [V]		max. permissible current [A]		max. power input [W]	
			50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz
1 ~ \perp (Δ)	63	118	230-277	230-277	0.18	0.21	46	54
	71	132	230-277	230-277	0.18	0.21	48	56
	80	150	230-277	230-277	0.19	0.22	48	59
	90	169	220-277	220-277	0.29	0.23	59	61
	100	187	220-277	220-277	0.29	0.28	62	73
	112	210	220-277	220-277	0.27	0.36	64	88
	132	250	230-277	230-277	0.52	0.61	125	163
	160-200	300	230-277	230-277	1.05	1.52	246	390
3 ~ Y	63	118	346-525	380-575	0.09	0.08	28	29
	71	132	346-525	380-575	0.09	0.07	29	28
	80	150	346-525	380-575	0.09	0.07	33	36
	90	169	346-525	380-575	0.22	0.18	78	71
	100	187	346-525	380-575	0.21	0.18	80	80
	112	210	346-525	380-575	0.2	0.17	87	93
	132	250	346-525	380-575	0.37	0.32	160	180
	160-200	300	346-525	380-575	0.74	0.62	314	391
3 ~ Δ	63	118	200-303	220-332	0.15	0.14	28	29
	71	132	200-303	220-332	0.15	0.13	29	28
	80	150	200-303	220-332	0.16	0.13	33	36
	90	169	200-303	220-332	0.39	0.32	78	71
	100	187	200-303	220-332	0.37	0.3	80	80
	112	210	200-303	220-332	0.35	0.29	87	93
	132	250	200-303	220-332	0.64	0.55	160	180
	160-200	300	200-303	220-332	1.28	1.08	314	391

Motor Mounted Components

Encoder system

Shaft encoder (G)

Bauer gear motors can be fitted with either an incremental encoder or an absolute encoder for special applications. Both the standard incremental encoder and the absolute encoder are optimised and suitable for use with all modern inverters.

Bauer standard encoders as from motor frame size S..05.. (0,18 kW) are protected against mechanical damage by means of a protective cover (Additional Dimension Sheet see chapter 16).

Special features: standard incremental encoder:

- Robust mount
- EMC-tested
- Protected against polarity reversal
- Supply voltage 8-30 V DC
- A-, B- and N-lines and inverted signals or output signals as preferred
- HTL output circuit (TTL on request)
- 1024 pulses per revolution


Special features: standard absolute encoder

- Steps per revolution: 8192 (13 Bit)
- Number of turns: 4096 (12 Bit) shaft turns
- Execution of electronic: SSI (Synchronous-Serial Interface)
- Output code: Gray-Code
- Supply voltage: 11-27 V DC
- Loss efficiency (no load): ≤ 3 Watt
- Output driver: RS-422 (2-wire)

Motor Mounted Components

Incremental rotary encoder

Functional description

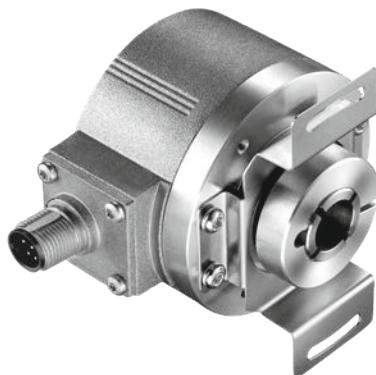

Incremental encoders are used to determine motor shaft positions. An incremental encoder detects rotary motion and converts it into an electrical output signal. An encoder disc with a specific number of periods per rotation senses angular motion. The optoelectronic scanning unit generates signals and issues pulses after the signals have been processed in trigger stages. The resolution is defined by the number of opaque and clear segments on the encoder disc. For example, an encoder with 1024 lines will generate a sequence of 1024 pulses for one full rotation.

The combination of an incremental encoder and a frequency converter allows optimised solutions to be developed, such as

- speed controllers with a wide adjustment range
- accurate speed control
- constant-speed control
- position control

Supply voltage: 8–30 V DC with HTL

5 V DC with differential TTL

Output signals: HTL A, B and N tracks; optional TTL

Pulses per revolution: 1024

Optional 1...65536




Enclosure rating: IP65 (optional IP67)

Temperature range: -40 °C to +100 °C

Electrical specifications

Output voltage	RS 422 (TTL compatible)	RS 422 (TTL compatible)	Differential	Differential (7272)
Supply voltage	5–30 V DC	5 V ±5%	8–30 V DC	5–30 V DC
No-load current consumption With inversion:	max. 70 mA	max. 70 mA	max. 70 mA	max. 70 mA
Allowable load per channel: Pulse rate:	max. ±20 mA max. 300 kHz	max. ±20 mA max. 300 kHz	max. ±20 mA max. 160 kHz	max. ±20 mA max. 160 kHz
High signal level:	min. 2.5 V	min. 2.5 V	min. UB – 3 V	min. UB – 3 V
Low signal level:	max. 0.5 V	max. 0.5 V	max. 1 V	max. 1 V

Plug end view with male pin insert

Connector type	8-pin M12 plug	12-pin M23 plug	MIL connector 10-pin
Layout			
Order code:	8.5000.XXX3.XXXX 8.5000.XXX4.XXXX	8.5000.XXX7.XXXX 8.5000.XXX8.XXXX	8.5000XXX.Y.XXXX
Mating 05.CMB-8181-0 connector:		8.0000.5012.0000	8.0000.5062.0000

Signal assignments

Signal:	0 V GND	+U _B	0 V Sens	+U _B Sens	A	A	B	B	Z	Z	Shield
M23 Multifast, 12-pin connector; pin assignments:	10	12	11	2	5	6	8	1	3	4	1)
M12 Eurofast, 8-pin connector; pin assignments:	1	2			3	4	5	6	7	8	1)
Military version; 10-pin connector; pin assignments:	F	D		E	A	G	B	H	C	I	J1)
Cable; lead colour:	WH	BN	GY PK	RD BU	GN	YE	GY	PK	BU	RD	Shield

¹ Shield connected to plug housing.

Insulate unused outputs before putting into service.

Motor Mounted Components

SinCos feedback

Functional description



The SinCos feedback system is a combination of incremental sensor and absolute sensor. The absolute value is initially only defined when the device is switched on and transmitted to an external counter, which then continues counting incrementally from this absolute value with the analogue Sinus/Cosinus interface.


Hollow shaft	diameter 10.00 mm
Speed	Max. 6000 RPM
Enclosure rating	IP65
Interface	Sinus
Connection type	Cable
Resolution	M23-socket max. 5000 Imp.
Temperature	-20...+80 °C
Supply voltage	5 VDC
10...30 VDC	
Shock resistance in accordance with EN 60068-2-27	1000 m/s ² , 6 ms
Vibration resistance in accordance with EN 60068-2-6	100 m/s ² , 10 ... 2000 Hz ^

Electrical specifications

Output circuit	SinCos, U=1 Vss	SinCos, U=1 Vss
Supply voltage	5 V ($\pm 5\%$)	10 ... 30 V DC
Current conversion with inversion (without load)	typ. 65 mA / max. 110 mA	typ. 65 mA / max. 110 mA
-3 dB frequency	≤ 180 kHz	≤ 180 kHz
Signal level channels A/B	1 Vss ($\pm 20\%$)	1 Vss ($\pm 20\%$)
Channel 0	0,1 ... 1,2 V	0,1 ... 1,2 V
Short-circuit proof outputs*	yes	yes
Reverse polarity protection of the supply voltage	no	yes
CE-compliant in accordance with EN 61000-6-1, EN 61000-6-4 and EN 61000-6-3		

* If supply voltage is correctly installed

Ansichten auf Steckseite, Stiftkontakteinsatz



M23 socket, 12-pin

Terminal assignment

Signal	0 V	0 V Sensor**	+UB	+UB Sensor**	A	Ā	B	B	0	0	Signal
	A	Ā	B	B	0	0					
M23-socket, Pin 12-pin	10	11	12	2	5	6					PH*
Core colour	WH 0,5 mm ²	WH	BN 0,5 mm ²	BN	GN	YE	GY	PK	BU	RD	


* PH = The shielding touches the plug housing.

** The sensor lines are connected with the power supply internally. Special power supply units correct for the loss of voltage on long lines.

Functional description

Absolute encoders detect both angular and rotational motions and convert them into electrical signals. In contrast to incremental encoders, with absolute encoders the current position is directly available. If an absolute encoder is moved mechanically while it is switched off, after the power is switched on again the current position can be read out immediately and directly. Absolute encoders are available in single-turn and multi-turn versions.

Profibus DP interface

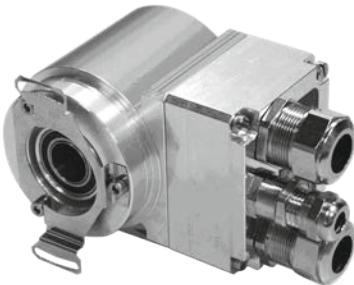

Specifications

Supply voltage	11–27 VDC
No-load current consumption	< 350 mA
Total resolution ¹	≤ 33 bits
Number of steps per revolution, standard/extended	≤ 8,192 / ≤ 32,768
Number of turns, standard/extended	≤ 4,096 / ≤ 256,000
Profibus DP V0	IEC 61158, IEC 61784
PNO encoder profile parameters ¹	Class 1/Class 2 Counting direction switchover, scaling function, etc.
Output code ¹	Binary, Gray, truncated Gray
Address	3–99, set using a rotary switch
Baud rate	9.6 kbit/s to 12 Mbit/s
TR-specific functions ¹	Gear and speed outputs
Data width on bus for actual position	≤ 25 bits
Permissible mechanical speed	≤ 12,000 rpm
Shaft load	Own mass
Bearing life	≥ 3.9 × 10 ¹⁰ revolutions at
- speed	≤ 6,000 rpm
- operating temperature	≤ 60 °C
Shaft diameter [mm]	10H7
Permissible angular acceleration	≤ 10 ⁴ rad/s ²
Moment of inertia	2.5 × 10 ⁻⁶ kg m ² (typical)
Start-up torque at 20 °C	2 Ncm (typical)
Weight	0.3–0.5 kg

¹ Configurable parameter

Ambient conditions

Vibration (EN 60068-2-6:1996)	≤ 100 m/s ² , sinusoidal 50–2,000 Hz
Shock (EN 60068-2-27:1995)	≤ 1000 m/s ² , half-cycle sinusoidal 11 ms
EMC	
- Interference emission compliant with EN 61000-6-3:2007	
- Interference immunity compliant with EN 61000-6-2:2006	
Operating temperature	0 °C to +60 °C; optionally -20 °C to +70 °C
Storage temperature	-30 °C to +80 °C, dry
Relative humidity (EN 60068-3-4:2002)	98%, non condensing
Enclosure rating (EN 60529:1991) ²	IP 65

² With mating connector fitted and/or cable glands fitted and tightened

Motor Mounted Components

Absolute rotary encoders

SSI interface



Specifications

Supply voltage	11–27 VDC
No-load current consumption	< 350 mA
Total resolution ¹⁾	≤ 25 bits
Number of steps per revolution ¹⁾	≤ 8,192
Number of rotations, standard ¹⁾	≤ 4,096
Number of rotations, extended ¹⁾	≤ 256,000
SSI	Synchronous Serial Interface
Clock input	Optocoupler
Data output	RS-422, 2-wire
Clock frequency	80 kHz – 1 MHz
Monostable time t_M	16 μ s ≤ t_M ≤ 25 μ s (20 μ s typical)
Output code ¹⁾	Binary, Gray, BCD
Output format ¹⁾	Standard, Tannenbaum, SSI + CRC, 26-bit cycle, variable number of data bits
Negative values ¹⁾	Sign and magnitude, twos complement
SSI or parallel special bits ¹⁾	Limit switch, overspeed, direction indication, motion indication, error indication, parity
F/R ¹⁾	Counting direction
Preset ¹⁾	Electronic alignment
Logic levels	"0" < +2 VDC; "1" = supply voltage
Permissible mechanical speed	≤ 12,000 rpm
Shaft load	Own mass
Bearing life	≥ 3.9 × 10 ¹⁰ revolutions at
- speed	≤ 6,000 rpm
- operating temperature	≤ 60 °C
Shaft diameter [mm]	10H7
Permissible angular acceleration	≤ 10 ⁴ rad/s ²
Moment of inertia	2.5 × 10 ⁻⁶ kg m ² (typical)
Start-up torque at 20 °C	2 Ncm (typical)
Weight	0.3–0.5 kg
Optional	
- incremental signals, RS422 levels	K1+, K1-, K2+, K2- with 1024 or 2048 pulses

¹⁾ Configurable parameter

Ambient conditions

Vibration (EN 60068-2-6:1996)	≤ 100 m/s ² , sinusoidal 50–2,000 Hz
Shock (EN 60068-2-27:1995)	≤ 1000 m/s ² , half-cycle sinusoidal 11 ms
EMC	
- Interference emission compliant with EN 61000-6-3:2007	
- Interference immunity compliant with EN 61000-6-2:2006	
Operating temperature	0 °C to +60 °C; optionally -20 °C to +70 °C
Storage temperature	-30 °C to +80 °C, dry
Relative humidity (EN 60068-3-4:2002)	98 %, non condensing
Enclosure rating (EN 60529:1991) ²⁾	IP65

²⁾ With mating connector fitted and/or cable glands fitted and tightened


In addition to the angular position within a rotation, multturn encoders detect multiple rotations. An internal reduction gear mechanism connected to the motor shaft is used to detect the number of turns. Consequently, the value measured by a multturn encoder consists of the current angular position and the number of turns. As with incremental encoders, the reading is calculated and output via various interface modules, depending on the interface.

On request, a large range of motor frames can be fitted with sensor bearings. The output signal from the sensor allows the direction of rotation to be determined, among other things. The number of possible pulse counts depends on the frame size. Please enquire for more information.


Motor Mounted Components

Modular motor system


Motor and encoder

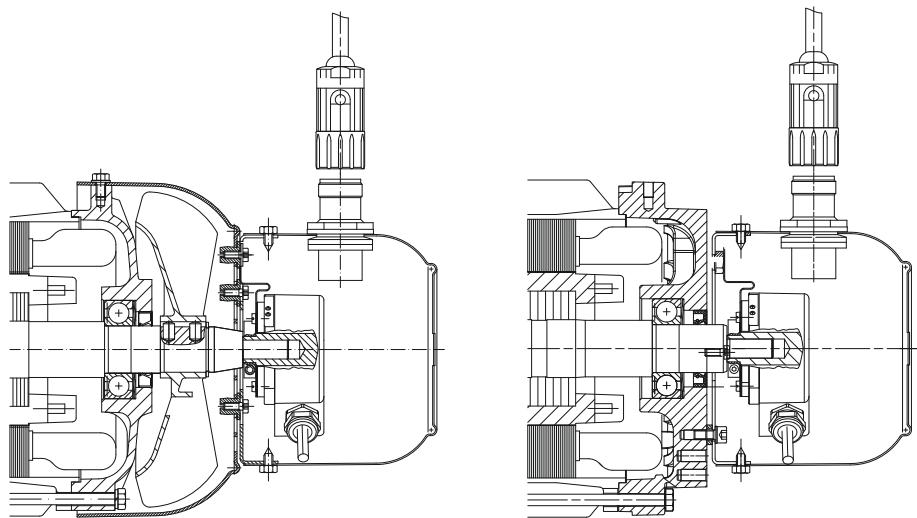

Motor, brake and encoder

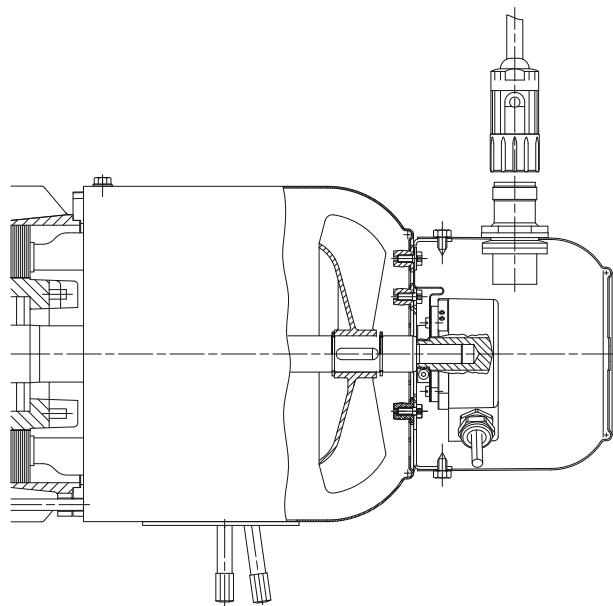


Motor and forced ventilation

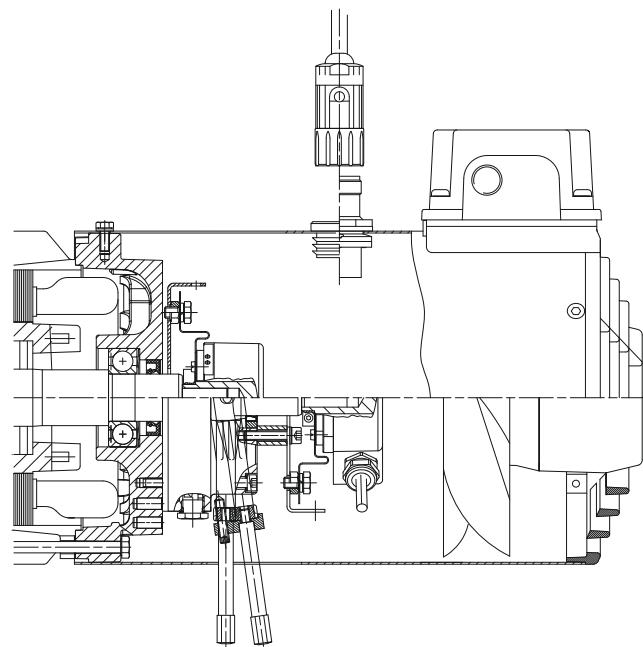

15

Energy Efficient Geared Motors

AC Variable Speed

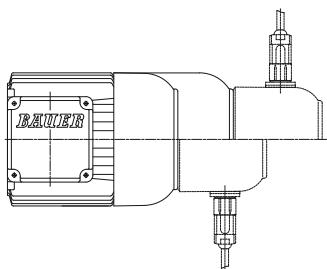

16

Motor Mounted Components - Dimensions

Dimensions	605
Standard terminal box	605
Terminal box for plug-connector	606
Motor with standard brake	607
"Heavy-Duty" - brake	608
Motor with second shaft end	609
Motor with brake and second shaft end	610
Motor with "heavy duty" brake and second shaft end	611
Motor with protective hood	612
Motor with independent fan	613
Motor with brake and independent fan	614
Motor with encoder and built-on independent fan	615
Motor with brake and encoder with built-on independent fan	616
Motor with encoder	617
Motor with "heavy duty" encoder	618
Motor with brake and encoder	619
Motor with "heavy duty" brake and encoder	620
Motor in IEC design	621


Energy Efficient Geared Motors

AC Variable Speed

Motor-mounted components

Dimensions

Standard terminal box

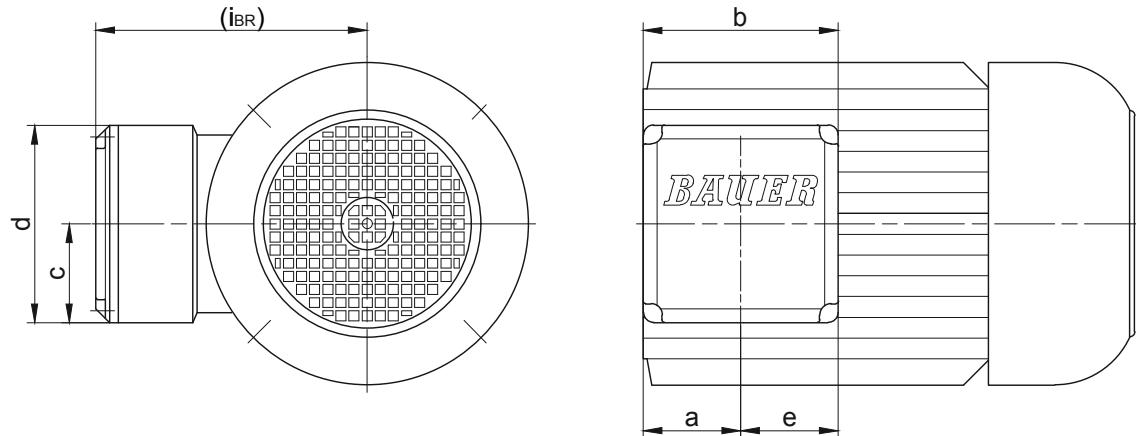

Motor/ Motor with brake	Dimensions (mm)					Code	Cable entry		max. spanner width for cable entry gland	
	a	b	c	d	e		i/i _{BR}	Major (M)		
S..04..	42.5	88	44	88	44	90	KAG1	M=2xM20x1.5	-	24 mm
S..06..	50	100	50	100	50	100	KAG2	M=2xM25x1.5	-	29 mm
S..08..	50	100	50	100	50	115	KAG2	M=2xM25x1.5	-	29 mm
S..09..	50	100	50	100	50	124	KAG2	M=2xM25x1.5	-	29 mm
S..11..	66.5	133	66.5	133	66.5	165	KAG3	M=2xM32x1.5	-	-


The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Motor-mounted components




Dimensions

Terminal box for plug-connector

Standard design (two brackets)

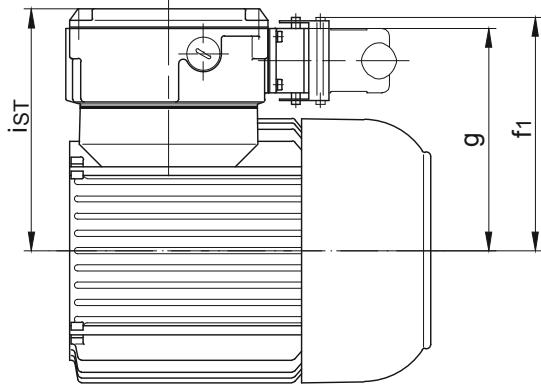


Optional for DESINA (one bracket)

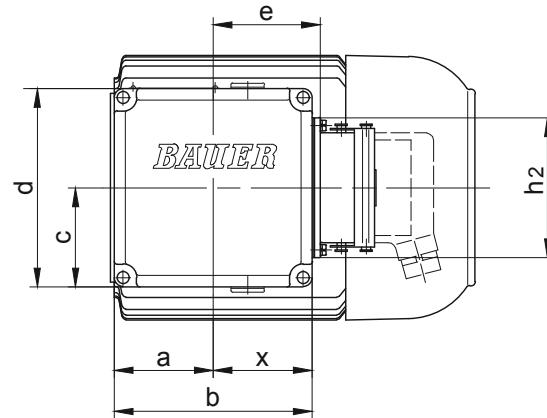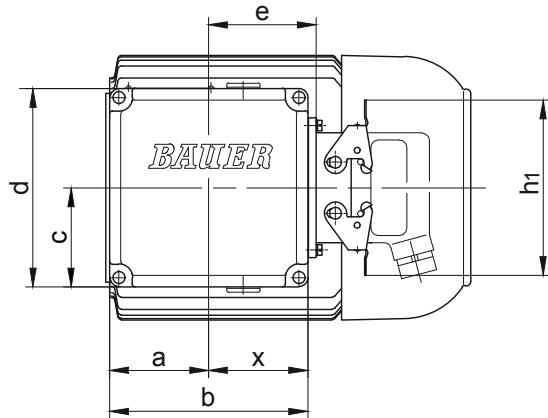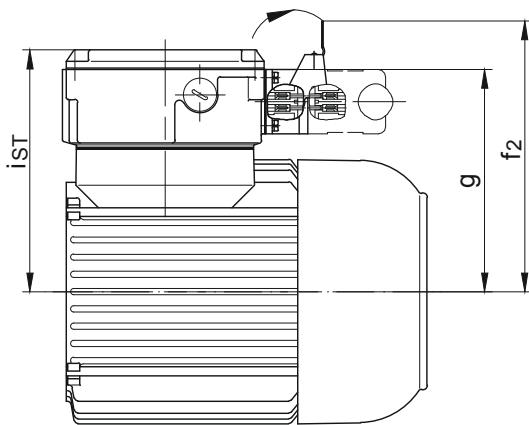

Motor	Size Terminal box	a	b	c	d	e	f_1	f_2	g	h_1	h_2	i_{ST}	x
S..04..	TBS1	30	90	52.5	106	49	118.5	147	111	117	93	124.5	46
S..06..	TBS1	45	90	52.5	106	49	125.5	154	118	117	93	131.5	46
S..08..	TBS1	45	90	52.5	106	49	143.5	172	136	117	93	149.5	46
S..09..	TBS2	62	132	66	135	71.5	158.5	187	158	117	93	164	68.5
S..11..	TBS2	62	132	66	135	71.5	175.5	191	166	117	93	181	68.5

Dimensions in millimetres (mm)

Motor with standard brake

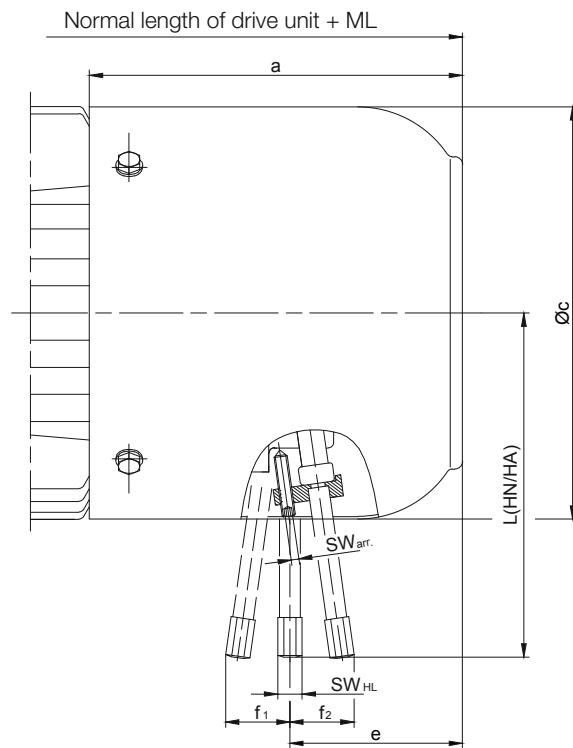

Motor	Brake	ML (mm) Additional length with brake	Dimensions (mm)								Additional weight kg
			a	Øc	e	f ₁	f ₂	L(HA/HN)	SW _{HL}	SW _{arr.}	
S..04..	E003	43.5	97	110.5	58.5	20.5	24	96/102	11	11	1.0
S..06..		42	102	123	58.5						
S..08..	ES(X)010	66	141	156	68	-	29	132	8	2.5	2.6
S..09..	ES(X)010	93	173	176	99	-	29	132	8	2.5	2.7
	ES(X)027				91	-	35.5	162			4.2
S..11..	ES(X)027	98	195	218	103	-	35.5	162	8	2.5	4.5
	ES(X)040				100	-	37	172			6.3
	ES(X)070				96	-	34.5	190	12	4	8.5


HA = manual release lockable

HN = manual release not lockable

Motor-mounted components

Dimensions

"Heavy-Duty" - brake

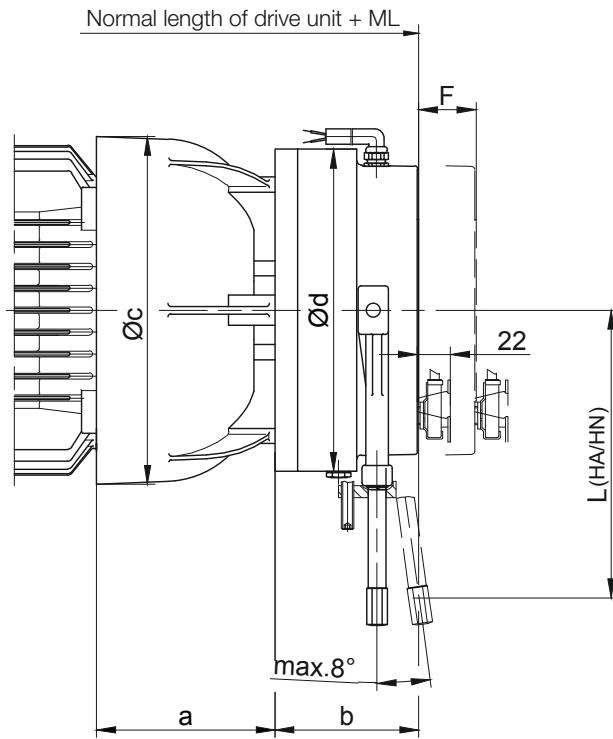


Motor	Brake	Additional length with brake (mm)		Dimensions (mm)					Additional weight kg
		ML Standard	ML Microswitch	a	b	c	$\varnothing d$	L (HA/HN)	
S..08..	EH(X)027	79	101	83.5	66.5	166	145	162	5.5
S..09..	EH(X)040	90	112	102	73	191	168	172	8.3
S..11..	EH(X)125	114	136	120	95	231	213	208.5	19.5

HA = manual release lockable

HN = manual release not lockable

Motor with second shaft end

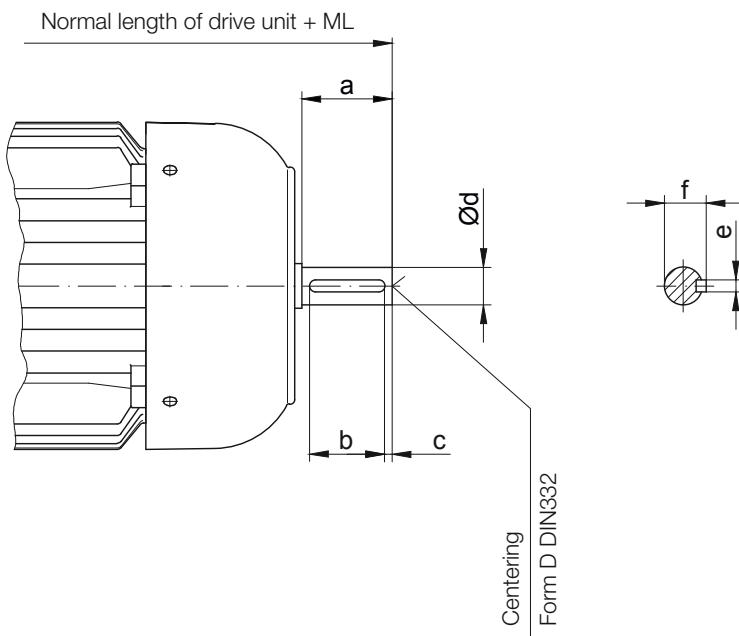


Motor	ML (mm) Additional length with second shaft end	Dimensions (mm)						Centering DIN 332
		a	b	c	d	e	f	
S..04..	20	15	-	-	8 _{g6}	-	-	-
S..06..	25	20	-	-	10 _{k6}	-	-	-
S..08..	45	40	30	5	16 _{k6}	5	18	D5
S..09..	55	50	40	5	20 _{k6}	6	22.5	D5
S..11..	65	60	50	5	25 _{k6}	8	28	D8

Motor-mounted components

Dimensions

Motor with brake and second shaft end

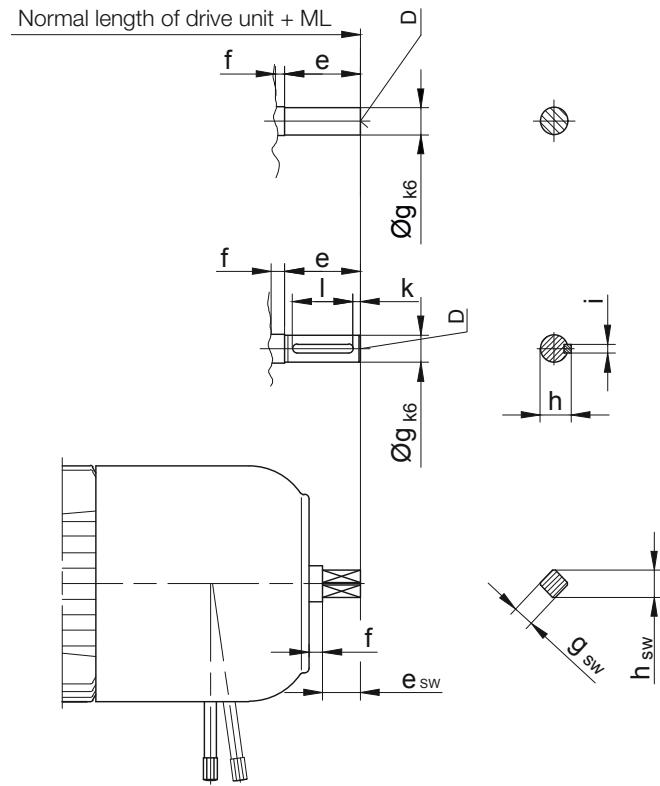


Motor	Brake	Additional length (mm)		Dimensions (mm)											Centering DIN 332	SW
		ML	ML _{sw}	e	e _{sw}	f	g	g _{sw}	h	h _{sw}	i	k	l			
S..04..	E003	63	-	15	-	5	8	-	-	-	-	-	-	D6	D4*	
S..06..				20			10									
S..08..	ES(X)..	121	96*	50	25*	5	18	SW14*	20.5	18*	6	5	40	D6	D4*	
S..09..																
S..11..																

* special design with manual release

Motor-mounted components

Dimensions

Motor with "heavy duty" brake and second shaft end

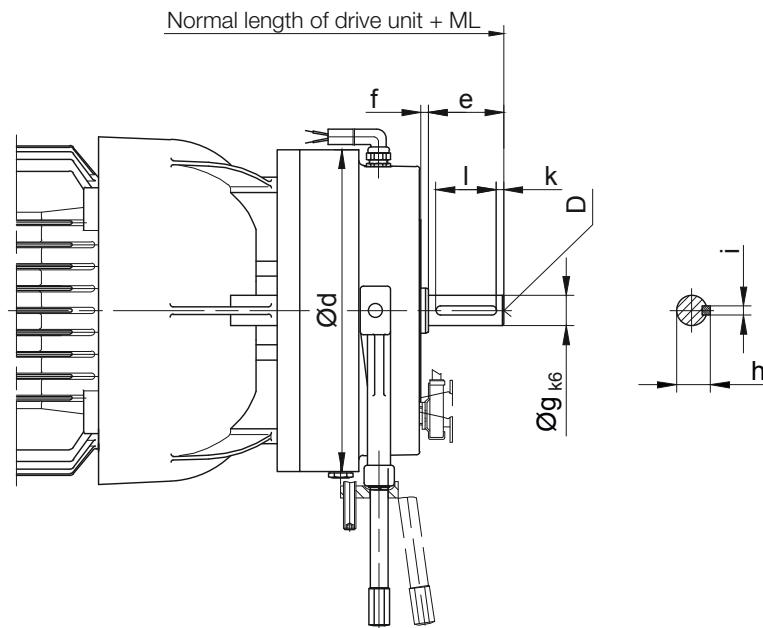


Motor	Brake	ML (mm) Additional length with encoder and brake	Dimensions (mm)									Centering D 332	Additional weight kg
			Ød	e	f	Øg	h	i	k	k			
S..08..	EH(X)027	132	145	50	4	18	20.5	6	5	6	D6	6	
S..09..	EH(X)040	144	168		5	20	22.5					9	
S..11..	EH(X)125	169	213									20	

Motor-mounted components


Dimensions

Motor with protective hood

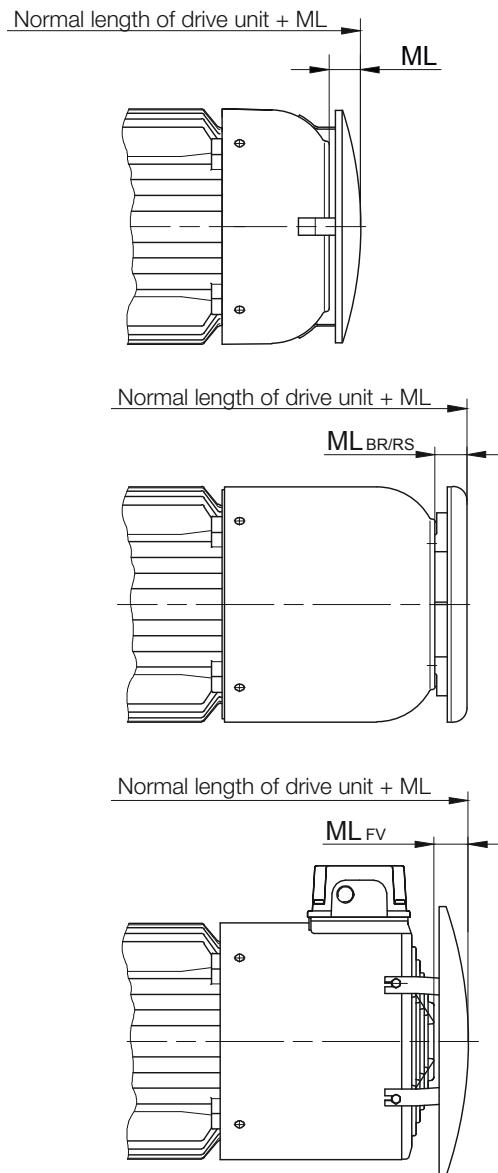

Motor	ML (mm)				Additional weight kg
	ML	ML _{BR}	ML _{RS}	ML _{FV}	
S..04..	16	-	-	-	0.15
S..06..	18	-	-	-	0.15
S..08..	14.5	24.5	24.5	40	0.20
S..09..	22	24.5	24.5	30	0.30
S..11..	29	29.5	29.5	33	0.40

Motor with independent fan

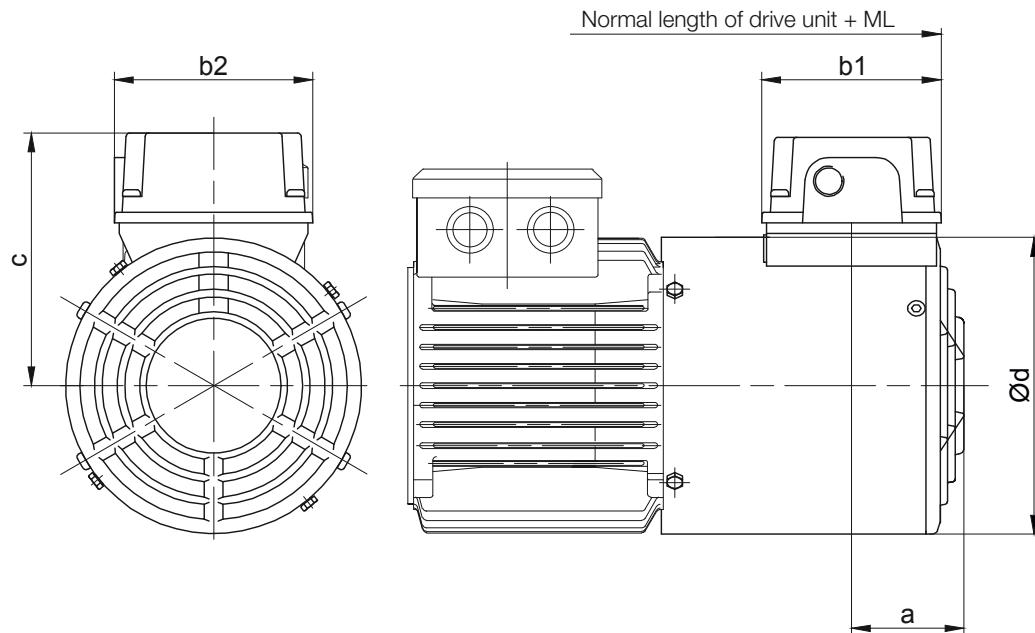


Drive Motor	Fan Motor	kW	r/min	400 V A	ML (mm) Additional length with forced cooling fan	Dimensions (mm)					Additional weight ~kg
						a	b1	b2	c	d	
S..08..	FV D08	0.019	2670	0.029	92	69.5	107	105	134	157	2.2
S..09..	FV D09	0.046	2820	0.106	97	69.5	107	105	143	177	2.7
S..11..	FV D11	0.051	2660	0.110	97	79.5	107	105	162.5	219	3.2

Motor-mounted components

Dimensions

Motor with brake and independent fan

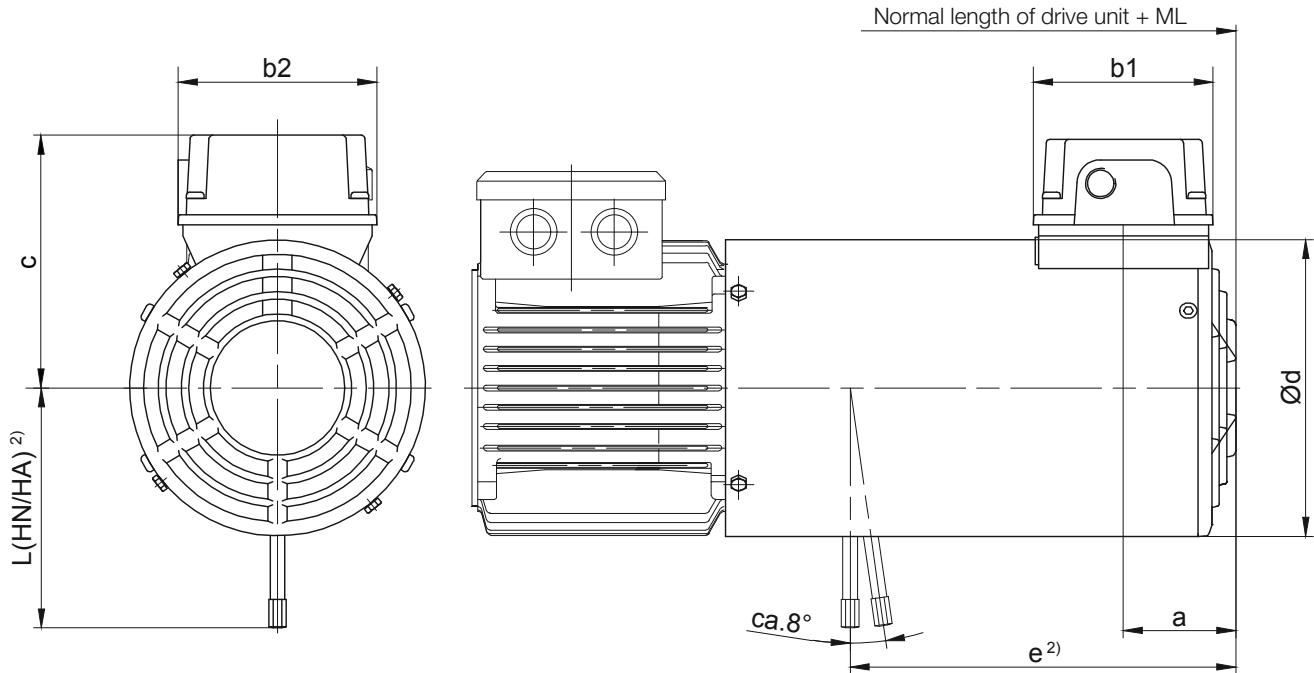

Motor	Brake	ML (mm) ¹⁾ Additional length with brake and forced ventilation	Dimensions (mm)							Additional weight ~kg
			a	b1	b2	c	Ød	e ²⁾	L(HA/HN) ²⁾	
S..08..	ES(X)010	202	59	107	105	134	157	204	132	5.0
S..09..	ES(X)010	214	69.5	107	105	143	177	220	132	5.5
	ES(X)027							212	162	7.5
S..11*	ES(X)027	221	69.5	107	105	162.5	219	226	162	8.0
	ES(X)040							223	172	10
	ES(X)070							218	184	12

* with bayonet joint

¹⁾The additional length is for normal motor unit without brake.


Other dimensions see the appropriate normal dimensioned sketch.

²⁾Brake release on request

HA = manual release lockable

HN = manual release not lockable

Motor with encoder and built-on independent fan

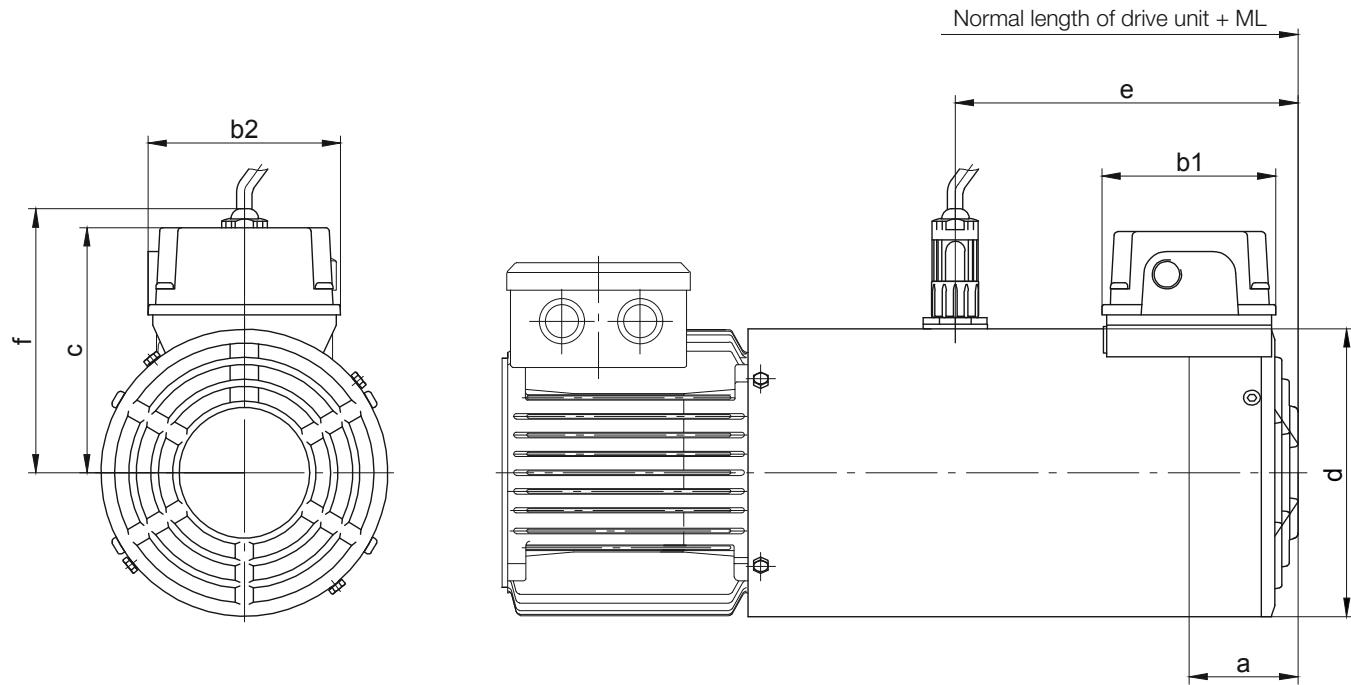

Motor	ML (mm) ¹⁾ Additional length with encoder and forced ventilation	Dimensions (mm)							Additional weight ~kg
		a	b1	b2	c	d	e	f	
S..08..	202	59	107	105	134	157	187	144	2.6
S..09..	214	69.5	107	105	143	177	192	153.5	3.3
S..11*	221	69.5	107	105	162.5	218	192	-	4.0

* with bayonet joint


¹⁾ The additional length is for normal motor unit without brake.

Other dimensions see the appropriate normal dimensioned sketch.

Motor-mounted components

Dimensions

Motor with brake and encoder with built-on independent fan

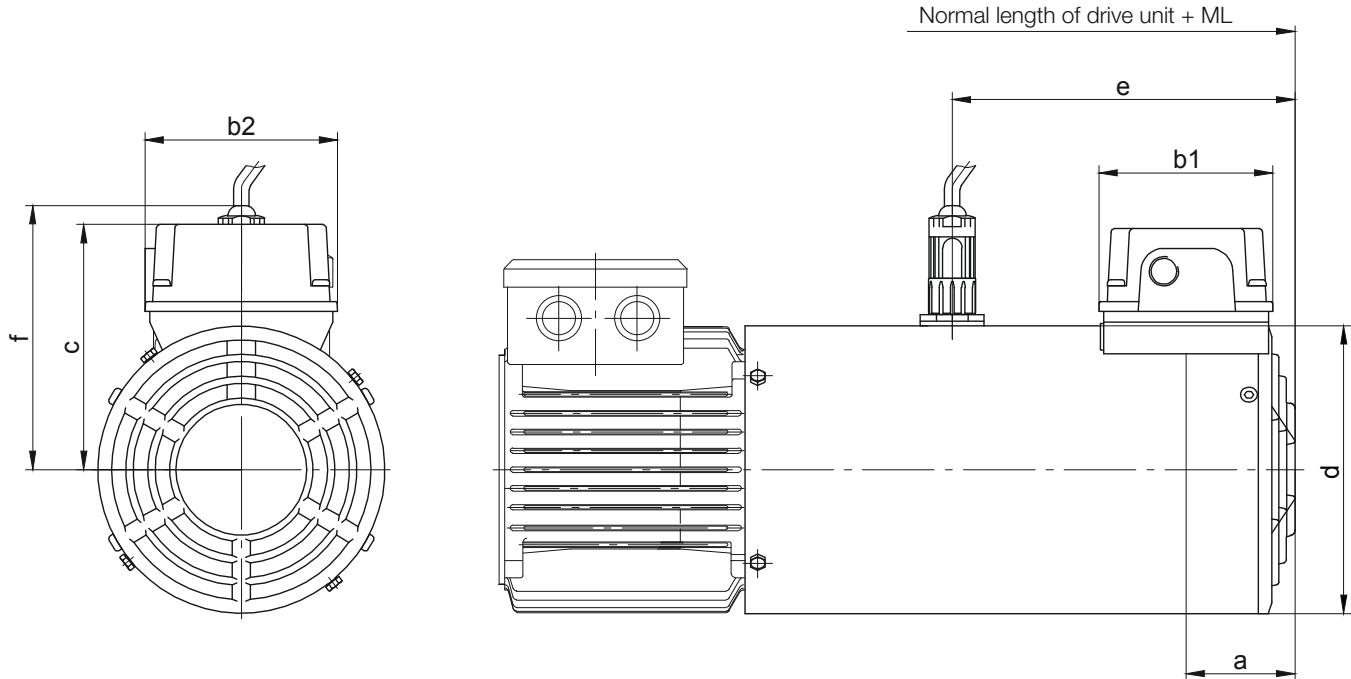

Motor	Brake	ML (mm) ¹⁾ Additional length with brake, encoder and forced ventilation	Dimensions (mm)									Additional weight ~kg
			a	b1	b2	c	Ød	e ²⁾	g	h	L(HA/HN) ²⁾	
S..08..	ES(X)010	202	59	107	105	134	157	204	150	150	132	6.0
S..09..	ES(X)010	214	69.5	107	105	143	177	220	160	160	132	6.5
	ES(X)027							212	160		162	8.5
S..11*	ES(X)027	221	69.5	107	105	162.5	219	226	155	175	162	9.0
	ES(X)040							223	155		172	11.5
	ES(X)070							218	155		184	13.5

* with bayonet joint

¹⁾ The additional length is for normal motor unit without brake.

Other dimensions see the appropriate normal dimensioned sketch.

²⁾ Brake release on request



HA = manual release lockable

HN = manual release not lockable

Motor-mounted components

Dimensions

Motor with encoder

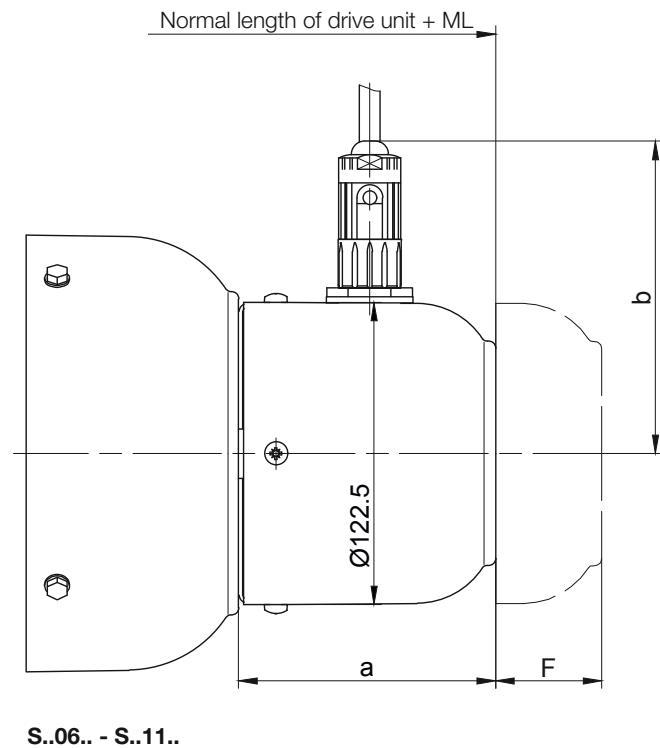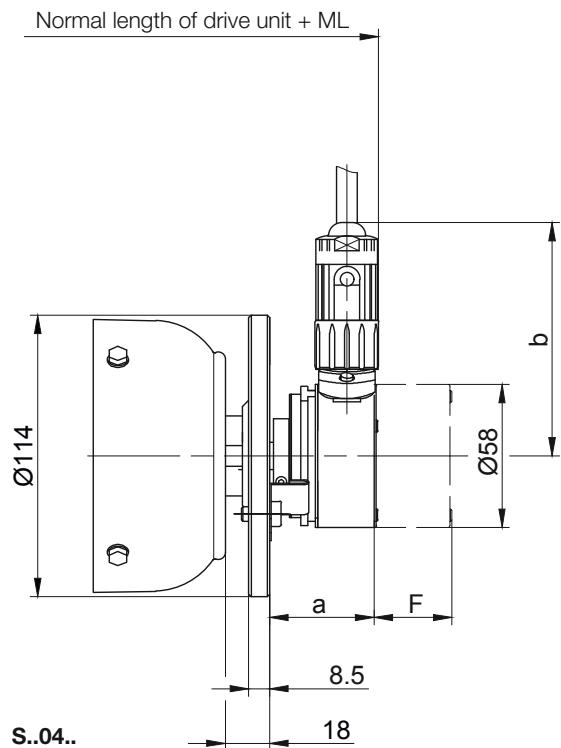


Motor	ML (mm) Additional length with encoder	Dimensions (mm)				Additional weight kg	Free space for removing encoder „F“	
		Incremental encoder		Absolute encoder			Incremental encoder	Absolute encoder
		a	c	a	b			
S..04..	62.5	43.5	95	69.5	109.5	0.7	30	55
S..06..	103	98.5		98.5		0.9	63	88
S..08..		107.5	127	107.5			41	66
S..09..	107	104		104			43	68
S..11..								

The actual gearbox design can vary from the geometry shown. Generate drive specific 3D and 2D geometries under www.BauerCat.com.

Motor-mounted components

Dimensions

Motor with “heavy duty“ encoder

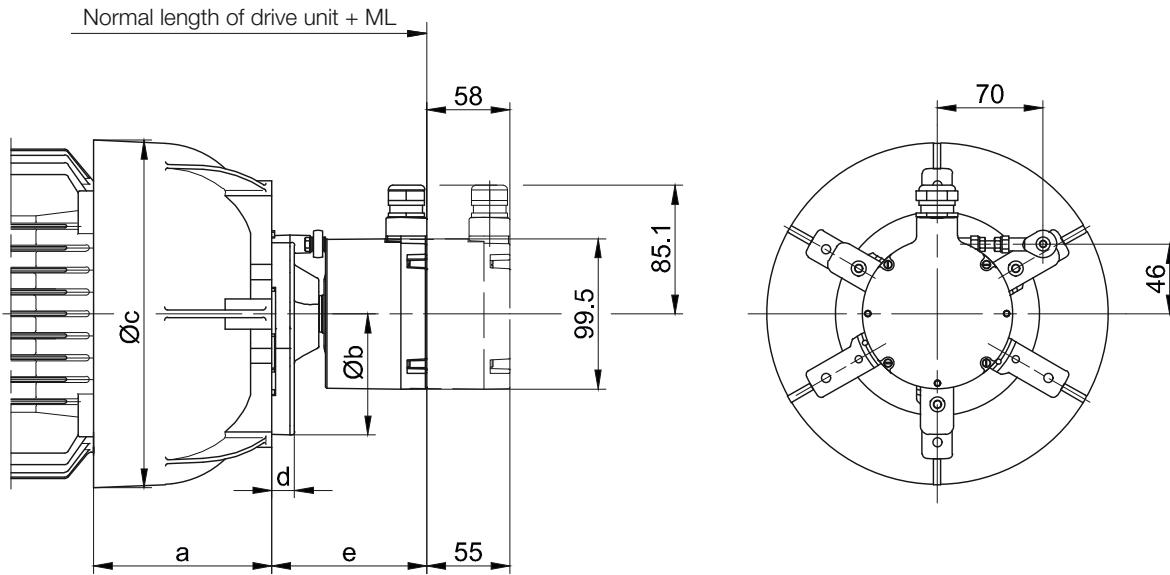


Motor	ML (mm) Additional length with encoder	Dimensions (mm)						Additional weight kg
		a	b	c	d	e		
S..08..	114	83.5	160	166	15	102.5	2	
S..09..	118.5	102		191				
S..11..	121.5	120		231				

Motor-mounted components


Dimensions

Motor with brake and encoder



S..04..

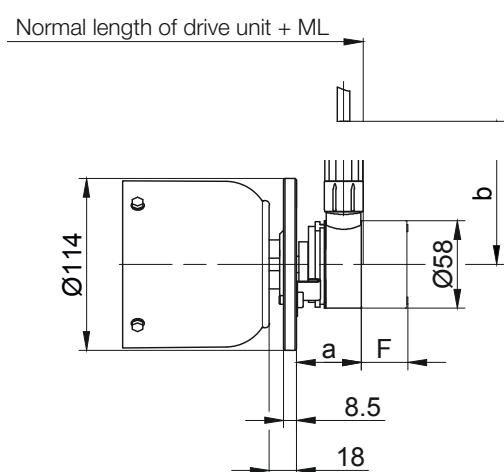

S..06..

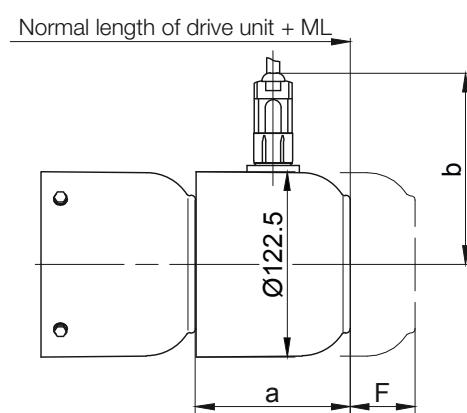

S..08.. - S..11..

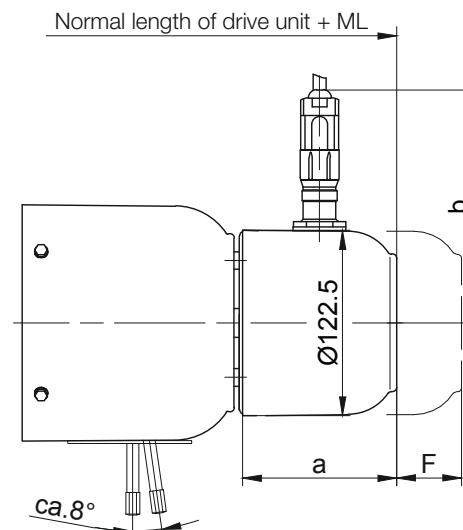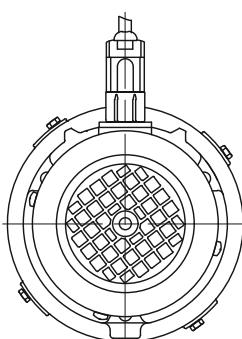


Motor	Brake	ML (mm) Additional length with brake and encoder	Dimensions (mm)				Additional weight kg	Free space for removing encoder „F“	
			Incremental encoder a c		Absolute en- coder a b			Incremental en- coder	Absolute encoder
S..04..	E003	105.5	43.5	95	69.5	109.5	0.7	30	55
S..06..		145	102	127	102	127	0.9	63	88
S..08..	ES(X)..	173.5					0.8	49	74
S..09..	ES(X)..	197							
S..11..	ES(X)..	200							

Motor-mounted components

Dimensions

Motor with "heavy duty" brake and encoder

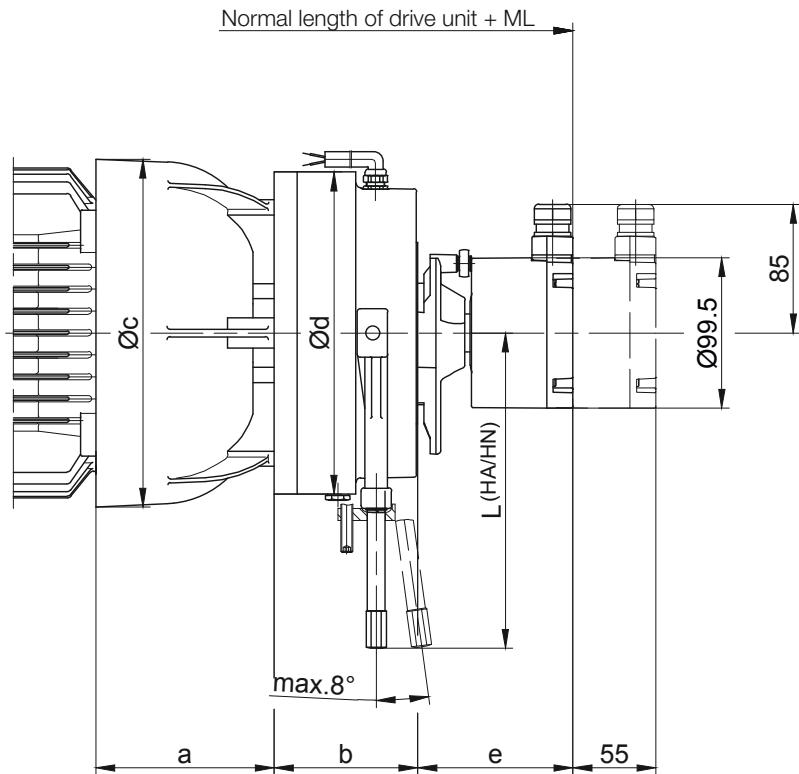

Motor	Brake	ML (mm) Additional length with brake and encoder	Dimensions (mm)						Additional weight kg
			a	b	c	Ød	e	L (HA/HN)	
S..08..	EH(X)027	180.5	83.5	66.5	166	145	102.5	162	7.1
S..09..	EH(X)040	191.5	102	73	191	168		172	10
S..11..	EH(X)125	216.5	120	95	231	213		208.5	21.4


HA = manual release lockable

HN = manual release not lockable

Motor-mounted components

Dimensions


Motor in IEC design

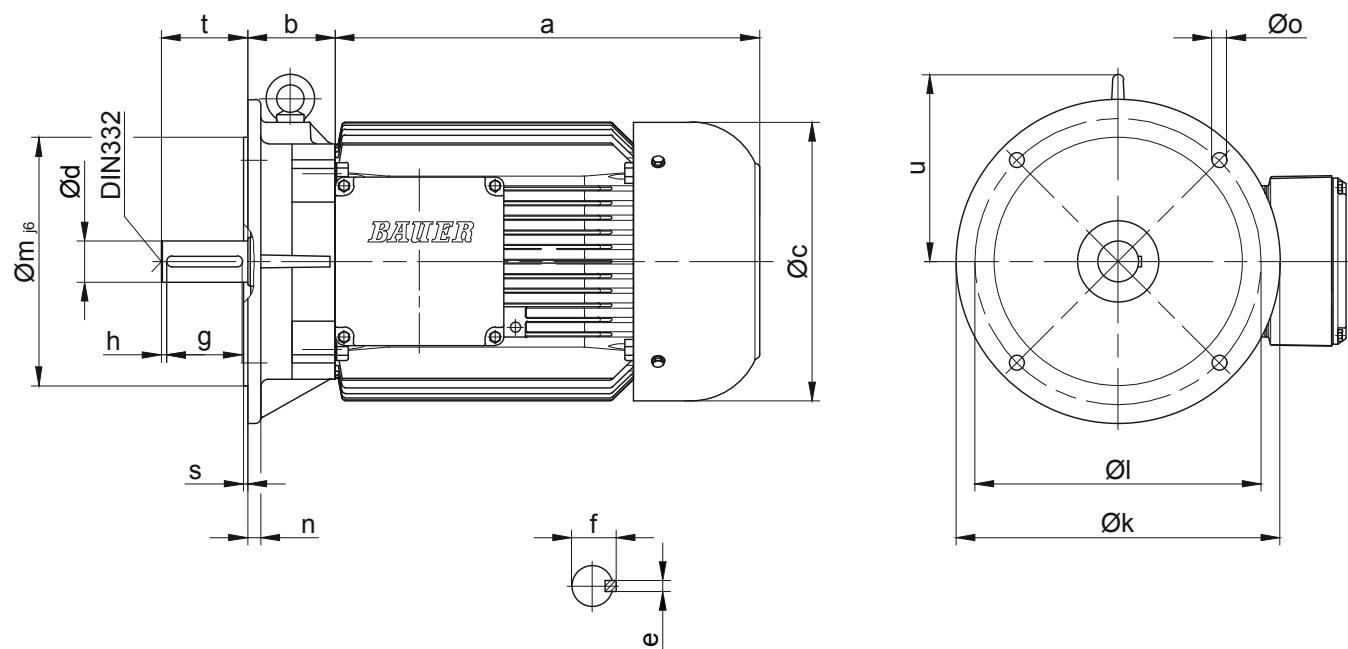

Motor	Dimensions (mm)																Centering DIN 332
	a	b	c	d	e	f	g	h	k	l	m	n	o	s	t	u	
S..06..	170	45	123	11 _{j6}	4	12.5	18	2.5	140	115	95	9	10	2.75	23	-	D4
S..08..	200	49	156	19 _{j6}	6	21.5	35	2.5	200	165	130	10	12	3.5	40	-	D4
S..09..	251	66	176	24 _{j6}	8	27	40	5	200	165	130	10	12	3.5	50	128.5	D6
S..11..	319	75	218	28 _{j6}	8	31	50	5	250	215	180	11	14.5	4	60	145.5	D10

Energy Efficient Geared Motors

AC Variable Speed

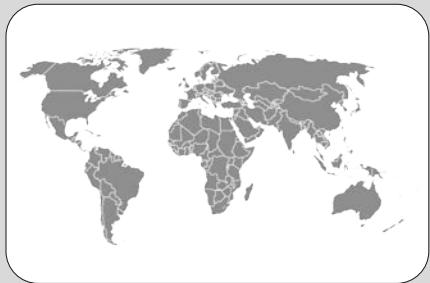

17

BAUER global

North America	625
Latin America	626
Europe	627
Eastern Europe	630
Middle East & Africa	631

Energy Efficient Geared Motors

AC Variable Speed



North America



Canada	Bauer GMC	4020B Sladeview Crescent, Unit 5 L5L 6B1 Mississauga	Phone +1 (905) 814 5152 Fax +1 (905) 814 5153	www.bauergmc.com
United States	Bauer Gear Motor LLC.	701 Carrier Drive NC 28216 Charlotte	Phone +1 (800) 3870130 Fax +1 (732) 4698773	bauer.us@bauergears.com www.bauergears.com



Latin America



Belize	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de http://www.transmisiones.de
Bolivia	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de http://www.transmisiones.de
Brazil	MKN Acionamentos LTDA	Rua Marco Gagliano 264 Americanópolis 04412-120 São Paulo-SP	Phone +55 (11) 56215574 Fax +55 (11) 56211406	mkn.aciona@terra.com.br
Chile	Jung y Cia LTDA	Huerfanos 757 Of 310 8320167 Santiago de Chile	Phone +56 (2) 26383731	jung@jung.cl
Colombia	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
Costa Rica	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
Cuba	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
French Guiana	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
Guatemala	Juan Niemann & Cia. Ltda.	Apartado Postal 290 C/Mariscal Cruz, C.A. Guatemala Ciudad, C.A.	Phone +502 (331) 5454 Fax +502 (334) 7453	jcniemann@jcniemann.com www.jcniemann.com/motorreductores
Guyana	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
Honduras	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
Mexico	Opeasa-Zugastek	2 Poniente 3102A Col. Amor 72140 Puebla	Phone +52 (222) 4036242	info@zugastek.com www.zugastek.com
Nicaragua	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
Panama	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
Paraguay	Transmisiones LTDA.	Cra. 69 B No. 21 A - 24 Parque Industrial Salitre 77158 Bogota / Colombia	Phone +57 (1) 4126898 Fax +57 (1) 2929737	aguerrero@transmisiones.de www.transmisiones.de
Peru	Transmisiones & Servicios S.A.C.	Alcanfores 981. of 601. 18 Miraflores - Lima	Phone +51 (1) 242 0862 Fax +51 (1) 242 086221	info@transmisiones.pe www.transmisiones.pe
Uruguay	Tradinter S.R.L	Pereira de la luz 1327 11300 Montevideo	Phone +598 (2) 6221130 Fax +598 (2) 6284691	
Venezuela	EMOTEC S.A.	Calle Johann Schafer, Edif. FHT, Piso 1, Oficina 1, Urb. Buena Vista, Caracas-Venezuela Urb. Sabana Grande Caracas	Phone +58 (212) 2715261 Fax +58 (212) 2711838	ventas@emotcsa.com www.emotcsa.com



Europe



Andora	TEM S.L. Bauer Gear Center for Spain and Portugal	Transmisiones Electromecánicas, Pol. Industrial Les Comes Calle Italia 11 Nave 9 08700 Igualada (Barcelona) / Spain	Phone +34 (93) 8056021 Fax +34 (93) 8056022	info@tem-sl.com www.tem-sl.com
Austria	ESKO Elektromaschinenbau GmbH	Ankerweg 8 8753 Fohnsdorf	Phone +43 (3573) 27570 Fax +43 (3573) 27570-4	office@esko.at www.esko.at
Austria	Mangold Elektromaschinen GmbH	Holzriedstr. 33 6960 Wolfurt	Phone +43 (5574) 64072-0 Fax +43 (5574) 64072-9	info@mangoldgmbh.at www.mangoldgmbh.at
Austria	BIS Chemserv GmbH	Bau 28 St. Peter-Str. 25 Postfach 750 4021 Linz	Phone +43 (732) 69172278 Fax +43 (732) 69173322	service@chemserv.at www.chemserv.at
Austria	BIS Chemserv GmbH	Haiminger-Str. 1 84489 Burghausen / Germany	Phone +49 (867) 7977507 Fax +49 (867) 7977510	www.chemserv.at
Belgium	Bauer Gear Motor Europe GmbH Branch Office Belgium	p/a Regus Pastoor Cooremansstraat 3 1702 Groot-Bijgaarden	Phone +32 (0) 2 8937280	info.be@bauergears.com www.bauergears.com
Belgium	emr NV/SA	Kruisstraat 61 C 9930 Lievem	Phone +32 (9) 2515956 Fax +32 (9) 2515891	emr@nvemr.be www.nvemr.be
Bosnien and Herzegowina	Indas Industry Assistance d.o.o.	Heroja Pinkija 95 YU-21000 Novi Sad Serbia and Montenegro	Phone +381(21) 4804800 Fax +381(21) 4804808	office@indas.rs http://www.indas.rs
Bulgaria	NASA - D Ltd.	kv. Mladost IV bl.602, vh.1 (In front of Business Park Sofia) 1715 Sofia	Phone +359 (2) 9755065 Fax +359 (2) 9755067	office@nasa-d.com www.nasa-d.com
Bulgaria	NASA - D Ltd.	12, Bitolya str. 9002 Varna	Phone +359 (52) 605995 Fax +359 (52) 600498	varna@nasa-d.com www.nasa-d.com
Croatia	TALER ING d.o.o.	Jelovška cesta 43A 4264 Bohinjska Bistrica / Slovenia	Phone +386 (4) 5747128 Fax +386 (4) 5747129	info@taler-ing.si www.taler-ing.si
Cyprus	Drivetech e.p.e.	Chrysostomou Smyrnis 124 18345 Moschato / Greece	Phone +30 (210) 7233318 Fax +30 (210) 7233357	info@drivetech.gr www.drivetech.gr
Czech Republic	Jan Komárek-HMF	Sturova 15 415 02 Teplice	Phone +420 (417) 565616 Fax +420 (417) 564455	tomas.abraham@navijama-hmf.cz www.navijarna-hmf.cz
Czech Republic	Huber CS s.r.o.	Cihlarska 19 602 00 Brno	Phone +420 541215635 Fax +420 541216835	doskocil@hubercs.cz www.hubercs.cz
Czech Republic	IHR Technika s.r.o.	Boleslavská 902 29306 Kosmonosy	Phone +420 (326) 722716 Fax +420 (326) 320119	Bauer@ihr-tech.cz www.ihr-tech.cz
Denmark	Eegholm A/S	Grundtvigs allé 165-169 (Main office) Jyllandsgade 30, Hal 2 (Stock) 6400 Sønderborg	Phone +45 (73) 121212 Fax +45 (73) 121213	eegholm@eegholm.dk www.eegholm.dk
Estonia	TECHVITAS OÜ	Tartu mnt 80J 101112 Tallinn	Phone +372 (56) 700702	info@techvitae.ee www.techvitae.com
Finland	Bauer Gear Motor Finland Oy Ab	Teknobulevardi 3-5 01530 Vantaa	Phone +358 (207) 189700	info.fi@bauergears.com www.bauergears.com
Finland	Sähkö-Team Oy	Pulttitie 10 00880 Helsinki	Phone +358 (207) 862330 Fax +358 (207) 862339	korjaamo@sahko-team.fi www.sahko-team.fi
Finland	Tornion Sähköpojat Oy	Raidekatu 29 95420 Tornio	Phone +358 (400) 222401 Fax +358 (16) 446853	markku.rantapaa@sahkopojat.fi www.sahkopojat.fi
France	Bauer Gear Motor Europe GmbH Succursale France	46, avenue des Frères Lumière 78190 Trappes	Phone +33 (0) 130132086 Fax +33 (0) 130132088	info.fr@bauergears.com www.bauergears.com
France	Avenel	1, rue Lucien Fromage BP 1 76160 Darnetal (Nord-Quest/Normandie)	Phone +33 (0) 235085353 Fax +33 (0) 235085608	infos@avenel.fr www.avenel.fr
France	Diceep	17-19 Route Nationale 54 280 Nancy-Laneuvelette (Nord-Est)	Phone +33 (0) 383290343 Fax +33 (0) 383214613	diceep@diceep.fr www.diceep.fr
France	LM Systèmes SARL	11 Avenue de la Madeleine 33170 Gradignan	Phone +33 (0) 556754607 Fax +33 (0) 556879150	info@lmsystemes.com www.lmsystemes.com
France	TIMA Transmissions Mécaniques Industrielles des Alpes	33 rue du Béal ZI sud 38400 Saint-Martin-d'Hères	Phone +33 (0) 476244039 Fax +33 (0) 476629658	b.majoux@tima.fr www.tima.fr

Germany	Bauer Gear Motor GmbH	Eberhard-Bauer-Straße 37 73734 Esslingen	Phone +49 (711) 3518 0 Fax +49 (711) 3518 381	info@bauergears.com www.bauergears.com
Germany	Bär - Elektromaschinen	Hafenstraße 53 39340 Haldensleben	Phone +49 (390) 4462589 Fax	info@baer-ema.de www.baer-ema.de



Europe



Germany	Beck Elektrotechnik	Nürnberg Str. 109 97076 Würzburg	Phone Fax	+49 (931) 20050 +49 (931) 2005200	info@team-elektro-beck www.beck-elektrotechnik.de
Germany	Boss Elektromaschinen + Pumpentechnik GmbH	Tankweg 27 44147 Dortmund	Phone Fax	+49 (231) 9820220 +49 (231) 98202241	elektromaschinen@boss-gruppe.de www.boss-gruppe.de
Germany	Bühler & Sell Elektromotoren KG	Sprendlinger Landstr. 180 63069 Offenbach	Phone Fax	+49 (69) 423076 +49 (69) 423078	info@buehler-sell.de www.buehler-sell.de
Germany	Dent Elektromaschinen GmbH	Grubwaldstr. 30 78224 Singen	Phone Fax	+49 (7461) 9697270 +49 (7461) 96972719	info@dent-elektromaschinen.de www.motorenpartner.de
Germany	Elektromaschinenbau Dipl.-Ing. Kögel & Ernst & Co. GmbH	Am Markbach 2 76547 Sinzheim	Phone Fax	+49 (7221) 50950 +49 (7221) 509527	info@koegel-ernst.de www.koegel-ernst.de
Germany	elektrotechnik + automation Ulrich Brodbeck GmbH	Gutenbergstr. 5 72631 Aichtal	Phone Fax	+49 (7127) 9583 0 +49 (7127) 958317	info@elektrotechnik-automation.de www.elektrotechnik-automation.de
Germany	Elektrowerk Nordhausen Dipl.-Ing. G. Francke Elektromaschinenbau	An der Helme 14 99734 Nordhausen	Phone Fax	+49 (3631) 47950 +49 (3631) 479520	info@elektrowerk-nordhausen.de www.elektrowerk-nordhausen.de
Germany	EMS Elektromotoren GmbH	Gewerbegebiet Egelsee 15 93354 Siegenburg	Phone Fax	+49 (9444) 9760 +49 (9444) 976177	bauergear@ems-elektromotoren.de www.ems-elektromotoren.de
Germany	Fuchs Elektromaschinenbau und Vertriebs GmbH	Kaiserstr. 4d 66133 Saarbrücken-Scheidt	Phone Fax	+49 (681) 98821690 +49 (681) 98821699	fuch_sb@t-online.de www.elektromaschinenbau-fuchs.de
Germany	Greif GmbH Elektrotechnik	Mushardstraße 11 27570 Bremerhaven	Phone Fax	+49 (471) 31997 +49 (471) 303694	info@greif-elektrotechnik.de www.greif-elektrotechnik.de
Germany	Klebs & Hartmann GmbH & Co. KG	August-Heller-Str. 3 67065 Ludwigshafen	Phone Fax	+49 (621) 579000 +49 (621) 5790024	e-technik@klebs-hartmann.de www.klebs-hartmann.de
Germany	Wilhelm Kleeberg GmbH & Co.KG E-Motoren E-Werkzeuge	Graf-Zeppelin-Straße 5 24941 Flensburg	Phone Fax	+49 (461) 43054110 +49 (461) 43054114	info@kleeberg-fl.de www.kleeberg-fl.de
Germany	Mangold Elektromaschinenbau GmbH	Lindauer Str. 116 88046 Friedrichshafen	Phone Fax	+49 (7541) 500622 +49 (7541) 500630	info@mangold-fn.de www.mangold-fn.de
Germany	Hans Mayer Elektrotechnik GmbH	Simonshofer Str. 41 91207 Lauf a. d. Pegnitz	Phone Fax	+49 (912) 32041 +49 (912) 382661	info@hans-mayer-elektrotechnik.de www.hans-mayer-elektrotechnik.de
Germany	Motoren Franke GmbH	Ringstr. 18 01468 Boxdorf	Phone Fax	+49 (351) 207680 +49 (351) 2076829	info@motoren-franke.de www motoren-franke.de
Germany	Polzin Elektromaschinenbau	Kunzestr. 20 04249 Leipzig	Phone Fax	+493414250107 +493414250108	info@polzin-elektromaschinenbau.de www.polzin-elektromaschinenbau.de
Germany	Rülke GbR Jens und Uwe Rülke	Auestr. 36 08371 Glauchau	Phone Fax	+49 (3763) 5089 0 +49 (3763) 5089 29	info@ruelke-glauchau.de www.ruelke-glauchau.de
Germany	Schulz Systemtechnik GmbH	Schneiderkruger Str. 12 49429 Visbek	Phone Fax	+49 (4445) 897 0 +49 (4445) 897 300	info@schulz.st www.schulz-elektrotechnik.de
Germany	Sroczynski GmbH	Pferdestr. 24 48084 Osnabrück	Phone Fax	+49 (541) 588443 +49 (541) 588609	info@sroczynski.de www.sroczynski.de/
Germany	Steinlen Elektromaschinenbau GmbH	Ehlbeck 21 30938 Burgwedel	Phone Fax	+49 (5139) 80700 +49 (5139) 807060	info@steinlen.de www.steinlen.de
Germany	Steinlen Elektromaschinenbau GmbH	Am Schiffbekerberg 18 22111 Hamburg	Phone Fax	+49 (40) 7320307 +49 (40) 7322228	info@steinlen.de www.steinlen.de
Germany	UAS Meßtechnik GmbH	Prof.-Hermann-Staudinger-Straße 4 94234 Viechtach	Phone Fax	+49 (9942) 94860 +49 (9942) 948610	info@uas.de www.uas.de
Germany	Velden GmbH	Frechen Str. 12 50226 Frechen-Habbelrath	Phone Fax	+49 2234 96767 0 +49 2234 96767 29	info@velden-gmbh.de www.velden-gmbh.de
Greece	Drivetech e.p.e.	Chrysostomou Smyrnis 124 18345 Moschato	Phone Fax	+30 (210) 7233318 +30 (210) 7233357	info@drivetech.gr www.drivetech.gr
Greenland	Eegholm A/S	Grundtvigs allé 165-169 (Main office) Jyllandsgade 30, Hal 2 (Stock) 6400 Sønderborg / Denmark	Phone Fax	+45 (73) 121212 +45 (73) 121213	eegholm@eegholm.dk www.eegholm.dk
Hungary	Schorch Hungary Ltd. Industrial Site	Gyari Street 1 P.O. box 85 3580 Tiszaujvaros	Phone	+36 (49) 440877	info@schorchhungaria.hu www.schorchhungaria.hu
Hungary	BC Ongroelektro. Kft.	Bolyai tér 1. 3702 Kazincbarcika (East Hungary)	Phone Fax	+36 (48) 511186 +36 (48) 712771	toth.tibor@borsodchem.hu
Ireland	Avonmore Electrical (Dublin) Ltd. Part of the Avonmore Group	Unit D2 Airton Business Park Airton Road, Tallaght 24 Dublin	Phone Fax	+353 (1) 462 8333 +353 (1) 462 8333	eoin@avonmore-electrical.com www.avonmore-electrical.com



Europe



Italy	Bauer Gear Motor Europe GmbH	Viale Veneto 48 35020 Saonara (PD)	Phone +39 (49) 8792327 Fax	bauer.it@bauergears.com www.bauergears.com/it/
Italy	Ma.In s.n.c.	Via Pola, 8 I-10135 Torino	Phone +39 (11) 34733 25 Fax +39 (11) 39133 56	dibello.e@ma-in.com www.ma-in.com
Italy	Assyservice	Via Chieppara, 14 int. 1 45011 Adria (RO)	Phone +39 (426) 1903888 Fax +39 (426) 1903694	info@assyservice.com www.assyservice.com
Latvia	Techvitas SIA	38 Daugavas Street 2167 Marupe, Marupes nov.	Phone +371 (22) 325004	info@techvitas.lv www.techvitas.com
Lithuania	Techvitas UAB	Dubysos str. 66A 94107 Klaipeda	Phone +370 46355494	info@techvitas.lt www.techvitas.com
Luxembourg	Bauer Gear Motor Europe GmbH Office Belgium	p/a Regus Pastoor Cooremansstraat 3 1702 Groot-Bijgaarden / Belgium	Phone +32 (0) 28937280 Fax	info.be@bauergears.com www.bauergears.com
Macedonia	Indas Industry Assistance d.o.o.	Heroja Pinkija 95 21000 Novi Sad / Serbia and Montenegro	Phone +381 (21) 4804800 Fax +381 (21) 4804808	office@indas.rs www.indas.rs
Netherlands	Bauer Gear Motor Europe GmbH Office Belgium	p/a Regus Pastoor Cooremansstraat 3 1702 Groot-Bijgaarden / Belgium	Phone +32 (0) 28937280	info.be@bauergears.com www.bauergears.com
Netherlands	Facta Friesland BV	De Alde Mar 11 9035 VP Dronryp	Phone +31 (0)517 231232 Fax	friesland@facta.nl www.facta.nl
Netherlands	De Bruyn B.V.	Van Konijnenburgweg 105 4612 PL Bergen op Zoom	Phone +31 (164) 234302 Fax +31 (164) 255140	repair@de-bruyn.nl www.de-bruyn.nl
Netherlands	Facta Zevenhuizen BV	Nijverheidscentrum 36 2761 JP Zevenhuizen	Phone 31 (88) 7384702	zevenhuizen@facta.nl www.facta.nl
Netherlands	Facta Nederweert BV	Pannenweg 208 6031 RK Nederweert	Phone +31 (495) 634141 Fax	31 (88) 7384702 www.facta.nl
Netherlands	Facta Uitgeest BV	Westerwerf 11 1911 JA Uitgeest	Phone +31 (88) 6000200 Fax	uitgeest@facta.nl www.facta.nl
Netherlands	Facta Staphorst BV	Roelof Brinkstraat 3 7951 DW Staphorst	Phone +31 (88) 7384700 Fax	straphorst@facta.nl www.facta.nl
Netherlands	Facta Appingedam BV	Holepolder 1 9902 SM Appingedam	Phone +31 (88) 7384700	appingendam@facta.nl www.facta.nl
Norway	BAUER Gearmotorer AS	Postboks 221 2021 Skedsmokorset	Phone +47 (63) 875950	bauergear@bauergear.no www.bauergear.no
Poland	Steinlen Polska Sp. z o.o.	ul. W. Grabskiego 4/8 63-500 Ostrzeszów	Phone +48 (62) 7322352 Fax +48 (62) 7322351	biuro@steinlenpolska.pl www.steinlenpolska.pl
Portugal	TEM S.L. Bauer Gear Center Transmisiones Electromecánicas, S.L.	Pol. Industrial Les Comes Calle Italia 11 Nave 9 08700 Igualada (Barcelona) / Spain	Phone +34 (93) 8056021 Fax +34 (93) 8056022	info@tem-sl.com www.tem-sl.com
Romania	BIBUS SES srl	Calea Lugojului 134/1 307200 Ghiroda, Timis	Phone +40 (256) 200500	office@ibus.ro wwwibus.ro
Serbia and Montenegro	Indas Industry Assistance d.o.o.	Heroja Pinkija 95 21000 Novi Sad	Phone +381 (21) 4804800 Fax +381 (21) 4804808	office@indas.rs www.indas.rs
Slovakia	Bauer Gear Motor Slovakia	Továrenská 49 953 36 Zlaté Moravce	Phone +421 (37) 6926158 Fax +421 (37) 6926181	bauer.sk@bauergears.com www.bauergears.com
Slovakia	Transmisie Engineering a.s.	P. Mudrona 10 036 01 Martin	Phone +421 (43) 4133157	dps@transmisie.sk www.transmisie.sk
Slovenia	TALER ING d.o.o.	Jelovška cesta 43A 4264 Bohinjska Bistrica	Phone +386 (4) 5747128 Fax +386 (4) 5747129	info@taler-ing.si www.taler-ing.si
Spain	TEM S.L. Bauer Gear Center Transmisiones Electromecánicas, S.L.	Pol. Industrial Les Comes Calle Italia 11 Nave 9 08700 Igualada (Barcelona) / Spain	Phone +34 (93) 8056021 Fax +34 (93) 8056022	info@tem-sl.com www.tem-sl.com
Sweden	BAUER Gearmotorer Sverige AB	Årjängsvägen 4 66693 Gustavs förs	Phone +46 (531) 20050 Fax +46 (531) 20040	postmaster@bauergear.net
Switzerland	Küffer Elektro-Technik AG	Industrie Neuhof 31 3422 Kirchberg	Phone +41 (34) 4452626	info@ketag.ch www.ketag.ch
Switzerland	Electro-Müller AG	Industriestr. 25 2555 Brügg	Phone +41 (32) 3441010 Fax +41 (32) 3441019	info@electro-mueller.ch www.electro-mueller.ch
United Kingdom	Bauer Gear Motor Limited	Unit1 Nat Lane Business Park CW7 3BS Winsford	Phone +44 (1606) 868600 Fax +44 (1606) 868603	info.uk@bauergears.com www..bauergears.com



Eastern Europe



Armenia	Bauer Gear Motor GmbH	Eberhard-Bauer-Str. 37 73734 Esslingen / Germany	Phone +49 (711) 3518 0 Fax +49 (711) 3518 381	info@bauergears.com www.bauergears.com
Azerbaijan	Bauer Gear Motor GmbH	Eberhard-Bauer-Str. 37 73734 Esslingen / Germany	Phone +49 (711) 3518 0 Fax +49 (711) 3518 381	info@bauergears.com www.bauergears.com
Georgia	Bauer Gear Motor GmbH	Eberhard-Bauer-Str. 37 73734 Esslingen / Germany	Phone +49 (711) 3518 0 Fax +49 (711) 3518 381	info@bauergears.com www.bauergears.com
Kazakhstan	Bauer Gear Motor GmbH	Eberhard-Bauer-Str. 37 73734 Esslingen / Germany	Phone +49 (711) 3518 0 Fax +49 (711) 3518 381	info@bauergears.com www.bauergears.com
Kazakhstan	Silumin-Vostok	Revolucionnaya st., 10 070010 Ust-Kamenogorsk	Phone +7 (7232) 558982 Fax +7 (7232) 552058	info@silumin.kz
Ukraine	LLC Industrial Mechanics	Michurina str. 4 Dnepр	Phone +38 (099) 1194979 Fax	director@ind-mech.com www.ind-mech.com
Uzbekistan	Bauer Gear Motor GmbH	Eberhard-Bauer-Str. 37 73734 Esslingen / Germany	Phone +49 (711) 3518 0 Fax +49 (711) 3518 381	info@bauergears.com www.bauergears.com



M i d d l e E a s t & A f r i c a



Bahrain	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
Botswana	Bauer a Division of Hudaco Trading (Pty) Ltd.	72 Acacia Road 1401 Primrose / South Africa	Phone +27 (11) 8289715 Fax +27 (11) 8224135	home@gbauer.co.za www.gbauer.co.za
Ethiopia	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
India	Bauer Gear Motor GmbH	Eberhard-Bauer-Straße 37 73734 Esslingen / Germany	Phone +49 (711) 35180 Fax +49 (711) 3518381	info@bauergears.com www.bauergears.com
India	International Combustion (India) Ltd.	Infinity Benchmark, 11th Floor, Plot – G1, Block – EP & GP, Salt Lake Electronics Complex, 700 091 Kolkata	Phone +91 (33) 33153000 Fax +91 (33) 23576653	info@internationalcombustion.in
Israel	Greenspon Engineering Works Ltd.	Bar-Lev Industrial Park 20179 Misgav	Phone +972-4-9913181 Fax +972-4-9913477	info@greenhpon-eng.com www.greenhpon-eng.com
Jordan	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
Kuwait	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
Mozambique	Bauer a Division of Hudaco Trading (Pty) Ltd.	72 Acacia Road 1401 Primrose / South Africa	Phone +27 (11) 8289715 Fax +27 (11) 8224135	home@gbauer.co.za www.gbauer.co.za
Namibia	Bauer a Division of Hudaco Trading (Pty) Ltd.	72 Acacia Road 1401 Primrose / South Africa	Phone +27 (11) 8289715 Fax +27 (11) 8224135	home@gbauer.co.za www.gbauer.co.za
Oman	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
Qatar	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
Saudi Arabia	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
South Africa	Bauer a Division of Hudaco Trading (Pty) Ltd.	72 Acacia Road 1401 Primrose	Phone +27 (11) 8289715 Fax +27 (11) 8224135	johnB@gbauer.co.za
Swaziland	Bauer a Division of Hudaco Trading (Pty) Ltd.	72 Acacia Road 1401 Primrose	Phone +27 (11) 8289715 Fax +27 (11) 8224135	johnB@gbauer.co.za
Syrian Arab Republic	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
Turkey	CEFIP - Makina & Endüstriyel Ürünler San. ve Dis Tic. Ltd. Sti.	Perpa Ticaret Merkezi A Blok Kat: 2 No: 9-0033 34384 Okmeydanı - İstanbul	Phone +90 (212) 2101890 Fax +90 (212) 2101597	cefip@cefip.com.tr www.cefip.com.tr
Turkey	CEFIP- Consulting & Engineering für Industrie-Produkte GmbH	Heidstraße 80 44649 Herne / Germany	Phone +49 (2325) 972580 Fax +49 (2325) 9725825	contact@cefip.de www.cefip.de
United Arab Emirates	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 4 2525711 Fax +971 4 2567125	info@kuhnezugag.com www.kuhnezugag.ae
Yemen	KUHNEZUG AG	C-1401, 14th Floor Ontario Tower Business Bay Dubai / United Arab Emirates	Phone +971 (4) 5722117 Fax +971 (4) 2567 125	info@kuhnezugag.com www.kuhnezugag.ae
Zimbabwe	Bauer a Division of Hudaco Trading (Pty) Ltd.	72 Acacia Road 1401 Primrose / South Africa	Phone +27 (11) 8289715 Fax +27 (11) 8224135	home@gbauer.co.za www.gbauer.co.za

Energy Efficient Geared Motors

AC Variable Speed


Notes

Notes


Energy Efficient Geared Motors

AC Variable Speed

Mounting Positions

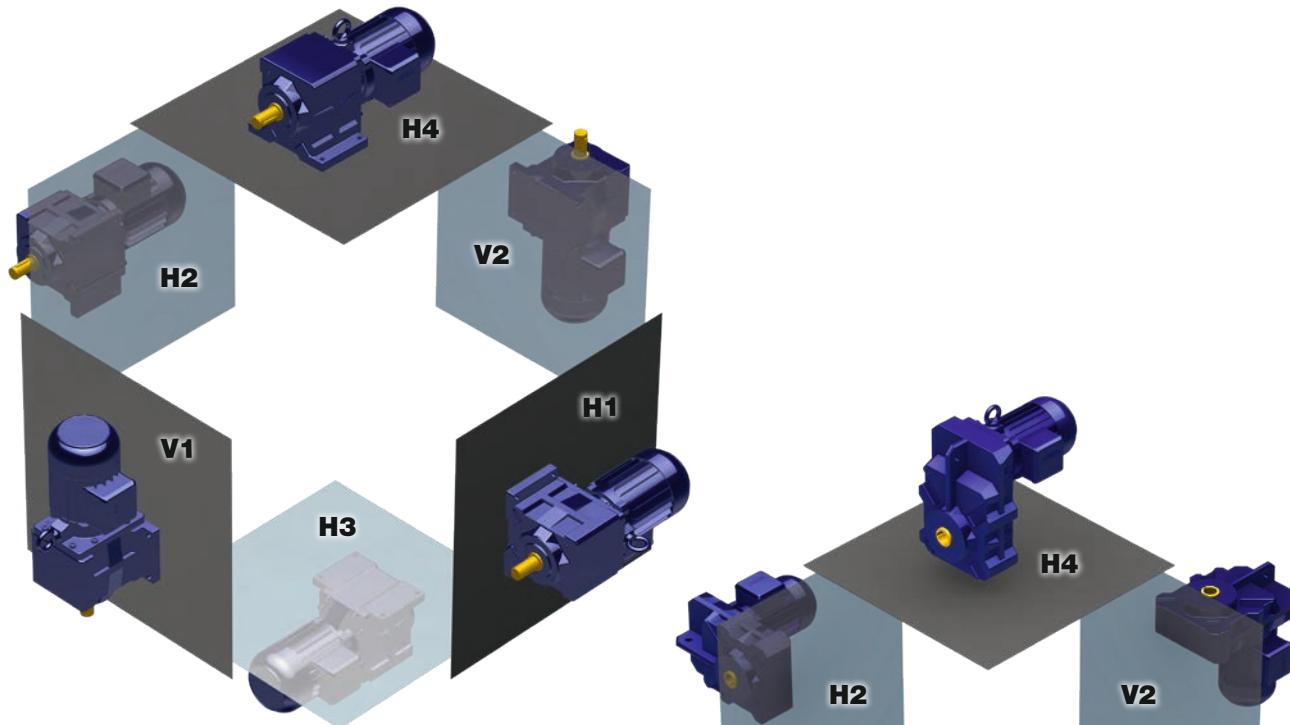


Helical Geared Motors

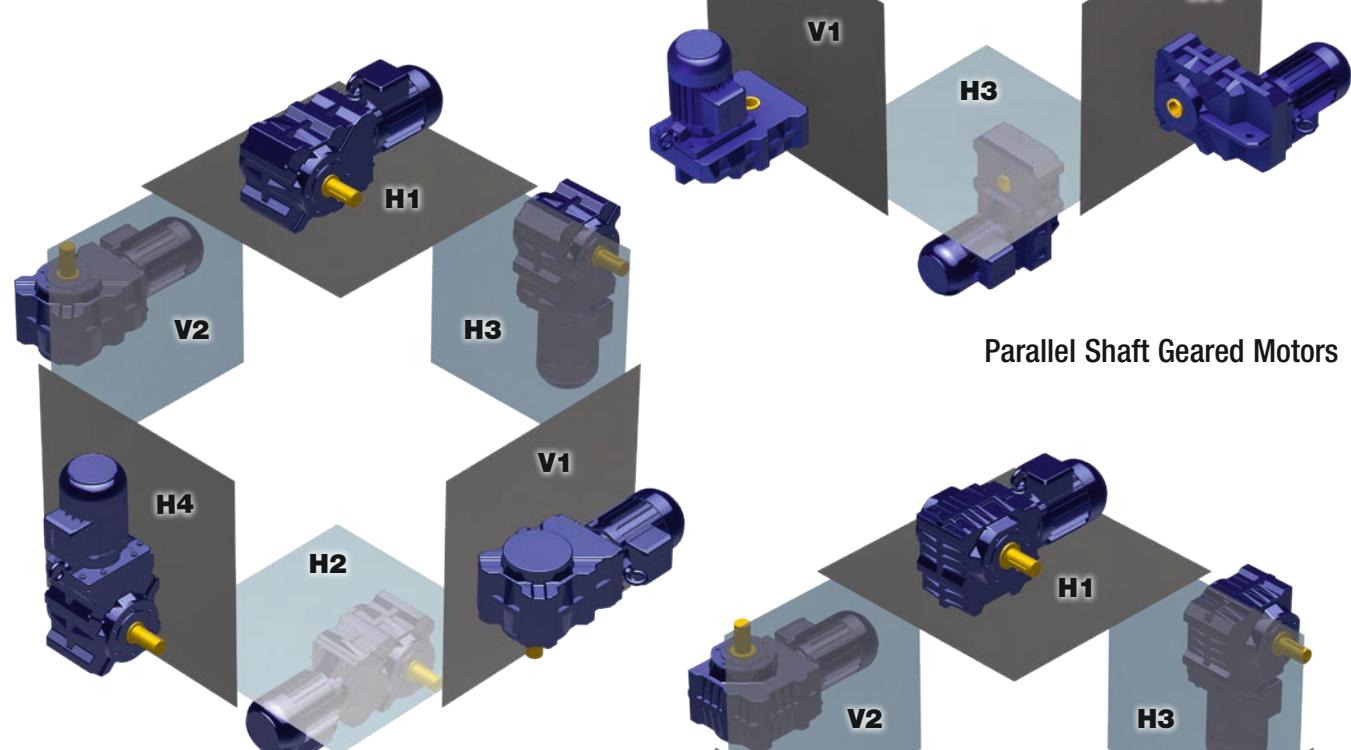

Parallel Shaft Geared Motors

Bevel Geared Motors

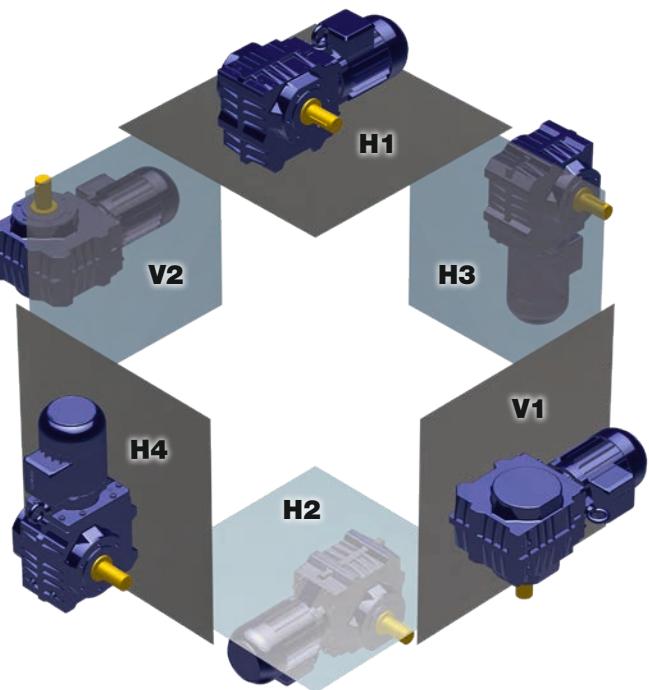

Worm Geared Motors

Bauer Gear Motor Facilities

Europe

Germany
Eberhard-Bauer-Str. 37
73734 Esslingen - Germany
+49 711 3518 0

Slovakia
Továrenská 49
953 01 Zlaté Moravce - Slovakia
+421 37 6926100

United Kingdom
Unit 1, Nat Lane Business Park
Winsford, Cheshire
CW7 3BS - United Kingdom
+44 1606 868600

North America

Charlotte, NC
701 Carrier Drive
Charlotte, NC 28216 - USA
+1 800-387-0130

Asia Pacific

China
No. 18 HuanZhen Road
Dabo Industrial Zone - BoGoang Village
Shajing Town - BaoAn District
518104 Shenzhen City
Guangdong Province - China
+86 755 27246308

Customer Service

Belgium
1702 Groot-Bijgaarden
+32 2 89372080

Finland
01530 Vantaa
+358 207 189700

France
1702 Groot-Bijgaarden
+32 2 89372080

Italy
35020 Padova (PD)
+39 049 8792327

China
Suite 301,#5 Lihpao Plaza,
88 Shen bin Road, Min hang District,
201106 Shanghai, China
Sales Enquiry : +86 (21) 5169 9255
Service hotline : +86 187 0171 2972



Scan to see all
the brands of
Regal Rexnord

Neither the accuracy nor completeness of the information contained in this publication is guaranteed by the company and may be subject to change in its sole discretion. The operating and performance characteristics of these products may vary depending on the application, installation, operating conditions and environmental factors. The company's terms and conditions of sale can be viewed at <http://www.alframotion.com/terms-and-conditions/sales-terms-and-conditions>. These terms and conditions apply to any person who may buy, acquire or use a product referred to herein, including any person who buys from a licensed distributor of these branded products.

©2023 by Bauer Gear Motor GmbH. All rights reserved. All trademarks in this publication are the sole and exclusive property of Bauer Gear Motor GmbH or one of its affiliated companies.

Images: Fotolia, Adobe Stock, Regal Rexnord and Bauer Archives