


Washdown Electro Pack Clutch/Brakes

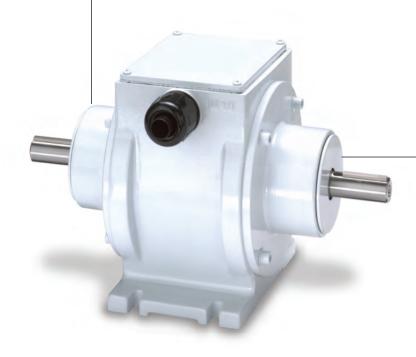

- USDA Approved Coating
- Smooth Exterior
- Shielded-Sealed Bearings
- Stainless Steel Shafting and Hardware
- Available in 70 and 270 lb-in Static Torque Configurations
- Available in 24 and 90 vdc

Designed for Food Processing Applications

If your clutch/brake application demands consistent, repeatable performance cycle after cycle, through wet and dry conditions, choose Warner Electric's Washdown Electro Pack Clutch/Brakes.

Even in the most demanding environments, Washdown Electro Pack Clutch/Brakes (EP-W) will weather the storm. Designed specifically for use in food, sanitary or any other washdown application, these packaged clutch/brakes are totally enclosed in smooth, completely sealed, rugged enclosures to keep wear particles in and contaminants out.

Washdown Electro Packs are factory aligned, assembled and burnished for consistent out-of-the-box performance.

For Technical Assistance Call

800-825-9050





Washdown Electro Pack Clutch/Brakes

Warner Electric's new Washdown Electro Packs are currently available in two sizes, and in 24 and 90 volt configurations. If your application requires a different voltage or mounting configuration, please contact Warner Electric for assistance.

| Model | Voltage (DC) | Max RPM | Static Torque (lb-in) | Part Number |
|----------|-----------------|---------|--------------------------|------------------------------|
| EP-250-W | 24 90 | 7500 | 70 | 5130-273-060 5130-273-061 |
| EP-400-W | 24 90 | 4500 | 270 | 5131-273-030 5131-273-031 |



Washdown Enclosed UniModule Clutch/Brakes

For washdown applications requiring more torque than the EP-W's provide and/or motor mounting, Warner Electric offers the Washdown Enclosed UniModules Series. These units are available in a wide range of sizes, voltages and mounting configurations as outlined below.



| Washdown EUM-W | Voltage (DC) | Max RPM | Static Torque (lb-ft) | NEMA Frame | Part Number | | | |
|--------------------|-----------------|------------|--------------------------|--------------------------|--|--|--|--|
| 1020 Configuration | | | | | | | | |
| EUM-50-1020W | 6 24 90 | 3600 | 16 | 56C/48Y | 5370-273-100 5370-273-101 5370-273-099 | | | |
| EUM-100-1020W | 6 24 90 | 3600 | 30 | 56C/48Y | 5370-273-108 5370-273-109 5370-273-107 | | | |
| EUM-180-1020W | 6 24 90 | 3600 | 30 | 182C/143TC 184C/145TC | 5370-273-116 5370-273-117 5370-273-115 | | | |
| EUM-210-1020W | 6 24 90 | 3600 | 95 | 213C/182TC 215C/184TC | 5371-273-056 5371-273-057 5371-273-055 | | | |
| EUM-215-1020W | 6 24 90 | 3600 | 95 | 213TC/215TC | 5371-273-086 5371-273-087 5371-273-088 | | | |
| 2030 Configuration | | | | | | | | |
| EUM-50-2030W | 6 24 90 | 3600 | 16 | 56C/48Y | 5370-273-104 5370-273-105 5370-273-103 | | | |
| EUM-180-2030W | 6 24 90 | 3600 | 30 | 182C/143TC 184C/145TC | 5370-273-120 5370-273-121 5370-273-119 | | | |
| EUM-210-2030W | 6 24 90 | 3600 | 95 | 213C/182TC 215C/184TC | 5371-273-060 5371-273-061 5371-273-059 | | | |



Warner Electric

449 Gardner Street • South Beloit, IL 61080 815-389-3771 • Fax: 815-389-2582 www.warnerelectric.com

P-1549-WE 6/11 Printed in USA